

VU University Amsterdam

De Boelelaan 1081a, 1081 HV Amsterdam  
The Netherlands

University of Amsterdam

Kruislaan 419, 1098 VA Amsterdam  
The Netherlands



# SWI Prolog

## Reference Manual

*Updated for version 8.0-2, March 2019*

*Jan Wielemaker*

`J.Wielemaker@vu.nl`

<http://www.swi-prolog.org>

SWI-Prolog is a comprehensive and portable implementation of the Prolog programming language. SWI-Prolog aims to be a robust and scalable implementation supporting a wide range of applications. In particular, it ships with a wide range of interface libraries, providing interfaces to other languages, databases, graphics and networking. It provides extensive support for managing HTML/SGML/XML and RDF documents. The system is particularly suited for server applications due to robust support for multithreading and HTTP server libraries.

SWI-Prolog is designed in the ‘Edinburgh tradition’. In addition to the ISO Prolog standard it is largely compatible to Quintus, SICStus and YAP Prolog. SWI-Prolog provides a compatibility framework developed in cooperation with YAP and instantiated for YAP, SICStus and IF/Prolog.

SWI-Prolog aims at providing a good development environment, including extensive editor support, graphical source-level debugger, autoloading and ‘make’ facility and much more. SWI-Prolog editor and the PDT plugin for Eclipse provide alternative environments.

This document gives an overview of the features, system limits and built-in predicates.

~



This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 Unported License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/> or send a letter to Creative Commons, 444 Castro Street, Suite 900, Mountain View, California, 94041, USA.

# Contents

---

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction</b>                     | <b>12</b> |
| 1.1      | Positioning SWI-Prolog                  | 12        |
| 1.2      | Status and releases                     | 13        |
| 1.3      | Should I be using SWI-Prolog?           | 13        |
| 1.4      | Support the SWI-Prolog project          | 14        |
| 1.5      | Implementation history                  | 15        |
| 1.6      | Acknowledgements                        | 15        |
| <br>     |   |           |
| <b>2</b> | <b>Overview</b>                         | <b>17</b> |
| 2.1      | Getting started quickly                 | 17        |
| 2.1.1    | Starting SWI-Prolog                     | 17        |
| 2.1.2    | Adding rules from the console           | 18        |
| 2.1.3    | Executing a query                       | 18        |
| 2.1.4    | Examining and modifying your program    | 19        |
| 2.1.5    | Stopping Prolog                         | 20        |
| 2.2      | The user's initialisation file          | 20        |
| 2.3      | Initialisation files and goals          | 20        |
| 2.4      | Command line options                    | 21        |
| 2.4.1    | Informational command line options      | 22        |
| 2.4.2    | Command line options for running Prolog | 22        |
| 2.4.3    | Controlling the stack sizes             | 24        |
| 2.4.4    | Running goals from the command line     | 25        |
| 2.4.5    | Compilation options                     | 25        |
| 2.4.6    | Maintenance options                     | 25        |
| 2.5      | GNU Emacs Interface                     | 25        |
| 2.6      | Online Help                             | 26        |
| 2.6.1    | library(help): Text based manual        | 26        |
| 2.6.2    | library(explain): Describe Prolog Terms | 27        |
| 2.7      | Command line history                    | 28        |
| 2.8      | Reuse of top-level bindings             | 28        |
| 2.9      | Overview of the Debugger                | 29        |
| 2.10     | Compilation                             | 32        |
| 2.10.1   | During program development              | 32        |
| 2.10.2   | For running the result                  | 33        |
| 2.11     | Environment Control (Prolog flags)      | 36        |
| 2.12     | An overview of hook predicates          | 51        |
| 2.13     | Automatic loading of libraries          | 52        |
| 2.14     | Packs: community add-ons                | 54        |
| 2.15     | Garbage Collection                      | 55        |
| 2.16     | The SWI-Prolog syntax                   | 55        |

|          |  |           |
|----------|--|-----------|
| 2.16.1   | ISO Syntax Support                                 | 55        |
| 2.17     | Rational trees (cyclic terms)                      | 61        |
| 2.18     | Just-in-time clause indexing                       | 62        |
| 2.18.1   | Deep indexing                                      | 63        |
| 2.18.2   | Future directions                                  | 64        |
| 2.18.3   | Indexing and portability                           | 64        |
| 2.19     | Wide character support                             | 64        |
| 2.19.1   | Wide character encodings on streams                | 65        |
| 2.20     | System limits                                      | 66        |
| 2.20.1   | Limits on memory areas                             | 66        |
| 2.20.2   | Other Limits                                       | 68        |
| 2.20.3   | Reserved Names                                     | 68        |
| 2.21     | SWI-Prolog and 64-bit machines                     | 68        |
| 2.21.1   | Supported platforms                                | 68        |
| 2.21.2   | Comparing 32- and 64-bits Prolog                   | 69        |
| 2.21.3   | Choosing between 32- and 64-bit Prolog             | 69        |
| <b>3</b> | <b>Initialising and Managing a Prolog Project</b>  | <b>71</b> |
| 3.1      | The project source files                           | 71        |
| 3.1.1    | File Names and Locations                           | 71        |
| 3.1.2    | Project Special Files                              | 72        |
| 3.1.3    | International source files                         | 73        |
| 3.2      | Using modules                                      | 73        |
| 3.3      | The test-edit-reload cycle                         | 74        |
| 3.3.1    | Locating things to edit                            | 74        |
| 3.3.2    | Editing and incremental compilation                | 75        |
| 3.4      | Using the PceEmacs built-in editor                 | 75        |
| 3.4.1    | Activating PceEmacs                                | 75        |
| 3.4.2    | Bluffing through PceEmacs                          | 76        |
| 3.4.3    | Prolog Mode  | 78        |
| 3.5      | The Graphical Debugger                             | 80        |
| 3.5.1    | Invoking the window-based debugger                 | 80        |
| 3.6      | The Prolog Navigator                               | 81        |
| 3.7      | Cross-referencer                                   | 81        |
| 3.8      | Accessing the IDE from your program                | 83        |
| 3.9      | Summary of the IDE                                 | 84        |
| <b>4</b> | <b>Built-in Predicates</b>                         | <b>85</b> |
| 4.1      | Notation of Predicate Descriptions                 | 85        |
| 4.2      | Character representation                           | 86        |
| 4.3      | Loading Prolog source files                        | 87        |
| 4.3.1    | Conditional compilation and program transformation | 98        |
| 4.3.2    | Reloading files, active code and threads           | 102       |
| 4.3.3    | Quick load files                                   | 104       |
| 4.4      | Editor Interface                                   | 105       |
| 4.4.1    | Customizing the editor interface                   | 105       |
| 4.5      | List the program, predicates or clauses            | 107       |

|        |   |     |
|--------|---|-----|
| 4.6    | Verify Type of a Term . . . . .                         | 107 |
| 4.7    | Comparison and Unification of Terms . . . . .           | 109 |
| 4.7.1  | Standard Order of Terms . . . . .                       | 109 |
| 4.7.2  | Special unification and comparison predicates . . . . . | 111 |
| 4.8    | Control Predicates . . . . .                            | 113 |
| 4.9    | Meta-Call Predicates . . . . .                          | 115 |
| 4.10   | Delimited continuations . . . . .                       | 119 |
| 4.11   | Exception handling . . . . .                            | 119 |
| 4.11.1 | Urgency of exceptions . . . . .                         | 121 |
| 4.11.2 | Debugging and exceptions . . . . .                      | 121 |
| 4.11.3 | The exception term . . . . .                            | 122 |
| 4.11.4 | Printing messages . . . . .                             | 122 |
| 4.12   | Handling signals . . . . .                              | 127 |
| 4.12.1 | Notes on signal handling . . . . .                      | 128 |
| 4.13   | DCG Grammar rules . . . . .                             | 128 |
| 4.14   | Database . . . . .                                      | 131 |
| 4.14.1 | Managing (dynamic) predicates . . . . .                 | 132 |
| 4.14.2 | The recorded database . . . . .                         | 134 |
| 4.14.3 | Flags . . . . .   | 135 |
| 4.14.4 | Tries . . . . .   | 135 |
| 4.14.5 | Update view . . . . .                                   | 137 |
| 4.14.6 | Indexing databases . . . . .                            | 137 |
| 4.15   | Declaring predicate properties . . . . .                | 138 |
| 4.16   | Examining the program . . . . .                         | 139 |
| 4.17   | Input and output . . . . .                              | 145 |
| 4.17.1 | Predefined stream aliases . . . . .                     | 145 |
| 4.17.2 | ISO Input and Output Streams . . . . .                  | 146 |
| 4.17.3 | Edinburgh-style I/O . . . . .                           | 154 |
| 4.17.4 | Switching between Edinburgh and ISO I/O . . . . .       | 156 |
| 4.17.5 | Adding IRI schemas . . . . .                            | 156 |
| 4.17.6 | Write onto atoms, code-lists, etc. . . . .              | 157 |
| 4.17.7 | Fast binary term I/O . . . . .                          | 158 |
| 4.18   | Status of streams . . . . .                             | 159 |
| 4.19   | Primitive character I/O . . . . .                       | 160 |
| 4.20   | Term reading and writing . . . . .                      | 164 |
| 4.21   | Analysing and Constructing Terms . . . . .              | 172 |
| 4.21.1 | Non-logical operations on terms . . . . .               | 175 |
| 4.22   | Analysing and Constructing Atoms . . . . .              | 176 |
| 4.23   | Localization (locale) support . . . . .                 | 179 |
| 4.24   | Character properties . . . . .                          | 181 |
| 4.24.1 | Case conversion . . . . .                               | 183 |
| 4.24.2 | White space normalization . . . . .                     | 183 |
| 4.24.3 | Language-specific comparison . . . . .                  | 183 |
| 4.25   | Operators . . . . .                                     | 184 |
| 4.26   | Character Conversion . . . . .                          | 185 |
| 4.27   | Arithmetic . . . . .                                    | 187 |
| 4.27.1 | Special purpose integer arithmetic . . . . .            | 187 |

|          |   |            |
|----------|---|------------|
| 4.27.2   | General purpose arithmetic                                | 188        |
| 4.28     | Misc arithmetic support predicates                        | 197        |
| 4.29     | Built-in list operations                                  | 198        |
| 4.30     | Finding all Solutions to a Goal                           | 201        |
| 4.31     | Forall  | 203        |
| 4.32     | Formatted Write   | 203        |
| 4.32.1   | Writef  | 203        |
| 4.32.2   | Format  | 205        |
| 4.32.3   | Programming Format  | 208        |
| 4.33     | Global variables  | 208        |
| 4.33.1   | Compatibility of SWI-Prolog Global Variables              | 210        |
| 4.34     | Terminal Control  | 210        |
| 4.35     | Operating System Interaction                              | 211        |
| 4.35.1   | Windows-specific Operating System Interaction             | 213        |
| 4.35.2   | Dealing with time and date                                | 214        |
| 4.35.3   | Controlling the swipl-win.exe console window              | 220        |
| 4.36     | File System Interaction                                   | 221        |
| 4.37     | User Top-level Manipulation                               | 226        |
| 4.38     | Creating a Protocol of the User Interaction               | 227        |
| 4.39     | Debugging and Tracing Programs                            | 228        |
| 4.40     | Obtaining Runtime Statistics                              | 231        |
| 4.41     | Execution profiling                                       | 231        |
| 4.41.1   | Profiling predicates                                      | 231        |
| 4.41.2   | Visualizing profiling data                                | 234        |
| 4.41.3   | Information gathering                                     | 235        |
| 4.42     | Memory Management   | 236        |
| 4.43     | Windows DDE interface                                     | 238        |
| 4.43.1   | DDE client interface                                      | 238        |
| 4.43.2   | DDE server mode   | 239        |
| 4.44     | Miscellaneous   | 240        |
| <b>5</b> | <b>SWI-Prolog extensions</b>                              | <b>242</b> |
| 5.1      | Lists are special   | 242        |
| 5.1.1    | Motivating '[]' and [] for lists                          | 243        |
| 5.2      | The string type and its double quoted syntax              | 243        |
| 5.2.1    | Predicates that operate on strings                        | 244        |
| 5.2.2    | Representing text: strings, atoms and code lists          | 247        |
| 5.2.3    | Adapting code for double quoted strings                   | 248        |
| 5.2.4    | Why has the representation of double quoted text changed? | 249        |
| 5.3      | Syntax changes  | 251        |
| 5.3.1    | Operators and quoted atoms                                | 251        |
| 5.3.2    | Compound terms with zero arguments                        | 251        |
| 5.3.3    | Block operators   | 252        |
| 5.4      | Dicts: structures with named arguments                    | 253        |
| 5.4.1    | Functions on dicts  | 254        |
| 5.4.2    | Predicates for managing dicts                             | 256        |
| 5.4.3    | When to use dicts?  | 259        |

|          |   |            |
|----------|---|------------|
| 5.4.4    | A motivation for dicts as primary citizens            | 261        |
| 5.4.5    | Implementation notes about dicts                      | 261        |
| 5.5      | Integration of strings and dicts in the libraries     | 262        |
| 5.5.1    | Dicts and option processing                           | 262        |
| 5.5.2    | Dicts in core data structures                         | 262        |
| 5.5.3    | Dicts, strings and XML                                | 262        |
| 5.5.4    | Dicts, strings and JSON                               | 262        |
| 5.5.5    | Dicts, strings and HTTP                               | 263        |
| 5.6      | Remaining issues                                      | 263        |
| <b>6</b> | <b>Modules</b>  | <b>264</b> |
| 6.1      | Why Use Modules?                                      | 264        |
| 6.2      | Defining a Module                                     | 264        |
| 6.3      | Importing Predicates into a Module                    | 265        |
| 6.4      | Defining a meta-predicate                             | 267        |
| 6.5      | Overruling Module Boundaries                          | 269        |
| 6.5.1    | Explicit manipulation of the calling context          | 269        |
| 6.6      | Interacting with modules from the top level           | 270        |
| 6.7      | Composing modules from other modules                  | 270        |
| 6.8      | Operators and modules                                 | 271        |
| 6.9      | Dynamic importing using import modules                | 271        |
| 6.10     | Reserved Modules and using the ‘user’ module          | 272        |
| 6.11     | An alternative import/export interface                | 272        |
| 6.12     | Dynamic Modules                                       | 273        |
| 6.13     | Transparent predicates: definition and context module | 273        |
| 6.14     | Module properties                                     | 275        |
| 6.15     | Compatibility of the Module System                    | 276        |
| <b>7</b> | <b>Tabled execution (SLG resolution)</b>              | <b>278</b> |
| 7.1      | Example 1: using tabling for memoizing                | 278        |
| 7.2      | Example 2: avoiding non-termination                   | 280        |
| 7.3      | Answer subsumption or mode directed tabling           | 281        |
| 7.4      | Tabling predicate reference                           | 282        |
| 7.5      | About the tabling implementation                      | 283        |
| <b>8</b> | <b>Constraint Logic Programming</b>                   | <b>285</b> |
| 8.1      | Attributed variables                                  | 286        |
| 8.1.1    | Attribute manipulation predicates                     | 288        |
| 8.1.2    | Attributed variable hooks                             | 288        |
| 8.1.3    | Operations on terms with attributed variables         | 290        |
| 8.1.4    | Special purpose predicates for attributes             | 290        |
| 8.2      | Coroutining   | 290        |
| <b>9</b> | <b>CHR: Constraint Handling Rules</b>                 | <b>293</b> |
| 9.1      | Introduction  | 293        |
| 9.2      | Syntax and Semantics                                  | 294        |
| 9.2.1    | Syntax of CHR rules                                   | 294        |

|           |  |            |
|-----------|--|------------|
| 9.2.2     | Semantics  | 295        |
| 9.3       | CHR in SWI-Prolog Programs   | 296        |
| 9.3.1     | Embedding in Prolog Programs   | 296        |
| 9.3.2     | Constraint declaration   | 297        |
| 9.3.3     | Compilation  | 300        |
| 9.4       | Debugging  | 300        |
| 9.4.1     | Ports  | 301        |
| 9.4.2     | Tracing  | 301        |
| 9.4.3     | CHR Debugging Predicates   | 302        |
| 9.5       | Examples   | 303        |
| 9.6       | Backwards Compatibility  | 304        |
| 9.6.1     | The Old SICStus CHR implementation   | 304        |
| 9.6.2     | The Old ECLiPSe CHR implementation   | 305        |
| 9.7       | Programming Tips and Tricks  | 305        |
| 9.8       | Compiler Errors and Warnings   | 306        |
| 9.8.1     | CHR Compiler Errors  | 306        |
| <b>10</b> | <b>Multithreaded applications</b>  | <b>308</b> |
| 10.1      | Creating and destroying Prolog threads   | 308        |
| 10.2      | Monitoring threads   | 312        |
| 10.3      | Thread communication   | 314        |
| 10.3.1    | Message queues   | 314        |
| 10.3.2    | Signalling threads   | 318        |
| 10.3.3    | Threads and dynamic predicates   | 318        |
| 10.4      | Thread synchronisation   | 319        |
| 10.5      | Thread support library(threadutil)   | 321        |
| 10.5.1    | Debugging threads  | 321        |
| 10.5.2    | Profiling threads  | 322        |
| 10.6      | Multithreaded mixed C and Prolog applications                                      | 322        |
| 10.6.1    | A Prolog thread for each native thread (one-to-one)                                | 323        |
| 10.6.2    | Pooling Prolog engines (many-to-many)  | 324        |
| 10.7      | Multithreading and the XPCE graphics system  | 325        |
| <b>11</b> | <b>Coroutining using Prolog engines</b>  | <b>327</b> |
| 11.1      | Examples using engines   | 327        |
| 11.1.1    | Aggregation using engines  | 327        |
| 11.1.2    | State accumulation using engines   | 329        |
| 11.1.3    | Scalable many-agent applications   | 331        |
| 11.2      | Engine resource usage  | 331        |
| 11.3      | Engine predicate reference   | 331        |
| <b>12</b> | <b>Foreign Language Interface</b>  | <b>334</b> |
| 12.1      | Overview of the Interface  | 334        |
| 12.2      | Linking Foreign Modules  | 334        |
| 12.2.1    | What linking is provided?  | 335        |
| 12.2.2    | What kind of loading should I be using?  | 335        |
| 12.2.3    | library(shlib): Utility library for loading foreign objects (DLLs, shared objects) | 335        |



|           |  |            |
|-----------|--|------------|
| 12.2.4    | Low-level operations on shared libraries                       | 337        |
| 12.2.5    | Static Linking   | 338        |
| 12.3      | Interface Data Types   | 339        |
| 12.3.1    | Type <code>term_t</code> : a reference to a Prolog term        | 339        |
| 12.3.2    | Other foreign interface types                                  | 341        |
| 12.4      | The Foreign Include File                                       | 342        |
| 12.4.1    | Argument Passing and Control                                   | 342        |
| 12.4.2    | Atoms and functors   | 345        |
| 12.4.3    | Analysing Terms via the Foreign Interface                      | 346        |
| 12.4.4    | Constructing Terms   | 354        |
| 12.4.5    | Unifying data  | 357        |
| 12.4.6    | Convenient functions to generate Prolog exceptions             | 364        |
| 12.4.7    | Serializing and deserializing Prolog terms                     | 366        |
| 12.4.8    | BLOBS: Using atoms to store arbitrary binary data              | 366        |
| 12.4.9    | Exchanging GMP numbers   | 368        |
| 12.4.10   | Calling Prolog from C  | 370        |
| 12.4.11   | Discarding Data  | 372        |
| 12.4.12   | Foreign Code and Modules                                       | 373        |
| 12.4.13   | Prolog exceptions in foreign code                              | 374        |
| 12.4.14   | Catching Signals (Software Interrupts)                         | 376        |
| 12.4.15   | Miscellaneous  | 378        |
| 12.4.16   | Errors and warnings  | 381        |
| 12.4.17   | Environment Control from Foreign Code                          | 381        |
| 12.4.18   | Querying Prolog  | 382        |
| 12.4.19   | Registering Foreign Predicates                                 | 382        |
| 12.4.20   | Foreign Code Hooks   | 385        |
| 12.4.21   | Storing foreign data   | 387        |
| 12.4.22   | Embedding SWI-Prolog in other applications                     | 390        |
| 12.5      | Linking embedded applications using <code>swipl-ld</code>      | 394        |
| 12.5.1    | A simple example   | 396        |
| 12.6      | The Prolog ‘home’ directory                                    | 397        |
| 12.7      | Example of Using the Foreign Interface                         | 399        |
| 12.8      | Notes on Using Foreign Code                                    | 401        |
| 12.8.1    | Foreign debugging functions                                    | 401        |
| 12.8.2    | Memory Allocation  | 402        |
| 12.8.3    | Compatibility between Prolog versions                          | 403        |
| 12.8.4    | Debugging and profiling foreign code ( <code>valgrind</code> ) | 403        |
| 12.8.5    | Name Conflicts in C modules                                    | 404        |
| 12.8.6    | Compatibility of the Foreign Interface                         | 404        |
| <b>13</b> | <b>Deploying applications</b>                                  | <b>405</b> |
| 13.1      | Deployment options   | 405        |
| 13.2      | Understanding saved states                                     | 405        |
| 13.2.1    | Creating a saved state   | 406        |
| 13.2.2    | Limitations of <code>qsave_program</code>                      | 408        |
| 13.2.3    | Runtimes and Foreign Code                                      | 409        |
| 13.3      | State initialization   | 410        |

|          |  |            |
|----------|--|------------|
| 13.4     | Using program resources  | 410        |
| 13.4.1   | Resources as files   | 410        |
| 13.4.2   | Access resources using <code>open_resource</code>  | 411        |
| 13.4.3   | Declaring resources  | 412        |
| 13.4.4   | Managing resource files  | 412        |
| 13.5     | Debugging and updating deployed systems  | 412        |
| 13.6     | Protecting your code   | 413        |
| 13.6.1   | Obfuscating code in saved states   | 413        |
| 13.7     | Finding Application files  | 414        |
| <b>A</b> | <b>The SWI-Prolog library</b>  | <b>415</b> |
| A.1      | <code>library(aggregate)</code> : Aggregation operators on backtrackable predicates      | 415        |
| A.2      | <code>library(ansi_term)</code> : Print decorated text to ANSI consoles                  | 418        |
| A.3      | <code>library(apply)</code> : Apply predicates on a list                                 | 419        |
| A.4      | <code>library(assoc)</code> : Association lists  | 420        |
| A.4.1    | Introduction   | 420        |
| A.4.2    | Creating association lists   | 421        |
| A.4.3    | Querying association lists   | 421        |
| A.4.4    | Modifying association lists  | 422        |
| A.4.5    | Conversion predicates  | 422        |
| A.4.6    | Reasoning about association lists and their elements                                     | 422        |
| A.5      | <code>library(broadcast)</code> : Broadcast and receive event notifications              | 423        |
| A.6      | <code>library(charsio)</code> : I/O on Lists of Character Codes                          | 425        |
| A.7      | <code>library(check)</code> : Consistency checking                                       | 426        |
| A.8      | <code>library(clpb)</code> : CLP(B): Constraint Logic Programming over Boolean Variables | 428        |
| A.8.1    | Introduction   | 428        |
| A.8.2    | Boolean expressions  | 429        |
| A.8.3    | Interface predicates   | 430        |
| A.8.4    | Examples   | 430        |
| A.8.5    | Obtaining BDDs   | 431        |
| A.8.6    | Enabling monotonic CLP(B)  | 431        |
| A.8.7    | Example: Pigeons   | 432        |
| A.8.8    | Example: Boolean circuit   | 432        |
| A.8.9    | Acknowledgments  | 433        |
| A.8.10   | CLP(B) predicate index   | 433        |
| A.9      | <code>library(clpfd)</code> : CLP(FD): Constraint Logic Programming over Finite Domains  | 434        |
| A.9.1    | Introduction   | 434        |
| A.9.2    | Arithmetic constraints   | 436        |
| A.9.3    | Declarative integer arithmetic   | 437        |
| A.9.4    | Example: Factorial relation  | 438        |
| A.9.5    | Combinatorial constraints  | 439        |
| A.9.6    | Domains  | 439        |
| A.9.7    | Example: Sudoku  | 440        |
| A.9.8    | Residual goals   | 441        |
| A.9.9    | Core relations and search  | 441        |
| A.9.10   | Example: Eight queens puzzle   | 443        |
| A.9.11   | Optimisation   | 444        |

|  |     |
|--|-----|
| A.9.12 Reification . . . . .   | 444 |
| A.9.13 Enabling monotonic CLP(FD) . . . . .  | 445 |
| A.9.14 Custom constraints . . . . .  | 445 |
| A.9.15 Applications . . . . .  | 446 |
| A.9.16 Acknowledgments . . . . .   | 446 |
| A.9.17 CLP(FD) predicate index . . . . .   | 446 |
| A.9.18 Closing and opening words about CLP(FD) . . . . .                             | 458 |
| A.10 library(clpqr): Constraint Logic Programming over Rationals and Reals . . . . . | 458 |
| A.10.1 Solver predicates . . . . .   | 459 |
| A.10.2 Syntax of the predicate arguments . . . . .                                   | 460 |
| A.10.3 Use of unification . . . . .  | 460 |
| A.10.4 Non-linear constraints . . . . .  | 461 |
| A.10.5 Status and known problems . . . . .   | 461 |
| A.11 library(csv): Process CSV (Comma-Separated Values) data . . . . .               | 462 |
| A.12 library(dcg/basics): Various general DCG utilities . . . . .                    | 464 |
| A.13 library(dcg/high_order): High order grammar operations . . . . .                | 466 |
| A.14 library(debug): Print debug messages and test assertions . . . . .              | 468 |
| A.15 library(dict): Dict utilities . . . . .   | 469 |
| A.16 library(error): Error generating support . . . . .                              | 471 |
| A.17 library(gensym): Generate unique identifiers . . . . .                          | 474 |
| A.18 library(iostream): Utilities to deal with streams . . . . .                     | 474 |
| A.19 library(lists): List Manipulation . . . . .                                     | 476 |
| A.20 library(main): Provide entry point for scripts . . . . .                        | 480 |
| A.21 library(nb_set): Non-backtrackable set . . . . .                                | 481 |
| A.22 library(www_browser): Activating your Web-browser . . . . .                     | 482 |
| A.23 library(occurs): Finding and counting sub-terms . . . . .                       | 483 |
| A.24 library(option): Option list processing . . . . .                               | 483 |
| A.25 library(optparse): command line parsing . . . . .                               | 485 |
| A.25.1 Notes and tips . . . . .  | 490 |
| A.26 library(ordsets): Ordered set manipulation . . . . .                            | 492 |
| A.27 library(pairs): Operations on key-value lists . . . . .                         | 494 |
| A.28 library(persistency): Provide persistent dynamic predicates . . . . .           | 495 |
| A.29 library(pio): Pure I/O . . . . .  | 498 |
| A.29.1 library(pure_input): Pure Input from files and streams . . . . .              | 498 |
| A.30 library(predicate_options): Declare option-processing of predicates . . . . .   | 500 |
| A.30.1 The strength and weakness of predicate options . . . . .                      | 500 |
| A.30.2 Options as arguments or environment? . . . . .                                | 501 |
| A.30.3 Improving on the current situation . . . . .                                  | 501 |
| A.31 library(prolog_pack): A package manager for Prolog . . . . .                    | 504 |
| A.32 library(prolog_xref): Cross-reference data collection library . . . . .         | 507 |
| A.32.1 Extending the library . . . . .   | 508 |
| A.33 library(quasi_quotations): Define Quasi Quotation syntax . . . . .              | 508 |
| A.34 library(random): Random numbers . . . . .                                       | 510 |
| A.35 library(readutil): Reading lines, streams and files . . . . .                   | 512 |
| A.36 library(record): Access named fields in a term . . . . .                        | 513 |
| A.37 library(registry): Manipulating the Windows registry . . . . .                  | 515 |
| A.38 library(settings): Setting management . . . . .                                 | 516 |

|          |  |            |
|----------|--|------------|
| A.39     | library(simplex): Solve linear programming problems . . . . .      | 518        |
| A.39.1   | Introduction . . . . .   | 518        |
| A.39.2   | Delayed column generation . . . . .                                | 520        |
| A.39.3   | Solving LPs with special structure . . . . .                       | 520        |
| A.39.4   | Examples . . . . .   | 520        |
| A.40     | library(solution_sequences): Modify solution sequences . . . . .   | 523        |
| A.41     | library(thread_pool): Resource bounded thread management . . . . . | 525        |
| A.42     | library(ugraphs): Unweighted Graphs . . . . .                      | 527        |
| A.43     | library(url): Analysing and constructing URL . . . . .             | 530        |
| A.44     | library(varnumbers): Utilities for numbered terms . . . . .        | 533        |
| A.45     | library(yall): Lambda expressions . . . . .                        | 534        |
| <b>B</b> | <b>Hackers corner</b> . . . . .                                    | <b>537</b> |
| B.1      | Examining the Environment Stack . . . . .                          | 537        |
| B.2      | Ancestral cuts . . . . .   | 539        |
| B.3      | Intercepting the Tracer . . . . .                                  | 539        |
| B.4      | Breakpoint and watchpoint handling . . . . .                       | 541        |
| B.5      | Adding context to errors: prolog_exception_hook . . . . .          | 543        |
| B.6      | Hooks using the exception predicate . . . . .                      | 543        |
| B.7      | Hooks for integrating libraries . . . . .                          | 544        |
| B.8      | Hooks for loading files . . . . .                                  | 545        |
| <b>C</b> | <b>Compatibility with other Prolog dialects</b> . . . . .          | <b>546</b> |
| C.1      | Some considerations for writing portable code . . . . .            | 547        |
| <b>D</b> | <b>Glossary of Terms</b> . . . . .                                 | <b>550</b> |
| <b>E</b> | <b>SWI-Prolog License Conditions and Tools</b> . . . . .           | <b>556</b> |
| E.1      | Contributing to the SWI-Prolog project . . . . .                   | 557        |
| E.2      | Software support to keep track of license conditions . . . . .     | 557        |
| E.3      | License conditions inherited from used code . . . . .              | 558        |
| E.3.1    | Cryptographic routines . . . . .                                   | 558        |
| <b>F</b> | <b>Summary</b> . . . . .   | <b>559</b> |
| F.1      | Predicates . . . . .   | 559        |
| F.2      | Library predicates . . . . .                                       | 576        |
| F.2.1    | library(aggregate) . . . . .                                       | 576        |
| F.2.2    | library(ansi_term) . . . . .                                       | 576        |
| F.2.3    | library(apply) . . . . .   | 576        |
| F.2.4    | library(assoc) . . . . .   | 576        |
| F.2.5    | library(broadcast) . . . . .                                       | 577        |
| F.2.6    | library(charsio) . . . . .   | 577        |
| F.2.7    | library(check) . . . . .   | 577        |
| F.2.8    | library(clpb) . . . . .  | 578        |
| F.2.9    | library(clpfd) . . . . .   | 578        |
| F.2.10   | library(clpqr) . . . . .   | 579        |
| F.2.11   | library(csv) . . . . .   | 579        |

|        |                                   |     |
|--------|-----------------------------------|-----|
| F.2.12 | library(dcgbasics)                | 579 |
| F.2.13 | library(dcghighorder)             | 580 |
| F.2.14 | library(debug)                    | 580 |
| F.2.15 | library(dicts)                    | 580 |
| F.2.16 | library(error)                    | 581 |
| F.2.17 | library(explain)                  | 581 |
| F.2.18 | library(help)                     | 581 |
| F.2.19 | library(iostream)                 | 581 |
| F.2.20 | library(summaries.d/iostream/tex) | 581 |
| F.2.21 | library(lists)                    | 581 |
| F.2.22 | library(main)                     | 582 |
| F.2.23 | library(occurs)                   | 582 |
| F.2.24 | library(option)                   | 582 |
| F.2.25 | library(optparse)                 | 583 |
| F.2.26 | library(ordsets)                  | 583 |
| F.2.27 | library(persistency)              | 583 |
| F.2.28 | library(predicate_options)        | 584 |
| F.2.29 | library(prologpack)               | 584 |
| F.2.30 | library(prologxref)               | 584 |
| F.2.31 | library(pairs)                    | 584 |
| F.2.32 | library(pio)                      | 585 |
| F.2.33 | library(random)                   | 585 |
| F.2.34 | library(readutil)                 | 585 |
| F.2.35 | library(record)                   | 586 |
| F.2.36 | library(registry)                 | 586 |
| F.2.37 | library(settings)                 | 586 |
| F.2.38 | library(simplex)                  | 586 |
| F.2.39 | library(ugraphs)                  | 586 |
| F.2.40 | library(url)                      | 587 |
| F.2.41 | library(www_browser)              | 587 |
| F.2.42 | library(solution_sequences)       | 587 |
| F.2.43 | library(thread_pool)              | 587 |
| F.2.44 | library(varnumbers)               | 587 |
| F.2.45 | library(yall)                     | 588 |
| F.3    | Arithmetic Functions              | 589 |
| F.4    | Operators                         | 591 |

# Introduction

---

This document is a *reference manual*. That means that it documents the system, but it does not explain the basics of the Prolog language and it leaves many details of the syntax, semantics and built-in primitives undefined where SWI-Prolog follows the standards. This manual is intended for people that are familiar with Prolog. For those not familiar with Prolog, we recommend to start with a Prolog textbook such as [Bratko, 1986], [Sterling & Shapiro, 1986] or [Clocksin & Melish, 1987]. For more advanced Prolog usage we recommend [O’Keefe, 1990].

## 1.1 Positioning SWI-Prolog

Most implementations of the Prolog language are designed to serve a limited set of use cases. SWI-Prolog is no exception to this rule. SWI-Prolog positions itself primarily as a Prolog environment for ‘programming in the large’ and use cases where it plays a central role in an application, i.e., where it acts as ‘glue’ between components. At the same time, SWI-Prolog aims at providing a productive rapid prototyping environment. Its orientation towards programming in the large is backed up by scalability, compiler speed, program structuring (modules), support for multithreading to accommodate servers, Unicode and interfaces to a large number of document formats, protocols and programming languages. Prototyping is facilitated by good development tools, both for command line usage as for usage with graphical development tools. Demand loading of predicates from the library and a ‘make’ facility avoids the *requirement* for using declarations and reduces typing.

SWI-Prolog is traditionally strong in education because it is free and portable, but also because of its compatibility with textbooks and its easy-to-use environment.

Note that these positions do not imply that the system cannot be used with other scenarios. SWI-Prolog is used as an embedded language where it serves as a small rule subsystem in a large application. It is also used as a deductive database. In some cases this is the right choice because SWI-Prolog has features that are required in the application, such as threading or Unicode support. In general though, for example, GNU-Prolog is more suited for embedding because it is small and can compile to native code, XSB is better for deductive databases because it provides advanced resolution techniques (tabling), and ECLiPSe is better at constraint handling.

The syntax and set of built-in predicates is based on the ISO standard [Hodgson, 1998]. Most extensions follow the ‘Edinburgh tradition’ (DEC10 Prolog and C-Prolog) and Quintus Prolog [Qui, 1997]. The infrastructure for constraint programming is based on hProlog [Demoen, 2002]. Some libraries are copied from the YAP<sup>1</sup> system. Together with YAP we developed a portability framework (see section C). This framework has been filled for SICStus Prolog, YAP, IF/Prolog and Ciao. SWI-Prolog version 7 introduces various extensions to the Prolog language (see section 5). The *string* data type and its supporting set of built-in predicates is compatibility with ECLiPSe.

---

<sup>1</sup><http://www.dcc.fc.up.pt/~{}vsc/Yap/>

## 1.2 Status and releases

This manual describes version 8.0 of SWI-Prolog. SWI-Prolog is widely considered to be a robust and scalable implementation of the Prolog language. It is widely used in education and research. In addition, it is in use for  $24 \times 7$  mission critical commercial server processes. The site <http://www.swi-prolog.org> is hosted using the SWI-Prolog HTTP server infrastructure. It receives approximately 2.3 million hits and serves approximately 300 Gbytes on manual data and downloads each month. SWI-Prolog applications range from student assignments to commercial applications that count more than one million lines of Prolog code.

SWI-Prolog has two development tracks. *Stable* releases have an even *minor* version number (e.g., 6.2.1) and are released as a branch from the development version when the development version is considered stable and there is sufficient new functionality to justify a stable release. Stable releases often get a few patch updates to deal with installation issues or major flaws. A new *Development* version is typically released every couple of weeks as a snapshot of the public git repository. ‘Extra editions’ of the development version may be released after problems that severely hindered the user in their progress have been fixed.

Known bugs that are not likely to be fixed soon are described as footnotes in this manual.

## 1.3 Should I be using SWI-Prolog?

There are a number of reasons why it might be better to choose a commercial, or another free, Prolog system:

- *SWI-Prolog comes with no warranties*  
Although the developers or the community often provide a work-around or a fix for a bug, there is no place you can go to for guaranteed support. However, the full source archive is available and can be used to compile and debug SWI-Prolog using free tools on all major platforms. Users requiring more support should ensure access to knowledgeable developers.
- *Performance is your first concern*  
Various free and commercial systems have better performance. But, ‘standard’ Prolog benchmarks disregard many factors that are often critical to the performance of large applications. SWI-Prolog is not good at fast calling of simple predicates, but it is fast with dynamic code, meta-calling and predicates that contain large numbers of clauses or require more advanced clauses indexing. Many of SWI-Prolog’s built-in predicates are written in C and have excellent performance.
- *You need features not offered by SWI-Prolog*  
Today’s SWI-Prolog supports most features available from other Prolog systems. Still, there are features that are not or poorly supported. Examples are tabling which, although provided, is rather slow and does not support e.g., *incremental tabling* and *well formed semantics*. If you require additional features and you have resources, be it financial or expertise, please contact the developers.

On the other hand, SWI-Prolog offers some facilities that are widely appreciated by users:

- *Nice environment*  
SWI-Prolog provides a good command line environment, including ‘Do What I Mean’, auto-completion, history and a tracer that operates on single key strokes. The system automatically

recompiles modified parts of the source code using the `make/0` command. The system can be instructed to open an arbitrary editor on the right file and line based on its source database. It ships with various graphical tools and can be combined with the SWI-Prolog editor, PDT (Eclipse plugin for Prolog), VScode or GNU-Emacs.

- *Fast compiler*  
Even very large applications can be loaded in seconds on most machines. If this is not enough, there is the Quick Load Format. See `qcompile/1` and `qsave_program/2`.
- *Transparent compiled code*  
SWI-Prolog compiled code can be treated just as interpreted code: you can list it, trace it, etc. This implies you do not have to decide beforehand whether a module should be loaded for debugging or not, and the performance of debugged code is close to that of normal operation.
- *Source level debugger*  
The source level debugger provides a good overview of your current location in the search tree, variable bindings, your source code and open choice points. Choice point inspection provides meaningful insight to both novices and experienced users. Avoiding unintended choice points often provides a huge increase in performance and a huge saving in memory usage.
- *Profiling*  
SWI-Prolog offers an execution profiler with either textual output or graphical output. Finding and improving hotspots in a Prolog program may result in huge speedups.
- *Flexibility*  
SWI-Prolog can easily be integrated with C, supporting non-determinism in Prolog calling C as well as C calling Prolog (see section 12). It can also be *embedded* in external programs (see section 12.5). System predicates can be redefined locally to provide compatibility with other Prolog systems.
- *Threads*  
Robust support for multiple threads may improve performance and is a key enabling factor for deploying Prolog in server applications.
- *Interfaces*  
SWI-Prolog ships with many extension packages that provide robust interfaces to processes, encryption, TCP/IP, TIPC, ODBC, SGML/XML/HTML, RDF, JSON, YAML, HTTP, graphics and much more.

## 1.4 Support the SWI-Prolog project

You can support the SWI-Prolog project in several ways. Academics are invited to cite one of the publications<sup>2</sup> on SWI-Prolog. Users can help by identifying and/or fixing problems with the code or its documentation.<sup>3</sup> Users can contribute new features or, more lightweight, contribute packs<sup>4</sup>. Commercial users may consider contacting the developers<sup>5</sup> to sponsor the development of new features or seek for opportunities to cooperate with the developers or other commercial users.

---

<sup>2</sup><http://www.swi-prolog.org/Publications.html>

<sup>3</sup><http://www.swi-prolog.org/howto/SubmitPatch.html>

<sup>4</sup><http://www.swi-prolog.org/pack/list>

<sup>5</sup><mailto:info@swi-prolog.org>



## 1.5 Implementation history

SWI-Prolog started back in 1986 with the requirement for a Prolog that could handle recursive interaction with the C-language: Prolog calling C and C calling Prolog recursively. In those days Prolog systems were not very aware of their environment and we needed such a system to support interactive applications. Since then, SWI-Prolog's development has been guided by requests from the user community, especially focussing on (in arbitrary order) interaction with the environment, scalability, (I/O) performance, standard compliance, teaching and the program development environment.

SWI-Prolog is based on a simple Prolog virtual machine called ZIP [Bowen *et al.*, 1983, Neumerkel, 1993] which defines only 7 instructions. Prolog can easily be compiled into this language, and the abstract machine code is easily decompiled back into Prolog. As it is also possible to wire a standard 4-port debugger in the virtual machine, there is no need for a distinction between compiled and interpreted code. Besides simplifying the design of the Prolog system itself, this approach has advantages for program development: the compiler is simple and fast, the user does not have to decide in advance whether debugging is required, and the system only runs slightly slower in debug mode compared to normal execution. The price we have to pay is some performance degradation (taking out the debugger from the VM interpreter improves performance by about 20%) and somewhat additional memory usage to help the decompiler and debugger.

SWI-Prolog extends the minimal set of instructions described in [Bowen *et al.*, 1983] to improve performance. While extending this set, care has been taken to maintain the advantages of decompilation and tracing of compiled code. The extensions include specialised instructions for unification, predicate invocation, some frequently used built-in predicates, arithmetic, and control (`;/2`, `|/2`), if-then (`->/2`) and negation-by-failure (`\+/1`).

## 1.6 Acknowledgements

Some small parts of the Prolog code of SWI-Prolog are modified versions of the corresponding Edinburgh C-Prolog code: grammar rule compilation and `writeln/2`. Also some of the C-code originates from C-Prolog: finding the path of the currently running executable and some of the code underlying `absolute_file_name/2`. Ideas on programming style and techniques originate from C-Prolog and Richard O'Keefe's *thief* editor. An important source of inspiration are the programming techniques introduced by Anjo Anjewierden in PCE version 1 and 2.

Our special thanks go to those who had the fate of using the early versions of this system, suggested extensions or reported bugs. Among them are Anjo Anjewierden, Huub Knops, Bob Wielinga, Wouter Jansweijer, Luc Peerdeman, Eric Nombden, Frank van Harmelen, Bert Rengel.

Martin Jansche (`jansche@novell11.gs.uni-heidelberg.de`) has been so kind to reorganise the sources for version 2.1.3 of this manual. Horst von Brand has been so kind to fix many typos in the 2.7.14 manual. Thanks! Randy Sharp fixed many issues in the 6.0.x version of the manual.

Bart Demoen and Tom Schrijvers have helped me adding coroutining, constraints, global variables and support for cyclic terms to the kernel. Tom Schrijvers has provided a first `clp(fd)` constraint solver, the CHR compiler and some of the coroutining predicates. Markus Triska contributed the current `clp(fd)` implementation as well as the `clp(b)` implementation.

Tom Schrijvers and Bart Demoen initiated the implementation of *delimited continuations* (section 4.10), which was used by Benoit Desouter and Tom Schrijvers to implement *tabling* (section 7) as a library. Fabrizio Riguzzi added a first implementation for *mode directed tabling* (section 7.3).

The SWI-Prolog 7 extensions (section 5) are the result of a long heated discussion on the mail-

inglist. Nicos Angelopoulos' wish for a smooth integration with the R language triggered the overall intent of these extensions to enable a smoother integration of Prolog with other languages. Michael Hendrix suggested and helped shaping SWI-Prolog *quasi quotations*.

Paul Singleton has integrated Fred Dushin's Java-calls-Prolog side with his Prolog-calls-Java side into the current bidirectional JPL interface package.

Richard O'Keefe is gratefully acknowledged for his efforts to educate beginners as well as valuable comments on proposed new developments.

Scientific Software and Systems Limited, [www.sss.co.nz](http://www.sss.co.nz) has sponsored the development of the SSL library, unbounded integer and rational number arithmetic and many enhancements to the memory management of the system.

Leslie de Koninck has made clp(QR) available to SWI-Prolog.

Jeff Rosenwald contributed the TIPC networking library and Google's protocol buffer handling.

Paulo Moura's great experience in maintaining Logtalk for many Prolog systems including SWI-Prolog has helped in many places fixing compatibility issues. He also worked on the MacOS port and fixed many typos in the 5.6.9 release of the documentation.

Kyndi (<https://kyndi.com/>) sponsored the development of the *engines* interface (chapter 11). The final API was established after discussion with the founding father of engines, Paul Tarau and Paulo Moura. Kyndi also sponsored JIT indexing on multiple arguments.

# Overview

---

## 2.1 Getting started quickly

### 2.1.1 Starting SWI-Prolog

#### Starting SWI-Prolog on Unix

By default, SWI-Prolog is installed as ‘swipl’. The command line arguments of SWI-Prolog itself and its utility programs are documented using standard Unix `man` pages. SWI-Prolog is normally operated as an interactive application simply by starting the program:

```
$ swipl
Welcome to SWI-Prolog ...
...
1 ?-
```

After starting Prolog, one normally loads a program into it using `consult/1`, which may be abbreviated by putting the name of the program file between square brackets. The following goal loads the file [likes.pl](#) containing clauses for the predicates `likes/2`:

```
?- [likes].
true.

?-
```

Alternatively, the source file may be given as command line arguments:

```
$ swipl likes.pl
Welcome to SWI-Prolog ...
...
1 ?-
```

After this point, Unix and Windows users unite, so if you are using Unix please continue at section [2.1.2](#).

### Starting SWI-Prolog on Windows

After SWI-Prolog has been installed on a Windows system, the following important new things are available to the user:

- A folder (called *directory* in the remainder of this document) called `swipl` containing the executables, libraries, etc., of the system. No files are installed outside this directory.
- A program `swipl-win.exe`, providing a window for interaction with Prolog. The program `swipl.exe` is a version of SWI-Prolog that runs in a console window.
- The file extension `.pl` is associated with the program `swipl-win.exe`. Opening a `.pl` file will cause `swipl-win.exe` to start, change directory to the directory in which the file to open resides, and load this file.

The normal way to start the `likes.pl` file mentioned in section 2.1.1 is by simply double-clicking this file in the Windows explorer.

#### 2.1.2 Adding rules from the console

Although we strongly advice to put your program in a file, optionally edit it and use `make/0` to reload it (see section 2.1.4), it is possible to manage facts and rules from the terminal. The most convenient way to add a few clauses is by consulting the pseudo file `user`. The input is ended using the system end-of-file character.

```
?- [user].
|: hello :- format('Hello world~n').
|: ^D
true.

?- hello.
Hello world
true.
```

The predicates `assertz/1` and `retract/1` are alternatives to add and remove rules and facts.

#### 2.1.3 Executing a query

After loading a program, one can ask Prolog queries about the program. The query below asks Prolog what food ‘sam’ likes. The system responds with `X = <value>` if it can prove the goal for a certain `X`. The user can type the semi-colon (;) or spacebar<sup>1</sup> if (s)he wants another solution. Use the RETURN key if you do not want to see the more answers. Prolog completes the output with a full stop (.) if the user uses the RETURN key or Prolog *knows* there are no more answers. If Prolog cannot find (more) answers, it writes **false**. Finally, Prolog answers using an error message to indicate the query or program contains an error.

---

<sup>1</sup>On most installations, single-character commands are executed without waiting for the RETURN key.

```
?- likes(sam, X).  
X = dahl ;  
X = tandoori ;  
...  
X = chips.  
  
?-
```

Note that the answer written by Prolog is a valid Prolog program that, when executed, produces the same set of answers as the original program.<sup>2</sup>

### 2.1.4 Examining and modifying your program

If properly configured, the predicate `edit/1` starts the built-in or user configured editor on the argument. The argument can be anything that can be linked to a location: a file name, predicate name, module name, etc. If the argument resolves to only one location the editor is started on this location, otherwise the user is presented a choice.

If a graphical user interface is available, the editor normally creates a new window and the system prompts for the next command. The user may edit the source file, save it and run `make/0` to update any modified source file. If the editor cannot be opened in a window it the same console and leaving the editor runs `make/0` to reload any source files that have been modified.

```
?- edit(likes).  
  
true.  
?- make.  
% /home/jan/src/pl-devel/linux/likes compiled 0.00 sec, 0 clauses  
  
?- likes(sam, X).  
...  

```

The program can also be *decompiled* using `listing/1` as below. The argument is `listing/1` is just a predicate name, a predicate *indicator* of the form *Name/Arity*, e.g., `?- listing(mild/1)` or a *head*, e.g., `?- listing(likes(sam, _))`, listing all *matching* clauses. The predicate `listing/0`, i.e., without arguments lists the entire program.<sup>3</sup>

```
?- listing(mild).  
mild(dahl).  
mild(tandoori).  
mild(kurma).  
  
true.
```

<sup>2</sup>The SWI-Prolog top level differs in several ways from traditional Prolog top level. The current top level was designed in cooperation with Ulrich Neumerkel.

<sup>3</sup>This lists several *hook* predicates that are defined by default and is typically not very informative.

### 2.1.5 Stopping Prolog

The interactive toplevel can be stopped in two ways: enter the system end-of-file character (typically *Control-D*) or by executing the `halt/0` predicate:

```
?- halt.
$
```

## 2.2 The user's initialisation file

After the system initialisation, the system consults (see `consult/1`) the user's startup file. The base-name of this file follows conventions of the operating system. On MS-Windows, it is the file `swipl.ini` and on Unix systems `.swiplrc`. The file is searched using the `file_search_path/2` clauses for `user_profile`.<sup>4</sup> The table below shows the default value for this search path. The phrase *<appdata>* refers to the Windows CSIDL name for the folder. The actual name depends on the Windows language. English versions typically use `ApplicationData`. See also `win.folder/2`

|             | Unix           | Windows                            |
|-------------|----------------|------------------------------------|
| <b>home</b> | <code>~</code> | <i>&lt;appdata&gt;</i> /SWI-Prolog |

After the first startup file is found it is loaded and Prolog stops looking for further startup files. The name of the startup file can be changed with the `-f file` option. If *File* denotes an absolute path, this file is loaded, otherwise the file is searched for using the same conventions as for the default startup file. Finally, if *file* is `none`, no file is loaded.

The installation provides a file `customize/dotswiplrc` with (commented) commands that are often used to customize the behaviour of Prolog, such as interfacing to the editor, color selection or history parameters. Many of the development tools provide menu entries for editing the startup file and starting a fresh startup file from the system skeleton.

See also the `-s` (script) and `-F` (system-wide initialisation) in section 2.4 and section 2.3.

## 2.3 Initialisation files and goals

Using command line arguments (see section 2.4), SWI-Prolog can be forced to load files and execute queries for initialisation purposes or non-interactive operation. The most commonly used options are `-f file` or `-s file` to make Prolog load a file, `-g goal` to define initialisation goals and `-t goal` to define the *top-level goal*. The following is a typical example for starting an application directly from the command line.

```
machine% swipl -s load.pl -g go -t halt
```

It tells SWI-Prolog to load `load.pl`, start the application using the *entry point* `go/0` and —instead of entering the interactive top level— exit after completing `go/0`.

<sup>4</sup>Older versions first searched in the current working directory. This feature has been removed for security reasons. Users can implement loading a setup file from the working directory in their global preference file.

The command line may have multiple `-g goal` occurrences. The goals are executed in order. Possible choice points of individual goals are pruned. If a *goal* fails execution stops with exit status 1. If a *goal* raises an exception, the exception is printed and the process stops with exit code 2.

The `-q` may be used to suppress all informational messages as well as the error message that is normally printed if an initialisation goal *fails*.

In MS-Windows, the same can be achieved using a short-cut with appropriately defined command line arguments. A typically seen alternative is to write a file `run.pl` with content as illustrated below. Double-clicking `run.pl` will start the application.

```
:- [load].           % load program
:- go.              % run it
:- halt.            % and exit
```

Section 2.10.2 discusses further scripting options, and chapter 13 discusses the generation of runtime executables. Runtime executables are a means to deliver executables that do not require the Prolog system.

## 2.4 Command line options

SWI-Prolog can be executed in one of the following modes:

```
swipl --help
swipl --version
swipl --arch
swipl --dump-runtime-variables
```

These options must appear as only option. They cause Prolog to print an informational message and exit. See section 2.4.1.

`swipl [option ...] script-file [arg ...]`

These arguments are passed on Unix systems if file that starts with `#!/path/to/executable` `[option ...]` is executed. Arguments after the script file are made available in the Prolog flag `argv`.

`swipl [option ...] prolog-file ... [--] arg ...`

This is the normal way to start Prolog. The options are described in section 2.4.2, section 2.4.3 and section 2.4.4. The Prolog flag `argv` provides access to `arg ...`. If the *options* are followed by one or more Prolog file names (i.e., names with extension `.pl`, `.prolog` or (on Windows) the user preferred extension registered during installation), these files are loaded. The first file is registered in the Prolog flag `associated_file`. In addition, `pl-win[.exe]` switches to the directory in which this primary source file is located using `working_directory/2`.

`swipl -o output -c prolog-file ...`

The `-c` option is used to compile a set of Prolog files into an executable. See section 2.4.5.

`swipl -o output -b bootfile prolog-file ...`

Bootstrap compilation. See section 2.4.6.

### 2.4.1 Informational command line options

**--arch**

When given as the only option, it prints the architecture identifier (see Prolog flag `arch`) and exits. See also `-dump-runtime-variables`. Also available as `-arch`.

**--dump-runtime-variables** [=format]

When given as the only option, it prints a sequence of variable settings that can be used in shell scripts to deal with Prolog parameters. This feature is also used by `swipl-ld` (see section 12.5). Below is a typical example of using this feature.

```
eval `swipl --dump-runtime-variables`  
cc -I$PLBASE/include -L$PLBASE/lib/$PLARCH ...
```

The option can be followed by `=sh` to dump in POSIX shell format (default) or `=cmd` to dump in MS-Windows `cmd.exe` compatible format.

**--help**

When given as the only option, it summarises the most important options. Also available as `-h` and `-help`.

**--version**

When given as the only option, it summarises the version and the architecture identifier. Also available as `-v`.

### 2.4.2 Command line options for running Prolog

**--home=DIR**

Use `DIR` as home directory. See section 12.6 for details.

**--quiet**

Set the Prolog flag `verbose` to `silent`, suppressing informational and banner messages. Also available as `-q`.

**--nodebug**

Disable debugging. See the `current_prolog_flag/2` flag `generate_debug_info` for details.

**--nosignals**

Inhibit any signal handling by Prolog, a property that is sometimes desirable for embedded applications. This option sets the flag `signals` to `false`. See section 12.4.22 for details. Note that the handler to unblock system calls is still installed. This can be prevented using `--sigalert=0` additionally. See `--sigalert`.

**--nothreads**

Disable threading for the multi-threaded version at runtime. See also the flags `threads` and `gc_thread`.



**--pldoc [=port]**

Start the Pldoc documentation system on a free network port and launch the user's browser on `http://localhost:port`. If *port* is specified, the server is started at the given port and the browser is *not* launched.

**--sigalert=NUM**

Use signal *NUM* (1...31) for alerting a thread. This is needed to make `thread_signal/2`, and derived Prolog signal handling act immediately when the target thread is blocked on an interruptable system call (e.g., `sleep/1`, `read/write` to most devices). The default is to use `SIGUSR2`. If *NUM* is 0 (zero), this handler is not installed. See `prolog_alert_signal/2` to query or modify this value at runtime.

**--no-tty**

Unix only. Switches controlling the terminal for allowing single-character commands to the tracer and `get_single_char/1`. By default, manipulating the terminal is enabled unless the system detects it is not connected to a terminal or it is running as a GNU-Emacs inferior process. See also `tty_control`.

**--win.app**

This option is available only in `swipl-win.exe` and is used for the start-menu item. It causes `plwin` to start in the folder `...\My Documents\Prolog` or local equivalent thereof (see `win_folder/2`). The Prolog subdirectory is created if it does not exist.

**-O**

Optimised compilation. See `current_prolog_flag/2` flag `optimise` for details.

**-l file**

Load *file*. This flag provides compatibility with some other Prolog systems.<sup>5</sup> It is used in SWI-Prolog to skip the program initialization specified using `initialization/2` directives. See also section 2.10.2, and `initialize/0`.

**-s file**

Use *file* as a script file. The script file is loaded after the initialisation file specified with the `-f file` option. Unlike `-f file`, using `-s` does not stop Prolog from loading the personal initialisation file.

**-f file**

Use *file* as initialisation file instead of the default `.swiplrc` (Unix) or `swipl.ini` (Windows). `'-f none'` stops SWI-Prolog from searching for a startup file. This option can be used as an alternative to `-s file` that stops Prolog from loading the personal initialisation file. See also section 2.2.

**-F script**

Select a startup script from the SWI-Prolog home directory. The script file is named `<script>.rc`. The default *script* name is deduced from the executable, taking the leading alphanumerical characters (letters, digits and underscore) from the program name. `-F none` stops looking for a script. Intended for simple management of slightly different versions. One could, for example, write a script `iso.rc` and then select ISO compatibility mode using `pl -F iso` or make a link from `iso-pl` to `pl`.

---

<sup>5</sup>YAP, SICStus

**-x bootfile**

Boot from *bootfile* instead of the system's default boot file. A boot file is a file resulting from a Prolog compilation using the `-b` or `-c` option or a program saved using `qsave_program/[1,2]`.

**-p alias=path1[:path2...]**

Define a path alias for `file_search_path`. *alias* is the name of the alias, and *argpath1 ...* is a list of values for the alias. On Windows the list separator is `;`. On other systems it is `:`. A value is either a term of the form `alias(value)` or `pathname`. The computed aliases are added to `file_search_path/2` using `asserta/1`, so they precede predefined values for the alias. See `file_search_path/2` for details on using this file location mechanism.

**--traditional**

This flag disables the most important extensions of SWI-Prolog version 7 (see section 5) that introduce incompatibilities with earlier versions. In particular, lists are represented in the traditional way, double quoted text is represented by a list of character codes and the functional notation on dicts is not supported. Dicts as a syntactic entity, and the predicates that act on them, are still supported if this flag is present.

--

Stops scanning for more arguments, so you can pass arguments for your application after this one. See `current_prolog_flag/2` using the flag `argv` for obtaining the command line arguments.

### 2.4.3 Controlling the stack sizes

As of version 7.7.14 the stacks are no longer limited individually. Instead, only the combined size is limited. Note that 32 bit systems still pose a 128Mb limit. See section 2.20.1. The combined limit is by default 1Gb on 64 bit machines and 512Mb on 32 bit machines.

For example, to limit the stacks to 32Gb use the command below. Note that the stack limits apply *per thread*. Individual threads may be controlled using the `stack_limit(+Bytes)` option of `thread_create`. Any thread can call `set_prolog_flag(stack_limit, Limit)` (see `stack_limit`) to adjust the stack limit. This limit is inherited by threads created from this thread.

```
$ swipl --stack_limit=32g
```

**--stack\_limitsize[bkmg]**

Limit the combined size of the Prolog stacks to the indicated size. The suffix specifies the value as *bytes*, *Kbytes*, *Mbytes* or *Gbytes*.

**-table\_spacesize[bkmg]**

Limit for the *table space*. This is where tries holding memoized<sup>6</sup> answers for *tabling* are stored. The default is 1Gb on 64 bit machines and 512Mb on 32 bit machines. See the Prolog flag `table_space`

<sup>6</sup>The letter M is used because the T was already in use. It is a mnemonic for **M**emoizing.

### 2.4.4 Running goals from the command line

#### **-g goal**

*Goal* is executed just before entering the top level. This option may appear multiple times. See section 2.3 for details. If no initialization goal is present the system calls `version/0` to print the welcome message. The welcome message can be suppressed with `--quiet`, but also with `-g true`. *goal* can be a complex term. In this case quotes are normally needed to protect it from being expanded by the shell. A safe way to run a goal non-interactively is below. If `go/0` succeeds `-g halt` causes the process to stop with exit code 0. If it fails, the exit code is 1; and if it raises an exception, the exit code is 2.

```
% swipl <options> -g go -g halt
```

#### **-t goal**

Use *goal* as interactive top level instead of the default goal `prolog/0`. The *goal* can be a complex term. If the top-level goal succeeds SWI-Prolog exits with status 0. If it fails the exit status is 1. If the top level raises an exception, this is printed as an uncaught error and the top level is *restarted*. This flag also determines the goal started by `break/0` and `abort/0`. If you want to prevent the user from entering interactive mode, start the application with `'-g goal -t halt'`.

### 2.4.5 Compilation options

#### **-c file ...**

Compile files into an 'intermediate code file'. See section 2.10.

#### **-o output**

Used in combination with `-c` or `-b` to determine output file for compilation.

### 2.4.6 Maintenance options

The following options are for system maintenance. They are given for reference only.

#### **-b initfile ... -c file ...**

Boot compilation. *initfile ...* are compiled by the C-written bootstrap compiler, *file ...* by the normal Prolog compiler. System maintenance only.

#### **-d token1,token2,...**

Print debug messages for DEBUG statements tagged with one of the indicated tokens. Only has effect if the system is compiled with the `-DO_DEBUG` flag. System maintenance only.

## 2.5 GNU Emacs Interface

Unfortunately the default Prolog mode of GNU Emacs is not very good. There are several alternatives though:

- [https://bruda.ca/emacs/prolog\\_mode\\_for\\_emacs](https://bruda.ca/emacs/prolog_mode_for_emacs)  
Prolog mode for Emacs and XEmacs maintained by Stefan Bruda.

- <https://www.metalevel.at/pceprolog/>  
Recommended configuration options for editing Prolog code with Emacs.
- <https://www.metalevel.at/ediprolog/>  
Interact with SWI-Prolog directly in Emacs buffers.
- <https://www.metalevel.at/etrace/>  
Trace Prolog code with Emacs.

## 2.6 Online Help

### 2.6.1 `library(help)`: Text based manual

This module provides `help/1` and `apropos/1` that give help on a topic or searches the manual for relevant topics.

By default the result of `help/1` is sent through a *pager* such as `less`. This behaviour is controlled by the following:

- The Prolog flag `help_pager`, which can be set to one of the following values:

#### **false**

Never use a pager.

#### **default**

Use default behaviour. This tries to determine whether Prolog is running interactively in an environment that allows for a pager. If so it examines the environment variable `PAGER` or otherwise tries to find the `less` program.

#### *Callable*

A *Callable* term is interpreted as `program_name(Arg, ...)`. For example, `less(' -r')` would be the default. Note that the program name can be an absolute path if single quotes are used.

**help** *[det]*

**help(+What)** *[det]*

Show help for *What*. *What* is a term that describes the `topics(s)` to give help for. Notations for *What* are:

#### *Atom*

This ambiguous form is most commonly used and shows all matching documents. For example:

```
?- help(append) .
```

#### *Name / Arity*

Give help on predicates with matching *Name/Arity*. *Arity* may be unbound.

#### *Name // Arity*

Give help on the matching DCG rule (non-terminal)

**f**(*Name/Arity*)

Give help on the matching Prolog arithmetic functions.

**c**(*Name*)

Give help on the matching C interface function

**section**(*Label*)

Show the section from the manual with matching *Label*.

If an exact match fails this predicates attempts fuzzy matching and, when successful, display the results headed by a warning that the matches are based on fuzzy matching.

If possible, the results are sent through a *pager* such as the `less` program. This behaviour is controlled by the Prolog flag `help_pager`. See section level documentation.

**See also** `apropos/1` for searching the manual names and summaries.

**show\_html\_hook**(+*HTML:string*)

[*semidet,multifile*]

Hook called to display the extracted *HTML* document. If this hook fails the *HTML* is rendered to the console as plain text using `html_text/2`.

**apropos**(+*Query*)

[*det*]

Print objects from the manual whose name or summary match with *Query*. *Query* takes one of the following forms:

*Type* : *Text*

Find objects matching *Text* and filter the results by *Type*. *Type* matching is a case insensitive *prefix* match. Defined types are `section`, `cfunction`, `function`, `iso_predicate`, `swi_builtin_predicate`, `library_predicate`, `dcg` and `aliases` `chapter`, `arithmetic`, `c_function`, `predicate`, `nonterminal` and `non_terminal`. For example:

```
?- apropos(c:close).
?- apropos(f:min).
```

*Text*

*Text* is broken into tokens. A topic matches if all tokens appear in the name or summary of the topic. Matching is case insensitive. Results are ordered depending on the quality of the match.

### 2.6.2 library(explain): Describe Prolog Terms

The `library(explain)` describes prolog-terms. The most useful functionality is its cross-referencing function.

```
?- explain(subset(_,_)).
"subset(_, _)" is a compound term
    Referenced from 2-th clause of lists:subset/2
    Referenced from 46-th clause of prolog_xref:imported/3
    Referenced from 68-th clause of prolog_xref:imported/3
lists:subset/2 is a predicate defined in
```

|       |  |
|-------|--|
| !!.   | Repeat last query                                  |
| !nr.  | Repeat query numbered <i>&lt;nr&gt;</i>            |
| !str. | Repeat last query starting with <i>&lt;str&gt;</i> |
| h.    | Show history of commands                           |
| !h.   | Show this list                                     |

Table 2.1: History commands

```
/staff/jan/lib/pl-5.6.17/library/lists.pl:307
Referenced from 2-th clause of lists:subset/2
Possibly referenced from 2-th clause of lists:subset/2
```

Note that the help-tool for XPCE provides a nice graphical cross-referencer.

### **explain(@Term)**

[det]

Give an explanation on *Term*. The argument may be any Prolog data object. If the argument is an atom, a term of the form *Name/Arity* or a term of the form *Module:Name/Arity*, *explain/1* describes the predicate as well as possible references to it. See also *gxref/0*.

### **explain(@Term, -Explanation)**

[nondet]

True when *Explanation* is an explanation of *Term*.

## **2.7 Command line history**

SWI-Prolog offers a query substitution mechanism similar to what is seen in Unix shells. The availability of this feature is controlled by *set\_prolog\_flag/2*, using the *history* Prolog flag. By default, history is available if no interactive command line editor is available. To enable history, remembering the last 50 commands, put the following into your startup file (see section 2.2):

```
:- set_prolog_flag(history, 50).
```

The history system allows the user to compose new queries from those typed before and remembered by the system. The available history commands are shown in table 2.1. History expansion is not done if these sequences appear in quoted atoms or strings.

## **2.8 Reuse of top-level bindings**

Bindings resulting from the successful execution of a top-level goal are asserted in a database *if they are not too large*. These values may be reused in further top-level queries as \$Var. If the same variable name is used in a subsequent query the system associates the variable with the latest binding. Example:

Note that variables may be set by executing *=/2*:

```

1 ?- maplist(plus(1), 'hello', X).
X = [105,102,109,109,112].

2 ?- format('~s~n', [$X]).
ifmmp
true.

3 ?-

```

Figure 2.1: Reusing top-level bindings

```

6 ?- X = statistics.
X = statistics.

7 ?- $X.
% Started at Fri Aug 24 16:42:53 2018
% 0.118 seconds cpu time for 456,902 inferences
% 7,574 atoms, 4,058 functors, 2,912 predicates, 56 modules, 109,791 VM-codes
%
%
%          Limit   Allocated   In use
% Local  stack:      -        20 Kb    1,888 b
% Global stack:      -        60 Kb     36 Kb
% Trail  stack:      -        30 Kb    4,112 b
%      Total:    1,024 Mb    110 Kb     42 Kb
%
% 3 garbage collections gained 178,400 bytes in 0.000 seconds.
% 2 clause garbage collections gained 134 clauses in 0.000 seconds.
% Stack shifts: 2 local, 2 global, 2 trail in 0.000 seconds
% 2 threads, 0 finished threads used 0.000 seconds
true.

```

## 2.9 Overview of the Debugger

SWI-Prolog has a traditional commandline debugger. It also provides programmatic access to the debugger. This facility is used to provide a graphical debugger as well as remote debugging in the web interface provided by [SWISH](#).

SWI-Prolog has a 6-port tracer, extending the standard 4-port tracer [Byrd, 1980, Clocksin & Melish, 1987] with two additional ports. The standard ports are called `call`, `exit`, `redo`, and `fail`. The additional *unify* port allows the user to inspect the result after unification of the head. The additional *exception* port shows exceptions raised by `throw/1` or one of the built-in predicates. See section 4.11.

The tracer is started by the `trace/0` command. If the system is in debug mode (see

```

min_numlist([H|T], Min) :-
    min_numlist(T, H, Min).

min_numlist([], Min, Min).
min_numlist([H|T], Min0, Min) :-
    Min1 is min(H, Min0),
    min_numlist(T, Min1, Min).

1 ?- visible(+all), leash(-exit).
true.

2 ?- trace, min_numlist([3, 2], X).
  Call: (7) min_numlist([3, 2], _G0) ? creep
  Unify: (7) min_numlist([3, 2], _G0)
  Call: (8) min_numlist([2], 3, _G0) ? creep
  Unify: (8) min_numlist([2], 3, _G0)
^ Call: (9) _G54 is min(2, 3) ? creep
^ Exit: (9) 2 is min(2, 3)
  Call: (9) min_numlist([], 2, _G0) ? creep
  Unify: (9) min_numlist([], 2, 2)
  Exit: (9) min_numlist([], 2, 2)
  Exit: (8) min_numlist([2], 3, 2)
  Exit: (7) min_numlist([3, 2], 2)
X = 2.

```

Figure 2.2: Example trace of the program above showing all ports. The lines marked ^ indicate calls to *transparent* predicates. See section 6.

debug/0) the trace is started, after reaching a *spy point* set using `spy/1` or *break point* set using `set_breakpoint/4`. The debugger is also started if an `error(Formal, Extended)` exception is raised that is not caught.

If the native graphics plugin (XPCE) is available, the commands `gtrace/0` and `gspy/1` activate the graphical debugger while `tdebug/0` and `tspy/1` allow debugging of arbitrary threads.

The interactive top-level goal `trace/0` means “trace the next query”. The tracer shows the port, displaying the port name, the current depth of the recursion and the goal. The goal is printed using the Prolog predicate `write_term/2`. The style is defined by the Prolog flag `debugger_write_options` and can be modified using this flag or using the `w`, `p` and `d` commands of the tracer.

On *leashed ports* (set with the predicate `leash/1`, default are `call`, `exit`, `redo` and `fail`) the user is prompted for an action. All actions are single-character commands which are executed **without** waiting for a return, unless the command line option `--no-tty` is active. Tracer options:

#### + (Spy)

Set a spy point (see `spy/1`) on the current predicate.



**– (No spy)**

Remove the spy point (see `nospy/1`) from the current predicate.

**/ (Find)**

Search for a port. After the `/`, the user can enter a line to specify the port to search for. This line consists of a set of letters indicating the port type, followed by an optional term, that should unify with the goal run by the port. If no term is specified it is taken as a variable, searching for any port of the specified type. If an atom is given, any goal whose functor has a name equal to that atom matches. Examples:

|                              |   |
|------------------------------|---|
| <code>/f</code>              | Search for any fail port  |
| <code>/fe solve</code>       | Search for a fail or exit port of any goal with name <code>solve</code>   |
| <code>/c solve(a, _)</code>  | Search for a call to <code>solve/2</code> whose first argument is a variable or the atom <code>a</code>             |
| <code>/a member(_, _)</code> | Search for any port on <code>member/2</code> . This is equivalent to setting a spy point on <code>member/2</code> . |

**. (Repeat find)**

Repeat the last find command (see `/`).

**A (Alternatives)**

Show all goals that have alternatives.

**C (Context)**

Toggle `'Show Context'`. If `on`, the context module of the goal is displayed between square brackets (see section 6). Default is `off`.

**L (Listing)**

List the current predicate with `listing/1`.

**a (Abort)**

Abort Prolog execution (see `abort/0`).

**b (Break)**

Enter a Prolog break environment (see `break/0`).

**c (Creep)**

Continue execution, stop at next port. (Also `RETURN`, `SPACE`).

**d (Display)**

Set the `max_depth(Depth)` option of `debugger_write_options`, limiting the depth to which terms are printed. See also the `w` and `p` options.

**e (Exit)**

Terminate Prolog (see `halt/0`).

**f (Fail)**

Force failure of the current goal.

**g (Goals)**

Show the list of parent goals (the execution stack). Note that due to tail recursion optimization a number of parent goals might not exist any more.

**h (Help)**

Show available options (also ‘?’).

**i (Ignore)**

Ignore the current goal, pretending it succeeded.

**l (Leap)**

Continue execution, stop at next spy point.

**n (No debug)**

Continue execution in ‘no debug’ mode.

**p (Print)**

Set the Prolog flag `debugger_write_options` to `[quoted(true), portray(true), max_depth(10), priority(699)]`. This is the default.

**r (Retry)**

Undo all actions (except for database and I/O actions) back to the call port of the current goal and resume execution at the call port.

**s (Skip)**

Continue execution, stop at the next port of **this** goal (thus skipping all calls to children of this goal).

**u (Up)**

Continue execution, stop at the next port of **the parent** goal (thus skipping this goal and all calls to children of this goal). This option is useful to stop tracing a failure driven loop.

**w (Write)**

Set the Prolog flag `debugger_write_options` to `[quoted(true), attributes(write), priority(699)]`, bypassing `portray/1`, etc.

The ideal 4-port model [Byrd, 1980] as described in many Prolog books [Clocksin & Melish, 1987] is not visible in many Prolog implementations because code optimisation removes part of the choice and exit points. Backtrack points are not shown if either the goal succeeded deterministically or its alternatives were removed using the cut. When running in debug mode (`debug/0`) choice points are only destroyed when removed by the cut. In debug mode, last call optimisation is switched off.<sup>7</sup>

Reference information to all predicates available for manipulating the debugger is in section 4.39.

## 2.10 Compilation

### 2.10.1 During program development

During program development, programs are normally loaded using the list abbreviation `(?- [load] .)`. It is common practice to organise a project as a collection of source files and a *load*

<sup>7</sup>This implies the system can run out of stack in debug mode, while no problems arise when running in non-debug mode.

*file*, a Prolog file containing only `use_module/[1,2]` or `ensure_loaded/1` directives, possibly with a definition of the *entry point* of the program, the predicate that is normally used to start the program. This file is often called `load.pl`. If the entry point is called *go*, a typical session starts as:

```
% swipl
<banner>

1 ?- [load].
<compilation messages>
true.

2 ?- go.
<program interaction>
```

When using Windows, the user may open `load.pl` from the Windows explorer, which will cause `swipl-win.exe` to be started in the directory holding `load.pl`. Prolog loads `load.pl` before entering the top level. If Prolog is started from an interactive shell, one may choose the type `swipl -s load.pl`.

### 2.10.2 For running the result

There are various options if you want to make your program ready for real usage. The best choice depends on whether the program is to be used only on machines holding the SWI-Prolog development system, the size of the program, and the operating system (Unix vs. Windows).

#### Using PrologScript

A Prolog source file can be used directly as a Unix program using the Unix `#!` magic start. The Unix `#!` magic is allowed because if the first letter of a Prolog file is `#`, the first line is treated as a comment.<sup>8</sup> To create a Prolog script, use one of the two alternatives below as first line. The first can be used to bind a script to a specific Prolog installation, while the latter uses the default prolog installed in `$PATH`.

```
#!/path/to/swipl
#!/usr/bin/env swipl
```

The interpretation of arguments to the executable in the *HashBang* line differs between Unix-derived systems. For portability, the `#!` must be followed immediately with an absolute path to the executable and should have none or one argument. Neither the executable path, nor the argument shall use quotes or spaces. When started this way, the Prolog flag `argv` contains the command line arguments that follow the script invocation.

Starting with version 7.5.8, `initialization/2` support the *When* options `program` and `main`, allowing for the following definition of a Prolog script that evaluates an arithmetic expression on the command line. Note that `main/0` is defined lib the library `main`. It calls `main/1` with the command line arguments after disabling signal handling.

<sup>8</sup>The `#`-sign can be the legal start of a normal Prolog clause. In the unlikely case this is required, leave the first line blank or add a header comment.

```
#!/usr/bin/env swipl

:- initialization(main, main).

main(Argv) :-
    concat_atom(Argv, ' ', SingleArg),
    term_to_atom(Term, SingleArg),
    Val is Term,
    format('~w~n', [Val]).
```

And here are two example runs:

```
% ./eval 1+2
3
% ./eval foo
ERROR: is/2: Arithmetic: 'foo/0' is not a function
```

Prolog script may be launched for debugging or inspection purposes using the `-l` or `-t`. For example, `-l` merely loads the script, ignoring `main` and program initialization.

```
swipl -l eval 1+1
<banner>

?- main.
2
true.

?-
```

We can also force the program to enter the interactive toplevel after the application is completed using `-t prolog`:

```
swipl -t prolog eval 1+1
2
?-
```

The Windows version simply ignores the `#!` line.<sup>9</sup>

### Creating a shell script

With the introduction of *PrologScript* (see section 2.10.2), using shell scripts as explained in this section has become redundant for most applications.

---

<sup>9</sup>Older versions extracted command line arguments from the *HashBang* line. As of version 5.9 all relevant setup can be achieved using *directives*. Due to the compatibility issues around *HashBang* line processing, we decided to remove it completely.

Especially on Unix systems and not-too-large applications, writing a shell script that simply loads your application and calls the entry point is often a good choice. A skeleton for the script is given below, followed by the Prolog code to obtain the program arguments.

```
#!/bin/sh

base=<absolute-path-to-source>
PL=swipl

exec $PL -q -f "$base/load" --
```

```
:- initialization go.

go :-
    current_prolog_flag(argv, Arguments),
    go(Arguments).

go(Args) :-
    ...
```

On Windows systems, similar behaviour can be achieved by creating a shortcut to Prolog, passing the proper options or writing a .bat file.

### Creating a saved state

For larger programs, as well as for programs that are required to run on systems that do not have the SWI-Prolog development system installed, creating a saved state is the best solution. A saved state is created using `qsave_program/[1,2]` or the `-c` command line option. A saved state is a file containing machine-independent<sup>10</sup> intermediate code in a format dedicated for fast loading. Optionally, the emulator may be integrated in the saved state, creating a single file, but machine-dependent, executable. This process is described in chapter 13.

### Compilation using the -c command line option

This mechanism loads a series of Prolog source files and then creates a saved state as `qsave_program/2` does. The command syntax is:

```
% swipl [option ...] [-o output] -c file.pl ...
```

The *options* argument are options to `qsave_program/2` written in the format below. The option names and their values are described with `qsave_program/2`.

*--option-name=option-value*

<sup>10</sup>The saved state does not depend on the CPU instruction set or endianness. Saved states for 32- and 64-bits are not compatible. Typically, saved states only run on the same version of Prolog on which they have been created.

For example, to create a stand-alone executable that starts by executing `main/0` and for which the source is loaded through `load.pl`, use the command

```
% swipl --goal=main --stand_alone=true -o myprog -c load.pl
```

This performs exactly the same as executing

```
% swipl
<banner>

?- [load].
?- qsave_program(myprog,
                  [ goal(main),
                    stand_alone(true)
                  ]).
?- halt.
```

## 2.11 Environment Control (Prolog flags)

The predicates `current_prolog_flag/2` and `set_prolog_flag/2` allow the user to examine and modify the execution environment. It provides access to whether optional features are available on this version, operating system, foreign code environment, command line arguments, version, as well as runtime flags to control the runtime behaviour of certain predicates to achieve compatibility with other Prolog environments.

### **current\_prolog\_flag(?Key, -Value)**

[ISO]

The predicate `current_prolog_flag/2` defines an interface to installation features: options compiled in, version, home, etc. With both arguments unbound, it will generate all defined Prolog flags. With *Key* instantiated, it unifies *Value* with the value of the Prolog flag or fails if the *Key* is not a Prolog flag.

Flags marked **rw** can be modified by the user using `set_prolog_flag/2`. Flag values are typed. Flags marked as **bool** can have the values `true` or `false`. The predicate `create_prolog_flag/3` may be used to create flags that describe or control behaviour of libraries and applications. The library `settings` provides an alternative interface for managing notably application parameters.

Some Prolog flags are not defined in all versions, which is normally indicated in the documentation below as “*if present and true*”. A boolean Prolog flag is true iff the Prolog flag is present **and** the *Value* is the atom `true`. Tests for such flags should be written as below:

```
(    current_prolog_flag(windows, true)
->    <Do MS-Windows things>
;    <Do normal things>
)
```

Some Prolog flags are scoped to a source file. This implies that if they are set using a directive inside a file, the flag value encountered when loading of the file started is restored when loading of the file is completed. Currently, the following flags are scoped to the source file: `generate_debug_info` and `optimise`.

A new thread (see section 10) *copies* all flags from the thread that created the new thread (its *parent*).<sup>11</sup> As a consequence, modifying a flag inside a thread does not affect other threads.

**access\_level** (*atom, changeable*)

This flag defines a normal ‘user’ view (`user`, default) or a ‘system’ view. In system view all system code is fully accessible as if it was normal user code. In user view, certain operations are not permitted and some details are kept invisible. We leave the exact consequences undefined, but, for example, system code can be traced using system access and system predicates can be redefined.

**address\_bits** (*integer*)

Address size of the hosting machine. Typically 32 or 64. Except for the maximum stack limit, this has few implications to the user. See also the Prolog flag `arch`.

**agc\_margin** (*integer, changeable*)

If this amount of atoms possible garbage atoms exist perform atom garbage collection at the first opportunity. Initial value is 10,000. May be changed. A value of 0 (zero) disables atom garbage collection. See also `PL_register_atom()`.<sup>12</sup>

**apple** (*bool*)

If present and `true`, the operating system is MacOSX. Defined if the C compiler used to compile this version of SWI-Prolog defines `__APPLE__`. Note that the `unix` is also defined for MacOSX.

**allow\_dot\_in\_atom** (*bool, changeable*)

If `true` (default `false`), dots may be embedded into atoms that are not quoted and start with a letter. The embedded dot *must* be followed by an identifier continuation character (i.e., letter, digit or underscore). The dot is allowed in identifiers in many languages, which can make this a useful flag for defining DSLs. Note that this conflicts with cascading functional notation. For example, `Post.meta.author` is read as `.(Post, 'meta.author'` if this flag is set to `true`.

**allow\_variable\_name\_as\_functor** (*bool, changeable*)

If `true` (default is `false`), `Functor(arg)` is read as if it were written `'Functor'(arg)`. Some applications use the Prolog `read/1` predicate for reading an application-defined script language. In these cases, it is often difficult to explain to non-Prolog users of the application that constants and functions can only start with a lowercase letter. Variables can be turned into atoms starting with an uppercase atom by calling `read_term/2` using the option `variable_names` and binding the variables to their name. Using this feature, `F(x)` can be turned into valid syntax for such script languages. Suggested by Robert van Engelen. SWI-Prolog specific.

**argv** (*list, changeable*)

List is a list of atoms representing the application command line arguments. Application

<sup>11</sup>This is implemented using the copy-on-write technique.

<sup>12</sup>Given that SWI-Prolog has no limit on the length of atoms, 10,000 atoms may still occupy a lot of memory. Applications using extremely large atoms may wish to call `garbage_collect_atoms/0` explicitly or lower the margin.

command line arguments are those that have *not* been processed by Prolog during its initialization. Note that Prolog's argument processing stops at `--` or the first non-option argument. See also `os_argv`.<sup>13</sup>

**arch** (*atom*)

Identifier for the hardware and operating system SWI-Prolog is running on. Used to select foreign files for the right architecture. See also section 12.2.3 and `file_search_path/2`.

**associated\_file** (*atom*)

Set if Prolog was started with a prolog file as argument. Used by e.g., `edit/0` to edit the initial file.

**autoload** (*bool, changeable*)

If `true` (default) autoloading of library functions is enabled.

**back\_quotes** (*codes, chars, string, symbol\_char, changeable*)

Defines the term-representation for back-quoted material. The default is `codes`. If `--traditional` is given, the default is `symbol_char`, which allows using ``` in operators composed of symbols.<sup>14</sup> See also section 5.2.

**backtrace** (*bool, changeable*)

If `true` (default), print a backtrace on an uncaught exception.

**backtrace\_depth** (*integer, changeable*)

If backtraces on errors are enabled, this flag defines the maximum number of frames that is printed (default 20).

**backtrace\_goal\_depth** (*integer, changeable*)

The frame of a backtrace is printed after making a shallow copy of the goal. This flag determines the depth to which the goal term is copied. Default is '3'.

**backtrace\_show\_lines** (*bool, changeable*)

If `true` (default), try to reconstruct the line number at which the exception happened.

**bounded** (*bool*)

ISO Prolog flag. If `true`, integer representation is bound by `min_integer` and `max_integer`. If `false` integers can be arbitrarily large and the `min_integer` and `max_integer` are not present. See section 4.27.2.

**break\_level** (*integer*)

Current break-level. The initial top level (started with `-t`) has value 0. See `break/0`. This flag is absent from threads that are not running a top-level loop.

**c\_cc** (*atom, changeable*)

Name of the C compiler used to compile SWI-Prolog. Normally either `gcc` or `cc`. See section 12.5.

**c\_cflags** (*atom, changeable*)

CFLAGS used to compile SWI-Prolog. See section 12.5.

**c\_ldflags** (*atom, changeable*)

LDFLAGS used to link SWI-Prolog. See section 12.5.

<sup>13</sup>Prior to version 6.5.2, `argv` was defined as `os_argv` is now. The change was made for compatibility reasons and because the current definition is more practical.

<sup>14</sup>Older versions had a boolean flag `backquoted_strings`, which toggled between `string` and `symbol_char`



**c\_libs** (*atom, changeable*)

Libraries needed to link executables that embed SWI-Prolog. Typically `-lswipl` if the SWI-Prolog kernel is a shared (DLL). If the SWI-Prolog kernel is in a static library, this flag also contains the dependencies.

**c\_libplso** (*atom, changeable*)

Libraries needed to link extensions (shared object, DLL) to SWI-Prolog. Typically empty on ELF systems and `-lswipl` on COFF-based systems. See section 12.5.

**char\_conversion** (*bool, changeable*)

Determines whether character conversion takes place while reading terms. See also `char_conversion/2`.

**character\_escapes** (*bool, changeable*)

If `true` (default), `read/1` interprets `\` escape sequences in quoted atoms and strings. May be changed. This flag is local to the module in which it is changed. See section 2.16.1.

**colon\_sets\_calling\_context** (*bool*)

Using the construct `<module>:<goal>` sets the *calling context* for executing `<goal>`. This flag is defined by ISO/IEC 13211-2 (Prolog modules standard). See section 6.

**color\_term** (*bool, changeable*)

This flag is managed by library `ansi_term`, which is loaded at startup if the two conditions below are both true. Note that this implies that setting this flag to `false` from the system or personal initialization file (see section 2.2) disables colored output. The predicate `message_property/2` can be used to control the actual color scheme depending in the message type passed to `print_message/2`.

- `stream_property(current_output, tty(true))`
- `\+ current_prolog_flag(color_term, false)`

**compile\_meta\_arguments** (*atom, changeable*)

Experimental flag that controls compilation of arguments passed to meta-calls marked `'0'` or `'^'` (see `meta_predicate/1`). Supported values are:

**false**

(default). Meta-arguments are passed verbatim.

**control**

Compile meta-arguments that contain control structures `((A,B), (A;B), (A-!B;C), etc.)`. If not compiled at compile time, such arguments are compiled to a temporary clause before execution. Using this option enhances performance of processing complex meta-goals that are known at compile time.

**true**

Also compile references to normal user predicates. This harms performance (a little), but enhances the power of poor-mens consistency check used by `make/0` and implemented by `list_undefined/0`.

**always**

Always create an intermediate clause, even for system predicates. This prepares for replacing the normal head of the generated predicate with a special reference (similar to database references as used by, e.g., `assert/2`) that provides direct access to the executable code, thus avoiding runtime lookup of predicates for meta-calling.

**compiled\_at** (*atom*)

Describes when the system has been compiled. Only available if the C compiler used to compile SWI-Prolog provides the `__DATE__` and `__TIME__` macros.

**console\_menu** (*bool*)

Set to `true` in `swipl-win.exe` to indicate that the console supports menus. See also section 4.35.3.

**cpu\_count** (*integer, changeable*)

Number of physical CPUs or cores in the system. The flag is marked read-write both to allow pretending the system has more or less processors. See also `thread_setconcurrency/2` and the library `thread`. This flag is not available on systems where we do not know how to get the number of CPUs. This flag is not included in a saved state (see `qsave_program/1`).

**dde** (*bool*)

Set to `true` if this instance of Prolog supports DDE as described in section 4.43.

**debug** (*bool, changeable*)

Switch debugging mode on/off. If debug mode is activated the system traps encountered spy points (see `spy/1`) and trace points (see `trace/1`). In addition, last-call optimisation is disabled and the system is more conservative in destroying choice points to simplify debugging.

Disabling these optimisations can cause the system to run out of memory on programs that behave correctly if debug mode is off.

**debug\_on\_error** (*bool, changeable*)

If `true`, start the tracer after an error is detected. Otherwise just continue execution. The goal that raised the error will normally fail. See also the Prolog flag `report_error`. Default is `true`.

**debugger\_write\_options** (*term, changeable*)

This argument is given as option-list to `write_term/2` for printing goals by the debugger. Modified by the ‘w’, ‘p’ and ‘<N> d’ commands of the debugger. Default is `[quoted(true), portray(true), max_depth(10), attributes(portray)]`.

**debugger\_show\_context** (*bool, changeable*)

If `true`, show the context module while printing a stack-frame in the tracer. Normally controlled using the ‘C’ option of the tracer.

**dialect** (*atom*)

Fixed to `swi`. The code below is a reliable and portable way to detect SWI-Prolog.

```
is_dialect(swi) :-
    catch(current_prolog_flag(dialect, swi), _, fail).
```

**double\_quotes** (*codes, chars, atom, string, changeable*)

This flag determines how double quoted strings are read by Prolog and is —like `character_escapes` and `back_quotes`— maintained for each module. The default is `string`, which produces a string as described in section 5.2. If `--traditional` is given, the default is `codes`, which produces a list of character codes, integers that represent a Unicode code-point. The value `chars` produces a list of one-character atoms

and the value `atom` makes double quotes the same as single quotes, creating a `atom`. See also section 5.

**editor** (*atom, changeable*)

Determines the editor used by `edit/1`. See section 4.4.1 for details on selecting the editor used.

**emacs\_inferior\_process** (*bool*)

If true, SWI-Prolog is running as an *inferior process* of (GNU/X-)Emacs. SWI-Prolog assumes this is the case if the environment variable `EMACS` is `t` and `INFERIOR` is `yes`.

**encoding** (*atom, changeable*)

Default encoding used for opening files in `text` mode. The initial value is deduced from the environment. See section 2.19.1 for details.

**executable** (*atom*)

Pathname of the running executable. Used by `qsave_program/2` as default emulator.

**exit\_status** (*integer*)

Set by `halt/1` to its argument, making the exit status available to hooks registered with `at_halt/1`.

**file\_name\_case\_handling** (*atom, changeable*)

This flag defines how Prolog handles the case of file names. The flag is used for case normalization and to determine whether two names refer to the same file.<sup>15</sup> It has one of the following values:

**case\_sensitive**

The filesystem is fully case sensitive. Prolog does not perform any case modification or case insensitive matching. This is the default on Unix systems.

**case\_preserving**

The filesystem is case insensitive, but it preserves the case with which the user has created a file. This is the default on Windows systems.

**case\_insensitive**

The filesystem doesn't store or match case. In this scenario Prolog maps all file names to lower case.

**file\_name\_variables** (*bool, changeable*)

If `true` (default `false`), `expand` `\$\arg{varname}` and `~` in arguments of built-in predicates that accept a file name (`open/3`, `exists_file/1`, `access_file/2`, etc.). The predicate `expand_file_name/2` can be used to expand environment variables and wildcard patterns. This Prolog flag is intended for backward compatibility with older versions of SWI-Prolog.

**file\_search\_cache\_time** (*number, changeable*)

Time in seconds for which search results from `absolute_file_name/3` are cached. Within this time limit, the system will first check that the old search result satisfies the conditions. Default is 10 seconds, which typically avoids most repetitive searches for (library) files during compilation. Setting this value to 0 (zero) disables the cache.

<sup>15</sup>BUG: Note that file name case handling is typically a property of the filesystem, while Prolog only has a global flag to determine its file handling.

**gc** (*bool, changeable*)

If `true` (default), the garbage collector is active. If `false`, neither garbage collection, nor stack shifts will take place, even not on explicit request. May be changed.

**gc\_thread** (*bool*)

If `true` (default if threading is enabled), atom and clause garbage collection are executed in a separate thread with the *alias* `gc`. Otherwise the thread that detected sufficient garbage executes the garbage collector. As running these global collectors may take relatively long, using a separate thread improves real time behaviour. The `gc` thread can be controlled using `set_prolog_gc_thread/1`.

**generate\_debug\_info** (*bool, changeable*)

If `true` (default) generate code that can be debugged using `trace/0`, `spy/1`, etc. Can be set to `false` using the `-nodebug`. This flag is scoped within a source file. Many of the libraries have `:- set_prolog_flag(generate_debug_info, false)` to hide their details from a normal trace.<sup>16</sup>

**gmp\_version** (*integer*)

If Prolog is linked with GMP, this flag gives the major version of the GMP library used. See also section 12.4.9.

**gui** (*bool*)

Set to `true` if XPCE is around and can be used for graphics.

**history** (*integer, changeable*)

If *integer* > 0, support Unix `cs(1)`-like history as described in section 2.7. Otherwise, only support reusing commands through the command line editor. The default is to set this Prolog flag to 0 if a command line editor is provided (see Prolog flag `readline`) and 15 otherwise.

**home** (*atom*)

SWI-Prolog's notion of the home directory. SWI-Prolog uses its home directory to find its startup file as `<home>/boot32.prc` (32-bit machines) or `<home>/boot64.prc` (64-bit machines) and to find its library as `<home>/library`.

**hwnd** (*integer*)

In `swipl-win.exe`, this refers to the MS-Windows window handle of the console window.

**integer\_rounding\_function** (*down, toward\_zero*)

ISO Prolog flag describing rounding by `//` and `rem` arithmetic functions. Value depends on the C compiler used.

**iso** (*bool, changeable*)

Include some weird ISO compatibility that is incompatible with normal SWI-Prolog behaviour. Currently it has the following effect:

- The `//2` (float division) *always* returns a float, even if applied to integers that can be divided.
- In the standard order of terms (see section 4.7.1), all floats are before all integers.
- `atom_length/2` yields a type error if the first argument is a number.

<sup>16</sup>In the current implementation this only causes a flag to be set on the predicate that causes children to be hidden from the debugger. The name anticipates further changes to the compiler.

- `clause/[2,3]` raises a permission error when accessing static predicates.
- `abolish/[1,2]` raises a permission error when accessing static predicates.
- Syntax is closer to the ISO standard:
  - Unquoted commas and bars appearing as atoms are not allowed. Instead of `f(, , a)` now write `f(' , ' , a)`. Unquoted commas can only be used to separate arguments in functional notation and list notation, and as a conjunction operator. Unquoted bars can only appear within lists to separate head and tail, like `[Head|Tail]`, and as infix operator for alternation in grammar rules, like `a --> b | c`.
  - Within functional notation and list notation terms must have priority below 1000. That means that rules and control constructs appearing as arguments need bracketing. A term like `[a :- b, c]` must now be disambiguated to mean `[(a :- b), c]` or `[(a :- b, c)]`.
  - Operators appearing as operands must be bracketed. Instead of `X == -, true.` write `X == (-), true.` Currently, this is not entirely enforced.
  - Backslash-escaped newlines are interpreted according to the ISO standard. See section 2.16.1.

**large\_files** (*bool*)

If present and `true`, SWI-Prolog has been compiled with *large file support* (LFS) and is capable of accessing files larger than 2GB on 32-bit hardware. Large file support is default on installations built using `configure` that support it and may be switched off using the `configure` option `--disable-largefile`.

**last\_call\_optimisation** (*bool, changeable*)

Determines whether or not last-call optimisation is enabled. Normally the value of this flag is the negation of the `debug` flag. As programs may run out of stack if last-call optimisation is omitted, it is sometimes necessary to enable it during debugging.

**max\_arity** (*unbounded*)

ISO Prolog flag describing there is no maximum arity to compound terms.

**max\_integer** (*integer*)

Maximum integer value if integers are *bounded*. See also the flag `bounded` and section 4.27.2.

**max\_tagged\_integer** (*integer*)

Maximum integer value represented as a ‘tagged’ value. Tagged integers require one word storage. Larger integers are represented as ‘indirect data’ and require significantly more space.

**message\_context** (*list(atom), changeable*)

Context information to add to messages of the levels `error` and `warning`. The list may contain the elements `thread` to add the thread that generates the message to the message, `time` or `time(Format)` to add a time stamp. The default time format is `%T.%3f`. The default is `[thread]`. See also `format_time/3` and `print_message/2`.

**min\_integer** (*integer*)

Minimum integer value if integers are *bounded*. See also the flag `bounded` and section 4.27.2.

**min\_tagged\_integer** (*integer*)

Start of the tagged-integer value range.

**mitigate\_spectre** (*bool, changeable*)

When `true` (default `false`), enforce mitigation against the [Spectre](#) timing-based security vulnerability. Spectre based attacks can extract information from memory owned by the process that should remain invisible, such as passwords or the private key of a web server. The attacks work by causing speculative access to sensitive data, and leaking the data via side-channels such as differences in the duration of successive instructions. An example of a potentially vulnerable application is [SWISH](#). SWISH allows users to run Prolog code while the swish server must protect the privacy of other users as well as its HTTPS private keys, cookies and passwords.

Currently, enabling this flag reduces the resolution of `get_time/1` and `statistics/2` CPU time to  $20\mu s$ .

**WARNING:** Although a coarser timer makes a successful attack of this type harder, it does not reliably prevent such attacks in general. Full mitigation may require compiler support to disable speculative access to sensitive data.

**occurs\_check** (*atom, changeable*)

This flag controls unification that creates an infinite tree (also called *cyclic term*) and can have three values. Using `false` (default), unification succeeds, creating an infinite tree. Using `true`, unification behaves as `unify_with_occurs_check/2`, failing silently. Using `error`, an attempt to create a cyclic term results in an `occurs_check` exception. The latter is intended for debugging unintentional creations of cyclic terms. Note that this flag is a global flag modifying fundamental behaviour of Prolog. Changing the flag from its default may cause libraries to stop functioning properly.

**open\_shared\_object** (*bool*)

If `true`, `open_shared_object/2` and friends are implemented, providing access to shared libraries (`.so` files) or dynamic link libraries (`.DLL` files).

**optimise** (*bool, changeable*)

If `true`, compile in optimised mode. The initial value is `true` if Prolog was started with the `-O` command line option. The `optimise` flag is scoped to a source file.

Currently optimised compilation implies compilation of arithmetic, and deletion of redundant `true/0` that may result from `expand_goal/2`.

Later versions might imply various other optimisations such as integrating small predicates into their callers, eliminating constant expressions and other predictable constructs. Source code optimisation is never applied to predicates that are declared dynamic (see `dynamic/1`).

**os\_argv** (*list, changeable*)

List is a list of atoms representing the command line arguments used to invoke SWI-Prolog. Please note that **all** arguments are included in the list returned. See `argv` to get the application options.

**pid** (*int*)

Process identifier of the running Prolog process. Existence of this flag is implementation-defined.

**pipe** (*bool, changeable*)

If `true`, `open(pipe(command), mode, Stream)`, etc. are supported. Can be changed to disable the use of pipes in applications testing this feature. Not recommended.

**posix\_shell** (*atom, changeable*)

Path to a POSIX compatible shell. This default is typically `/bin/sh`. This flag is used by `shell/1` and `qsave_program/2`.

**print\_write\_options** (*term, changeable*)

Specifies the options for `write_term/2` used by `print/1` and `print/2`.

**tmp\_dir** (*atom, changeable*)

Path to the temporary directory. initialised from the environment variable `TMP` or `TEMP` in windows. If this variable is not defined a default is used. This default is typically `/tmp` or `c:/temp` in windows.

**prompt\_alternatives\_on** (*atom, changeable*)

Determines prompting for alternatives in the Prolog top level. Default is `determinism`, which implies the system prompts for alternatives if the goal succeeded while leaving choice points. Many classical Prolog systems behave as `groundness`: they prompt for alternatives if and only if the query contains variables.

**protect\_static\_code** (*bool, changeable*)

If `true` (default `false`), `clause/2` does not operate on static code, providing some basic protection from hackers that wish to list the static code of your Prolog program. Once the flag is `true`, it cannot be changed back to `false`. Protection is default in ISO mode (see Prolog flag `iso`). Note that many parts of the development environment require `clause/2` to work on static code, and enabling this flag should thus only be used for production code.

**qcompile** (*atom, changeable*)

This option provides the default for the `qcompile(+Atom)` option of `load_files/2`.

**readline** (*atom, changeable*)

Specifies which form of command line editing is provided. Possible values are below. The flag may be set from the user's init file (see section 2.3) to one of `false`, `readline` or `editline`. This causes the toplevel not to load a command line editor (`false`) or load the specified one. If loading fails the flag is set to `false`.

**false**

No command line editing is available.

**readline**

The library `readline` is loaded, providing line editing based on the GNU `readline` library.

**editline**

The library `editline` is loaded, providing line editing based on the BSD `libedit`. This is the default if `editline` is available and can be loaded.

**swipl\_win**

SWI-Prolog uses its own console (`swipl-win.exe` on Windows, the Qt based `swipl-win` on MacOS) which provides line editing.

**resource.database** (*atom*)

Set to the absolute filename of the attached state. Typically this is the file `boot32.prc`, the file specified with `-x` or the running executable. See also `resource/3`.



**report\_error** (*bool, changeable*)

If `true`, print error messages; otherwise suppress them. May be changed. See also the `debug_on_error` Prolog flag. Default is `true`, except for the runtime version.

**runtime** (*bool*)

If present and `true`, SWI-Prolog is compiled with `-DO_RUNTIME`, disabling various useful development features (currently the tracer and profiler).

**sandboxed\_load** (*bool, changeable*)

If `true` (default `false`), `load_files/2` calls hooks to allow `library(sandbox)` to verify the safety of directives.

**saved\_program** (*bool*)

If present and `true`, Prolog has been started from a state saved with `qsave_program/[1,2]`.

**shared\_object\_extension** (*atom*)

Extension used by the operating system for shared objects. `.so` for most Unix systems and `.dll` for Windows. Used for locating files using the `file_type` executable. See also `absolute_file_name/3`.

**shared\_object\_search\_path** (*atom*)

Name of the environment variable used by the system to search for shared objects.

**signals** (*bool*)

Determine whether Prolog is handling signals (software interrupts). This flag is `false` if the hosting OS does not support signal handling or the command line option `-nosignals` is active. See section 12.4.22 for details.

**stack\_limit** (*int, changeable*)

Limits the combined sizes of the Prolog stacks for the current thread. See also `--stack` and section 2.20.1.

**stream\_type\_check** (*atom, changeable*)

Defines whether and how strictly the system validates that byte I/O should not be applied to text streams and text I/O should not be applied to binary streams. Values are `false` (no checking), `true` (full checking) and `loose`. Using checking mode `loose` (default), the system accepts byte I/O from text stream that use ISO Latin-1 encoding and accepts writing text to binary streams.

**system\_thread\_id** (*int*)

Available in multithreaded version (see section 10) where the operating system provides system-wide integer thread identifiers. The integer is the thread identifier used by the operating system for the calling thread. See also `thread_self/1`.

**table\_space** (*integer, changeable*)

Space reserved for storing answer tables for *tabled predicates* (see `table/1`).<sup>17</sup> When exceeded a `resource_error(table_space)` exception is raised.

**threads** (*bool, changeable*)

True when threads are supported. If the system is compiled without thread support the value is `false` and read-only. Otherwise the value is `true` unless the system was started with the `--nothreads`. Threading may be disabled only if no threads are running. See also the `gc_thread` flag.

<sup>17</sup>BUG: Currently only counts the space occupied by the nodes in the answer tries.



**timezone** (*integer*)

Offset in seconds west of GMT of the current time zone. Set at initialization time from the `timezone` variable associated with the POSIX `tzset()` function. See also `format_time/3`.

**toplevel\_goal** (*term, changeable*)

Defines the goal that is executed after running the initialization goals and entry point (see `-g`, `initialization/2` and section 2.10.2). The initial value is `default`, starting a normal interactive session. This value may be changed using the command line option `-t`. The explicit value `prolog` is equivalent to `default`. If `initialization(Goal,main)` is used and the `toplevel` is `default`, the `toplevel` is set to `halt` (see `halt/0`).

**toplevel\_mode** (*atom, changeable*)

If `backtracking` (default), the `toplevel` backtracks after completing a query. If `recursive`, the `toplevel` is implemented as a recursive loop. This implies that global variables set using `b_setval/2` are maintained between queries. In *recursive* mode, answers to `toplevel` variables (see section 2.8) are kept in backtrackable global variables and thus **not copied**. In *backtracking* mode answers to `toplevel` variables are kept in the recorded database (see section 4.14.2).

The recursive mode has been added for interactive usage of CHR (see section 9),<sup>18</sup> which maintains the global constraint store in backtrackable global variables.

**toplevel\_print\_anon** (*bool, changeable*)

If `true`, top-level variables starting with an underscore (`_`) are printed normally. If `false` they are hidden. This may be used to hide bindings in complex queries from the top level.

**toplevel\_print\_factorized** (*bool, changeable*)

If `true` (default `false`) show the internal sharing of subterms in the answer substitution. The example below reveals internal sharing of leaf nodes in *red-black trees* as implemented by the `rbtrees` predicate `rb_new/1`:

```
?- set_prolog_flag(toplevel_print_factorized, true).
?- rb_new(X).
X = t(_S1, _S1), % where
    _S1 = black(' ', _G387, _G388, ' ').
```

If this flag is `false`, the `% where` notation is still used to indicate cycles as illustrated below. This example also shows that the implementation reveals the internal cycle length, and *not* the minimal cycle length. Cycles of different length are indistinguishable in Prolog (as illustrated by `S == R`).

```
?- S = s(S), R = s(s(R)), S == R.
S = s(S),
R = s(s(R)).
```

**answer\_write\_options** (*term, changeable*)

This argument is given as option-list to `write_term/2` for printing results of queries. Default is `[quoted(true), portray(true), max_depth(10), attributes(portray)]`.

<sup>18</sup>Suggested by Falco Nogatz

**toplevel\_prompt** (*atom, changeable*)

Define the prompt that is used by the interactive top level. The following ~ (tilde) sequences are replaced:

---

```
~m  Type in module if not user (see module/1)
~l  Break level if not 0 (see break/0)
~d  Debugging state if not normal execution (see debug/0, trace/0)
~!  History event if history is enabled (see flag history)
```

---

**toplevel\_var\_size** (*int, changeable*)

Maximum size counted in literals of a term returned as a binding for a variable in a top-level query that is saved for re-use using the \$ variable reference. See section 2.8.

**trace\_gc** (*bool, changeable*)

If `true` (default `false`), garbage collections and stack-shifts will be reported on the terminal. May be changed. Values are reported in bytes as *G+T*, where *G* is the global stack value and *T* the trail stack value. ‘Gained’ describes the number of bytes reclaimed. ‘used’ the number of bytes on the stack after GC and ‘free’ the number of bytes allocated, but not in use. Below is an example output.

```
% GC: gained 236,416+163,424 in 0.00 sec;
      used 13,448+5,808; free 72,568+47,440
```

**traditional** (*bool*)

Available in SWI-Prolog version 7. If `true`, ‘traditional’ mode has been selected using `--traditional`. Notice that some SWI7 features, like the functional notation on dicts, do not work in this mode. See also section 5.

**tty\_control** (*bool, changeable*)

Determines whether the terminal is switched to raw mode for `get_single_char/1`, which also reads the user actions for the trace. May be set. If this flag is `false` at startup, command line editing is disabled. See also the `--no-tty` command line option.

**unix** (*bool*)

If present and `true`, the operating system is some version of Unix. Defined if the C compiler used to compile this version of SWI-Prolog either defines `__unix__` or `unix`. On other systems this flag is not available. See also `apple` and `windows`.

**unknown** (*fail, warning, error, changeable*)

Determines the behaviour if an undefined procedure is encountered. If `fail`, the predicate fails silently. If `warn`, a warning is printed, and execution continues as if the predicate was not defined, and if `error` (default), an `existence_error` exception is raised. This flag is local to each module and inherited from the module’s *import-module*. Using default setup, this implies that normal modules inherit the flag from `user`, which in turn inherit the value `error` from `system`. The user may change the flag for module `user` to change the default for all application modules or for a specific module. It is strongly advised to keep the `error` default and use `dynamic/1` and/or `multifile/1` to specify possible non-existence of a predicate.

**unload\_foreign\_libraries** (*bool, changeable*)

If `true` (default `false`), unload all loaded foreign libraries. Default is `false` because modern OSes reclaim the resources anyway and unloading the foreign code may cause registered hooks to point to no longer existing data or code.

**user\_flags** (*Atom, changeable*)

Define the behaviour of `set_prolog_flag/2` if the flag is not known. Values are `silent`, `warning` and `error`. The first two create the flag on-the-fly, where `warning` prints a message. The value `error` is consistent with ISO: it raises an existence error and does not create the flag. See also `create_prolog_flag/3`. The default is `silent`, but future versions may change that. Developers are encouraged to use another value and ensure proper use of `create_prolog_flag/3` to create flags for their library.

**var\_prefix** (*bool, changeable*)

If `true` (default `false`), variables must start with an underscore (`_`). May be changed. This flag is local to the module in which it is changed. See section 2.16.1.

**verbose** (*atom, changeable*)

This flag is used by `print_message/2`. If its value is `silent`, messages of type `informational` and `banner` are suppressed. The `-q` switches the value from the initial `normal` to `silent`.

**verbose\_autoload** (*bool, changeable*)

If `true` the normal consult message will be printed if a library is autoloaded. By default this message is suppressed. Intended to be used for debugging purposes.

**verbose\_load** (*atom, changeable*)

Determines messages printed for loading (compiling) Prolog files. Current values are `full` (print a message at the start and end of each file loaded), `normal` (print a message at the end of each file loaded), `brief` (print a message at end of loading the toplevel file), and `silent` (no messages are printed, default). The value of this flag is normally controlled by the option `silent(Bool)` provided by `load_files/2`.

**verbose\_file\_search** (*bool, changeable*)

If `true` (default `false`), print messages indicating the progress of `absolute_file_name/[2,3]` in locating files. Intended for debugging complicated file-search paths. See also `file_search_path/2`.

**version** (*integer*)

The version identifier is an integer with value:

$$10000 \times Major + 100 \times Minor + Patch$$

**version\_data** (*swi(Major, Minor, Patch, Extra)*)

Part of the dialect compatibility layer; see also the Prolog flag `dialect` and section C. *Extra* provides platform-specific version information as a list. *Extra* is used for *tagged versions* such as “7.4.0-rc1”, in which case *Extra* contains a term `tag(rc1)`.

**version\_git** (*atom*)

Available if created from a git repository. See `git-describe` for details.

**windows** (*bool*)

If present and `true`, the operating system is MS-Windows.

**wine\_version** (*atom*)

If present, SWI-Prolog is the MS-Windows version running under the [Wine](#) emulator.

**warn\_override\_implicit\_import** (*bool, changeable*)

If `true` (default), a warning is printed if an implicitly imported predicate is clobbered by a local definition. See `use_module/1` for details.

**win\_file\_access\_check** (*atom, changeable*)

Controls the behaviour of `access_file/2` under Windows. There is no reliable way to check access to files and directories on Windows. This flag allows for switching between three alternative approximations.

**access**

Use Windows `_waccess()` function. This ignores ACLs (Access Control List) and thus may indicate that access is allowed while it is not.

**getfilesecurity**

Use the Windows `GetFileSecurity()` function. This does not work on all file systems, but is probably the best choice on file systems that do support it, notably local NTFS volumes.

**openclose**

Try to open the file and close it. This works reliable for files, but not for directories. Currently directories are checked using `_waccess()`. This is the default.

**windows** (*bool*)

If present and `true`, the operating system is an implementation of Microsoft Windows. This flag is only available on MS-Windows based versions. See also `unix`.

**write\_attributes** (*atom, changeable*)

Defines how `write/1` and friends write attributed variables. The option values are described with the `attributes` option of `write_term/3`. Default is `ignore`.

**write\_help\_with\_overstrike** (*bool*)

Internal flag used by `help/1` when writing to a terminal. If present and `true` it prints bold and underlined text using *overstrike*.

**xpce** (*bool*)

Available and set to `true` if the XPCE graphics system is loaded.

**xpce\_version** (*atom*)

Available and set to the version of the loaded XPCE system.

**xref** (*bool, changeable*)

If `true`, source code is being read for *analysis* purposes such as cross-referencing. Otherwise (default) it is being read to be compiled. This flag is used at several places by `term_expansion/2` and `goal_expansion/2` hooks, notably if these hooks use side effects. See also the libraries `prolog_source` and `prolog_xref`.

**set\_prolog\_flag**(:Key, +Value)

[ISO]

Define a new Prolog flag or change its value. *Key* is an atom. If the flag is a system-defined flag that is not marked *changeable* above, an attempt to modify the flag yields a `permission_error`. If the provided *Value* does not match the type of the flag, a `type_error` is raised.

Some flags (e.g., `unknown`) are maintained on a per-module basis. The addressed module is determined by the *Key* argument.

In addition to ISO, SWI-Prolog allows for user-defined Prolog flags. The type of the flag is determined from the initial value and cannot be changed afterwards. Defined types are `boolean` (if the initial value is one of `false`, `true`, `on` or `off`), `atom` if the initial value is any other

`atom`, `integer` if the value is an integer that can be expressed as a 64-bit signed value. Any other initial value results in an untyped flag that can represent any valid Prolog term.

The behaviour when *Key* denotes a non-existent key depends on the Prolog flag `user_flags`. The default is to define them silently. New code is encouraged to use `create_prolog_flag/3` for portability.

**`create_prolog_flag(+Key, +Value, +Options)`** [YAP]  
Create a new Prolog flag. The ISO standard does not foresee creation of new flags, but many libraries introduce new flags. *Options* is a list of the options below. See also `user_flags`.

**`access(+Access)`**  
Define access rights for the flag. Values are `read.write` and `read.only`. The default is `read.write`.

**`type(+Atom)`**  
Define a type restriction. Possible values are `boolean`, `atom`, `integer`, `float` and `term`. The default is determined from the initial value. Note that `term` restricts the term to be ground.

**`keep(+Boolean)`**  
If `true`, do not modify the flag if it already exists. Otherwise (default), this predicate behaves as `set_prolog_flag/2` if the flag already exists.

## 2.12 An overview of hook predicates

SWI-Prolog provides a large number of hooks, mainly to control handling messages, debugging, startup, shut-down, macro-expansion, etc. Below is a summary of all defined hooks with an indication of their portability.

- `portray/1`  
Hook into `write_term/3` to alter the way terms are printed (ISO).
- `message_hook/3`  
Hook into `print_message/2` to alter the way system messages are printed (Quintus/SICStus).
- `message_property/2`  
Hook into `print_message/2` that defines prefix, output stream, color, etc.
- `message_prefix_hook/2`  
Hook into `print_message/2` to add additional prefixes to the message such as the time and thread.
- `library_directory/1`  
Hook into `absolute_file_name/3` to define new library directories (most Prolog systems).
- `file_search_path/2`  
Hook into `absolute_file_name/3` to define new search paths (Quintus/SICStus).

- `term_expansion/2`  
Hook into `load_files/2` to modify read terms before they are compiled (macro-processing) (most Prolog systems).
- `goal_expansion/2`  
Same as `term_expansion/2` for individual goals (SICStus).
- `prolog_load_file/2`  
Hook into `load_files/2` to load other data formats for Prolog sources from ‘non-file’ resources. The `load_files/2` predicate is the ancestor of `consult/1`, `use_module/1`, etc.
- `prolog_edit:locate/3`  
Hook into `edit/1` to locate objects (SWI).
- `prolog_edit:edit_source/1`  
Hook into `edit/1` to call an internal editor (SWI).
- `prolog_edit:edit_command/2`  
Hook into `edit/1` to define the external editor to use (SWI).
- `prolog_list_goal/1`  
Hook into the tracer to list the code associated to a particular goal (SWI).
- `prolog_trace_interception/4`  
Hook into the tracer to handle trace events (SWI).
- `prolog:debug_control_hook/1`  
Hook in `spy/1`, `nospy/1`, `nospyall/0` and `debugging/0` to extend these control predicates to higher-level libraries.
- `prolog:help_hook/1`  
Hook in `help/0`, `help/1` and `apropos/1` to extend the help system.
- `resource/3`  
Define a new resource (not really a hook, but similar) (SWI).
- `exception/3`  
Old attempt to a generic hook mechanism. Handles undefined predicates (SWI).
- `attr_unify_hook/2`  
Unification hook for attributed variables. Can be defined in any module. See section 8.1 for details.

## 2.13 Automatic loading of libraries

If —at runtime— an undefined predicate is trapped, the system will first try to import the predicate from the module’s default module (see section 6.9). If this fails the *auto loader* is activated.<sup>19</sup> On first activation an index to all library files in all library directories is loaded in core

<sup>19</sup>Actually, the hook `user:exception/3` is called; only if this hook fails does it call the autoloader.

(see `library_directory/1`, `file_search_path/2` and `reload_library_index/0`). If the undefined predicate can be located in one of the libraries, that library file is automatically loaded and the call to the (previously undefined) predicate is restarted. By default this mechanism loads the file silently. The `current_prolog_flag/2` key `verbose_autoload` is provided to get verbose loading. The Prolog flag `autoload` can be used to enable/disable the autoload system.

Autoloading only handles (library) source files that use the module mechanism described in chapter 6. The files are loaded with `use_module/2` and only the trapped undefined predicate is imported into the module where the undefined predicate was called. Each library directory must hold a file `INDEX.pl` that contains an index to all library files in the directory. This file consists of lines of the following format:

```
index(Name, Arity, Module, File).
```

The predicate `make/0` updates the autoload index. It searches for all library directories (see `library_directory/1` and `file_search_path/2`) holding the file `MKINDEX.pl` or `INDEX.pl`. If the current user can write or create the file `INDEX.pl` and it does not exist or is older than the directory or one of its files, the index for this directory is updated. If the file `MKINDEX.pl` exists, updating is achieved by loading this file, normally containing a directive calling `make_library_index/2`. Otherwise `make_library_index/1` is called, creating an index for all `*.pl` files containing a module.

Below is an example creating an indexed library directory.

```
% mkdir ~/lib/prolog
% cd ~/lib/prolog
% swipl -g true -t 'make_library_index.'
```

If there is more than one library file containing the desired predicate, the following search schema is followed:

1. If there is a library file that defines the module in which the undefined predicate is trapped, this file is used.
2. Otherwise library files are considered in the order they appear in the `library_directory/1` predicate and within the directory alphabetically.

#### **autoload\_path(+DirAlias)**

Add *DirAlias* to the libraries that are used by the autoloader. This extends the search path `autoload` and reloads the library index. For example:

```
:- autoload_path(library(http)).
```

If this call appears as a directive, it is term-expanded into a clause for `user:file_search_path/2` and a directive calling `reload_library_index/0`. This keeps source information and allows for removing this directive.

#### **make\_library\_index(+Directory)**

Create an index for this directory. The index is written to the file `'INDEX.pl'` in the specified directory. Fails with a warning if the directory does not exist or is write protected.

**make\_library\_index(+Directory, +ListOfPatterns)**

Normally used in `MKINDEX.pl`, this predicate creates `INDEX.pl` for *Directory*, indexing all files that match one of the file patterns in *ListOfPatterns*.

Sometimes library packages consist of one public load file and a number of files used by this load file, exporting predicates that should not be used directly by the end user. Such a library can be placed in a sub-directory of the library and the files containing public functionality can be added to the index of the library. As an example we give the XPCE library's `MKINDEX.pl`, including the public functionality of `trace/browse.pl` to the autoloadable predicates for the XPCE package.

```
:- make_library_index('.',
    [ '*.pl',
      'trace/browse.pl'
    ]).
```

**reload\_library\_index**

Force reloading the index after modifying the set of library directories by changing the rules for `library_directory/1`, `file_search_path/2`, adding or deleting `INDEX.pl` files. This predicate does *not* update the `INDEX.pl` files. Check `make_library_index/[1,2]` and `make/0` for updating the index files.

Normally, the index is reloaded automatically if a predicate cannot be found in the index and the set of library directories has changed. Using `reload_library_index/0` is necessary if directories are removed or the order of the library directories is changed.

When creating an executable using either `qsave_program/2` or the `-c` command line options, it is necessary to load all predicates that would normally be autoloaded explicitly. This is discussed in section 13. See `autoload/0`.

## 2.14 Packs: community add-ons

SWI-Prolog has a mechanism for easy incorporation of community extensions. See the [pack landing page](#) for details and available packs. This section documents the built-in predicates to attach packs. Predicates for creating, registering and installing packs are provided by the library `prolog-pack`.

**attach\_packs**

Attaches all packs in subdirectories of directories that are accessible through the *file search path* (see `absolute_file_name/3`) pack. The default for this search path is:

```
user:file_search_path(pack, app_data(pack)).
user:file_search_path(pack, swi(pack)).
```

The predicate `attach_packs/0` is called on startup of SWI-Prolog.

**attach\_packs(+Directory)**

Attach all packs in subdirectories of *Directory*. Same as `attach_packs(Directory, [])`.

**attach\_packs(+Directory, +Options)**

Attach all packs in subdirectories of *Directory*. Options is one of:



**search(+Where)**

Determines the order in which pack library directories are searched. Default is to add new packages at the end (*last*). Using *first*, new packages are added at the start.

**duplicate(+Action)**

Determines what happens if a pack with the same name is already attached. Default is *warning*, which prints a warning and ignores the new pack. Other options are *keep*, which is like *warning* but operates silently and *replace*, which detaches the old pack and attaches the new.

The predicate `attach_packs/2` can be used to attach packages that are bundled with an application.

## 2.15 Garbage Collection

SWI-Prolog provides garbage collection, last-call optimization and atom garbage collection. These features are controlled using Prolog flags (see `current_prolog_flag/2`).

## 2.16 The SWI-Prolog syntax

SWI-Prolog syntax is close to ISO-Prolog standard syntax, which is based on the Edinburgh Prolog syntax. A formal description can be found in the ISO standard document. For an informal introduction we refer to Prolog text books (see section 1) and [online tutorials](#). In addition to the differences from the ISO standard documented here, SWI-Prolog offers several extensions, some of which also extend the syntax. See section 5 for more information.

### 2.16.1 ISO Syntax Support

This section lists various extensions w.r.t. the ISO Prolog syntax.

#### Processor Character Set

The processor character set specifies the class of each character used for parsing Prolog source text. Character classification is fixed to [Unicode](#). See also section 2.19.

#### Nested comments

SWI-Prolog allows for nesting `/* ... */` comments. Where the ISO standard accepts `/* ... /* ... */` as a comment, SWI-Prolog will search for a terminating `*/`. This is useful if some code with `/* ... */` comment statements in it should be commented out. This modification also avoids unintended commenting in the example below, where the closing `*/` of the first comment has been forgotten.<sup>20</sup>

```
/* comment
```

<sup>20</sup>Recent copies of GCC give a style warning if `/*` is encountered in a comment, which suggests that this problem has been recognised more widely.

```
code

/* second comment */

code
```

### Character Escape Syntax

Within quoted atoms (using single quotes: '*atom*') special characters are represented using escape sequences. An escape sequence is led in by the backslash (\) character. The list of escape sequences is compatible with the ISO standard but contains some extensions, and the interpretation of numerically specified characters is slightly more flexible to improve compatibility. Undefined escape characters raise a `syntax_error` exception.<sup>21</sup>

`\a`

Alert character. Normally the ASCII character 7 (beep).

`\b`

Backspace character.

`\c`

No output. All input characters up to but not including the first non-layout character are skipped. This allows for the specification of pretty-looking long lines. Not supported by ISO. Example:

```
format('This is a long line that looks better if it was \c
      split across multiple physical lines in the input')
```

`\(NEWLINE)`

When in ISO mode (see the Prolog flag `iso`), only skip this sequence. In native mode, white space that follows the newline is skipped as well and a warning is printed, indicating that this construct is deprecated and advising to use `\c`. We advise using `\c` or putting the layout *before* the `\`, as shown below. Using `\c` is supported by various other Prolog implementations and will remain supported by SWI-Prolog. The style shown below is the most compatible solution.<sup>22</sup>

```
format('This is a long line that looks better if it was \
      split across multiple physical lines in the input')
```

instead of

```
format('This is a long line that looks better if it was\
      split across multiple physical lines in the input')
```

<sup>21</sup>Up to SWI-Prolog 6.1.9, undefined escape characters were copied verbatim, i.e., removing the backslash.

<sup>22</sup>Future versions will interpret `\(return)` according to ISO.

Note that SWI-Prolog also allows unescaped newlines to appear in quoted material. This is not allowed by the ISO standard, but used to be common practice before.

`\e`

Escape character (ASCII 27). Not ISO, but widely supported.

`\f`

Form-feed character.

`\n`

Next-line character.

`\r`

Carriage-return only (i.e., go back to the start of the line).

`\s`

Space character. Intended to allow writing `0'\s` to get the character code of the space character. Not ISO.

`\t`

Horizontal tab character.

`\v`

Vertical tab character (ASCII 11).

`\xxx... \`

Hexadecimal specification of a character. The closing `\` is obligatory according to the ISO standard, but optional in SWI-Prolog to enhance compatibility with the older Edinburgh standard. The code `\xa\3` emits the character 10 (hexadecimal 'a') followed by '3'. Characters specified this way are interpreted as Unicode characters. See also `\u`.

`\uXXXX`

Unicode character specification where the character is specified using *exactly* 4 hexadecimal digits. This is an extension to the ISO standard, fixing two problems. First, where `\x` defines a numeric character code, it doesn't specify the character set in which the character should be interpreted. Second, it is not needed to use the idiosyncratic closing `\` ISO Prolog syntax.

`\UXXXXXXXX`

Same as `\uXXXX`, but using 8 digits to cover the whole Unicode set.

`\40`

Octal character specification. The rules and remarks for hexadecimal specifications apply to octal specifications as well.

`\\`

Escapes the backslash itself. Thus, `'\\'` is an atom consisting of a single `\`.

`\'`

Single quote. Note that `'\''` and `''''` both describe the atom with a single `'`, i.e., `'\'' == ''''` is true.

`\"`

Double quote.

`\``

Back quote.

Character escaping is only available if `current_prolog_flag(character_escapes, true)` is active (default). See `current_prolog_flag/2`. Character escapes conflict with `writeln/2` in two ways: `\40` is interpreted as decimal 40 by `writeln/2`, but as octal 40 (decimal 32) by `read`. Also, the `writeln/2` sequence `\1` is illegal. It is advised to use the more widely supported `format/[2,3]` predicate instead. If you insist upon using `writeln/2`, either switch `character_escapes` to `false`, or use double `\\`, as in `writeln('\\1')`.

### Syntax for non-decimal numbers

SWI-Prolog implements both Edinburgh and ISO representations for non-decimal numbers. According to Edinburgh syntax, such numbers are written as  $\langle radix \rangle' \langle number \rangle$ , where  $\langle radix \rangle$  is a number between 2 and 36. ISO defines binary, octal and hexadecimal numbers using `0[bxo]⟨number⟩`. For example: `A is 0b100 \ / 0xf00` is a valid expression. Such numbers are always unsigned.

### Using digit groups in large integers

SWI-Prolog supports splitting long integers into *digit groups*. Digit groups can be separated with the sequence  $\langle underscore \rangle$ ,  $\langle optional\ white\ space \rangle$ . If the  $\langle radix \rangle$  is 10 or lower, they may also be separated with exactly one space. The following all express the integer 1 million:

```
1_000_000
1 000 000
1_000_/*more*/000
```

Integers can be printed using this notation with `format/2`, using the `~I` format specifier. For example:

```
?- format('~I', [1000000]).
1_000_000
```

The current syntax has been proposed by Ulrich Neumerkel on the SWI-Prolog mailinglist.

### NaN and Infinity floats and their syntax

SWI-Prolog supports reading and printing ‘special’ floating point values according to [Proposal for Prolog Standard core update wrt floating point arithmetic](#) by Joachim Schimpf and available in ECLiPSe Prolog. In particular,

- Infinity is printed as `1.0Inf` or `-1.0Inf`. Any sequence matching the regular expression `[+-]?\\sd+[.]\\sd+Inf` is mapped to plus or minus infinity.

- NaN (Not a Number) is printed as `1.xxxNaN`, where `1.xxx` is the float after replacing the exponent by '1'. Such numbers are read, resulting in the same NaN. The NaN constant can also be produced using the function `nan/0`, e.g.,

```
?- A is nan.
A = 1.5NaN.
```

Note that, compliant with the ISO standard, SWI-Prolog arithmetic (see section 4.27) never returns one of the above values but instead raises an *exception*, e.g.,

```
?- A is 1/0.
ERROR: //2: Arithmetic: evaluation error: `zero_divisor'
```

There is one exception to this rule. For compatibility the functions `inf/0` and `nan/0` return `1.0Inf` and the default system NaN. The ability to create, read and write such values is primarily provided to exchange data with languages that can represent the full range of IEEE doubles.

### Force only underscore to introduce a variable

According to the ISO standard and most Prolog systems, identifiers that start with an uppercase letter or an underscore are variables. In the past, *Prolog by BIM* provided an alternative syntax, where only the underscore (`_`) introduces a variable. As of SWI-Prolog 7.3.27 SWI-Prolog supports this alternative syntax, controlled by the Prolog flag `var_prefix`. As the `character_escapes` flag, this flag is maintained per module, where the default is `false`, supporting standard syntax.

Having only the underscore introduce a variable is particularly useful if code contains identifiers for case sensitive external languages. Examples are the RDF library where code frequently specifies property and class names<sup>23</sup> and the R interface for specifying functions or variables that start with an uppercase character. Lexical databases where part of the terms start with an uppercase letter is another category where the readability of the code improves using this option.

### Unicode Prolog source

The ISO standard specifies the Prolog syntax in ASCII characters. As SWI-Prolog supports Unicode in source files we must extend the syntax. This section describes the implication for the source files, while writing international source files is described in section 3.1.3.

The SWI-Prolog Unicode character classification is based on version 6.0.0 of the Unicode standard. Please note that `char_type/2` and friends, intended to be used with all text except Prolog source code, is based on the C library locale-based classification routines.

- *Quoted atoms and strings*

Any character of any script can be used in quoted atoms and strings. The escape sequences `\uXXXX` and `\UXXXXXXXX` (see section 2.16.1) were introduced to specify Unicode code points in ASCII files.

<sup>23</sup>Samer Abdallah suggested this feature based on experience with non-Prolog users using the RDF library.

- *Atoms and Variables*

We handle them in one item as they are closely related. The Unicode standard defines a syntax for identifiers in computer languages.<sup>24</sup> In this syntax identifiers start with `ID_Start` followed by a sequence of `ID_Continue` codes. Such sequences are handled as a single token in SWI-Prolog. The token is a *variable* iff it starts with an uppercase character or an underscore (`_`). Otherwise it is an atom. Note that many languages do not have the notion of character case. In such languages variables *must* be written as `_name`.

- *White space*

All characters marked as separators (`Z*`) in the Unicode tables are handled as layout characters.

- *Control and unassigned characters*

Control and unassigned (`C*`) characters produce a syntax error if encountered outside quoted atoms/strings and outside comments.

- *Other characters*

The first 128 characters follow the ISO Prolog standard. Unicode symbol and punctuation characters (general category `S*` and `P*`) act as glueing symbol characters (i.e., just like `==`: an unquoted sequence of symbol characters are combined into an atom).

Other characters (this is mainly `No`: *a numeric character of other type*) are currently handled as ‘solo’.

### Singleton variable checking

A *singleton variable* is a variable that appears only one time in a clause. It can always be replaced by `_`, the *anonymous* variable. In some cases, however, people prefer to give the variable a name. As mistyping a variable is a common mistake, Prolog systems generally give a warning (controlled by `style_check/1`) if a variable is used only once. The system can be informed that a variable is meant to appear once by *starting* it with an underscore, e.g., `_Name`. Please note that any variable, except plain `_`, shares with variables of the same name. The term `t(_X, _X)` is equivalent to `t(X, X)`, which is *different* from `t(_, _)`.

As Unicode requires variables to start with an underscore in many languages, this schema needs to be extended.<sup>25</sup> First we define the two classes of named variables.

- *Named singleton variables*

Named singletons start with a double underscore (`__`) or a single underscore followed by an uppercase letter, e.g., `__var` or `_Var`.

- *Normal variables*

All other variables are ‘normal’ variables. Note this makes `_var` a normal variable.<sup>26</sup>

Any normal variable appearing exactly once in the clause *and* any named singleton variables appearing more than once are reported. Below are some examples with warnings in the right column. Singleton messages can be suppressed using the `style_check/1` directive.

<sup>24</sup><http://www.unicode.org/reports/tr31/>

<sup>25</sup>After a proposal by Richard O’Keefe.

<sup>26</sup>Some Prolog dialects write variables this way.

|               |   |
|---------------|---|
| test(_).      |   |
| test(_a).     | Singleton variables: [_a]                                 |
| test(_12).    | Singleton variables: [_12]                                |
| test(A).      | Singleton variables: [A]                                  |
| test(_A).     |   |
| test(_a).     |   |
| test(_, _).   |   |
| test(_a, _a). |   |
| test(_a, _a). | Singleton-marked variables appearing more than once: [_a] |
| test(_A, _A). | Singleton-marked variables appearing more than once: [_A] |
| test(A, A).   |   |

**Semantic singletons** Starting with version 6.5.1, SWI-Prolog has *syntactic singletons* and *semantic singletons*. The first are checked by `read_clause/3` (and `read_term/3` using the option `singletons(warning)`). The latter are generated by the compiler for variables that appear alone in a *branch*. For example, in the code below the variable `X` is not a *syntactic* singleton, but the variable `X` does not communicate any bindings and replacing `X` with `_` does not change the semantics.

```
test :-
    (   test_1(X)
    ;   test_2(X)
    ) .
```

## 2.17 Rational trees (cyclic terms)

SWI-Prolog supports rational trees, also known as cyclic terms. ‘Supports’ is so defined that most relevant built-in predicates terminate when faced with rational trees. Almost all SWI-Prolog’s built-in term manipulation predicates process terms in a time that is linear to the amount of memory used to represent the term on the stack. The following set of predicates safely handles rational trees: `=../2`, `==/2`, `=@=/2`, `=/2`, `@</2`, `@=</2`, `@>/2`, `@>=/2`, `\==/2`, `\=@=/2`, `\=/2`, `acyclic_term/1`, `bagof/3`, `compare/3`, `copy_term/2`, `cyclic_term/1`, `dif/2`, `duplicate_term/2`, `findall/3`, `ground/1`, `term_hash/2`, `numbervars/3`, `numbervars/4`, `recorda/3`, `recordz/3`, `setof/3`, `subsumes_term/2`, `term_variables/2`, `throw/1`, `unify_with_occurs_check/2`, `unifiable/3`, `when/2`, `write/1` (and related predicates).

In addition, some built-ins recognise rational trees and raise an appropriate exception. Arithmetic evaluation belongs to this group. The compiler (`asserta/1`, etc.) also raises an exception. Future versions may support rational trees. Predicates that could provide meaningful processing of rational trees raise a `representation_error`. Predicates for which rational trees have no meaningful interpretation raise a `type_error`. For example:

```
1 ?- A = f(A), asserta(a(A)).
ERROR: asserta/1: Cannot represent due to `cyclic_term'
2 ?- A = 1+A, B is A.
```

```
ERROR: is/2: Type error: 'expression' expected, found
      '@(S_1,[S_1=1+S_1])' (cyclic term)
```

## 2.18 Just-in-time clause indexing

SWI-Prolog provides ‘just-in-time’ indexing over multiple arguments.<sup>27</sup> ‘Just-in-time’ means that clause indexes are not built by the compiler (or `asserta/1` for dynamic predicates), but on the first call to such a predicate where an index might help (i.e., a call where at least one argument is instantiated). This section describes the rules used by the indexing logic. Note that this logic is not ‘set in stone’. The indexing capabilities of the system will change. Although this inevitably leads to some regressing on some particular use cases, we strive to avoid significant slowdowns.

The list below describes the clause selection process for various predicates and calls. The alternatives are considered in the order they are presented.

- *Special purpose code*

Currently two special cases are recognised by the compiler: static code with exactly one clause and static code with two clauses, one where the first argument is the empty list (`[]`) and one where the first argument is a non-empty list (`[_|_]`).

- *Linear scan on first argument*

The principal clause list maintains a *key* for the first argument. An indexing key is either a constant or a functor (name/arity reference). Calls with an instantiated first argument and less than 10 clauses perform a linear scan for a possible matching clause using this index key. If the result is deterministic it is used. Otherwise the system looks for better indexes.<sup>28</sup>

- *Hash lookup*

If none of the above applies, the system considers the available hash tables for which the corresponding argument is instantiated. If a table is found with acceptable characteristics, it is used. Otherwise it assesses the clauses for all instantiated arguments and selects the best candidate for creating a new hash table. If there is no single argument that provides an acceptable hash quality it will search for a combination of arguments.<sup>29</sup> Searching for index candidates is only performed on the first 254 arguments.

If a single-argument index contains multiple compound terms with the same name and arity and at least one non-variable argument, a *list index* is created. A subsequent query where this argument is bound to a compound causes jiti indexing to be applied *recursively* on the arguments of the term. This is called *deep indexing*.<sup>30</sup> See also section 2.18.1

Clauses that have a variable at an otherwise indexable argument must be linked into all hash buckets. Currently, predicates that have more than 10% such clauses for a specific argument are not considered for indexing on that argument.

<sup>27</sup>JIT indexing was added in version 5.11.29 (Oct. 2011).

<sup>28</sup>Up to 7.7.2 this result was used also when non-deterministic.

<sup>29</sup>The last step was added in SWI-Prolog 7.5.8.

<sup>30</sup>Deep indexing was added in version 7.7.4.



Disregarding variables, the suitability of an argument for hashing is expressed as the number of unique indexable values divided by the standard deviation of the number of duplicate values for each value plus one.<sup>31</sup>

The indexes of dynamic predicates are deleted if the number of clauses is doubled since its creation or reduced below 1/4th. The JIT approach will recreate a suitable index on the next call. Indexes of running predicates cannot be deleted. They are added to a ‘removed index list’ associated to the predicate. Outdated indexes of predicates are reclaimed by `garbage_collect_clauses/0`. The clause garbage collector is scheduled automatically, based on time and space based heuristics. See `garbage_collect_clauses/0` for details.

The library `prolog_jiti` provides `jiti_list/0,1` to list the characteristics of all or some of the created hash tables.

**Dynamic predicates** are indexed using the same rules as static predicates, except that the *special purpose* schemes are never applied. In addition, the JIT index is discarded if the number of clauses has doubled since the predicate was last assessed or shrinks below one fourth. A subsequent call reassesses the statistics of the dynamic predicate and, when applicable, creates a new index.

### 2.18.1 Deep indexing

As introduced in section 2.18, *deep indexing* creates hash tables distinguish clauses that share a compound with the same name and arity. Deep indexes allow for efficient lookup of arbitrary terms. Without it is advised to *flatten* the term, i.e., turn  $F(X)$  into two arguments for the fact, one argument denoting the functor  $F$  and the second the argument  $X$ . This works fine as long as the arity of the each of the terms is the same. Alternatively we can use `term_hash/2` or `term_hash/4` to add a column holding the hash of the term. That approach can deal with arbitrary arities, but requires us to know that the term is ground (`term_hash/2`) or up to which depth we get sufficient selectivity (`term_hash/4`).

Deep indexing does not require this knowledge and leads to efficient lookup regardless of the instantiation of the query and term. The current version does come with some limitations:

- The decision which index to use is taken independently at each level. Future versions may be smarter on this.
- Deep indexing only applies to a *single argument* indexes (on any argument).
- Currently, the depth of indexing is limited to 7 levels.

Note that, when compiling DCGs (see section 4.13) and the first body term is a *literal*, it is included into the clause head. See for example the grammar and its plain Prolog representation below.

```
det(det(a), sg) --> "a".
det(det(an), pl) --> "an".
det(det(the), _) --> "the".
```

<sup>31</sup>Earlier versions simply used the number of unique values, but poor distribution of values makes a table less suitable. This was analysed by Fabien Noth and Günter Kriesel.

```
?- listing(det).
det(det(a), sg, [97|A], A).
det(det(an), pl, [97, 110|A], A).
det(det(the), _, [116, 104, 101|A], A).
```

Deep argument indexing will create indexes for the 3rd list argument, providing speedup and making clause selection deterministic if all rules start with a literal and all literals are unique in the first 6 elements. Note that deep index creation stops as soon as a deterministic choice can be made or there are no two clauses that have the same name/arity combination.

### 2.18.2 Future directions

- The ‘special cases’ can be extended. This is notably attractive for static predicates with a relatively small number of clauses where a hash lookup is too costly.
- Create an efficient decision diagram for selecting between low numbers of static clauses.
- Implement a better judgements for selecting between deep and plain indexes.

### 2.18.3 Indexing and portability

The base-line functionality of Prolog implementations provides indexing on constants and functor (name/arity) on the first argument. This must be your assumption if wide portability of your program is important. This can typically be achieved by exploiting `term_hash/2` or `term_hash/4` and/or maintaining multiple copies of a predicate with reordered arguments and wrappers that update all implementations (`assert/retract`) and selects the appropriate implementation (`query`).

YAP provides full JIT indexing, including indexing arguments of compound terms. YAP’s indexing has been the inspiration for enhancing SWI-Prolog’s indexing capabilities.

## 2.19 Wide character support

SWI-Prolog supports *wide characters*, characters with character codes above 255 that cannot be represented in a single *byte*. *Universal Character Set* (UCS) is the ISO/IEC 10646 standard that specifies a unique 31-bit unsigned integer for any character in any language. It is a superset of 16-bit Unicode, which in turn is a superset of ISO 8859-1 (ISO Latin-1), a superset of US-ASCII. UCS can handle strings holding characters from multiple languages, and character classification (uppercase, lowercase, digit, etc.) and operations such as case conversion are unambiguously defined.

For this reason SWI-Prolog has two representations for atoms and string objects (see section 5.2). If the text fits in ISO Latin-1, it is represented as an array of 8-bit characters. Otherwise the text is represented as an array of 32-bit numbers. This representational issue is completely transparent to the Prolog user. Users of the foreign language interface as described in chapter 12 sometimes need to be aware of these issues though.

Character coding comes into view when characters of strings need to be read from or written to file or when they have to be communicated to other software components using the foreign language interface. In this section we only deal with I/O through streams, which includes file I/O as well as I/O through network sockets.

### 2.19.1 Wide character encodings on streams

Although characters are uniquely coded using the UCS standard internally, streams and files are byte (8-bit) oriented and there are a variety of ways to represent the larger UCS codes in an 8-bit octet stream. The most popular one, especially in the context of the web, is UTF-8. Bytes 0 ... 127 represent simply the corresponding US-ASCII character, while bytes 128 ... 255 are used for multi-byte encoding of characters placed higher in the UCS space. Especially on MS-Windows the 16-bit Unicode standard, represented by pairs of bytes, is also popular.

Prolog I/O streams have a property called *encoding* which specifies the used encoding that influences `get_code/2` and `put_code/2` as well as all the other text I/O predicates.

The default encoding for files is derived from the Prolog flag `encoding`, which is initialised from the environment. If the environment variable `LANG` ends in "UTF-8", this encoding is assumed. Otherwise the default is `text` and the translation is left to the wide-character functions of the C library.<sup>32</sup> The encoding can be specified explicitly in `load_files/2` for loading Prolog source with an alternative encoding, `open/4` when opening files or using `set_stream/2` on any open stream. For Prolog source files we also provide the `encoding/1` directive that can be used to switch between encodings that are compatible with US-ASCII (`ascii`, `iso_latin_1`, `utf8` and many locales). See also section 3.1.3 for writing Prolog files with non-US-ASCII characters and section 2.16.1 for syntax issues. For additional information and Unicode resources, please visit <http://www.unicode.org/>.

SWI-Prolog currently defines and supports the following encodings:

**octet**

Default encoding for `binary` streams. This causes the stream to be read and written fully untranslated.

**ascii**

7-bit encoding in 8-bit bytes. Equivalent to `iso_latin_1`, but generates errors and warnings on encountering values above 127.

**iso\_latin\_1**

8-bit encoding supporting many Western languages. This causes the stream to be read and written fully untranslated.

**text**

C library default locale encoding for text files. Files are read and written using the C library functions `mbrtowc()` and `wcrtomb()`. This may be the same as one of the other locales, notably it may be the same as `iso_latin_1` for Western languages and `utf8` in a UTF-8 context.

**utf8**

Multi-byte encoding of full UCS, compatible with `ascii`. See above.

**unicode\_be**

Unicode *Big Endian*. Reads input in pairs of bytes, most significant byte first. Can only represent 16-bit characters.

**unicode\_le**

Unicode *Little Endian*. Reads input in pairs of bytes, least significant byte first. Can only represent 16-bit characters.

---

<sup>32</sup>The Prolog native UTF-8 mode is considerably faster than the generic `mbrtowc()` one.

Note that not all encodings can represent all characters. This implies that writing text to a stream may cause errors because the stream cannot represent these characters. The behaviour of a stream on these errors can be controlled using `set_stream/2`. Initially the terminal stream writes the characters using Prolog escape sequences while other streams generate an I/O exception.

### BOM: Byte Order Mark

From section 2.19.1, you may have got the impression that text files are complicated. This section deals with a related topic, making life often easier for the user, but providing another worry to the programmer. **BOM** or *Byte Order Marker* is a technique for identifying Unicode text files as well as the encoding they use. Such files start with the Unicode character 0xFEFF, a non-breaking, zero-width space character. This is a pretty unique sequence that is not likely to be the start of a non-Unicode file and uniquely distinguishes the various Unicode file formats. As it is a zero-width blank, it even doesn't produce any output. This solves all problems, or ...

Some formats start off as US-ASCII and may contain some encoding mark to switch to UTF-8, such as the `encoding="UTF-8"` in an XML header. Such formats often explicitly forbid the use of a UTF-8 BOM. In other cases there is additional information revealing the encoding, making the use of a BOM redundant or even illegal.

The BOM is handled by SWI-Prolog `open/4` predicate. By default, text files are probed for the BOM when opened for reading. If a BOM is found, the encoding is set accordingly and the property `bom(true)` is available through `stream_property/2`. When opening a file for writing, writing a BOM can be requested using the option `bom(true)` with `open/4`.

## 2.20 System limits

### 2.20.1 Limits on memory areas

The SWI-Prolog engine uses three *stacks* the *local stack* (also called *environment stack*) stores the environment frames used to call predicates as well as choice points. The *global stack* (also called *heap*) contains terms, floats, strings and large integers. Finally, the *trail stack* records variable bindings and assignments to support *backtracking*. The internal data representation limits these stacks to 128 MB (each) on 32-bit processors. More generally to  $2^{\text{bits-per-pointer}-5}$  bytes, which implies they are virtually unlimited on 64-bit machines.

As of version 7.7.14, the stacks are restricted by the writeable flag `stack_limit` or the command line option `--stack_limit`. This flag limits the combined size of the three stacks per thread. The default limit is currently 512 Mbytes on 32-bit machines, which imposes no additional limit considering the 128 Mbytes hard limit on 32-bit and 1 Gbytes on 64-bit machines.

Considering portability, applications that need to modify the default limits are advised to do so using the Prolog flag `stack_limit`.

### The heap

With the heap, we refer to the memory area used by `malloc()` and friends. SWI-Prolog uses the area to store atoms, functors, predicates and their clauses, records and other dynamic data. No limits are imposed on the addresses returned by `malloc()` and friends.

| Option | Area name           | Description   |
|--------|---------------------|---|
| -L     | <b>local stack</b>  | The local stack is used to store the execution environments of procedure invocations. The space for an environment is reclaimed when it fails, exits without leaving choice points, the alternatives are cut off with the !/0 predicate or no choice points have been created since the invocation and the last subclause is started (last call optimisation).  |
| -G     | <b>global stack</b> | The global stack is used to store terms created during Prolog's execution. Terms on this stack will be reclaimed by backtracking to a point before the term was created or by garbage collection (provided the term is no longer referenced).   |
| -T     | <b>trail stack</b>  | <p>The trail stack is used to store assignments during execution. Entries on this stack remain alive until backtracking before the point of creation or the garbage collector determines they are no longer needed.</p> <p>As the trail and global stacks are garbage collected together, a small trail can cause an excessive amount of garbage collections. To avoid this, the trail is automatically resized to be at least 1/6th of the size of the global stack.</p> |

Table 2.2: Memory areas

### 2.20.2 Other Limits

**Clauses** The only limit on clauses is their arity (the number of arguments to the head), which is limited to 1024. Raising this limit is easy and relatively cheap; removing it is harder.

**Atoms and Strings** SWI-Prolog has no limits on the length of atoms and strings. The number of atoms is limited to 16777216 (16M) on 32-bit machines. On 64-bit machines this is virtually unlimited. See also section [12.4.2](#).

**Memory areas** On 32-bit hardware, SWI-Prolog data is packed in a 32-bit word, which contains both type and value information. The size of the various memory areas is limited to 128 MB for each of the areas, except for the program heap, which is not limited. On 64-bit hardware there are no meaningful limits.

**Nesting of terms** Most built-in predicates that process Prolog terms create an explicitly managed stack and perform optimization for processing the last argument of a term. This implies they can process deeply nested terms at constant and low usage of the C stack, and the system raises a resource error if no more stack can be allocated. Currently only `read/1` and `write/1` (and all variations thereof) still use the C stack and may cause the system to crash in an uncontrolled way (i.e., not mapped to a Prolog exception that can be caught).

**Integers** On most systems SWI-Prolog is compiled with support for unbounded integers by means of the GNU GMP library. In practice this means that integers are bound by the global stack size. Too large integers cause a `resource_error`. On systems that lack GMP, integers are 64-bit on 32- as well as 64-bit machines.

Integers up to the value of the `max_tagged_integer` Prolog flag are represented more efficiently on the stack. For integers that appear in clauses, the value (below `max_tagged_integer` or not) has little impact on the size of the clause.

**Floating point numbers** Floating point numbers are represented as C-native double precision floats, 64-bit IEEE on most machines.

### 2.20.3 Reserved Names

The boot compiler (see `-b` option) does not support the module system. As large parts of the system are written in Prolog itself we need some way to avoid name clashes with the user's predicates, database keys, etc. Like Edinburgh C-Prolog [[Pereira, 1986](#)] all predicates, database keys, etc., that should be hidden from the user start with a dollar (\$) sign.

## 2.21 SWI-Prolog and 64-bit machines

Most of today's 64-bit platforms are capable of running both 32-bit and 64-bit applications. This asks for some clarifications on the advantages and drawbacks of 64-bit addressing for (SWI-)Prolog.

### 2.21.1 Supported platforms

SWI-Prolog can be compiled for a 32- or 64-bit address space on any system with a suitable C compiler. Pointer arithmetic is based on the type `(u)intptr_t` from `stdint.h`, with suitable emulation on MS-Windows.

### 2.21.2 Comparing 32- and 64-bits Prolog

Most of Prolog's memory usage consists of pointers. This indicates the primary drawback: Prolog memory usage almost doubles when using the 64-bit addressing model. Using more memory means copying more data between CPU and main memory, slowing down the system.

What then are the advantages? First of all, SWI-Prolog's addressing of the Prolog stacks does not cover the whole address space due to the use of *type tag bits* and *garbage collection flags*. On 32-bit hardware the stacks are limited to 128 MB each. This tends to be too low for demanding applications on modern hardware. On 64-bit hardware the limit is  $2^{32}$  times higher, exceeding the addressing capabilities of today's CPUs and operating systems. This implies Prolog can be started with stack sizes that use the full capabilities of your hardware.

Multi-threaded applications profit much more because every thread has its own set of stacks. The Prolog stacks start small and are dynamically expanded (see section 2.20.1). The C stack is also dynamically expanded, but the maximum size is *reserved* when a thread is started. Using 100 threads at the maximum default C stack of 8Mb (Linux) costs 800Mb virtual memory!<sup>33</sup>

The implications of theoretical performance loss due to increased memory bandwidth implied by exchanging wider pointers depend on the design of the hardware. We only have data for the popular IA32 vs. AMD64 architectures. Here, it appears that the loss is compensated for by an instruction set that has been optimized for modern programming. In particular, the AMD64 has more registers and the relative addressing capabilities have been improved. Where we see a 10% performance degradation when placing the SWI-Prolog kernel in a Unix shared object, we cannot find a measurable difference on AMD64.

### 2.21.3 Choosing between 32- and 64-bit Prolog

For those cases where we can choose between 32 and 64 bits, either because the hardware and OS support both or because we can still choose the hardware and OS, we give guidelines for this decision.

First of all, if SWI-Prolog needs to be linked against 32- or 64-bit native libraries, there is no choice as it is not possible to link 32- and 64-bit code into a single executable. Only if all required libraries are available in both sizes and there is no clear reason to use either do the different characteristics of Prolog become important.

Prolog applications that require more than the 128 MB stack limit provided in 32-bit addressing mode must use the 64-bit edition. Note however that the limits must be doubled to accommodate the same Prolog application.

If the system is tight on physical memory, 32-bit Prolog has the clear advantage of using only slightly more than half of the memory of 64-bit Prolog. This argument applies as long as the application fits in the *virtual address space* of the machine. The virtual address space of 32-bit hardware is 4GB, but in many cases the operating system provides less to user applications.

The only standard SWI-Prolog library adding significantly to this calculation is the RDF database provided by the *semweb* package. It uses approximately 80 bytes per triple on 32-bit hardware and 150 bytes on 64-bit hardware. Details depend on how many different resources and literals appear in the dataset as well as desired additional literal indexes.

Summarizing, if applications are small enough to fit comfortably in virtual and physical memory, simply take the model used by most of the applications on the OS. If applications require more than 128 MB per stack, use the 64-bit edition. If applications approach the size of physical memory, fit

---

<sup>33</sup>C-recursion over Prolog data structures is removed from most of SWI-Prolog. When removed from all predicates it will often be possible to use lower limits in threads. See <http://www.swi-prolog.org/Devel/CStack.html>

in the 128 MB stack limit and fit in virtual memory, the 32-bit version has clear advantages. For demanding applications on 64-bit hardware with more than about 6GB physical memory the 64-bit model is the model of choice.



# Initialising and Managing a Prolog Project

---

# 3

Prolog text-books give you an overview of the Prolog language. The manual tells you what predicates are provided in the system and what they do. This chapter explains how to run a project. There is no ultimate ‘right’ way to do this. Over the years we developed some practice in this area and SWI-Prolog’s commands are there to support this practice. This chapter describes the conventions and supporting commands.

The first two sections (section 3.1 and section 3.2) only require plain Prolog. The remainder discusses the use of the built-in graphical tools that require the XPCE graphical library installed on your system.

## 3.1 The project source files

Organisation of source files depends largely on the size of your project. If you are doing exercises for a Prolog course you’ll normally use one file for each exercise. If you have a small project you’ll work with one directory holding a couple of files and some files to link it all together. Even bigger projects will be organised in sub-projects, each using its own directory.

### 3.1.1 File Names and Locations

#### File Name Extensions

The first consideration is what extension to use for the source files. Tradition calls for `.pl`, but conflicts with Perl force the use of another extension on systems where extensions have global meaning, such as MS-Windows. On such systems `.pro` is the common alternative. On MS-Windows, the alternative extension is stored in the registry key `HKEY_CURRENT_USER/Software/SWI/Prolog/fileExtension` or `HKEY_LOCAL_MACHINE/Software/SWI/Prolog/fileExtension`. All versions of SWI-Prolog load files with the extension `.pl` as well as with the registered alternative extension without explicitly specifying the extension. For portability reasons we propose the following convention:

**If there is no conflict** because you do not use a conflicting application or the system does not force a unique relation between extension and application, use `.pl`.

**With a conflict** choose `.pro` and use this extension for the files you want to load through your file manager. Use `.pl` for all other files for maximal portability.

#### Project Directories

Large projects are generally composed of sub-projects, each using its own directory or directory structure. If nobody else will ever touch your files and you use only one computer, there is little to worry

about, but this is rarely the case with a large project.

To improve portability, SWI-Prolog uses the POSIX notation for filenames, which uses the forward slash (/) to separate directories. Just before reaching the file system, SWI-Prolog uses `prolog_to_os_filename/2` to convert the filename to the conventions used by the hosting operating system. It is *strongly* advised to write paths using the /, especially on systems using the \ for this purpose (MS-Windows). Using \ violates the portability rules and requires you to *double* the \ due to the Prolog quoted-atom escape rules.

Portable code should use `prolog_to_os_filename/2` to convert computed paths into system paths when constructing commands for `shell/1` and friends.

### Sub-projects using search paths

Thanks to Quintus, Prolog adapted an extensible mechanism for searching files using `file_search_path/2`. This mechanism allows for comfortable and readable specifications.

Suppose you have extensive library packages on graph algorithms, set operations and GUI primitives. These sub-projects are likely candidates for re-use in future projects. A good choice is to create a directory with sub-directories for each of these sub-projects.

Next, there are three options. One is to add the sub-projects to the directory hierarchy of the current project. Another is to use a completely dislocated directory. Third, the sub-project can be added to the SWI-Prolog hierarchy. Using local installation, a typical `file_search_path/2` is:

```
:- prolog_load_context(directory, Dir),
   asserta(user:file_search_path(myapp, Dir)).

user:file_search_path(graph, myapp(graph)).
user:file_search_path(ui, myapp(ui)).
```

When using sub-projects in the SWI-Prolog hierarchy, one should use the path alias `swi` as basis. For a system-wide installation, use an absolute path.

Extensive sub-projects with a small well-defined API should define a load file with calls to `use_module/1` to import the various library components and export the API.

### 3.1.2 Project Special Files

There are a number of tasks you typically carry out on your project, such as loading it, creating a saved state, debugging it, etc. Good practice on large projects is to define small files that hold the commands to execute such a task, name this file after the task and give it a file extension that makes starting easy (see section 3.1.1). The task *load* is generally central to these tasks. Here is a tentative list:

- *load.pl*  
Use this file to set up the environment (Prolog flags and file search paths) and load the sources. Quite commonly this file also provides convenient predicates to parse command line options and start the application.
- *run.pl*  
Use this file to start the application. Normally it loads `load.pl` in silent-mode, and calls one of the starting predicates from `load.pl`.

- *save.pl*  
Use this file to create a saved state of the application by loading `load.pl` and calling `qsave_program/2` to generate a saved state with the proper options.
- *debug.pl*  
Loads the program for debugging. In addition to loading `load.pl` this file defines rules for `portray/1` to modify printing rules for complex terms and customisation rules for the debugger and editing environment. It may start some of these tools.

### 3.1.3 International source files

As discussed in section 2.19, SWI-Prolog supports international character handling. Its internal encoding is UNICODE. I/O streams convert to/from this internal format. This section discusses the options for source files not in US-ASCII.

SWI-Prolog can read files in any of the encodings described in section 2.19. Two encodings are of particular interest. The `text` encoding deals with the current *locale*, the default used by this computer for representing text files. The encodings `utf8`, `unicode_le` and `unicode_be` are *UNICODE* encodings: they can represent—in the same file—characters of virtually any known language. In addition, they do so unambiguously.

If one wants to represent non US-ASCII text as Prolog terms in a source file, there are several options:

- *Use escape sequences*  
This approach describes NON-ASCII as sequences of the form `\octal\`. The numerical argument is interpreted as a UNICODE character.<sup>1</sup> The resulting Prolog file is strict 7-bit US-ASCII, but if there are many NON-ASCII characters it becomes very unreadable.
- *Use local conventions*  
Alternatively the file may be specified using local conventions, such as the EUC encoding for Japanese text. The disadvantage is portability. If the file is moved to another machine, this machine must use the same *locale* or the file is unreadable. There is no elegant way if files from multiple locales must be united in one application using this technique. In other words, it is fine for local projects in countries with uniform locale conventions.
- *Using UTF-8 files*  
The best way to specify source files with many NON-ASCII characters is definitely the use of UTF-8 encoding. Prolog can be notified of this encoding in two ways, using a UTF-8 *BOM* (see section 2.19.1) or using the directive `:- encoding(utf8).` Many of today's text editors, including PceEmacs, are capable of editing UTF-8 files. Projects that were started using local conventions can be re-coded using the Unix `iconv` tool or often using commands offered by the editor.

## 3.2 Using modules

Modules have been debated fiercely in the Prolog world. Despite all counter-arguments we feel they are extremely useful because:

---

<sup>1</sup>To my knowledge, the ISO escape sequence is limited to 3 octal digits, which means most characters cannot be represented.

- *They hide local predicates*

This is the reason they were invented in the first place. Hiding provides two features. They allow for short predicate names without worrying about conflicts. Given the flat name-space introduced by modules, they still require meaningful module names as well as meaningful names for exported predicates.

- *They document the interface*

Possibly more important than avoiding name conflicts is their role in documenting which part of the file is for public usage and which is private. When editing a module you may assume you can reorganise anything except the name and the semantics of the exported predicates without worrying.

- *They help the editor*

The PceEmacs built-in editor does on-the-fly cross-referencing of the current module, colouring predicates based on their origin and usage. Using modules, the editor can quickly find out what is provided by the imported modules by reading just the first term. This allows it to indicate in real-time which predicates are not used or not defined.

Using modules is generally easy. Only if you write meta-predicates (predicates reasoning about other predicates) that are exported from a module is a good understanding required of the resolution of terms to predicates inside a module. Here is a typical example from `readutil`.

```
:- module(read_util,
    [ read_line_to_codes/2,      % +Fd, -Codes
      read_line_to_codes/3,      % +Fd, -Codes, ?Tail
      read_stream_to_codes/2,    % +Fd, -Codes
      read_stream_to_codes/3,    % +Fd, -Codes, ?Tail
      read_file_to_codes/3,      % +File, -Codes, +Options
      read_file_to_terms/3       % +File, -Terms, +Options
    ] ).
```

### 3.3 The test-edit-reload cycle

SWI-Prolog does not enforce the use of a particular editor for writing Prolog source code. Editors are complicated programs that must be mastered in detail for real productive programming. If you are familiar with a specific editor you should not be forced to change. You may specify your favourite editor using the Prolog flag `editor`, the environment variable `EDITOR` or by defining rules for `prolog_edit:edit_source/1`.

The use of a built-in editor, which is selected by setting the Prolog flag `editor` to `pce_emacs`, has advantages. The XPCe *editor* object, around which the built-in PceEmacs is built, can be opened as a Prolog stream allowing analysis of your source by the real Prolog system.

#### 3.3.1 Locating things to edit

The central predicate for editing something is `edit/1`, an extensible front-end that searches for objects (files, predicates, modules, as well as XPCe classes and methods) in the Prolog database.

If multiple matches are found it provides a choice. Together with the built-in completion on atoms bound to the TAB key this provides a quick way to edit objects:

```
?- edit(country).
Please select item to edit:

  1 chat:country/10      '/staff/jan/lib/prolog/chat/countr.pl':16
  2 chat:country/1      '/staff/jan/lib/prolog/chat/world0.pl':72

Your choice?
```

### 3.3.2 Editing and incremental compilation

One of the nice features of Prolog is that the code can be modified while the program is running. Using pure Prolog you can trace a program, find it is misbehaving, enter a *break environment*, modify the source code, reload it and finally do *retry* on the misbehaving predicate and try again. This sequence is not uncommon for long-running programs. For faster programs one will normally abort after understanding the misbehaviour, edit the source, reload it and try again.

One of the nice features of SWI-Prolog is the availability of `make/0`, a simple predicate that checks all loaded source files to see which ones you have modified. It then reloads these files, considering the module from which the file was loaded originally. This greatly simplifies the trace-edit-verify development cycle. For example, after the tracer reveals there is something wrong with `prove/3`, you do:

```
?- edit(prove).
```

Now edit the source, possibly switching to other files and making multiple changes. After finishing, invoke `make/0`, either through the editor UI (Compile/Make (Control-C Control-M)) or on the top level, and watch the files being reloaded.<sup>2</sup>

```
?- make.
% show compiled into photo_gallery 0.03 sec, 3,360 bytes
```

## 3.4 Using the PceEmacs built-in editor

### 3.4.1 Activating PceEmacs

Initially `edit/1` uses the editor specified in the `EDITOR` environment variable. There are two ways to force it to use the built-in editor. One is to set the Prolog flag `editor` to `pce_emacs` and the other is by starting the editor explicitly using the `emacs/[0,1]` predicates.

<sup>2</sup>Watching these files is a good habit. If expected files are not reloaded you may have forgotten to save them from the editor or you may have been editing the wrong file (wrong directory).

### 3.4.2 Bluffing through PceEmacs

PceEmacs closely mimics Richard Stallman’s GNU-Emacs commands, adding features from modern window-based editors to make it more acceptable for beginners.<sup>3</sup>

At the basis, PceEmacs maps keyboard sequences to methods defined on the extended *editor* object. Some frequently used commands are, with their key-binding, presented in the menu bar above each editor window. A complete overview of the bindings for the current *mode* is provided through Help/Show key bindings (Control-h Control-b).

#### Edit modes

Modes are the heart of (Pce)Emacs. Modes define dedicated editing support for a particular kind of (source) text. For our purpose we want *Prolog mode*. There are various ways to make PceEmacs use Prolog mode for a file.

- *Using the proper extension*  
If the file ends in `.pl` or the selected alternative (e.g. `.pro`) extension, Prolog mode is selected.
- *Using `#!/path/to/.../swipl`*  
If the file is a *Prolog Script* file, starting with the line `#!/path/to/swipl options`, Prolog mode is selected regardless of the extension.
- *Using `-- Prolog --`*  
If the above sequence appears in the first line of the file (inside a Prolog comment) Prolog mode is selected.
- *Explicit selection*  
Finally, using File/Mode/Prolog you can switch to Prolog mode explicitly.

#### Frequently used editor commands

Below we list a few important commands and how to activate them.

- *Cut/Copy/Paste*  
These commands follow Unix/X11 traditions. You’re best suited with a three-button mouse. After selecting using the left-mouse (double-click uses word-mode and triple line-mode), the selected text is *automatically* copied to the clipboard (X11 primary selection on Unix). *Cut* is achieved using the DEL key or by typing something else at the location. *Paste* is achieved using the middle-mouse (or wheel) button. If you don’t have a middle-mouse button, pressing the left- and right-button at the same time is interpreted as a middle-button click. If nothing helps, there is the Edit/Paste menu entry. Text is pasted at the caret location.
- *Undo*  
Undo is bound to the GNU-Emacs Control-\_ as well as the MS-Windows Control-Z sequence.
- *Abort*  
Multi-key sequences can be aborted at any stage using Control-G.

---

<sup>3</sup>Decent merging with MS-Windows control-key conventions is difficult as many conflict with GNU-Emacs. Especially the cut/copy/paste commands conflict with important GNU-Emacs commands.

- *Find*

Find (Search) is started using **Control-S** (forward) or **Control-R** (backward). PceEmacs implements *incremental search*. This is difficult to use for novices, but very powerful once you get the clue. After one of the above start keys, the system indicates search mode in the status line. As you are typing the search string, the system searches for it, extending the search with every character you type. It illustrates the current match using a green background.

If the target cannot be found, PceEmacs warns you and no longer extends the search string.<sup>4</sup> During search, some characters have special meaning. Typing anything but these characters commits the search, re-starting normal edit mode. Special commands are:

**Control-S**

Search forwards for next.

**Control-R**

Search backwards for next.

**Control-W**

Extend search to next word boundary.

**Control-G**

Cancel search, go back to where it started.

**ESC**

Commit search, leaving caret at found location.

**Backspace**

Remove a character from the search string.

- *Dynamic Abbreviation*

Also called *dabbrev*, dynamic abbreviation is an important feature of Emacs clones to support programming. After typing the first few letters of an identifier, you may press **Alt-/**, causing PceEmacs to search backwards for identifiers that start the same and use it to complete the text you typed. A second **Alt-/** searches further backwards. If there are no hits before the caret, it starts searching forwards. With some practice, this system allows for entering code very fast with nice and readable identifiers (or other difficult long words).

- *Open (a file)*

Is called **File/Find file** (**Control-x Control-f**). By default the file is loaded into the current window. If you want to keep this window, press **Alt-s** or click the little icon at the bottom left to make the window *sticky*.

- *Split view*

Sometimes you want to look at two places in the same file. To do this, use **Control-x 2** to create a new window pointing to the same file. Do not worry, you can edit as well as move around in both. **Control-x 1** kills all other windows running on the same file.

These are the most commonly used commands. In section 3.4.3 we discuss specific support for dealing with Prolog source code.

---

<sup>4</sup>GNU-Emacs keeps extending the string, but why? Adding more text will not make it match.

### 3.4.3 Prolog Mode

In the previous section (section 3.4.2) we explained the basics of PceEmacs. Here we continue with Prolog-specific functionality. Possibly the most interesting is *Syntax highlighting*. Unlike most editors where this is based on simple patterns, PceEmacs syntax highlighting is achieved by Prolog itself actually reading and interpreting the source as you type it. There are three moments at which PceEmacs checks (part of) the syntax.

- *After typing a .*  
After typing a `.` that is not preceded by a *symbol* character, the system assumes you completed a clause, tries to find the start of this clause and verifies the syntax. If this process succeeds it colours the elements of the clause according to the rules given below. Colouring is done using information from the last full check on this file. If it fails, the syntax error is displayed in the status line and the clause is not coloured.
- *After the command Control-c Control-s*  
Acronym for **C**heck **S**yntax, it performs the same checks as above for the clause surrounding the caret. On a syntax error, however, the caret is moved to the expected location of the error.<sup>5</sup>
- *After pausing for two seconds*  
After a short pause (2 seconds), PceEmacs opens the edit buffer and reads it as a whole, creating an index of defined, called, dynamic, imported and exported predicates. After completing this, it re-reads the file and colours all clauses and calls with valid syntax.
- *After typing Control-l Control-l*  
The **Control-l** command re-centers the window (scrolls the window to make the caret the center of the window). Typing this command twice starts the same process as above.

**The colour schema** itself is defined in `emacs/prolog_colour`. The colouring can be extended and modified using multifile predicates. Please check this source file for details. In general, underlined objects have a popup (right-mouse button) associated with common commands such as viewing the documentation or source. **Bold** text is used to indicate the definition of objects (typically predicates when using plain Prolog). Other colours follow intuitive conventions. See table 3.4.3.

**Layout support** Layout is not ‘just nice’, it is *essential* for writing readable code. There is much debate on the proper layout of Prolog. PceEmacs, being a rather small project, supports only one particular style for layout.<sup>6</sup> Below are examples of typical constructs.

```
head(arg1, arg2) .

head(arg1, arg2) :- !.

head(Arg1, arg2) :- !,
    call1(Arg1) .

head(Arg1, arg2) :-
```

<sup>5</sup>In most cases the location where the parser cannot proceed is further down the file than the actual error location.

<sup>6</sup>Defined in Prolog in the file `emacs/prolog_mode`, you may wish to extend this. Please contribute your extensions!



| Clauses                  |  |
|--------------------------|--|
| Blue bold                | Head of an exported predicate          |
| Red bold                 | Head of a predicate that is not called |
| Black bold               | Head of remaining predicates           |
| Calls in the clause body |  |
| Blue                     | Call to built-in or imported predicate |
| Red                      | Call to undefined predicate            |
| Purple                   | Call to dynamic predicate              |
| Other entities           |  |
| Dark green               | Comment                                |
| Dark blue                | Quoted atom or string                  |
| Brown                    | Variable                               |

Table 3.1: Colour conventions

```

(   if(Arg1)
->  then
;   else
).

head(Arg1) :-
(   a
;   b
).

head :-
a(many,
  long,
  arguments(with,
             many,
             more),
  and([ a,
        long,
        list,
        with,
        a,
        | tail
      ])).

```

PceEmacs uses the same conventions as GNU-Emacs. The **TAB** key indents the current line according to the syntax rules. **Alt-q** indents all lines of the current clause. It provides support for head, calls (indented 1 tab), if-then-else, disjunction and argument lists broken across multiple lines as illustrated above.

### Finding your way around

The command `Alt-.` extracts name and arity from the caret location and jumps (after conformation or edit) to the definition of the predicate. It does so based on the source-location database of loaded predicates also used by `edit/1`. This makes locating predicates reliable if all sources are loaded and up-to-date (see `make/0`).

In addition, references to files in `use_module/[1,2]`, `consult/1`, etc. are red if the file cannot be found and underlined blue if the file can be loaded. A popup allows for opening the referenced file.

## 3.5 The Graphical Debugger

SWI-Prolog offers two debuggers. One is the traditional text console-based 4-port Prolog tracer and the other is a window-based source level debugger. The window-based debugger requires XPC installed. It operates based on the `prolog_trace_interception/4` hook and other low-level functionality described in chapter B.

Window-based tracing provides a much better overview due to the eminent relation to your source code, a clear list of named variables and their bindings as well as a graphical overview of the call and choice point stack. There are some drawbacks though. Using a textual trace on the console, one can scroll back and examine the past, while the graphical debugger just presents a (much better) overview of the current state.

### 3.5.1 Invoking the window-based debugger

Whether the text-based or window-based debugger is used is controlled using the predicates `guitracer/0` and `noguitracer/0`. Entering debug mode is controlled using the normal predicates for this: `trace/0` and `spy/1`. In addition, PceEmacs prolog mode provides the command **Prolog/Break at** (`Control-c b`) to insert a break-point at a specific location in the source code.

The graphical tracer is particularly useful for debugging threads. The tracer must be loaded from the main thread before it can be used from a background thread.

#### **guitracer**

This predicate installs the above-mentioned hooks that redirect tracing to the window-based environment. No window appears. The debugger window appears as actual tracing is started through `trace/0`, by hitting a spy point defined by `spy/1` or a break point defined using the PceEmacs command **Prolog/Break at** (`Control-c b`).

#### **noguitracer**

Disable the hooks installed by `guitracer/0`, reverting to normal text console-based tracing.

#### **gtrace**

Utility defined as `guitracer, trace`.

#### **gdebug**

Utility defined as `guitracer, debug`.

#### **gs py(+Predicate)**

Utility defined as `guitracer, spy(Predicate)`.

## 3.6 The Prolog Navigator

Another tool is the *Prolog Navigator*. This tool can be started from PceEmacs using the command `Browse/Prolog navigator`, from the GUI debugger or using the programmatic IDE interface described in section 3.8.

## 3.7 Cross-referencer

A cross-referencer is a tool that examines the caller-callee relation between predicates, and, using this information to explicate dependency relations between source files, finds calls to non-existing predicates and predicates for which no callers can be found. Cross-referencing is useful during program development, reorganisation, clean-up, porting and other program maintenance tasks. The dynamic nature of Prolog makes the task non-trivial. Goals can be created dynamically using `call/1` after construction of a goal term. Abstract interpretation can find some of these calls, but they can also come from external communication, making it impossible to predict the callee. In other words, the cross-referencer has only partial understanding of the program, and its results are necessarily incomplete. Still, it provides valuable information to the developer.

SWI-Prolog's cross-referencer is split into two parts. The standard Prolog library `prolog_xref` is an extensible library for information gathering described in section A.32, and the XPCE library `pce_xref` provides a graphical front-end for the cross-referencer described here. We demonstrate the tool on CHAT80, a natural language question and answer system by Fernando C.N. Pereira and David H.D. Warren.

### gxref

Run cross-referencer on all currently loaded files and present a graphical overview of the result. As the predicate operates on the currently loaded application it must be run after loading the application.

The **left window** (see figure 3.1) provides browsers for loaded files and predicates. To avoid long file paths, the file hierarchy has three main branches. The first is the current directory holding the sources. The second is marked `alias`, and below it are the file-search-path aliases (see `file_search_path/2` and `absolute_file_name/3`). Here you find files loaded from the system as well as modules of the program loaded from other locations using the file search path. All loaded files that fall outside these categories are below the last branch called `/`. Files where the system found suspicious dependencies are marked with an exclamation mark. This also holds for directories holding such files. Clicking on a file opens a *File info* window in the right pane.

The **File info** window shows a file, its main properties, its undefined and not-called predicates and its import and export relations to other files in the project. Both predicates and files can be opened by clicking on them. The number of callers in a file for a certain predicate is indicated with a blue underlined number. A left-click will open a list and allow editing the calling predicate.

The **Dependencies** (see figure 3.2) window displays a graphical overview of dependencies between files. Using the background menu a complete graph of the project can be created. It is also possible to drag files onto the graph window and use the menu on the nodes to incrementally expand the graph. The underlined blue text indicates the number of predicates used in the destination file. Left-clicking opens a menu to open the definition or select one of the callers.

Prolog XREF

File View

project

.plrc  
aggreg.pl  
border.pl  
chat.pl  
chattop.pl  
cities.pl  
clotab.pl  
contai.pl  
countr.pl  
ndtabl.pl  
newdic.pl  
newg.pl  
ptree.pl  
qplan.pl  
readin.pl  
rivers.pl  
scopes.pl  
talkr.pl  
templ.pl  
world0.pl  
xgrun.pl

alias  
library  
library  
pce\_boot  
swi  
user\_profile

Undefined predicate version/0

Dependencies File info

**chattop.pl**

Modified: Tue Dec 2 16:10:31 2003

| Undefined/autoload | Called by                          |
|--------------------|------------------------------------|
| display/1          | check_word/2, control/1, failure/0 |
| otherwise/0        | show_results/3                     |
| pp_quant/2         | report_item/2                      |
| time/1             | test/0                             |
| version/0          | runtime_entry/1                    |

| Not called      |
|-----------------|
| runtime_entry/1 |
| test/0          |

| Defined     | Used by      |
|-------------|--------------|
| hi/0        | chat.pl (1)  |
| test_chat/0 | .plrc (1)    |
| quote/1     | ptree.pl (1) |

| From      | Uses                                    |
|-----------|---|
| newdic.pl | word/1                                  |
| newg.pl   | sentence/5                              |
| ptree.pl  | print_tree/1                            |
| qplan.pl  | qplan/2                                 |
| readin.pl | read_in/1                               |
| scopes.pl | clausify/2                              |
| slots.pl  | i_sentence/2                            |
| talkr.pl  | answer/1, holds/2, seto/3, write_tree/1 |

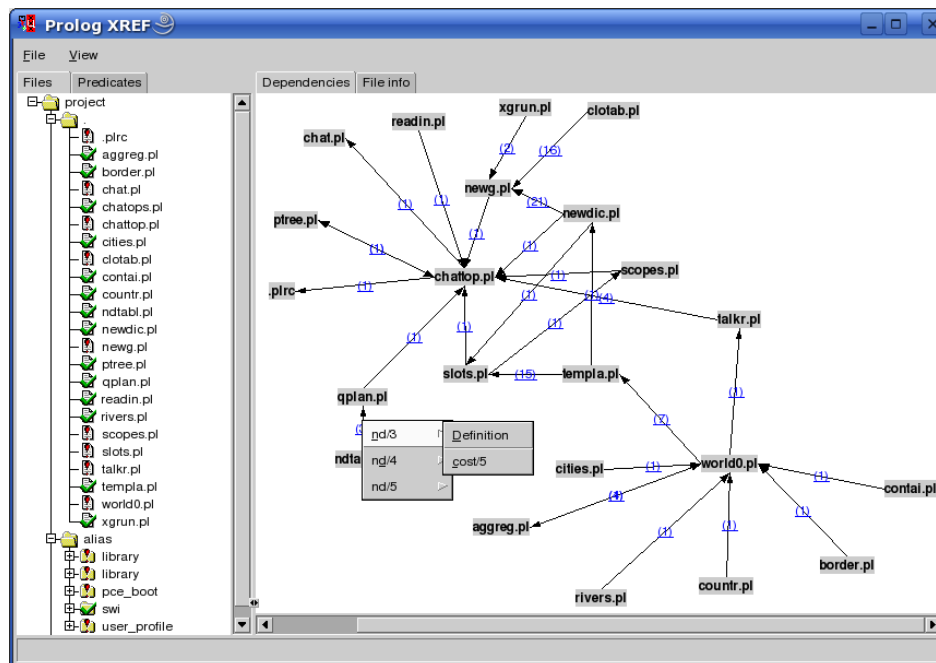
Figure 3.1: File info for `chattop.pl`, part of CHAT80

Figure 3.2: Dependencies between source files of CHAT80

**Module and non-module files** The cross-referencer threads module and non-module project files differently. Module files have explicit import and export relations and the tool shows the usage and consistency of the relations. Using the **Header** menu command, the tool creates a consistent import list for the module that can be included in the file. The tool computes the dependency relations between the non-module files. If the user wishes to convert the project into a module-based one, the **Header** command generates an appropriate module header and import list. Note that the cross-referencer may have missed dependencies and does not deal with meta-predicates defined in one module and called in another. Such problems must be resolved manually.

**Settings** The following settings can be controlled from the **settings** menu:

**Warn autoloader**

By default disabled. If enabled, modules that require predicates to be autoloader are flagged with a warning and the file info window of a module shows the required autoloader predicates.

**Warn not called**

If enabled (default), the file overview shows an alert icon for files that have predicates that are not called.

## 3.8 Accessing the IDE from your program

Over the years a collection of IDE components have been developed, each with its own interface. In addition, some of these components require each other, and loading IDE components must be on demand to avoid the IDE being part of a saved state (see `qsave_program/2`). For this reason, access to the IDE is concentrated on a single interface called `prolog_ide/1`:

**prolog\_ide(+Action)**

This predicate ensures the IDE-enabling XPCE component is loaded, creates the XPCE class *prolog\_ide* and sends *Action* to its one and only instance `@prolog_ide`. *Action* is one of the following:

**open\_navigator(+Directory)**

Open the Prolog Navigator (see section 3.6) in the given *Directory*.

**open\_debug\_status**

Open a window to edit spy and trace points.

**open\_query\_window**

Open a little window to run Prolog queries from a GUI component.

**thread\_monitor**

Open a graphical window indicating existing threads and their status.

**debug\_monitor**

Open a graphical front-end for the `debug` library that provides an overview of the topics and catches messages.

**xref**

Open a graphical front-end for the cross-referencer that provides an overview of predicates and their callers.

### 3.9 Summary of the IDE

The SWI-Prolog development environment consists of a number of interrelated but not (yet) integrated tools. Here is a list of the most important features and tips.

- *Atom completion*  
The console<sup>7</sup> completes a partial atom on the `TAB` key and shows alternatives on the command `Alt-?`.
- *Use `edit/1` for finding locations*  
The command `edit/1` takes the name of a file, module, predicate or other entity registered through extensions and starts the user's preferred editor at the right location.
- *Select editor*  
External editors are selected using the `EDITOR` environment variable, by setting the Prolog flag `editor`, or by defining the hook `prolog_edit:edit_source/1`.
- *Update Prolog after editing*  
Using `make/0`, all files you have edited are re-loaded.
- *PceEmacs*  
Offers syntax highlighting and checking based on real-time parsing of the editor's buffer, layout support and navigation support.
- *Using the graphical debugger*  
The predicates `guitracer/0` and `noguitracer/0` switch between traditional text-based and window-based debugging. The tracer is activated using the `trace/0`, `spy/1` or menu items from PceEmacs or the Prolog Navigator.
- *The Prolog Navigator*  
Shows the file structure and structure inside the file. It allows for loading files, editing, setting spy points, etc.

---

<sup>7</sup>On Windows this is realised by `swipl-win.exe`, on Unix through the GNU readline library, which is included automatically when found by `configure`.

# Built-in Predicates

---

## 4.1 Notation of Predicate Descriptions

We have tried to keep the predicate descriptions clear and concise. First, the predicate name is printed in bold face, followed by the arguments in *italics*. Arguments are preceded by a mode indicator. There is no complete agreement on mode indicators in the Prolog community. We use the following definitions:<sup>1</sup>

- 
- ++ Argument must be ground, i.e., the argument may not contain a variable anywhere.
  - + Argument must be fully instantiated to a term that satisfies the type. This is not necessarily *ground*, e.g., the term `[_]` is a *list*, although its only member is unbound.
  - Argument is an *output* argument. Unless specified otherwise, output arguments need not to be unbound. For example, the goal `findall(X, Goal, [T])` is good style and equivalent to `findall(X, Goal, Xs), Xs = [T]`<sup>2</sup> Note that the *determinism* specification, e.g., “det” only applies if this argument is unbound.
  - Argument must be unbound. Typically used by predicates that create ‘something’ and return a handle to the created object, such as `open/3` which creates a *stream*.
  - ? Argument must be bound to a *partial term* of the indicated type. Note that a variable is a partial term for any type. Think of the argument as either *input* or *output* or *both* input and output. For example, in `stream_property(S, reposition(Bool))`, the `reposition` part of the term is input and the uninstantiated `Bool` is output.
  - : Argument is a meta-argument. Implies +. See chapter 6 for more information on module handling.
  - @ Argument is not further instantiated. Typically used for type tests.
  - ! Argument contains a mutable structure that may be modified using `setarg/3` or `nb_setarg/3`.
- 

Referring to a predicate in running text is done using a *predicate indicator*. The canonical and most generic form of a predicate indicator is a term `<module>:<name>/<arity>`. If the module is irrelevant (built-in predicate) or can be inferred from the context it is often omitted. Compliant to the ISO standard draft on DCG (see section 4.13), SWI-Prolog also allows for `[<module>]:<name>/<arity>` to

<sup>1</sup>These definitions are taken from PIDoc. The current manual has only one mode declaration per predicate and therefore predicates with mode (+,-) and (-,+) are described as (?,?). The @-mode is often replaced by +.

refer to a grammar rule. For all non-negative arity,  $\langle name \rangle // \langle arity \rangle$  is the same as  $\langle name \rangle // \langle arity \rangle + 2$ , regardless of whether or not the referenced predicate is defined or can be used as a grammar rule. The `//`-notation can be used in all places that traditionally allow for a predicate indicator, e.g., the module declaration, `spy/1`, and `dynamic/1`.

## 4.2 Character representation

In traditional (Edinburgh) Prolog, characters are represented using *character codes*. Character codes are integer indices into a specific character set. Traditionally the character set was 7-bit US-ASCII. 8-bit character sets have been allowed for a long time, providing support for national character sets, of which iso-latin-1 (ISO 8859-1) is applicable to many Western languages.

ISO Prolog introduces three types, two of which are used for characters and one for accessing binary streams (see `open/4`). These types are:

- *code*  
A *character code* is an integer representing a single character. As files may use multi-byte encoding for supporting different character sets (utf-8 encoding for example), reading a code from a text file is in general not the same as reading a byte.
- *char*  
Alternatively, characters may be represented as *one-character atoms*. This is a natural representation, hiding encoding problems from the programmer as well as providing much easier debugging.
- *byte*  
Bytes are used for accessing binary streams.

In SWI-Prolog, character codes are *always* the Unicode equivalent of the encoding. That is, if `get_code/1` reads from a stream encoded as KOI8-R (used for the Cyrillic alphabet), it returns the corresponding Unicode code points. Similarly, assembling or disassembling atoms using `atom_codes/2` interprets the codes as Unicode points. See section 2.19.1 for details.

To ease the pain of the two character representations (code and char), SWI-Prolog's built-in predicates dealing with character data work as flexible as possible: they accept data in any of these formats as long as the interpretation is unambiguous. In addition, for output arguments that are instantiated, the character is extracted before unification. This implies that the following two calls are identical, both testing whether the next input character is an `a`.

```
peek_code(Stream, a).
peek_code(Stream, 97).
```

The two character representations are handled by a large number of built-in predicates, all of which are ISO-compatible. For converting between code and character there is `char_code/2`. For breaking atoms and numbers into characters there are `atom_chars/2`, `atom_codes/2`, `number_chars/2` and `number_codes/2`. For character I/O on streams there are `get_char/[1,2]`, `get_code/[1,2]`, `get_byte/[1,2]`, `peek_char/[1,2]`, `peek_code/[1,2]`, `peek_byte/[1,2]`, `put_code/[1,2]`, `put_char/[1,2]` and `put_byte/[1,2]`. The Prolog flag `double_quotes` controls how text between double quotes is interpreted.



### 4.3 Loading Prolog source files

This section deals with loading Prolog source files. A Prolog source file is a plain text file containing a Prolog program or part thereof. Prolog source files come in three flavours:

**A traditional** Prolog source file contains Prolog clauses and directives, but no *module declaration* (see `module/1`). They are normally loaded using `consult/1` or `ensure_loaded/1`. Currently, a non-module file can only be loaded into a single module.<sup>3</sup>

**A module** Prolog source file starts with a module declaration. The subsequent Prolog code is loaded into the specified module, and only the *exported* predicates are made available to the context loading the module. Module files are normally loaded with `use_module/[1, 2]`. See chapter 6 for details.

**An include** Prolog source file is loaded using the `include/1` directive, textually including Prolog text into another Prolog source. A file may be included into multiple source files and is typically used to share *declarations* such as `multifile` or `dynamic` between source files.

Prolog source files are located using `absolute_file_name/3` with the following options:

```
locate_prolog_file(Spec, Path) :-
    absolute_file_name(Spec,
        [ file_type(prolog),
          access(read)
        ],
        Path).
```

The `file_type(prolog)` option is used to determine the extension of the file using `prolog_file_type/2`. The default extension is `.pl`. *Spec* allows for the *path alias* construct defined by `absolute_file_name/3`. The most commonly used path alias is `library(LibraryFile)`. The example below loads the library file `ordsets.pl` (containing predicates for manipulating ordered sets).

```
:- use_module(library(ordsets)).
```

SWI-Prolog recognises grammar rules (DCG) as defined in [Clocksin & Melish, 1987]. The user may define additional compilation of the source file by defining the dynamic multifile predicates `term_expansion/2`, `term_expansion/4`, `goal_expansion/2` and `goal_expansion/4`. It is not allowed to use `assert/1`, `retract/1` or any other database predicate in `term_expansion/2` other than for local computational purposes.<sup>4</sup> Code that needs to create additional clauses must use `compile_aux_clauses/1`. See `library(apply_macros)` for an example.

A *directive* is an instruction to the compiler. Directives are used to set (predicate) properties (see section 4.15), set flags (see `set_prolog_flag/2`) and load files (this section). Directives are terms of the form `:- <term>..` Here are some examples:

<sup>3</sup>This limitation may be lifted in the future. Existing limitations in SWI-Prolog's source code administration make this non-trivial.

<sup>4</sup>It does work for normal loading, but not for `qcompile/1`.

| Predicate       | if         | must_be_module | import    |
|-----------------|------------|----------------|-----------|
| consult/1       | true       | false          | all       |
| ensure_loaded/1 | not_loaded | false          | all       |
| use_module/1    | not_loaded | true           | all       |
| use_module/2    | not_loaded | true           | specified |
| reexport/1      | not_loaded | true           | all       |
| reexport/2      | not_loaded | true           | specified |

Table 4.1: Properties of the file-loading predicates. The *import* column specifies what is imported if the loaded file is a module file.

```
:- use_module(library(lists)).
:- dynamic
    store/2.                % Name, Value
```

The directive `initialization/1` can be used to run arbitrary Prolog goals. The specified goal is started *after* loading the file in which it appears has completed.

SWI-Prolog compiles code as it is read from the file, and directives are executed as *goals*. This implies that directives may call any predicate that has been defined before the point where the directive appears. It also accepts `?- <term>.` as a synonym.

SWI-Prolog does not have a separate `reconsult/1` predicate. Reconsulting is implied automatically by the fact that a file is consulted which is already loaded.

Advanced topics are handled in subsequent sections: mutually dependent files (section 4.3.2), multithreaded loading (section 4.3.2) and reloading running code (section 4.3.2).

The core of the family of loading predicates is `load_files/2`. The predicates `consult/1`, `ensure_loaded/1`, `use_module/1`, `use_module/2` and `reexport/1` pass the file argument directly to `load_files/2` and pass additional options as expressed in the table 4.1:

#### **load\_files(:Files)**

Equivalent to `load_files(Files, [])`. Same as `consult/1`, See `load_files/2` for supported options.

#### **load\_files(:Files, +Options)**

The predicate `load_files/2` is the parent of all the other loading predicates except for `include/1`. It currently supports a subset of the options of Quintus `load_files/2`. *Files* is either a single source file or a list of source files. The specification for a source file is handed to `absolute_file_name/2`. See this predicate for the supported expansions. *Options* is a list of options using the format *OptionName(OptionValue)*.

The following options are currently supported:

#### **autoload(Bool)**

If `true` (default `false`), indicate that this load is a *demand* load. This implies that, depending on the setting of the Prolog flag `verbose_autoload`, the load action is printed at level `informational` or `silent`. See also `print_message/2` and `current_prolog_flag/2`.

**check\_script(*Bool*)**

If `false` (default `true`), do not check the first character to be `#` and skip the first line when found.

**derived\_from(*File*)**

Indicate that the loaded file is derived from *File*. Used by `make/0` to time-check and load the original file rather than the derived file.

**dialect(+*Dialect*)**

Load *Files* with enhanced compatibility with the target Prolog system identified by *Dialect*. See `expects_dialect/1` and section C for details.

**encoding(*Encoding*)**

Specify the way characters are encoded in the file. Default is taken from the Prolog flag `encoding`. See section 2.19.1 for details.

**expand(*Bool*)**

If `true`, run the filenames through `expand_file_name/2` and load the returned files. Default is `false`, except for `consult/1` which is intended for interactive use. Flexible location of files is defined by `file_search_path/2`.

**format(+*Format*)**

Used to specify the file format if data is loaded from a stream using the `stream(Stream)` option. Default is `source`, loading Prolog source text. If `qlf`, load QLF data (see `qcompile/1`).

**if(*Condition*)**

Load the file only if the specified condition is satisfied. The value `true` loads the file unconditionally, `changed` loads the file if it was not loaded before or has been modified since it was loaded the last time, and `not_loaded` loads the file if it was not loaded before.

**imports(*Import*)**

Specify what to import from the loaded module. The default for `use_module/1` is `all`. *Import* is passed from the second argument of `use_module/2`. Traditionally it is a list of predicate indicators to import. As part of the SWI-Prolog/YAP integration, we also support *Pred* as *Name* to import a predicate under another name. Finally, *Import* can be the term `except(Exceptions)`, where *Exceptions* is a list of predicate indicators that specify predicates that are *not* imported or *Pred* as *Name* terms to denote renamed predicates. See also `reexport/2` and `use_module/2`.<sup>5</sup>

If *Import* equals `all`, all operators are imported as well. Otherwise, operators are *not* imported. Operators can be imported selectively by adding terms `op(Pri,Assoc,Name)` to the *Import* list. If such a term is encountered, all exported operators that unify with this term are imported. Typically, this construct will be used with all arguments unbound to import all operators or with only *Name* bound to import a particular operator.

**modified(*TimeStamp*)**

Claim that the source was loaded at *TimeStamp* without checking the source. This option is intended to be used together with the `stream(Input)` option, for example after extracting the time from an HTTP server or database.

<sup>5</sup>BUG: *Name/Arity* as *NewName* is currently implemented using a *link clause*. This harms efficiency and does not allow for querying the relation through `predicate_property/2`.

**module(+Module)**

Load the indicated file into the given module, overruling the module name specified in the `:- module(Name, ...)` directive. This currently serves two purposes: (1) allow loading two module files that specify the same module into the same process and force and (2): force loading source code in a specific module, even if the code provides its own module name. Experimental.

**must\_be\_module(Bool)**

If `true`, raise an error if the file is not a module file. Used by `use_module/[1,2]`.

**qcompile(Atom)**

How to deal with quick-load-file compilation by `qcompile/1`. Values are:

**never**

Default. Do not use `qcompile` unless called explicitly.

**auto**

Use `qcompile` for all writeable files. See comment below.

**large**

Use `qcompile` if the file is 'large'. Currently, files larger than 100 Kbytes are considered large.

**part**

If `load_files/2` appears in a directive of a file that is compiled into Quick Load Format using `qcompile/1`, the contents of the argument files are included in the `.qlf` file instead of the loading directive.

If this option is not present, it uses the value of the Prolog flag `qcompile` as default.

**optimise(+Boolean)**

Explicitly set the optimization for compiling this module. See `optimise`.

**redefine\_module(+Action)**

Defines what to do if a file is loaded that provides a module that is already loaded from another file. *Action* is one of `false` (default), which prints an error and refuses to load the file, or `true`, which uses `unload_file/1` on the old file and then proceeds loading the new file. Finally, there is `ask`, which starts interaction with the user. `ask` is only provided if the stream `user_input` is associated with a terminal.

**reexport(Bool)**

If `true` re-export the imported predicate. Used by `reexport/1` and `reexport/2`.

**register(Bool)**

If `false`, do not register the load location and options. This option is used by `make/0` and `load_hotfixes/1` to avoid polluting the load-context database. See `source_file_property/2`.

**sandboxed(Bool)**

Load the file in *sandboxed* mode. This option controls the flag `sandboxed_load`. The only meaningful value for *Bool* is `true`. Using `false` while the Prolog flag is set to `true` raises a permission error.

**scope\_settings(Bool)**

Scope `style_check/1` and `expects_dialect/1` to the file and files loaded from the file after the directive. Default is `true`. The system and user initialization files (see `-f` and `-F`) are loading with `scope_settings(false)`.

**silent(*Bool*)**

If `true`, load the file without printing a message. The specified value is the default for all files loaded as a result of loading the specified files. This option writes the Prolog flag `verbose_load` with the negation of *Bool*.

**stream(*Input*)**

This SWI-Prolog extension compiles the data from the stream *Input*. If this option is used, *Files* must be a single atom which is used to identify the source location of the loaded clauses as well as to remove all clauses if the data is reconsulted.

This option is added to allow compiling from non-file locations such as databases, the web, the *user* (see `consult/1`) or other servers. It can be combined with `format(qlf)` to load QLF data from a stream.

The `load_files/2` predicate can be hooked to load other data or data from objects other than files. See `prolog_load_file/2` for a description and `http/http_load` for an example. All hooks for `load_files/2` are documented in section B.8.

**consult(*:File*)**

Read *File* as a Prolog source file. Calls to `consult/1` may be abbreviated by just typing a number of filenames in a list. Examples:

```
?- consult(load).           % consult load or load.pl
?- [library(lists)].        % load library lists
?- [user].                  % Type program on the terminal
```

The predicate `consult/1` is equivalent to `load_files(File, [])`, except for handling the special file `user`, which reads clauses from the terminal. See also the `stream(Input)` option of `load_files/2`. Abbreviation using `?- [file1, file2].` does *not* work for the empty list `[]`. This facility is implemented by defining the list as a predicate. Applications may only rely on using the list abbreviation at the Prolog toplevel and in directives.

**ensure\_loaded(*:File*)**

If the file is not already loaded, this is equivalent to `consult/1`. Otherwise, if the file defines a module, import all public predicates. Finally, if the file is already loaded, is not a module file, and the context module is not the global user module, `ensure_loaded/1` will call `consult/1`.

With this semantics, we hope to get as close as possible to the clear semantics without the presence of a module system. Applications using modules should consider using `use_module/[1, 2]`.

Equivalent to `load_files(Files, [if(not_loaded)])`.<sup>6</sup>

**include(+*File*)**

[ISO]

Textually include the content of *File* at the position where the *directive* `:- include(File).` appears. The `include` construct is only honoured if it appears as a directive in a source file. *Textual* include (similar to C/C++ `#include`) is obviously useful

<sup>6</sup>On older versions the condition used to be `if(changed)`. Poor time management on some machines or copying often caused problems. The `make/0` predicate deals with updating the running system after changing the source code.

for sharing declarations such as `dynamic/1` or `multifile/1` by including a file with directives from multiple files that use these predicates.

Textually including files that contain *clauses* is less obvious. Normally, in SWI-Prolog, clauses are *owned* by the file in which they are defined. This information is used to *replace* the old definition after the file has been modified and is reloaded by, e.g., `make/0`. As we understand it, `include/1` is intended to include the same file multiple times. Including a file holding clauses multiple times into the same module is rather meaningless as it just duplicates the same clauses. Including a file holding clauses in multiple modules does not suffer from this problem, but leads to multiple equivalent *copies* of predicates. Using `use_module/1` can achieve the same result while *sharing* the predicates.

If `include/1` is used to load files holding clauses, and if these files are loaded only once, then these `include/1` directives can be replaced by other predicates (such as `consult/1`). However, there are several cases where either `include/1` has no alternative, or using any alternative also requires other changes. An example of the former is using `include/1` to share directives. An example of the latter are cases where clauses of different predicates are distributed over multiple files: If these files are loaded with `include/1`, the directive `discontiguous/1` is appropriate, whereas if they are consulted, one must use the directive `multifile/1`.

To accommodate included files holding clauses, SWI-Prolog distinguishes between the source location of a clause (in this case the included file) and the *owner* of a clause (the file that includes the file holding the clause). The source location is used by, e.g., `edit/1`, the graphical tracer, etc., while the owner is used to determine which clauses are removed if the file is modified. Relevant information is found with the following predicates:

- `source_file/2` describes the owner relation.
- `predicate_property/2` describes the source location (of the first clause).
- `clause_property/2` provides access to both source and ownership.
- `source_file_property/2` can be used to query include relationships between files.

#### **require(+ListOfNameAndArity)**

Declare that this file/module requires the specified predicates to be defined “with their commonly accepted definition”. This predicate originates from the Prolog portability layer for XPCE. It is intended to provide a portable mechanism for specifying that this module requires the specified predicates.

The implementation normally first verifies whether the predicate is already defined. If not, it will search the libraries and load the required library.

SWI-Prolog, having autoloading, does **not** load the library. Instead it creates a procedure header for the predicate if it does not exist. This will flag the predicate as ‘undefined’. See also `check/0` and `autoload/0`.

#### **encoding(+Encoding)**

This directive can appear anywhere in a source file to define how characters are encoded in the remainder of the file. It can be used in files that are encoded with a superset of US-ASCII, currently UTF-8 and ISO Latin-1. See also section [2.19.1](#).

**make**

Consult all source files that have been changed since they were consulted. It checks *all* loaded source files: files loaded into a compiled state using `pl -c ...` and files loaded using `consult/1` or one of its derivatives. The predicate `make/0` is called after `edit/1`, automatically reloading all modified files. If the user uses an external editor (in a separate window), `make/0` is normally used to update the program after editing. In addition, `make/0` updates the autoload indices (see section 2.13) and runs `list_undefined/0` from the `check library` to report on undefined predicates.

**library\_directory(?Atom)**

Dynamic predicate used to specify library directories. Default `./lib`, `~/lib/prolog` and the system's library (in this order) are defined. The user may add library directories using `assertz/1`, `asserta/1` or remove system defaults using `retract/1`. Deprecated. New code should use `file_search_path/2`.

**file\_search\_path(+Alias, -Path)**

Dynamic multifile hook predicate used to specify 'path aliases'. This hook is called by `absolute_file_name/3` to search files specified as `Alias(Name)`, e.g., `library(lists)`. This feature is best described using an example. Given the definition:

```
file_search_path(demo, '/usr/lib/prolog/demo').
```

the file specification `demo(myfile)` will be expanded to `/usr/lib/prolog/demo/myfile`. The second argument of `file_search_path/2` may be another alias.

Below is the initial definition of the file search path. This path implies `swi(<Path>)` and refers to a file in the SWI-Prolog home directory. The alias `foreign(<Path>)` is intended for storing shared libraries (`.so` or `.DLL` files). See also `use_foreign_library/1`.

```
user:file_search_path(library, X) :-
    library_directory(X).
user:file_search_path(swi, Home) :-
    current_prolog_flag(home, Home).
user:file_search_path(foreign, swi(ArchLib)) :-
    current_prolog_flag(arch, Arch),
    atom_concat('lib/', Arch, ArchLib).
user:file_search_path(foreign, swi(lib)).
user:file_search_path(path, Dir) :-
    getenv('PATH', Path),
    (
        current_prolog_flag(windows, true)
    -> atomic_list_concat(Dirs, (;), Path)
    ; atomic_list_concat(Dirs, :, Path)
    ),
    member(Dir, Dirs).
```

The `file_search_path/2` expansion is used by all loading predicates as well as by `absolute_file_name/[2,3]`.

The Prolog flag `verbose_file_search` can be set to `true` to help debugging Prolog's search for files.

**expand\_file\_search\_path(+Spec, -Path)** *[nondet]*  
 Unifies *Path* with all possible expansions of the filename specification *Spec*. See also `absolute_file_name/3`.

**prolog\_file\_type(?Extension, ?Type)**

This dynamic multifile predicate defined in module `user` determines the extensions considered by `file_search_path/2`. *Extension* is the filename extension without the leading dot, and *Type* denotes the type as used by the `file_type(Type)` option of `file_search_path/2`. Here is the initial definition of `prolog_file_type/2`:

```
user:prolog_file_type(pl,      prolog).
user:prolog_file_type(Ext,    prolog) :-
    current_prolog_flag(associate, Ext),
    Ext \== pl.
user:prolog_file_type(qlf,    qlf).
user:prolog_file_type(Ext,    executable) :-
    current_prolog_flag(shared_object_extension, Ext).
```

Users can add extensions for Prolog source files to avoid conflicts (for example with `perl`) as well as to be compatible with another Prolog implementation. We suggest using `.pro` for avoiding conflicts with `perl`. Overriding the system definitions can stop the system from finding libraries.

**source\_file(?File)**

True if *File* is a loaded Prolog source file. *File* is the absolute and canonical path to the source file.

**source\_file(:Pred, ?File)**

True if the predicate specified by *Pred* is owned by file *File*, where *File* is an absolute path name (see `absolute_file_name/2`). Can be used with any instantiation pattern, but the database only maintains the source file for each predicate. If *Pred* is a *multifile* predicate this predicate succeeds for all files that contribute clauses to *Pred*.<sup>7</sup> See also `clause_property/2`. Note that the relation between files and predicates is more complicated if `include/1` is used. The predicate describes the *owner* of the predicate. See `include/1` for details.

**source\_file\_property(?File, ?Property)**

True when *Property* is a property of the loaded file *File*. If *File* is non-var, it can be a file specification that is valid for `load_files/2`. Defined properties are:

**derived\_from(Original, OriginalModified)**

*File* was generated from the file *Original*, which was last modified at time *OriginalModified* at the time it was loaded. This property is available if *File* was loaded using the `derived_from(Original)` option to `load_files/2`.

<sup>7</sup>The current implementation performs a linear scan through all clauses to establish this set of files.



**includes**(*IncludedFile*, *IncludedFileModified*)

*File* used `include/1` to include *IncludedFile*. The last modified time of *IncludedFile* was *IncludedFileModified* at the time it was included.

**included\_in**(*MasterFile*, *Line*)

*File* was included into *MasterFile* from line *Line*. This is the inverse of the `includes` property.

**load\_context**(*Module*, *Location*, *Options*)

*Module* is the module into which the file was loaded. If *File* is a module, this is the module into which the exports are imported. Otherwise it is the module into which the clauses of the non-module file are loaded. *Location* describes the file location from which the file was loaded. It is either a term  $\langle file \rangle : \langle line \rangle$  or the atom `user` if the file was loaded from the terminal or another unknown source. *Options* are the options passed to `load_files/2`. Note that all predicates to load files are mapped to `load_files/2`, using the option argument to specify the exact behaviour.

**load\_count**(-*Count*)

*Count* is the number of times the file have been loaded, i.e., 1 (one) if the file has been loaded once.

**modified**(*Stamp*)

File modification time when *File* was loaded. This is used by `make/0` to find files whose modification time is different from when it was loaded.

**source**(*Source*)

One of `file` if the source was loaded from a file, `resource` if the source was loaded from a resource or `state` if the file was included in the saved state.

**module**(*Module*)

*File* is a module file that declares the module *Module*.

**number\_of\_clauses**(*Count*)

*Count* is the number of clauses associated with *File*. Note that clauses loaded from included files are counted as part of the main file.

**reloading**

Present if the file is currently being reloaded.

**unload\_file**(+*File*)

Remove all clauses loaded from *File*. If *File* loaded a module, clear the module's export list and disassociate it from the file. *File* is a canonical filename or a file indicator that is valid for `load_files/2`.

This predicate should be used with care. The multithreaded nature of SWI-Prolog makes removing static code unsafe. Attempts to do this should be reserved for development or situations where the application can guarantee that none of the clauses associated to *File* are active.

**prolog\_load\_context**(?Key, ?Value)

Obtain context information during compilation. This predicate can be used from directives appearing in a source file to get information about the file being loaded as well as by the `term_expansion/2` and `goal_expansion/2` hooks. See also `source_location/2` and `if/1`. The following keys are defined:

| Key            | Description   |
|----------------|---|
| directory      | Directory in which source lives   |
| dialect        | Compatibility mode. See <code>expects_dialect/1</code> .  |
| file           | Similar to <code>source</code> , but returns the file being included when called while an include file is being processed   |
| module         | Module into which file is loaded  |
| reload         | <code>true</code> if the file is being <b>reloaded</b> . Not present on first load  |
| script         | Boolean that indicates whether the file is loaded as a script file (see <code>-s</code> )   |
| source         | File being loaded. If the system is processing an included file, the value is the <i>main</i> file. Returns the original Prolog file when loading a <code>.qlf</code> file. |
| stream         | Stream identifier (see <code>current_input/1</code> )   |
| term_position  | Start position of last term read. See also <code>stream_property/2</code> ( <code>position</code> property and <code>stream_position_data/3</code> ). <sup>8</sup>          |
| term           | Term being expanded by <code>expand_term/2</code> .   |
| variable_names | A list of ' <i>Name</i> = <i>Var</i> ' of the last term read. See <code>read_term/2</code> for details.   |

The `directory` is commonly used to add rules to `file_search_path/2`, setting up a search path for finding files with `absolute_file_name/3`. For example:

```
:- dynamic user:file_search_path/2.
:- multifile user:file_search_path/2.

:- prolog_load_context(directory, Dir),
   asserta(user:file_search_path(my_program_home, Dir)).

...
   absolute_file_name(my_program_home('README.TXT'), ReadMe,
                     [ access(read) ]),
...

```

### source\_location(-File, -Line)

If the last term has been read from a physical file (i.e., not from the file `user` or a string), unify *File* with an absolute path to the file and *Line* with the line number in the file. New code should use `prolog_load_context/2`.

### at\_halt(:Goal)

Register *Goal* to be run from `PL_cleanup()`, which is called when the system halts. The hooks are run in the reverse order they were registered (FIFO). Success or failure executing a hook is ignored. If the hook raises an exception this is printed using `print_message/2`. An attempt to call `halt/[0,1]` from a hook is ignored. Hooks may call `cancel_halt/1`, causing `halt/0` and `PL.halt(0)` to print a message indicating that halting the system has been cancelled.

**cancel\_halt(+Reason)**

If this predicate is called from a hook registered with `at_halt/1`, halting Prolog is cancelled and an informational message is printed that includes *Reason*. This is used by the development tools to cancel halting the system if the editor has unsaved data and the user decides to cancel.

**:- initialization(:Goal)**

[ISO]

Call *Goal* after loading the source file in which this directive appears has been completed. In addition, *Goal* is executed if a saved state created using `qsave_program/1` is restored.

The ISO standard only allows for using `:- Term` if *Term* is a *directive*. This means that arbitrary goals can only be called from a directive by means of the `initialization/1` directive. SWI-Prolog does not enforce this rule.

The `initialization/1` directive must be used to do program initialization in saved states (see `qsave_program/1`). A saved state contains the predicates, Prolog flags and operators present at the moment the state was created. Other resources (records, foreign resources, etc.) must be recreated using `initialization/1` directives or from the entry goal of the saved state.

Up to SWI-Prolog 5.7.11, *Goal* was executed immediately rather than after loading the program text in which the directive appears as dictated by the ISO standard. In many cases the exact moment of execution is irrelevant, but there are exceptions. For example, `load_foreign_library/1` must be executed immediately to make the loaded foreign predicates available for exporting. SWI-Prolog now provides the directive `use_foreign_library/1` to ensure immediate loading as well as loading after restoring a saved state. If the system encounters a directive `:- initialization(load_foreign_library(...))`, it will load the foreign library immediately and issue a warning to update your code. This behaviour can be extended by providing clauses for the multifile hook predicate `prolog:initialize_now(Term, Advice)`, where *Advice* is an atom that gives advice on how to resolve the compatibility issue.

**initialization(:Goal, +When)**

Similar to `initialization/1`, but allows for specifying when *Goal* is executed while loading the program text:

**now**

Execute *Goal* immediately.

**after\_load**

Execute *Goal* after loading the program text in which the directive appears. This is the same as `initialization/1`.

**prepare\_state**

Execute *Goal* as part of `qsave_program/2`. This hook can be used for example to eagerly execute initialization that is normally done lazily on first usage.

**restore\_state**

Do not execute *Goal* while loading the program, but *only* when restoring a saved state.<sup>9</sup>

**program**

Execute *Goal* once after executing the `-g` goals at program startup. Registered goals

<sup>9</sup>Used to be called `restore`. `restore` is still accepted for backward compatibility.

are executed in the order encountered and a failure or exception causes the Prolog to exit with non-zero exit status. These goals are *not* executed if the `-l` is given to merely *load* files. In that case they may be executed explicitly using `initialize/0`. See also section 2.10.2.

#### main

When Prolog starts, the last goal registered using `initialization(Goal, main)` is executed as main goal. If *Goal* fails or raises an exception, the process terminates with non-zero exit code. If not explicitly specified using the `-t` the *toplevel goal* is set to `halt/0`, causing the process to exit with status 0. An explicitly specified toplevel is executed normally. This implies that `-t prolog` causes the application to start the normal interactive toplevel after completing *Goal*. See also the Prolog flag `toplevel_goal` and section 2.10.2.

#### initialize

[det]

Run all initialization goals registered using `initialization(Goal, program)`. Raises an error `initialization_error(Reason, Goal, File:Line)` if *Goal* fails or raises an exception. *Reason* is failed or the exception raised.

#### compiling

True if the system is compiling source files with the `-c` option or `qcompile/1` into an intermediate code file. Can be used to perform conditional code optimisations in `term_expansion/2` (see also the `-O` option) or to omit execution of directives during compilation.

### 4.3.1 Conditional compilation and program transformation

ISO Prolog defines no way for program transformations such as macro expansion or conditional compilation. Expansion through `term_expansion/2` and `expand_term/2` can be seen as part of the de-facto standard. This mechanism can do arbitrary translation between valid Prolog terms read from the source file to Prolog terms handed to the compiler. As `term_expansion/2` can return a list, the transformation does not need to be term-to-term.

Various Prolog dialects provide the analogous `goal_expansion/2` and `expand_goal/2` that allow for translation of individual body terms, freeing the user of the task to disassemble each clause.

#### term\_expansion(+Term1, -Term2)

Dynamic and multifile predicate, normally not defined. When defined by the user all terms read during consulting are given to this predicate. If the predicate succeeds Prolog will assert *Term2* in the database rather than the read term (*Term1*). *Term2* may be a term of the form `?- Goal.` or `:- Goal.` *Goal* is then treated as a directive. If *Term2* is a list, all terms of the list are stored in the database or called (for directives). If *Term2* is of the form below, the system will assert *Clause* and record the indicated source location with it:

```
'$source.location' (<File>, <Line>) : <Clause>
```

When compiling a module (see chapter 6 and the directive `module/2`), `expand_term/2` will first try `term_expansion/2` in the module being compiled to allow for term expansion rules that are local to a module. If there is no local definition, or the local definition fails to translate the term, `expand_term/2` will try `term_expansion/2` in module `user`.

For compatibility with SICStus and Quintus Prolog, this feature should not be used. See also `expand_term/2`, `goal_expansion/2` and `expand_goal/2`.

#### **expand\_term(+Term1, -Term2)**

This predicate is normally called by the compiler on terms read from the input to perform preprocessing. It consists of four steps, where each step processes the output of the previous step.

1. Test conditional compilation directives and translate all input to `[]` if we are in a ‘false branch’ of the conditional compilation. See section 4.3.1.
2. Call `term_expansion/2`. This predicate is first tried in the module that is being compiled and then in modules from which this module inherits according to `default_module/2`. The output of the expansion in a module is used as input for the next module. Using the default setup and when compiling a normal application module *M*, this implies expansion is executed in *M*, *user* and finally in *system*. Library modules inherit directly from *system* and can thus not be re-interpreted by term expansion rules in *user*.
3. Call DCG expansion (`dcg_translate_rule/2`).
4. Call `expand_goal/2` on each body term that appears in the output of the previous steps.

#### **goal\_expansion(+Goal1, -Goal2)**

Like `term_expansion/2`, `goal_expansion/2` provides for macro expansion of Prolog source code. Between `expand_term/2` and the actual compilation, the body of clauses analysed and the goals are handed to `expand_goal/2`, which uses the `goal_expansion/2` hook to do user-defined expansion.

The predicate `goal_expansion/2` is first called in the module that is being compiled, and then follows the module inheritance path as defined by `default_module/2`, i.e., by default *user* and *system*. If *Goal* is of the form *Module:Goal* where *Module* is instantiated, `goal_expansion/2` is called on *Goal* using rules from module *Module* followed by default modules for *Module*.

Only goals appearing in the body of clauses when reading a source file are expanded using this mechanism, and only if they appear literally in the clause, or as an argument to a defined meta-predicate that is annotated using ‘0’ (see `meta_predicate/1`). Other cases need a real predicate definition.

The expansion hook can use `prolog_load_context/2` to obtain information about the context in which the goal is expanded such as the module, variable names or the encapsulating term.

#### **expand\_goal(+Goal1, -Goal2)**

This predicate is normally called by the compiler to perform preprocessing using `goal_expansion/2`. The predicate computes a fixed-point by applying transformations until there are no more changes. If optimisation is enabled (see `-O` and `optimise`), `expand_goal/2` simplifies the result by removing unneeded calls to `true/0` and `fail/0` as well as unreachable branches.

#### **compile\_aux\_clauses(+Clauses)**

Compile clauses on behalf of `goal_expansion/2`. This predicate compiles the argument

clauses into static predicates, associating the predicates with the current file but avoids changing the notion of current predicate and therefore discontinuous warnings.

Note that in some cases multiple expansions of similar goals can share the same compiled auxiliary predicate. In such cases, the implementation of `goal_expansion/2` can use `predicate_property/2` using the property defined to test whether the predicate is already defined in the current context.

#### **dcg\_translate\_rule(+In, -Out)**

This predicate performs the translation of a term `Head-->Body` into a normal Prolog clause. Normally this functionality should be accessed using `expand_term/2`.

#### **var\_property(+Var, ?Property)**

True when *Property* is a property of *Var*. These properties are available during goal- and term-expansion. Defined properties are below. Future versions are likely to provide more properties, such as whether the variable is a singleton or whether the variable is referenced in the remainder of the term. See also `goal_expansion/2`.

#### **fresh(Bool)**

*Bool* has the value *true* if the variable is guaranteed to be unbound at entry of the goal, otherwise its value is *false*. This implies that the variable first appears in this goal or a previous appearance was in a negation (`\+/1`) or a different branch of a disjunction.

#### **name(Name)**

True when variable appears with the given name in the source.

### **Program transformation with source layout info**

This sections documents extended versions of the program transformation predicates that also transform the source layout information. Extended layout information is currently processed, but unused. Future versions will use for the following enhancements:

- More precise locations of warnings and errors
- More reliable setting of breakpoints
- More reliable source layout information in the graphical debugger.

#### **expand\_goal(+Goal1, ?Layout1, -Goal2, -Layout2)**

#### **goal\_expansion(+Goal1, ?Layout1, -Goal2, -Layout2)**

#### **expand\_term(+Term1, ?Layout1, -Term2, -Layout2)**

#### **term\_expansion(+Term1, ?Layout1, -Term2, -Layout2)**

#### **dcg\_translate\_rule(+In, ?LayoutIn, -Out, -LayoutOut)**

These versions are called *before* their 2-argument counterparts. The input layout term is either a variable (if no layout information is available) or a term carrying detailed layout information as returned by the `subterm_positions` of `read_term/2`.

### Conditional compilation

Conditional compilation builds on the same principle as `term_expansion/2`, `goal_expansion/2` and the expansion of grammar rules to compile sections of the source code conditionally. One of the reasons for introducing conditional compilation is to simplify writing portable code. See section C for more information. Here is a simple example:

```
:- if(\+source_exports(library(lists), suffix/2)).

suffix(Suffix, List) :-
    append(_, Suffix, List).

:- endif.
```

Note that these directives can only appear as separate terms in the input. Typical usage scenarios include:

- Load different libraries on different dialects.
- Define a predicate if it is missing as a system predicate.
- Realise totally different implementations for a particular part of the code due to different capabilities.
- Realise different configuration options for your software.

#### **`:- if(:Goal)`**

Compile subsequent code only if *Goal* succeeds. For enhanced portability, *Goal* is processed by `expand_goal/2` before execution. If an error occurs, the error is printed and processing proceeds as if *Goal* has failed.

#### **`:- elif(:Goal)`**

Equivalent to `:- else. :-if(Goal). ... :- endif.` In a sequence as below, the section below the first matching `elif` is processed. If no test succeeds, the `else` branch is processed.

```
:- if(test1).
section_1.
:- elif(test2).
section_2.
:- elif(test3).
section_3.
:- else.
section_else.
:- endif.
```

#### **`:- else`**

Start 'else' branch.

#### **`:- endif`**

End of conditional compilation.

### 4.3.2 Reloading files, active code and threads

Traditionally, Prolog environments allow for reloading files holding currently active code. In particular, the following sequence is a valid use of the development environment:

- Trace a goal
- Find unexpected behaviour of a predicate
- Enter a *break* using the **b** command
- Fix the sources and reload them using `make/0`
- Exit the break, *retry* executing the now fixed predicate using the **r** command

*Reloading* a previously loaded file is safe, both in the debug scenario above and when the code is being executed by another *thread*. Executing threads switch atomically to the new definition of modified predicates, while clauses that belong to the old definition are (eventually) reclaimed by `garbage_collect_clauses/0`.<sup>10</sup> Below we describe the steps taken for *reloading* a file to help understanding the limitations of the process.

1. If a file is being reloaded, a *reload context* is associated to the file administration. This context includes a table keeping track of predicates and a table keeping track of the module(s) associated with this source.
2. If a new predicate is found, an entry is added to the context predicate table. Three options are considered:
  - (a) The predicate is new. It is handled the same as if the file was loaded for the first time.
  - (b) The predicate is foreign or thread local. These too are treated as if the file was loaded for the first time.
  - (c) Normal predicates. Here we initialise a pointer to the *current clause*.
3. New clauses for ‘normal predicates’ are considered as follows:
  - (a) If the clause’s byte-code is the same as the predicates current clause, discard the clause and advance the current clause pointer.
  - (b) If the clause’s byte-code is the same as some clause further into the clause list of the predicate, discard the new clause, mark all intermediate clauses for future deletion, and advance the current clause pointer to the first clause after the matched one.
  - (c) If the clause’s byte-code matches no clause, insert it for *future activation* before the current clause and keep the current clause.
4. *Properties* such as `dynamic` or `meta_predicate` are in part applied immediately and in part during the fixup process after the file completes loading. Currently, `dynamic` and `thread_local` are applied immediately.
5. New modules are recorded in the reload context. Export declarations (the module’s public list and `export/1` calls) are both applied and recorded.

<sup>10</sup>As of version 7.3.12. Older versions wipe all clauses originating from the file before loading the new clauses. This causes threads that executes the code to (typically) die with an *undefined predicate* exception.



6. When the end-of-file is reached, the following fixup steps are taken
  - (a) For each predicate
    - i. The current clause and subsequent clauses are marked for future deletion.
    - ii. All clauses marked for future deletion or creation are (in)activated by changing their ‘erased’ or ‘created’ *generation*. Erased clauses are (eventually) reclaimed by the *clause garbage collector*, see `garbage_collect_clauses/0`.
    - iii. Pending predicate property changes are applied.
  - (b) For each module
    - i. Exported predicates that are not encountered in the reload context are removed from the export list.

The above generally ensures that changes to the *content* of source files can typically be activated safely using `make/0`. Global changes such as operator changes, changes of module names, changes to multi-file predicates, etc. sometimes require a restart. In almost all cases, the need for restart is indicated by permission or syntax errors during the reload or existence errors while running the program.

In some cases the content of a source file refers ‘to itself’. This is notably the case if local rules for `goal_expansion/2` or `term_expansion/2` are defined or goals are executed using *directives*.<sup>11</sup> Up to version 7.5.12 it was typically needed to reload the file *twice*, once for updating the code that was used for compiling the remainder of the file and once to effectuate this. As of version 7.5.13, conventional *transaction semantics* apply. This implies that for the thread performing the reload the file’s content is first wiped and gradually rebuilt, while other threads see an *atomic* update from the old file content to the new.<sup>12</sup>

### Compilation of mutually dependent code

Large programs are generally split into multiple files. If file *A* accesses predicates from file *B* which accesses predicates from file *A*, we consider this a mutual or circular dependency. If traditional load predicates (e.g., `consult/1`) are used to include file *B* from *A* and *A* from *B*, loading either file results in a loop. This is because `consult/1` is mapped to `load_files/2` using the option `if(true)(.)`. Such programs are typically loaded using a *load file* that consults all required (non-module) files. If modules are used, the dependencies are made explicit using `use_module/1` statements. The `use_module/1` predicate, however, maps to `load_files/2` with the option `if(not_loaded)(.)`. A `use_module/1` on an already loaded file merely makes the public predicates of the used module available.

Summarizing, mutual dependency of source files is fully supported with no precautions when using modules. Modules can use each other in an arbitrary dependency graph. When using `consult/1`, predicate dependencies between loaded files can still be arbitrary, but the consult relations between files must be a proper tree.

### Compilation with multiple threads

This section discusses compiling files for the first time. For reloading, see section 4.3.2.

<sup>11</sup>Note that `initialization/1` directives are executed *after* loading the file. SWI-Prolog allows for directives that are executed *while* loading the file using `:- Goal.` or `initialization/2`

<sup>12</sup>This feature was implemented by Keri Harris.

In older versions, compilation was thread-safe due to a global *lock* in `load_files/2` and the code dealing with *autoloading* (see section 2.13). Besides unnecessary stalling when multiple threads trap unrelated undefined predicates, this easily leads to deadlocks, notably if threads are started from an `initialization/1` directive.<sup>13</sup>

Starting with version 5.11.27, the autoloader is no longer locked and multiple threads can compile files concurrently. This requires special precautions only if multiple threads wish to load the same file at the same time. Therefore, `load_files/2` checks automatically whether some other thread is already loading the file. If not, it starts loading the file. If another thread is already loading the file, the thread blocks until the other thread finishes loading the file. After waiting, and if the file is a module file, it will make the public predicates available.

Note that this schema does not prevent deadlocks under all situations. Consider two mutually dependent (see section 4.3.2) module files *A* and *B*, where thread 1 starts loading *A* and thread 2 starts loading *B* at the same time. Both threads will deadlock when trying to load the used module.

The current implementation does not detect such cases and the involved threads will freeze. This problem can be avoided if a mutually dependent collection of files is always loaded from the same start file.

### 4.3.3 Quick load files

SWI-Prolog supports compilation of individual or multiple Prolog source files into ‘Quick Load Files’. A ‘Quick Load File’ (`.qlf` file) stores the contents of the file in a precompiled format.

These files load considerably faster than source files and are normally more compact. They are machine-independent and may thus be loaded on any implementation of SWI-Prolog. Note, however, that clauses are stored as virtual machine instructions. Changes to the compiler will generally make old compiled files unusable.

Quick Load Files are created using `qcompile/1`. They are loaded using `consult/1` or one of the other file-loading predicates described in section 4.3. If `consult/1` is given an explicit `.pl` file, it will load the Prolog source. When given a `.qlf` file, it will load the file. When no extension is specified, it will load the `.qlf` file when present and the `.pl` file otherwise.

#### **qcompile(:File)**

Takes a file specification as `consult/1`, etc., and, in addition to the normal compilation, creates a *Quick Load File* from *File*. The file extension of this file is `.qlf`. The basename of the Quick Load File is the same as the input file.

If the file contains `‘:- consult(+File)’`, `‘:- [+File]’` or `‘:- load_files(+File, [qcompile(part), ...])’` statements, the referred files are compiled into the same `.qlf` file. Other directives will be stored in the `.qlf` file and executed in the same fashion as when loading the `.pl` file.

For `term_expansion/2`, the same rules as described in section 2.10 apply.

Conditional execution or optimisation may test the predicate `compiling/0`.

Source references (`source_file/2`) in the Quick Load File refer to the Prolog source file from which the compiled code originates.

<sup>13</sup> Although such goals are started after loading the file in which they appear, the calling thread is still likely to hold the ‘load’ lock because it is compiling the file from which the file holding the directive is loaded.

**qcompile**(:File, +Options)

As `qcompile/1`, but processes additional options as defined by `load_files/2`.<sup>14</sup>

## 4.4 Editor Interface

SWI-Prolog offers an extensible interface which allows the user to edit objects of the program: predicates, modules, files, etc. The editor interface is implemented by `edit/1` and consists of three parts: *locating*, *selecting* and *starting* the editor. Any of these parts may be customized. See section 4.4.1.

The built-in edit specifications for `edit/1` (see `prolog_edit:locate/3`) are described in the table below:

| Fully specified objects                                |   |
|--|---|
| <code>&lt;Module&gt;:&lt;Name&gt;/&lt;Arity&gt;</code> | Refers to a predicate   |
| <code>module(&lt;Module&gt;)</code>                    | Refers to a module  |
| <code>file(&lt;Path&gt;)</code>                        | Refers to a file  |
| <code>source_file(&lt;Path&gt;)</code>                 | Refers to a loaded source file  |
| Ambiguous specifications                               |   |
| <code>&lt;Name&gt;/&lt;Arity&gt;</code>                | Refers to this predicate in any module  |
| <code>&lt;Name&gt;</code>                              | Refers to (1) the named predicate in any module with any arity, (2) a (source) file, or (3) a module. |

**edit**(+Specification)

First, exploit `prolog_edit:locate/3` to translate *Specification* into a list of *Locations*. If there is more than one ‘hit’, the user is asked to select from the locations found. Finally, `prolog_edit:edit_source/1` is used to invoke the user’s preferred editor. Typically, `edit/1` can be handed the name of a predicate, module, basename of a file, XPCE class, XPCE method, etc.

**edit**

Edit the ‘default’ file using `edit/1`. The default file is the file loaded with the command line option `-s` or, in Windows, the file loaded by double-clicking from the Windows shell.

### 4.4.1 Customizing the editor interface

The predicates described in this section are *hooks* that can be defined to disambiguate specifications given to `edit/1`, find the related source, and open an editor at the given source location.

**prolog\_edit:locate**(+Spec, -FullSpec, -Location)

Where *Spec* is the specification provided through `edit/1`. This multifile predicate is used to enumerate locations where an object satisfying the given *Spec* can be found. *FullSpec* is unified with the complete specification for the object. This distinction is used to allow for ambiguous specifications. For example, if *Spec* is an atom, which appears as the basename of a loaded file and as the name of a predicate, *FullSpec* will be bound to `file(Path)` or `Name/Arity`.

*Location* is a list of attributes of the location. Normally, this list will contain the term `file(File)` and, if available, the term `line(Line)`.

<sup>14</sup>BUG: Option processing is currently incomplete.

**prolog\_edit:locate(+Spec, -Location)**

Same as `prolog_edit:locate/3`, but only deals with fully specified objects.

**prolog\_edit:edit\_source(+Location)**

Start editor on *Location*. See `prolog_edit:locate/3` for the format of a location term. This multifile predicate is normally not defined. If it succeeds, `edit/1` assumes the editor is started.

If it fails, `edit/1` uses its internal defaults, which are defined by the Prolog flag `editor` and/or the environment variable `EDITOR`. The following rules apply. If the Prolog flag `editor` is of the format `$<name>`, the editor is determined by the environment variable `<name>`. Else, if this flag is `pce_emacs` or `built_in` and XPCE is loaded or can be loaded, the built-in Emacs clone is used. Else, if the environment `EDITOR` is set, this editor is used. Finally, `vi` is used as default on Unix systems and `notepad` on Windows.

See the default user preferences file `dotfiles/dotswiplrc` for examples.

**prolog\_edit:edit\_command(+Editor, -Command)**

Determines how *Editor* is to be invoked using `shell/1`. *Editor* is the determined editor (see `prolog_edit:edit_source/1`), without the full path specification, and without a possible `(.exe)` extension. *Command* is an atom describing the command. The following `%`-sequences are replaced in *Command* before the result is handed to `shell/1`:

|                 |   |
|-----------------|---|
| <code>%e</code> | Replaced by the (OS) command name of the editor |
| <code>%f</code> | Replaced by the (OS) full path name of the file |
| <code>%d</code> | Replaced by the line number                     |

If the editor can deal with starting at a specified line, two clauses should be provided. The first pattern invokes the editor with a line number, while the second is used if the line number is unknown.

The default contains definitions for `vi`, `emacs`, `emacsclient`, `vim`, `notepad*` and `wordpad*`. Starred editors do not provide starting at a given line number.

Please contribute your specifications to [bugs@swi-prolog.org](mailto:bugs@swi-prolog.org).

**prolog\_edit:load**

Normally an undefined multifile predicate. This predicate may be defined to provide loading hooks for user extensions to the edit module. For example, XPCE provides the code below to load `swi_edit`, containing definitions to locate classes and methods as well as to bind this package to the PceEmacs built-in editor.

```
:- multifile prolog_edit:load/0.

prolog_edit:load :-
    ensure_loaded(library(swi_edit)).
```

## 4.5 List the program, predicates or clauses

### **listing**(:*Pred*)

List predicates specified by *Pred*. *Pred* may be a predicate name (atom), which lists all predicates with this name, regardless of their arity. It can also be a predicate indicator ( $\langle name \rangle / \langle arity \rangle$  or  $\langle name \rangle // \langle arity \rangle$ ), possibly qualified with a module. For example:  
`?- listing(lists:member/2) ..`

A listing is produced by enumerating the clauses of the predicate using `clause/2` and printing each clause using `portray_clause/1`. This implies that the variable names are generated (*A*, *B*, ...) and the layout is defined by rules in `portray_clause/1`.

### **listing**

List all predicates from the calling module using `listing/1`. For example, `?- listing.` lists clauses in the default user module and `?- lists:listing.` lists the clauses in the module `lists`.

### **portray\_clause**(+*Clause*)

Pretty print a clause. A clause should be specified as a term ' $\langle Head \rangle :- \langle Body \rangle$ '. Facts are represented as ' $\langle Head \rangle :- \text{true}$ ' or simply  $\langle Head \rangle$ . Variables in the clause are written as *A*, *B*, ... Singleton variables are written as `_`. See also `portray_clause/2`.

### **portray\_clause**(+*Stream*, +*Clause*)

Pretty print a clause to *Stream*. See `portray_clause/1` for details.

## 4.6 Verify Type of a Term

Type tests are semi-deterministic predicates that succeed if the argument satisfies the requested type. Type-test predicates have no error condition and do not instantiate their argument. See also `library_error`.

### **var**(@*Term*)

[ISO]

True if *Term* currently is a free variable.

### **nonvar**(@*Term*)

[ISO]

True if *Term* currently is not a free variable.

### **integer**(@*Term*)

[ISO]

True if *Term* is bound to an integer.

### **float**(@*Term*)

[ISO]

True if *Term* is bound to a floating point number.

### **rational**(@*Term*)

True if *Term* is bound to a rational number. Rational numbers include integers.

### **rational**(@*Term*, -*Numerator*, -*Denominator*)

True if *Term* is a rational number with given *Numerator* and *Denominator*. The *Numerator* and *Denominator* are in canonical form, which means *Denominator* is a positive integer and there are no common divisors between *Numerator* and *Denominator*.

**number(@Term)** [ISO]

True if *Term* is bound to an integer or floating point number.<sup>15</sup>

**atom(@Term)** [ISO]

True if *Term* is bound to an atom.

**blob(@Term, ?Type)**

True if *Term* is a *blob* of type *Type*. See section 12.4.8.

**string(@Term)**

True if *Term* is bound to a string. Note that string here refers to the built-in atomic type string as described in section 5.2. Starting with version 7, the syntax for a string object is text between double quotes, such as "hello".<sup>16</sup> See also the Prolog flag `double_quotes`.

**atomic(@Term)** [ISO]

True if *Term* is bound (i.e., not a variable) and is not compound. Thus, atomic acts as if defined by:

```
atomic(Term) :-
    nonvar(Term),
    \+ compound(Term).
```

SWI-Prolog defines the following atomic datatypes: atom (atom/1), string (string/1), integer (integer/1), floating point number (float/1) and blob (blob/2). In addition, the symbol [] (empty list) is atomic, but not an atom. See section 5.1.

**compound(@Term)** [ISO]

True if *Term* is bound to a compound term. See also functor/3 =./2, compound\_name\_arity/3 and compound\_name\_arguments/3.

**callable(@Term)** [ISO]

True if *Term* is bound to an atom or a compound term. This was intended as a type-test for arguments to call/1 and call/2.. Note that callable only tests the *surface term*. Terms such as (22,true) are considered callable, but cause call/1 to raise a type error. Module-qualification of meta-argument (see meta\_predicate/1) using :/2 causes callable to succeed on any meta-argument.<sup>17</sup> Consider the program and query below:

```
:- meta_predicate p(0).

p(G) :- callable(G), call(G).

?- p(22).
ERROR: Type error: 'callable' expected, found '22'
```

<sup>15</sup>As rational numbers are not atomic in the current implementation and we do not want to break the rule that number/1 implies atomic/1, number/1 fails on rational numbers. This will change if rational numbers become atomic.

<sup>16</sup>In traditional Prolog systems, double quoted text is often mapped to a list of *character codes*.

<sup>17</sup>We think that callable/1 should be deprecated and there should be two new predicates, one performing a test for callable that is minimally module aware and possibly consistent with type-checking in call/1 and a second predicate that tests for atom or compound.

```
ERROR: In:
ERROR:      [6] p(user:22)
```

**ground(@Term)** [ISO]

True if *Term* holds no free variables. See also `nonground/2` and `term_variables/2`.

**cyclic\_term(@Term)**

True if *Term* contains cycles, i.e. is an infinite term. See also `acyclic_term/1` and section 2.17.<sup>18</sup>

**acyclic\_term(@Term)** [ISO]

True if *Term* does not contain cycles, i.e. can be processed recursively in finite time. See also `cyclic_term/1` and section 2.17.

## 4.7 Comparison and Unification of Terms

Although unification is mostly done implicitly while matching the head of a predicate, it is also provided by the predicate `=/2`.

**?Term1 = ?Term2** [ISO]

Unify *Term1* with *Term2*. True if the unification succeeds. For behaviour on cyclic terms see the Prolog flag `occurs_check`. It acts as if defined by the following fact:

```
=(Term, Term) .
```

**@Term1 \= @Term2** [ISO]

Equivalent to `\+Term1 = Term2`.

This predicate is logically sound if its arguments are sufficiently instantiated. In other cases, such as `?- X \= Y.`, the predicate fails although there are solutions. This is due to the incomplete nature of `\+/1`.

To make your programs work correctly also in situations where the arguments are not yet sufficiently instantiated, use `dif/2` instead.

### 4.7.1 Standard Order of Terms

Comparison and unification of arbitrary terms. Terms are ordered in the so-called “standard order”. This order is defined as follows:

1. *Variables* < *Numbers* < *Strings* < *Atoms* < *Compound Terms*
2. Variables are sorted by address.
3. *Numbers* are compared by value. Mixed integer/float are compared as floats. If the comparison is equal, the float is considered the smaller value. If the Prolog flag `iso` is defined, all floating point numbers precede all integers.

<sup>18</sup>The predicates `cyclic_term/1` and `acyclic_term/1` are compatible with SICStus Prolog. Some Prolog systems supporting cyclic terms use `is_cyclic/1`.

4. *Strings* are compared alphabetically.
5. *Atoms* are compared alphabetically.
6. *Compound* terms are first checked on their arity, then on their functor name (alphabetically) and finally recursively on their arguments, leftmost argument first.

Although variables are ordered, there are some unexpected properties one should keep in mind when relying on variable ordering. This applies to the predicates below as to predicate such as `sort/2` as well as libraries that rely on ordering such as library `assoc` and library `ordsets`. Obviously, an established relation  $A @< B$  no longer holds if  $A$  is unified with e.g., a number. Also unifying  $A$  with  $B$  invalidates the relation because they become equivalent ( $==/2$ ) after unification.

As stated above, variables are sorted by address, which implies that they are sorted by ‘age’, where ‘older’ variables are ordered before ‘newer’ variables. If two variables are unified their ‘shared’ age is the age of oldest variable. This implies we can examine a list of sorted variables with ‘newer’ (fresh) variables without invalidating the order. Attaching an *attribute*, see section 8.1, turns an ‘old’ variable into a ‘new’ one as illustrated below. Note that the first always succeeds as the first argument of a term is always the oldest. This only applies for the *first* attribute, i.e., further manipulation of the attribute list does *not* change the ‘age’.

```
?- T = f(A,B) , A @< B.
T = f(A, B) .

?- T = f(A,B) , put_attr(A, name, value) , A @< B.
false.
```

The above implies you *can* use e.g., an `assoc` (from library `assoc`, implemented as an AVL tree) to maintain information about a set of variables. You must be careful about what you do with the attributes though. In many cases it is more robust to use attributes to register information about variables.

**@Term1 == @Term2** [ISO]

True if *Term1* is equivalent to *Term2*. A variable is only identical to a sharing variable.

**@Term1 \== @Term2** [ISO]

Equivalent to `\+Term1 == Term2`.

**@Term1 @< @Term2** [ISO]

True if *Term1* is before *Term2* in the standard order of terms.

**@Term1 @=< @Term2** [ISO]

True if both terms are equal ( $==/2$ ) or *Term1* is before *Term2* in the standard order of terms.

**@Term1 @> @Term2** [ISO]

True if *Term1* is after *Term2* in the standard order of terms.

**@Term1 @>= @Term2** [ISO]

True if both terms are equal ( $==/2$ ) or *Term1* is after *Term2* in the standard order of terms.

**compare(?Order, @Term1, @Term2)** [ISO]

Determine or test the *Order* between two terms in the standard order of terms. *Order* is one of `<`, `>` or `=`, with the obvious meaning.



### 4.7.2 Special unification and comparison predicates

This section describes special purpose variations on Prolog unification. The predicate `unify_with_occurs_check/2` provides sound unification and is part of the ISO standard. The predicate `subsumes_term/2` defines ‘one-sided unification’ and is part of the ISO proposal established in Edinburgh (2010). Finally, `unifiable/3` is a ‘what-if’ version of unification that is often used as a building block in constraint reasoners.

**`unify_with_occurs_check(+Term1, +Term2)`**

[ISO]

As `=/2`, but using *sound unification*. That is, a variable only unifies to a term if this term does not contain the variable itself. To illustrate this, consider the two queries below.

```
1 ?- A = f(A) .
A = f(A) .
2 ?- unify_with_occurs_check(A, f(A)) .
false.
```

The first statement creates a *cyclic term*, also called a *rational tree*. The second executes logically sound unification and thus fails. Note that the behaviour of unification through `=/2` as well as implicit unification in the head can be changed using the Prolog flag `occurs_check`.

The SWI-Prolog implementation of `unify_with_occurs_check/2` is cycle-safe and only guards against *creating* cycles, not against cycles that may already be present in one of the arguments. This is illustrated in the following two queries:

```
?- X = f(X), Y = X, unify_with_occurs_check(X, Y) .
X = Y, Y = f(Y) .
?- X = f(X), Y = f(Y), unify_with_occurs_check(X, Y) .
X = Y, Y = f(Y) .
```

Some other Prolog systems interpret `unify_with_occurs_check/2` as if defined by the clause below, causing failure on the above two queries. Direct use of `acyclic_term/1` is portable and more appropriate for such applications.

```
unify_with_occurs_check(X, X) :- acyclic_term(X) .
```

**`+Term1 @= +Term2`**

True if *Term1* is a *variant* of (or *structurally equivalent* to) *Term2*. Testing for a variant is weaker than equivalence (`==/2`), but stronger than unification (`=/2`). Two terms *A* and *B* are variants iff there exists a renaming of the variables in *A* that makes *A* equivalent (`==`) to *B* and vice versa.<sup>19</sup> Examples:

<sup>19</sup>Row 7 and 8 of this table may come as a surprise, but row 8 is satisfied by (left-to-right)  $A \rightarrow C, B \rightarrow A$  and (right-to-left)  $C \rightarrow A, A \rightarrow B$ . If the same variable appears in different locations in the left and right term, the variant relation can be broken by consistent binding of both terms. E.g., after binding the first argument in row 8 to a value, both terms are no longer variant.

```

1      a =@= A      false
2      A =@= B      true
3      x(A,A) =@= x(B,C) false
4      x(A,A) =@= x(B,B) true
5      x(A,A) =@= x(A,B) false
6      x(A,B) =@= x(C,D) true
7      x(A,B) =@= x(B,A) true
8      x(A,B) =@= x(C,A) true

```

A term is always a variant of a copy of itself. Term copying takes place in, e.g., `copy_term/2`, `findall/3` or proving a clause added with `asserta/1`. In the pure Prolog world (i.e., without attributed variables), `=@=/2` behaves as if defined below. With attributed variables, variant of the attributes is tested rather than trying to satisfy the constraints.

```

A =@= B :-
    copy_term(A, Ac),
    copy_term(B, Bc),
    numbertvars(Ac, 0, N),
    numbertvars(Bc, 0, N),
    Ac == Bc.

```

The SWI-Prolog implementation is cycle-safe and can deal with variables that are shared between the left and right argument. Its performance is comparable to `==/2`, both on success and (early) failure.<sup>20</sup>

This predicate is known by the name `variant/2` in some other Prolog systems. Be aware of possible differences in semantics if the arguments contain attributed variables or share variables.<sup>21</sup>

**`+Term1 \=@= +Term2`**

Equivalent to `\+Term1 =@= Term2'`. See `=@=/2` for details.

**`subsumes_term(@Generic, @Specific)`**

[ISO]

True if *Generic* can be made equivalent to *Specific* by only binding variables in *Generic*. The current implementation performs the unification and ensures that the variable set of *Specific* is not changed by the unification. On success, the bindings are undone.<sup>22</sup> This predicate respects constraints.

**`term_subsumer(+Special1, +Special2, -General)`**

*General* is the most specific term that is a generalisation of *Special1* and *Special2*. The implementation can handle cyclic terms.

**`unifiable(@X, @Y, -Unifier)`**

If *X* and *Y* can unify, unify *Unifier* with a list of *Var = Value*, representing the bindings required

<sup>20</sup>The current implementation is contributed by Kuniaki Mukai.

<sup>21</sup>In many systems `variant` is implemented using two calls to `subsumes_term/2`.

<sup>22</sup>This predicate is often named `subsumes_chk/2` in older Prolog dialects. The current name was established in the ISO WG17 meeting in Edinburgh (2010). The `chk` postfix was considered to refer to determinism as in e.g., `memberchk/2`.

to make  $X$  and  $Y$  equivalent.<sup>23</sup> This predicate can handle cyclic terms. Attributed variables are handled as normal variables. Associated hooks are *not* executed.

`?=(Term1, Term2)`

Succeeds if the syntactic equality of *Term1* and *Term2* can be decided safely, i.e. if the result of `Term1 == Term2` will not change due to further instantiation of either term. It behaves as if defined by `?=(X, Y) :- \+ unifiable(X, Y, [_|_])`.

## 4.8 Control Predicates

The predicates of this section implement control structures. Normally the constructs in this section, except for `repeat/0`, are translated by the compiler. Please note that complex goals passed as arguments to meta-predicates such as `findall/3` below cause the goal to be compiled to a temporary location before execution. It is faster to define a sub-predicate (i.e. `one_character_atoms/1` in the example below) and make a call to this simple predicate.

```
one_character_atoms(As) :-
    findall(A, (current_atom(A), atom_length(A, 1)), As).
```

**fail** [ISO]

Always fail. The predicate `fail/0` is translated into a single virtual machine instruction.

**false** [ISO]

Same as `fail`, but the name has a more declarative connotation.

**true** [ISO]

Always succeed. The predicate `true/0` is translated into a single virtual machine instruction.

**repeat** [ISO]

Always succeed, provide an infinite number of choice points.

**!** [ISO]

Cut. Discard all choice points created since entering the predicate in which the cut appears. In other words, *commit* to the clause in which the cut appears *and* discard choice points that have been created by goals to the left of the cut in the current clause. Meta calling is opaque to the cut. This implies that cuts that appear in a term that is subject to meta-calling (`call/1`) only affect choice points created by the meta-called term. The following control structures are transparent to the cut: `;/2`, `->/2` and `*->/2`. Cuts appearing in the *condition* part of `->/2` and `*->/2` are opaque to the cut. The table below explains the scope of the cut with examples. *Prunes* here means “prunes  $X$  choice point created by  $X$ ”.

|  |                                    |
|--|------------------------------------|
| <code>t0 :- (a, !, b).</code>              | <code>% prunes a/0 and t0/0</code> |
| <code>t1 :- (a, !, fail ; b).</code>       | <code>% prunes a/0 and t1/0</code> |
| <code>t2 :- (a -&gt; b, ! ; c).</code>     | <code>% prunes b/0 and t2/0</code> |
| <code>t3 :- call((a, !, fail ; b)).</code> | <code>% prunes a/0</code>          |
| <code>t4 :- \+(a, !, fail).</code>         | <code>% prunes a/0</code>          |

<sup>23</sup>This predicate was introduced for the implementation of `dif/2` and `when/2` after discussion with Tom Schrijvers and Bart Demoen. None of us is really happy with the name and therefore suggestions for a new name are welcome.

`:Goal1 , :Goal2`

[ISO]

Conjunction. True if both ‘Goal1’ and ‘Goal2’ can be proved. It is defined as follows (this definition does not lead to a loop as the second comma is handled by the compiler):

```
Goal1, Goal2 :- Goal1, Goal2.
```

`:Goal1 ; :Goal2`

[ISO]

The ‘or’ predicate is defined as:

```
Goal1 ; _Goal2 :- Goal1.
_Goal1 ; Goal2 :- Goal2.
```

`:Goal1 | :Goal2`

Equivalent to `; /2`. Retained for compatibility only. New code should use `; /2`.

`:Condition -> :Action`

[ISO]

If-then and If-Then-Else. The `->/2` construct commits to the choices made at its left-hand side, destroying choice points created inside the clause (by `; /2`), or by goals called by this clause. Unlike `!/0`, the choice point of the predicate as a whole (due to multiple clauses) is **not** destroyed. The combination `; /2` and `->/2` acts as if defined as:

```
If -> Then; _Else :- If, !, Then.
If -> _Then; Else :- !, Else.
If -> Then :- If, !, Then.
```

Please note that `(If -> Then)` acts as `(If -> Then ; fail)`, making the construct *fail* if the condition fails. This unusual semantics is part of the ISO and all de-facto Prolog standards.

Please note that `(if->then;else)` is read as `((if->then);else)` and that the *combined* semantics of this syntactic construct as defined above is *different* from the simple nesting of the two individual constructs, i.e., the semantics of `->/2` *changes* when embedded in `; /2`. See also `once/1`.

`:Condition *-> :Action ; :Else`

This construct implements the so-called ‘soft-cut’. The control is defined as follows: If *Condition* succeeds at least once, the semantics is the same as `(call(Condition), Action)`.<sup>24</sup> If *Condition* does not succeed, the semantics is that of `(\+ Condition, Else)`. In other words, if *Condition* succeeds at least once, simply behave as the conjunction of `call(Condition)` and *Action*, otherwise execute *Else*. The construct is known under the name `if/3` in some other Prolog implementations.

The construct `A *-> B`, i.e., without an *Else* branch, the semantics is the same as `(call(A), B)`.

This construct is rarely used. An example use case is the implementation of `OPTIONAL` in SPARQL. The optional construct should preserve all solutions if the argument succeeds at least once but still succeed otherwise. This is implemented as below.

<sup>24</sup>Note that the *Condition* is wrapped in `call/1`, limiting the scope of the cut `!/0`

```
optional(Goal) :-
    (   Goal
    *-> true
    ;   true
    ).
```

Now calling e.g., `optional(member(X, [a,b]))` has the solutions  $X = a$  and  $X = b$ , while `optional(member(X, []))` succeeds without binding  $X$ .

**`\+ :Goal`** [ISO]  
 True if ‘Goal’ cannot be proven (mnemonic: + refers to *provable* and the backslash (\) is normally used to indicate negation in Prolog).

## 4.9 Meta-Call Predicates

Meta-call predicates are used to call terms constructed at run time. The basic meta-call mechanism offered by SWI-Prolog is to use variables as a subclause (which should of course be bound to a valid goal at runtime). A meta-call is slower than a normal call as it involves actually searching the database at runtime for the predicate, while for normal calls this search is done at compile time.

**`call(:Goal)`** [ISO]  
 Invoke *Goal* as a goal. Note that clauses may have variables as subclauses, which is identical to `call/1`.

**`call(:Goal, +ExtraArg1, ...)`** [ISO]  
 Append *ExtraArg1*, *ExtraArg2*, ... to the argument list of *Goal* and call the result. For example, `call(plus(1), 2, X)` will call `plus(1, 2, X)`, binding  $X$  to 3.

The `call/[2..]` construct is handled by the compiler. The predicates `call/[2-8]` are defined as real (meta-)predicates and are available to inspection through `current_predicate/1`, `predicate_property/2`, etc.<sup>25</sup> Higher arities are handled by the compiler and runtime system, but the predicates are not accessible for inspection.<sup>26</sup>

**`apply(:Goal, +List)`**  
 Append the members of *List* to the arguments of *Goal* and call the resulting term. For example: `apply(plus(1), [2, X])` calls `plus(1, 2, X)`. New code should use `call/[2..]` if the length of *List* is fixed.

**`not(:Goal)`**  
 True if *Goal* cannot be proven. Retained for compatibility only. New code should use `\+ /1`.

**`once(:Goal)`** [ISO]  
 Make a possibly *nondet* goal *semidet*, i.e., succeed at most once. Defined as:

<sup>25</sup> Arities 2..8 are demanded by ISO/IEC 13211-1:1995/Cor.2:2012.

<sup>26</sup> Future versions of the reflective predicate may fake the presence of `call/9`... Full logical behaviour, generating all these pseudo predicates, is probably undesirable and will become impossible if *max\_arity* is removed.

```
once(Goal) :-
    call(Goal), !.
```

`once/1` can in many cases be replaced with `->/2`. The only difference is how the cut behaves (see `!/0`). The following two clauses below are identical. Be careful about the interaction with `;/2`. The `apply_macros` library defines an inline expansion of `once/1`, mapping it to `(Goal->true;fail)`. Using the full if-then-else constructs prevents its semantics from being changed when embedded in a `;/2` disjunction.

```
1) a :- once((b, c)), d.
2) a :- b, c -> d.
```

### **ignore(:Goal)**

Calls *Goal* as `once/1`, but succeeds, regardless of whether *Goal* succeeded or not. Defined as:

```
ignore(Goal) :-
    Goal, !.
ignore(_).
```

### **call\_with\_depth\_limit(:Goal, +Limit, -Result)**

If *Goal* can be proven without recursion deeper than *Limit* levels, `call_with_depth_limit/3` succeeds, binding *Result* to the deepest recursion level used during the proof. Otherwise, *Result* is unified with `depth_limit_exceeded` if the limit was exceeded during the proof, or the entire predicate fails if *Goal* fails without exceeding *Limit*.

The depth limit is guarded by the internal machinery. This may differ from the depth computed based on a theoretical model. For example, `true/0` is translated into an inline virtual machine instruction. Also, `repeat/0` is not implemented as below, but as a non-deterministic foreign predicate.

```
repeat.
repeat :-
    repeat.
```

As a result, `call_with_depth_limit/3` may still loop infinitely on programs that should theoretically finish in finite time. This problem can be cured by using Prolog equivalents to such built-in predicates.

This predicate may be used for theorem provers to realise techniques like *iterative deepening*. See also `call_with_inference_limit/3`. It was implemented after discussion with Steve Moyle [smoyle@ermine.ox.ac.uk](mailto:smoyle@ermine.ox.ac.uk).

**call\_with\_inference\_limit**(:Goal, +Limit, -Result)

Equivalent to `call(Goal)`, but limits the number of inferences for each solution of *Goal*.<sup>27</sup>. Execution may terminate as follows:

- If *Goal* does *not* terminate before the inference limit is exceeded, *Goal* is aborted by injecting the exception `inference_limit_exceeded` into its execution. After termination of *Goal*, *Result* is unified with the atom `inference_limit_exceeded`. Otherwise,
- If *Goal* fails, `call_with_inference_limit/3` fails.
- If *Goal* succeeds without a choice point, *Result* is unified with `!`.
- If *Goal* succeeds with a choice point, *Result* is unified with `true`.
- If *Goal* throws an exception, `call_with_inference_limit/3` re-throws the exception.

An inference is defined as a call or redo on a predicate. Please note that some primitive built-in predicates are compiled to virtual machine instructions for which inferences are not counted. The execution of predicates defined in other languages (e.g., C, C++) count as a single inference. This includes potentially expensive built-in predicates such as `sort/2`.

Calls to this predicate may be nested. An inner call that sets the limit below the current is honoured. An inner call that would terminate after the current limit does not change the effective limit. See also `call_with_depth_limit/3` and `call_with_time_limit/2`.

**setup\_call\_cleanup**(:Setup, :Goal, :Cleanup)

Calls `(once(Setup), Goal)`. If *Setup* succeeds, *Cleanup* will be called exactly once after *Goal* is finished: either on failure, deterministic success, commit, or an exception. The execution of *Setup* is protected from asynchronous interrupts like `call_with_time_limit/2` (package `clib`) or `thread_signal/2`. In most uses, *Setup* will perform temporary side-effects required by *Goal* that are finally undone by *Cleanup*.

Success or failure of *Cleanup* is ignored, and choice points it created are destroyed (as `once/1`). If *Cleanup* throws an exception, this is executed as normal while it was not triggered as the result of an exception the exception is propagated as normal. If *Cleanup* was triggered by an exception the rules are described in section 4.11.1

Typically, this predicate is used to cleanup permanent data storage required to execute *Goal*, close file descriptors, etc. The example below provides a non-deterministic search for a term in a file, closing the stream as needed.

```
term_in_file(Term, File) :-
    setup_call_cleanup(open(File, read, In),
                      term_in_stream(Term, In),
                      close(In) ).

term_in_stream(Term, In) :-
    repeat,
    read(In, T),
    ( T == end_of_file
```

<sup>27</sup>This predicate was realised after discussion with Ulrich Neumerkel and Markus Triska.

```

->  !, fail
;   T = Term
).

```

Note that it is impossible to implement this predicate in Prolog. The closest approximation would be to read all terms into a list, close the file and call `member/2`. Without `setup_call_cleanup/3` there is no way to gain control if the choice point left by `repeat/0` is removed by a cut or an exception.

`setup_call_cleanup/3` can also be used to test determinism of a goal, providing a portable alternative to `deterministic/1`:

```

?- setup_call_cleanup(true, (X=1;X=2), Det=yes) .

X = 1 ;

X = 2,
Det = yes ;

```

This predicate is under consideration for inclusion into the ISO standard. For compatibility with other Prolog implementations see `call_cleanup/2`.

#### **setup\_call\_catcher\_cleanup(*:Setup*, *:Goal*, *+Catcher*, *:Cleanup*)**

Similar to `setup_call_cleanup(Setup, Goal, Cleanup)` with additional information on the reason for calling *Cleanup*. Prior to calling *Cleanup*, *Catcher* unifies with the termination code (see below). If this unification fails, *Cleanup* is *not* called.

#### **exit**

*Goal* succeeded without leaving any choice points.

#### **fail**

*Goal* failed.

#### **!**

*Goal* succeeded with choice points and these are now discarded by the execution of a cut (or other pruning of the search tree such as if-then-else).

#### **exception(*Exception*)**

*Goal* raised the given *Exception*.

#### **external\_exception(*Exception*)**

*Goal* succeeded with choice points and these are now discarded due to an exception. For example:

```

?- setup_call_catcher_cleanup(true, (X=1;X=2),
                               Catcher, writeln(Catcher)),
   throw(ball) .
external_exception(ball)
ERROR: Unhandled exception: Unknown message: ball

```



**call\_cleanup(:Goal, :Cleanup)**

Same as `setup_call_cleanup(true, Goal, Cleanup)`. This is provided for compatibility with a number of other Prolog implementations only. Do not use `call_cleanup/2` if you perform side-effects prior to calling that will be undone by *Cleanup*. Instead, use `setup_call_cleanup/3` with an appropriate first argument to perform those side-effects.

**call\_cleanup(:Goal, +Catcher, :Cleanup)**

Same as `setup_call_catcher_cleanup(true, Goal, Catcher, Cleanup)`. The same warning as for `call_cleanup/2` applies.

## 4.10 Delimited continuations

The predicates `reset/3` and `shift/1` implement *delimited continuations* for Prolog. Delimited continuation for Prolog is described in [Schrijvers *et al.*, 2013]. The mechanism allows for proper *coroutines*, two or more routines whose execution is interleaved, while they exchange data. Note that coroutines in this sense differ from coroutines realised using attributed variables as described in chapter 8.

The suspension mechanism provided by delimited continuations is suitable for the implementation of *tabling* [Desouter *et al.*, 2015], see library `tabling`.

**reset(:Goal, ?Ball, -Continuation)**

Call *Goal*. If *Goal* calls `shift/1` and the argument of `shift/1` can be unified with *Ball*,<sup>28</sup> `shift/1` causes `reset/3` to return, unifying *Continuation* with a goal that represents the *continuation* after `shift/1`. In other words, meta-calling *Continuation* completes the execution where `shift` left it. If *Goal* does not call `shift/1`, *Continuation* are unified with the integer 0 (zero).<sup>29</sup>

**shift(+Ball)**

Abandon the execution of the current goal, returning control to just *after* the matching `reset/3` call. This is similar to `throw/1` except that (1) nothing is ‘undone’ and (2) the 3th argument of `reset/3` is unified with the *continuation*, which allows the code calling `reset/3` to *resume* the current goal.

## 4.11 Exception handling

The predicates `catch/3` and `throw/1` provide ISO compliant raising and catching of exceptions.

**catch(:Goal, +Catcher, :Recover)**

[ISO]

Behaves as `call/1` if no exception is raised when executing *Goal*. If an exception is raised using `throw/1` while *Goal* executes, and the *Goal* is the innermost goal for which *Catcher* unifies with the argument of `throw/1`, all choice points generated by *Goal* are cut, the system backtracks to the start of `catch/3` while preserving the thrown exception term, and *Recover* is called as in `call/1`.

<sup>28</sup>The argument order described in [Schrijvers *et al.*, 2013] is `reset(Goal, Continuation, Ball)`. We swapped the argument order for compatibility with `catch/3`

<sup>29</sup>Note that older versions also unify *Ball* with 0. Testing whether or not `shift` happened on *Ball* however is *always* ambiguous.

The overhead of calling a goal through `catch/3` is comparable to `call/1`. Recovery from an exception is much slower, especially if the exception term is large due to the copying thereof or is decorated with a stack trace using, e.g., the library `prolog_stack` based on the `prolog_exception.hook/4` hook predicate to rewrite exceptions.

### **throw(+Exception)**

[ISO]

Raise an exception. The system looks for the innermost `catch/3` ancestor for which *Exception* unifies with the *Catcher* argument of the `catch/3` call. See `catch/3` for details.

ISO demands that `throw/1` make a copy of *Exception*, walk up the stack to a `catch/3` call, backtrack and try to unify the copy of *Exception* with *Catcher*. SWI-Prolog delays backtracking until it actually finds a matching `catch/3` goal. The advantage is that we can start the debugger at the first possible location while preserving the entire exception context if there is no matching `catch/3` goal. This approach can lead to different behaviour if *Goal* and *Catcher* of `catch/3` call shared variables. We assume this to be highly unlikely and could not think of a scenario where this is useful.<sup>30</sup>

In addition to explicit calls to `throw/1`, many built-in predicates throw exceptions directly from C. If the *Exception* term cannot be copied due to lack of stack space, the following actions are tried in order:

1. If the exception is of the form `error(Format, ImplementationDefined)`, try to raise the exception without the *ImplementationDefined* part.
2. Try to raise `error(resource_error(stack), global)`.
3. Abort (see `abort/0`).

If an exception is raised in a call-back from C (see chapter 12) and not caught in the same call-back, `PL_next_solution()` fails and the exception context can be retrieved using `PL_exception()`.

### **catch\_with\_backtrace(:Goal, +Catcher, :Recover)**

As `catch/3`, but if library `prolog_stack` is loaded and an exception of the shape `error(Format, Context)` is raised *Context* is extended with a backtrace. To catch an error and print its message including a backtrace, use the following template:

```
:- use_module(library(prolog_stack)).

...
catch_with_backtrace(Goal, Error,
                    print_message(error, Error)),
...
```

This is good practice for a *catch-all* wrapper around an application. See also `main/0` from library `main`.

<sup>30</sup>I'd like to acknowledge Bart Demoen for his clarifications on these matters.

### 4.11.1 Urgency of exceptions

Under some conditions an exception may be raised as a result of handling another exception. Below are some of the scenarios:

- The predicate `setup_call_cleanup/3` calls the cleanup handler as a result of an exception and the cleanup handler raises an exception itself. In this case the most *urgent* exception is propagated into the environment.
- Raising an exception fails due to lack of resources, e.g., lack of stack space to store the exception. In this case a resource exception is raised. If that too fails the system tries to raise a resource exception without (stack) context. If that fails it will raise the exception `'$aborted'`, also raised by `abort/0`. As no stack space is required for processing this atomic exception, this should always succeed.
- Certain *callback* operations raise an exception while processing another exception or a previous callback already raised an exception before there was an opportunity to process the exception. The most notable *callback* subject to this issue are `prolog_event_hook/1` (supporting e.g., the graphical debugger), `prolog_exception_hook/4` (rewriting exceptions, e.g., by adding context) and `print_message/2` when called from the core facilities such as the internal debugger. As with `setup_call_cleanup/3`, the most *urgent* exception is preserved.

If the most urgent exceptions needs to be preserved, the following exception ordering is respected, preserving the topmost matching error.

1. `'$aborted'` (`abort/0`)
2. `time_limit_exceeded(call_with_time_limit/2)`
3. `error(resource_error(Resource), Context)`
4. `error(Formal, Context)`
5. All other exceptions

**Note** The above resolution is not described in the ISO standard. This is not needed either because ISO does not specify `setup_call_cleanup/3` and does not deal with environment management issues such as (debugger) callbacks. Neither does it define `abort/0` or timeout handling. Notably `abort/0` and timeout are non-logical control structures. They are implemented on top of exceptions as they need to unwind the stack, destroy choice points and call cleanup handlers in the same way. However, the pending exception should not be replaced by another one before the intended handler is reached. The abort exception cannot be caught, something which is achieved by wrapping the *cleanup handler* of `catch/3` into `call_cleanup(Handler, abort)`.

### 4.11.2 Debugging and exceptions

Before the introduction of exceptions in SWI-Prolog a runtime error was handled by printing an error message, after which the predicate failed. If the Prolog flag `debug_on_error` was in effect (default), the tracer was switched on. The combination of the error message and trace information is generally sufficient to locate the error.

With exception handling, things are different. A programmer may wish to trap an exception using `catch/3` to avoid it reaching the user. If the exception is not handled by user code, the interactive top level will trap it to prevent termination.

If we do not take special precautions, the context information associated with an unexpected exception (i.e., a programming error) is lost. Therefore, if an exception is raised which is not caught using `catch/3` and the top level is running, the error will be printed, and the system will enter trace mode.

If the system is in a non-interactive call-back from foreign code and there is no `catch/3` active in the current context, it cannot determine whether or not the exception will be caught by the external routine calling Prolog. It will then base its behaviour on the Prolog flag `debug_on_error`:

- *current\_prolog\_flag(debug\_on\_error, false)*  
The exception does not trap the debugger and is returned to the foreign routine calling Prolog, where it can be accessed using `PL_exception()`. This is the default.
- *current\_prolog\_flag(debug\_on\_error, true)*  
If the exception is not caught by Prolog in the current context, it will trap the tracer to help analyse the context of the error.

While looking for the context in which an exception takes place, it is advised to switch on debug mode using the predicate `debug/0`. The hook `prolog_exception_hook/4` can be used to add more debugging facilities to exceptions. An example is the library `http/http_error`, generating a full stack trace on errors in the HTTP server library.

### 4.11.3 The exception term

Built-in predicates generate exceptions using a term `error(Formal, Context)`. The first argument is the ‘formal’ description of the error, specifying the class and generic defined context information. When applicable, the ISO error term definition is used. The second part describes some additional context to help the programmer while debugging. In its most generic form this is a term of the form `context(Name/Arity, Message)`, where *Name/Arity* describes the built-in predicate that raised the error, and *Message* provides an additional description of the error. Any part of this structure may be a variable if no information was present.

### 4.11.4 Printing messages

The predicate `print_message/2` is used to print a message term in a human-readable format. The other predicates from this section allow the user to refine and extend the message system. A common usage of `print_message/2` is to print error messages from exceptions. The code below prints errors encountered during the execution of *Goal*, without further propagating the exception and without starting the debugger.

```
...
catch(Goal, E,
      ( print_message(error, E),
        fail
      )),
...

```

Another common use is to define `message_hook/3` for printing messages that are normally *silent*, suppressing messages, redirecting messages or make something happen in addition to printing the message.

#### **print\_message(+Kind, +Term)**

The predicate `print_message/2` is used by the system and libraries to print messages. *Kind* describes the nature of the message, while *Term* is a Prolog term that describes the content. Printing messages through this indirection instead of using `format/3` to the stream `user_error` allows displaying the message appropriate to the application (terminal, logfile, graphics), acting on messages based on their content instead of a string (see `message_hook/3`) and creating language specific versions of the messages. See also section 4.11.4. The following message kinds are known:

##### **banner**

The system banner message. Banner messages can be suppressed by setting the Prolog flag `verbose` to `silent`.

##### **debug(Topic)**

Message from library(debug). See `debug/3`.

##### **error**

The message indicates an erroneous situation. This kind is used to print uncaught exceptions of type `error(Formal, Context)`. See section introduction (section 4.11.4).

##### **help**

User requested help message, for example after entering ‘h’ or ‘?’ to a prompt.

##### **information**

Information that is requested by the user. An example is `statistics/0`.

##### **informational**

Typically messages of events are progress that are considered useful to a developer. Such messages can be suppressed by setting the Prolog flag `verbose` to `silent`.

##### **silent**

Message that is normally not printed. Applications may define `message_hook/3` to act upon such messages.

##### **trace**

Messages from the (command line) tracer.

##### **warning**

The message indicates something dubious that is not considered fatal. For example, discontinuous predicates (see `discontinuous/1`).

The predicate `print_message/2` first translates the *Term* into a list of ‘message lines’ (see `print_message_lines/3` for details). Next, it calls the hook `message_hook/3` to allow the user to intercept the message. If `message_hook/3` fails it prints the message unless *Kind* is `silent`.

The `print_message/2` predicate and its rules are in the file `<plhome>/boot/messages.pl`, which may be inspected for more information on the error messages and related error terms. If you need to write messages from your own predicates, it is recommended to reuse the existing message terms if applicable. If no existing

message term is applicable, invent a fairly unique term that represents the event and define a rule for the multifile predicate `prolog:message//1`. See section 4.11.4 for a deeper discussion and examples.

See also `message_to_string/2`.

### **print\_message\_lines(+Stream, +Prefix, +Lines)**

Print a message (see `print_message/2`) that has been translated to a list of message elements. The elements of this list are:

$\langle \text{Format} \rangle$ - $\langle \text{Args} \rangle$

Where *Format* is an atom and *Args* is a list of format arguments. Handed to `format/3`.

### **flush**

If this appears as the last element, *Stream* is flushed (see `flush_output/1`) and no final newline is generated. This is combined with a subsequent message that starts with `at_same_line` to complete the line.

### **at\_same\_line**

If this appears as first element, no prefix is printed for the first line and the line position is not forced to 0 (see `format/1`, `~N`).

### **ansi(+Attributes, +Format, +Args)**

This message may be intercepted by means of the hook `prolog:message_line_element/2`. The library `ansi_term` implements this hook to achieve coloured output. If it is not intercepted it invokes `format(Stream, Format, Args)`.

### **nl**

A new line is started. If the message is not complete, *Prefix* is printed before the remainder of the message.

### **begin(Kind, Var)**

### **end(Var)**

The entire message is headed by `begin(Kind, Var)` and ended by `end(Var)`. This feature is used by, e.g., library `ansi_term` to colour entire messages.

$\langle \text{Format} \rangle$

Handed to `format/3` as `format(Stream, Format, [])`. Deprecated because it is ambiguous if *Format* collides with one of the atomic commands.

See also `print_message/2` and `message_hook/3`.

### **message\_hook(+Term, +Kind, +Lines)**

Hook predicate that may be defined in the module `user` to intercept messages from `print_message/2`. *Term* and *Kind* are the same as passed to `print_message/2`. *Lines* is a list of format statements as described with `print_message_lines/3`. See also `message_to_string/2`.

This predicate must be defined dynamic and multifile to allow other modules defining clauses for it too.

### **thread\_message\_hook(+Term, +Kind, +Lines)**

As `message_hook/3`, but this predicate is local to the calling thread (see

`thread_local/1`). This hook is called *before* `message_hook/3`. The ‘pre-hook’ is indented to catch messages they may be produced by calling some goal without affecting other threads.

#### **message\_property(+Kind, ?Property)**

This hook can be used to define additional message kinds and the way they are displayed. The following properties are defined:

##### **color(-Attributes)**

Print message using ANSI terminal attributes. See `ansi_format/3` for details. Here is an example, printing help messages in blue:

```
:- multifile user:message_property/2.

user:message_property(help, color([fg(blue)])) .
```

##### **prefix(-Prefix)**

Prefix printed before each line. This argument is handed to `format/3`. The default is ‘~N’. For example, messages of kind `warning` use ‘~NWarning: ’.

##### **location\_prefix(+Location, -FirstPrefix, -ContinuePrefix)**

Used for printing messages that are related to a source location. Currently, *Location* is a term *File:Line*. *FirstPrefix* is the prefix for the first line and *-ContinuePrefix* is the prefix for continuation lines. For example, the default for errors is

```
location_prefix(File:Line,
                '~NERROR: ~w:~d:'-[File,Line], '~N\t')).
```

##### **stream(-Stream)**

Stream to which to print the message. Default is `user_error`.

##### **wait(-Seconds)**

Amount of time to wait after printing the message. Default is not to wait.

#### **prolog:message\_line\_element(+Stream, +Term)**

This hook is called to print the individual elements of a message from `print_message_lines/3`. This hook is used by e.g., library `ansi_term` to colour messages on ANSI-capable terminals.

#### **prolog:message\_prefix\_hook(+ContextTerm, -Prefix)**

This hook is called to add context to the message prefix. *ContextTerm* is a member of the list provided by the `message_context`. *Prefix* must be unified with an atomic value that is added to the message prefix.

#### **message\_to\_string(+Term, -String)**

Translates a message term into a string object (see section 5.2).

#### **version**

Write the SWI-Prolog banner message as well as additional messages registered using `version/1`. This is the default *initialization goal* which can be modified using `-g`.

**version(+Message)**

Register additional messages to be printed by `version/0`. Each registered message is handed to the message translation DCG and can thus be defined using the hook `prolog:message//1`. If not defined, it is simply printed.

**Printing from libraries**

Libraries should *not* use `format/3` or other output predicates directly. Libraries that print informational output directly to the console are hard to use from code that depend on your textual output, such as a CGI script. The predicates in section 4.11.4 define the API for dealing with messages. The idea behind this is that a library that wants to provide information about its status, progress, events or problems calls `print_message/2`. The first argument is the *level*. The supported levels are described with `print_message/2`. Libraries typically use `informational` and `warning`, while libraries should use exceptions for errors (see `throw/1`, `type_error/2`, etc.).

The second argument is an arbitrary Prolog term that carries the information of the message, but *not* the precise text. The text is defined by the grammar rule `prolog:message//1`. This distinction is made to allow for translations and to allow hooks processing the information in a different way (e.g., to translate progress messages into a progress bar).

For example, suppose we have a library that must download data from the Internet (e.g., based on `http_open/3`). The library wants to print the progress after each downloaded file. The code below is a good skeleton:

```
download_urls(List) :-
    length(List, Total),
    forall(nth1(I, List, URL),
        (
            download_url(URL),
            print_message(informational,
                download_url(URL, I, Total)))
    ).
```

The programmer can now specify the default textual output using the rule below. Note that this rule may be in the same file or anywhere else. Notably, the application may come with several rule sets for different languages. This, and the user-hook example below are the reason to represent the message as a compound term rather than a string. This is similar to using message numbers in non-symbolic languages. The documentation of `print_message_lines/3` describes the elements that may appear in the output list.

```
:- multifile
    prolog:message//1.

prolog:message(download_url(URL, I, Total)) -->
    { Perc is round(I*100/Total) },
    [ 'Downloaded ~w; ~D from ~D (~d%)'-[URL, I, Total, Perc] ].
```

A *user* of the library may define rules for `message_hook/3`. The rule below acts on the message content. Other applications can act on the message level and, for example, popup a message box for warnings and errors.



```
:- multifile user:message_hook/3.

message_hook(download_url(URL, I, Total), _Kind, _Lines) :-
    <send this information to a GUI component>
```

In addition, using the command line option `-q`, the user can disable all *informational* messages.

## 4.12 Handling signals

As of version 3.1.0, SWI-Prolog is able to handle software interrupts (signals) in Prolog as well as in foreign (C) code (see section 12.4.14).

Signals are used to handle internal errors (execution of a non-existing CPU instruction, arithmetic domain errors, illegal memory access, resource overflow, etc.), as well as for dealing with asynchronous interprocess communication.

Signals are defined by the POSIX standard and part of all Unix machines. The MS-Windows Win32 provides a subset of the signal handling routines, lacking the vital functionality to raise a signal in another thread for achieving asynchronous interprocess (or interthread) communication (Unix `kill()` function).

### **on\_signal(+Signal, -Old, :New)**

Determines the reaction on *Signal*. *Old* is unified with the old behaviour, while the behaviour is switched to *New*. As with similar environment control predicates, the current value is retrieved using `on_signal(Signal, Current, Current)`.

The action description is an atom denoting the name of the predicate that will be called if *Signal* arrives. `on_signal/3` is a meta-predicate, which implies that `<Module>:<Name>` refers to `<Name>/1` in module `<Module>`. The handler is called with a single argument: the name of the signal as an atom. The Prolog names for signals are explained below.

Two predicate names have special meaning. `throw` implies Prolog will map the signal onto a Prolog exception as described in section 4.11. `default` resets the handler to the settings active before SWI-Prolog manipulated the handler.

Signals bound to a foreign function through `PL_signal()` are reported using the term `$foreign.function(Address)`.

After receiving a signal mapped to `throw`, the exception raised has the following structure:

```
error(signal(<SigName>, <SigNum>), <Context>)
```

The signal names are defined by the POSIX standard as symbols of the form `SIG<SIGNAME>`. The Prolog name for a signal is the lowercase version of `<SIGNAME>`. The predicate `current_signal/3` may be used to map between names and signals.

Initially, some signals are mapped to `throw`, while all other signals are `default`. The following signals throw an exception: `fpe`, `alarm`, `xcpu`, `xfsz` and `vtalarm`.

### **current\_signal(?Name, ?Id, ?Handler)**

Enumerate the currently defined signal handling. *Name* is the signal name, *Id* is the numerical identifier and *Handler* is the currently defined handler (see `on_signal/3`).

**prolog.alert\_signal(?Old, +New)**

Query or set the signal used to unblock blocking system calls on Unix systems and process pending Prolog signals. The default is SIGUSR2. See also `--sigalert`.

**4.12.1 Notes on signal handling**

Before deciding to deal with signals in your application, please consider the following:

- *Portability*

On MS-Windows, the signal interface is severely limited. Different Unix brands support different sets of signals, and the relation between signal name and number may vary. Currently, the system only supports signals numbered 1 to 32<sup>31</sup>. Installing a signal outside the limited set of supported signals in MS-Windows crashes the application.

- *Safety*

Immediately delivered signals (see below) are unsafe. This implies that foreign functions called from a handler cannot safely use the SWI-Prolog API and cannot use C `longjmp()`. Handlers defined as `throw` are unsafe. Handlers defined to call a predicate are safe. Note that the predicate can call `throw/1`, but the delivery is delayed until Prolog is in a safe state.

The C-interface described in section 12.4.14 provides the option `PL_SIGSYNC` to select either safe synchronous or unsafe asynchronous delivery.

- *Time of delivery*

Using `throw` or a foreign handler, signals are delivered immediately (as defined by the OS). When using a Prolog predicate, delivery is delayed to a safe moment. Blocking system calls or foreign loops may cause long delays. Foreign code can improve on that by calling `PL_handle_signals()`.

Signals are blocked when the garbage collector is active.

**4.13 DCG Grammar rules**

Grammar rules form a comfortable interface to *difference lists*. They are designed both to support writing parsers that build a parse tree from a list of characters or tokens and for generating a flat list from a term.

Grammar rules look like ordinary clauses using `-->/2` for separating the head and body rather than `:-/2`. Expanding grammar rules is done by `expand_term/2`, which adds two additional arguments to each term for representing the difference list.

The body of a grammar rule can contain three types of terms. A callable term is interpreted as a reference to a grammar rule. Code between `{...}` is interpreted as plain Prolog code, and finally, a list is interpreted as a sequence of *literals*. The Prolog control-constructs `(\+/1, ->/2, ;//2, ,/2` and `!/0`) can be used in grammar rules.

We illustrate the behaviour by defining a rule set for parsing an integer.

```
integer(I) -->
    digit(D0),
```

<sup>31</sup>TBD: the system should support the Unix realtime signals

```

        digits(D),
        { number_codes(I, [D0|D])
        }.

digits([D|T]) -->
    digit(D), !,
    digits(T).
digits([]) -->
    [].

digit(D) -->
    [D],
    { code_type(D, digit)
    }.

```

Grammar rule sets are called using the built-in predicates `phrase/2` and `phrase/3`:

**phrase(*DCGBody*, ?*List*)**

Equivalent to `phrase(DCGBody, InputList, [])`.

**phrase(*DCGBody*, ?*List*, ?*Rest*)**

True when *DCGBody* applies to the difference *List/Rest*. Although *DCGBody* is typically a *callable* term that denotes a grammar rule, it can be any term that is valid as the body of a DCG rule.

The example below calls the rule set `integer//1` defined in section 4.13 and available from `library(dcg/basics)`, binding *Rest* to the remainder of the input after matching the integer.

```

?- [library(dcg/basics)].
?- atom_codes('42 times', Codes),
   phrase(integer(X), Codes, Rest).
X = 42
Rest = [32, 116, 105, 109, 101, 115]

```

The next example exploits a complete body. Given the following definition of `digit_weight//1`, we can pose the query below.

```

digit_weight(W) -->
    [D],
    { code_type(D, digit(W)) }.

```

```

?- atom_codes('Version 3.4', Codes),
   phrase("Version ",
         digit_weight(Major), ".", digit_weight(Minor)),
   Codes).

```

```
Major = 3,
Minor = 4.
```

The SWI-Prolog implementation of `phrase/3` verifies that the *List* and *Rest* arguments are unbound, bound to the empty list or a list *cons cell*. Other values raise a type error.<sup>32</sup> The predicate `call_dcg/3` is provided to use grammar rules with terms that are not lists.

Note that the syntax for lists of codes changed in SWI-Prolog version 7 (see section 5.2). If a DCG body is translated, both `"text"` and ``text`` is a valid code-list literal in version 7. A version 7 string (`"text"`) is **not** acceptable for the second and third arguments of `phrase/3`. This is typically not a problem for applications as the input of a DCG rarely appears in the source code. For testing in the toplevel, one must use double quoted text in versions prior to 7 and back quoted text in version 7 or later.

See also `portray_text/1`, which can be used to print lists of character codes as a string to the top level and debugger to facilitate debugging DCGs that process character codes. The library `apply_macros` compiles `phrase/3` if the argument is sufficiently instantiated, eliminating the runtime overhead of translating *DCGBody* and meta-calling.

#### **call\_dcg**(:DCGBody, ?State0, ?State)

As `phrase/3`, but without type checking *State0* and *State*. This allows for using DCG rules for threading an arbitrary state variable. This predicate was introduced after type checking was added to `phrase/3`.<sup>33</sup>

A portable solution for threading state through a DCG can be implemented by wrapping the state in a list and use the DCG semicontext facility. Subsequently, the following predicates may be used to access and modify the state:<sup>34</sup>

```
state(S), [S] --> [S].
state(S0, S), [S] --> [S0].
```

As stated above, grammar rules are a general interface to difference lists. To illustrate, we show a DCG-based implementation of `reverse/2`:

```
reverse(List, Reversed) :-
    phrase(reverse(List), Reversed).

reverse([]) --> [].
reverse([H|T]) --> reverse(T), [H].
```

<sup>32</sup>The ISO standard allows for both raising a type error and accepting any term as input and output. Note the tail of the list is not checked for performance reasons.

<sup>33</sup>After discussion with Samer Abdallah.

<sup>34</sup>This solution was proposed by Markus Triska.

## 4.14 Database

SWI-Prolog offers several ways to store data in globally accessible memory, i.e., outside the Prolog *stacks*. Data stored this way notably does not change on *backtracking*. Typically it is a bad idea to use any of the predicates in this section for realising global variables that can be assigned to. Typically, first consider representing data processed by your program as terms passed around as predicate arguments. If you need to reason over multiple solutions to a goal, consider `findall/3`, `aggregate/3` and related predicates.

Nevertheless, there are scenarios where storing data outside the Prolog stacks is a good option. Below are the main options for storing data:

**Using dynamic predicates** Dynamic predicates are predicates for which the list of clauses is modified at runtime using `asserta/1`, `assertz/1`, `retract/1` or `retractall/1`. Following the ISO standard, predicates that are modified this way need to be declared using the `dynamic/1` *directive*. These facilities are defined by the ISO standard and widely supported. The mechanism is often considered slow in the literature. Performance depends on the Prolog implementation. In SWI-Prolog, querying dynamic predicates has the same performance as static ones. The manipulation predicates are fast. Using `retract/1` or `retractall/1` on a predicate registers the predicate as ‘dirty’. Dirty predicates are cleaned by `garbage_collect_clauses/0`, which is normally automatically invoked. Some workloads may result in significant performance reduction due to skipping retracted clauses and/or clause garbage collection.

Dynamic predicates can be wrapped using library `persistence` to maintain a backup of the data on disk. Dynamic predicates come in two flavours, *shared* between threads and *local* to each thread. The latter version is created using the directive `thread_local/1`.

**The recorded database** The ‘recorded database’ registers a list of terms with a *key*, an atom or compound term. The list is managed using `recorda/3`, `recordz/3` and `erase/1`. It is queried using `recorded/3`. The recorded database is not part of the ISO standard but fairly widely supported, notably in implementations building on the ‘Edinburgh tradition’. There are few reasons to use this database in SWI-Prolog due to the good performance of dynamic predicates. Advantages are (1) the handle provides a direct reference to a term, (2) cyclic terms can be stored and (3) attributes (section 8.1) are preserved. Disadvantages are (1) the terms in a list associated with a key are not indexed, (2) the poorly specified *immediate update semantics* (see section 4.14.5) applies to the recorded database and (3) reduced portability.

**The `flag/3` predicate** The predicate `flag/3` associates one simple value (number or atom) with a key (atom, integer or compound). It is an old SWI-Prolog specific predicate that should be considered deprecated, although there is no plan to remove it.

**Using global variables** The predicates `b_setval/2` and `nb_setval/2` associate a term living on the Prolog stack with a name, either backtrackable or non-backtrackable. Backtrackable and non-backtrackable assignment without using a global name can be realised with `setarg/3` and `nb_setarg/3`. Notably the latter are used to realise aggregation as e.g., `aggregate_all/3` performs.

**Tries** As of version 7.3.21, SWI-Prolog provides *tries* (prefix trees) to associate a term *variant* with a value. Tries have been introduced to support *tabling* and are described in section 4.14.4.

#### 4.14.1 Managing (dynamic) predicates

##### **abolish**(:*PredicateIndicator*)

[ISO]

Removes all clauses of a predicate with functor *Functor* and arity *Arity* from the database. All predicate attributes (dynamic, multifile, index, etc.) are reset to their defaults. Abolishing an imported predicate only removes the import link; the predicate will keep its old definition in its definition module.

According to the ISO standard, `abolish/1` can only be applied to dynamic procedures. This is odd, as for dealing with dynamic procedures there is already `retract/1` and `retractall/1`. The `abolish/1` predicate was introduced in DEC-10 Prolog precisely for dealing with static procedures. In SWI-Prolog, `abolish/1` works on static procedures, unless the Prolog flag `iso` is set to `true`.

It is advised to use `retractall/1` for erasing all clauses of a dynamic predicate.

##### **abolish**(+*Name*, +*Arity*)

Same as `abolish(Name/Arity)`. The predicate `abolish/2` conforms to the Edinburgh standard, while `abolish/1` is ISO compliant.

##### **copy\_predicate\_clauses**(:*From*, :*To*)

Copy all clauses of predicate *From* to *To*. The predicate *To* must be dynamic or undefined. If *To* is undefined, it is created as a dynamic predicate holding a copy of the clauses of *From*. If *To* is a dynamic predicate, the clauses of *From* are added (as in `assertz/1`) to the clauses of *To*. *To* and *From* must have the same arity. Acts as if defined by the program below, but at a much better performance by avoiding decompilation and compilation.

```
copy_predicate_clauses(From, To) :-
    head(From, MF:FromHead),
    head(To, MT:ToHead),
    FromHead =.. [_|Args],
    ToHead =.. [_|Args],
    forall(clause(MF:FromHead, Body),
           assertz(MT:ToHead, Body)).

head(From, M:Head) :-
    strip_module(From, M, Name/Arity),
    functor(Head, Name, Arity).
```

##### **redefine\_system\_predicate**(+*Head*)

This directive may be used both in module `user` and in normal modules to redefine any system predicate. If the system definition is redefined in module `user`, the new definition is the default definition for all sub-modules. Otherwise the redefinition is local to the module. The system definition remains in the module `system`.

Redefining system predicate facilitates the definition of compatibility packages. Use in other contexts is discouraged.

##### **retract**(+*Term*)

[ISO,nondet]

When *Term* is an atom or a term it is unified with the first unifying fact or clause in the database.

The fact or clause is removed from the database. The `retract/1` predicate respects the *logical update view*. This implies that `retract/1` succeeds for all clauses that match *Term* when the predicate was *called*. The example below illustrates that the first call to `retract/1` succeeds on `bee` on backtracking despite the fact that `bee` is already retracted.<sup>35</sup>

```
:- dynamic insect/1.
insect(ant).
insect(bee).

?- (    retract(insect(I)),
      writeln(I),
      retract(insect(bee)),
      fail
      ; true
    ).
ant ;
bee.
```

If multiple threads start a `retract` on the same predicate at the same time their notion of the *entry generation* is adjusted such that they do not retract the same first clause. This implies that, if multiple threads use `once(retract(Term))`, no two threads will retract the same clause. Note that on backtracking over `retract/1`, multiple threads may retract the same clause as both threads respect the logical update view.

#### **retractall(+Head)**

[ISO, det]

All facts or clauses in the database for which the *head* unifies with *Head* are removed. If *Head* refers to a predicate that is not defined, it is implicitly created as a dynamic predicate. See also `dynamic/1`.<sup>36</sup>

#### **asserta(+Term)**

[ISO]

#### **assertz(+Term)**

[ISO]

#### **assert(+Term)**

[deprecated]

Assert a clause (fact or rule) into the database. The predicate `asserta/1` asserts the clause as first clause of the predicate while `assertz/1` assert the clause as last clause. The deprecated `assert/1` is equivalent to `assertz/1`. If the program space for the target module is limited (see `set_module/1`), `asserta/1` can raise a `resource_error(program_space)` exception. The example below adds two facts and a rule. Note the double parentheses around the rule.

```
?- assertz(parent('Bob', 'Jane')).
?- assertz(female('Jane')).
?- assertz((mother(Child, Mother) :-
            parent(Child, Mother),
            female(Mother))).
```

<sup>35</sup>Example by Jan Burse

<sup>36</sup>The ISO standard only allows using `dynamic/1` as a *directive*.

**asserta**(+Term, -Reference)

**assertz**(+Term, -Reference)

**assert**(+Term, -Reference) [deprecated]

Equivalent to `asserta/1`, `assertz/1`, `assert/1`, but in addition unifies *Reference* with a handle to the asserted clauses. The handle can be used to access this clause with `clause/3` and `erase/1`.

#### 4.14.2 The recorded database

**recorda**(+Key, +Term, -Reference)

Assert *Term* in the recorded database under key *Key*. *Key* is a small integer (range `min_tagged_integer ... max_tagged_integer`, atom or compound term. If the key is a compound term, only the name and arity define the key. *Reference* is unified with an opaque handle to the record (see `erase/1`).

**recorda**(+Key, +Term)

Equivalent to `recorda(Key, Term, _)`.

**recordz**(+Key, +Term, -Reference)

Equivalent to `recorda/3`, but puts the *Term* at the tail of the terms recorded under *Key*.

**recordz**(+Key, +Term)

Equivalent to `recordz(Key, Term, _)`.

**recorded**(?Key, ?Value, ?Reference)

True if *Value* is recorded under *Key* and has the given database *Reference*. If *Reference* is given, this predicate is semi-deterministic. Otherwise, it must be considered non-deterministic. If neither *Reference* nor *Key* is given, the triples are generated as in the code snippet below.<sup>37</sup> See also `current_key/1`.

```
current_key(Key) ,
recorded(Key, Value, Reference)
```

**recorded**(+Key, -Value)

Equivalent to `recorded(Key, Value, _)`.

**erase**(+Reference)

Erase a record or clause from the database. *Reference* is a db-reference returned by `recorda/3`, `recordz/3` or `recorded/3`, `clause/3`, `assert/2`, `asserta/2` or `assertz/2`. Fail silently if the referenced object no longer exists. Notably, if multiple threads attempt to erase the same clause one will succeed and the others will fail.

**instance**(+Reference, -Term)

Unify *Term* with the referenced clause or database record. Unit clauses are represented as *Head* `:- true.`

<sup>37</sup>Note that, without a given *Key*, some implementations return triples in the order defined by `recorda/2` and `recordz/2`.



### 4.14.3 Flags

The predicate `flag/3` is the oldest way to store global non-backtrackable data in SWI-Prolog. Flags are global and shared by all threads. Their value is limited to atoms, small (64-bit) integers and floating point numbers. Flags are thread-safe. The flags described in this section must not be confused with *Prolog flags* described in section 2.11.

**get\_flag(+Key, -Value)**

True when *Value* is the value currently associated with *Key*. If *Key* does not exist, a new flag with value '0' (zero) is created.

**set\_flag(+Key, Value)**

Set flag *Key* to *Value*. Value must be an atom, small (64-bit) integer or float.

**flag(+Key, -Old, +New)**

True when *Old* is the current value of the flag *Key* and the flag has been set to *New*. *New* can be an arithmetic expression. The update is *atomic*. This predicate can be used to create a *shared* global counter as illustrated in the example below.

```
next_id(Id) :-
    flag(my_id, Id, Id+1).
```

### 4.14.4 Tries

Tries (also called *digital tree*, *radix tree* or *prefix tree* maintain a mapping between a variant of a term (see =@=/2) and a value. They have been introduced in SWI-Prolog 7.3.21 as part of the implementation of *tabling*. The current implementation is rather immature. In particular, the following limitations currently apply:

- Tries are not thread-safe.
- Tries should not be modified while non-deterministic predicates such as `trie_gen/3` are running on the trie.
- Terms cannot have *attributed variables*.
- Terms cannot be *cyclic*. Possibly this will not change because cyclic terms can only be supported after creating a canonical form of the term.

**We give the definition of these predicates for reference and debugging tabled predicates. Future versions are likely to get a more stable and safer implementation. The API to tries should not be considered stable.**

**trie\_new(-Trie)**

Create a new trie and unify *Trie* with a handle to the trie. The trie handle is a *blob*. Tries are subject to atom garbage collection.

**trie\_destroy(+Trie)**

Destroy *Trie*. This removes all nodes from the trie and causes further access to *Trie* to raise an `existence_error` exception. The handle itself is reclaimed by atom garbage collection.

- is\_trie**(@*Trie*) [semidet]  
 True when *Trie* is a trie object. See also `current_trie/1`.
- current\_trie**(-*Trie*) [nondet]  
 True if *Trie* is a currently existing trie. As this enumerates and then filters all known atoms this predicate is slow and should only be used for debugging purposes. See also `is_trie/1`.
- trie\_insert**(+*Trie*, +*Key*, +*Value*)  
 Insert the term *Key* into *Trie* and associate it with *Value*. *Value* can be any term. If *Key-Value* is already part of *Trie*, the predicates *fails* silently. If *Key* is in *Trie* associated with a different value, a `permission_error` is raised.
- trie\_update**(+*Trie*, +*Key*, +*Value*)  
 As `trie_insert/3`, but if *Key* is in *Trie*, its associated value is *updated*.
- trie\_insert**(+*Trie*, +*Term*, +*Value*, -*Handle*)  
 As `trie_insert/3`, returning a handle to the trie node. This predicate is currently unsafe as *Handle* is an integer used to encode a pointer. It was used to implement a pure Prolog version of the `tabling` library.
- trie\_delete**(+*Trie*, +*Key*, ?*Value*)  
 Delete *Key* from *Trie* if the value associated with *Key* unifies with *Value*.
- trie\_lookup**(+*Trie*, +*Key*, -*Value*)  
 True if the term *Key* is in *Trie* and associated with *Value*.
- trie\_term**(+*Handle*, -*Term*)  
 True when *Term* is a copy of the term associated with *Handle*. The result is undefined (including crashes) if *Handle* is not a handle returned by `trie_insert_new/3` or the node has been removed afterwards.
- trie\_gen**(+*Trie*, ?*Key*, -*Value*) [nondet]  
 True when *Key* is associated with *Value* in *Trie*. Backtracking retrieves all pairs. Currently scans the entire trie, even if *Key* is partly known. Currently unsafe if *Trie* is modified while the values are being enumerated.
- trie\_property**(?*Trie*, ?*Property*) [nondet]  
 True if *Trie* exists with *Property*. Intended for debugging and statistical purposes. Retrieving some of these properties visit all nodes of the trie. Defined properties are
- value\_count**(-*Count*)  
 Number of key-value pairs in the trie.
  - node\_count**(-*Count*)  
 Number of nodes in the trie.
  - size**(-*Bytes*)  
 Required storage space of the trie.
  - hashed**(-*Count*)  
 Number of nodes that use a hashed index to its children.

### 4.14.5 Update view

Traditionally, Prolog systems used the *immediate update view*: new clauses became visible to predicates backtracking over dynamic predicates immediately, and retracted clauses became invisible immediately.

Starting with SWI-Prolog 3.3.0 we adhere to the *logical update view*, where backtrackable predicates that enter the definition of a predicate will not see any changes (either caused by `assert/1` or `retract/1`) to the predicate. This view is the ISO standard, the most commonly used and the most ‘safe’.<sup>38</sup> Logical updates are realised by keeping reference counts on predicates and *generation* information on clauses. Each change to the database causes an increment of the generation of the database. Each goal is tagged with the generation in which it was started. Each clause is flagged with the generation it was created in as well as the generation it was erased from. Only clauses with a ‘created’ ... ‘erased’ interval that encloses the generation of the current goal are considered visible.

### 4.14.6 Indexing databases

The indexing capabilities of SWI-Prolog are described in section 2.18. Summarizing, SWI-Prolog creates indexes for any applicable argument, pairs of arguments and indexes on the arguments of compound terms when applicable. Extended JIT indexing is not widely supported among Prolog implementations. Programs that aim at portability should consider using `term_hash/2` and `term_hash/4` to design their database such that indexing on constant or functor (name/arity reference) on the first argument is sufficient. In some cases, using the predicates below to add one or more additional columns (arguments) to a database predicate may improve performance. The overall design of code using these predicates is given below. Note that as `term_hash/2` leaves the hash unbound if *Term* is not ground. This causes the lookup to be fast if *Term* is ground and correct (but slow) otherwise.

```
:- dynamic
   x/2.

assert_x(Term) :-
    term_hash(Term, Hash),
    assertz(x(Hash, Term)).

x(Term) :-
    term_hash(Term, Hash),
    x(Hash, Term).
```

#### **term\_hash(+Term, -HashKey)**

[det]

If *Term* is a ground term (see `ground/1`), *HashKey* is unified with a positive integer value that may be used as a hash key to the value. If *Term* is not ground, the predicate leaves *HashKey* an unbound variable. Hash keys are in the range 0 ... 16,777,215, the maximal integer that can be stored efficiently on both 32 and 64 bit platforms.

This predicate may be used to build hash tables as well as to exploit argument indexing to find complex terms more quickly.

<sup>38</sup>For example, using the immediate update view, no call to a dynamic predicate is deterministic.

The hash key does not rely on temporary information like addresses of atoms and may be assumed constant over different invocations and versions of SWI-Prolog.<sup>39</sup> Hashes differ between big and little endian machines. The `term_hash/2` predicate is cycle-safe.<sup>40</sup>

**term\_hash(+Term, +Depth, +Range, -HashKey)** [det]

As `term_hash/2`, but only considers *Term* to the specified *Depth*. The top-level term has depth 1, its arguments have depth 2, etc. That is, *Depth* = 0 hashes nothing; *Depth* = 1 hashes atomic values or the functor and arity of a compound term, not its arguments; *Depth* = 2 also indexes the immediate arguments, etc.

*HashKey* is in the range  $[0 \dots Range - 1]$ . *Range* must be in the range  $[1 \dots 2147483647]$

**variant\_sha1(+Term, -SHA1)** [det]

Compute a SHA1-hash from *Term*. The hash is represented as a 40-byte hexadecimal atom. Unlike `term_hash/2` and friends, this predicate produces a hash key for non-ground terms. The hash is invariant over variable-renaming (see `=@=/2`) and constants over different invocations of Prolog.<sup>41</sup>

This predicate raises an exception when trying to compute the hash on a cyclic term or attributed term. Attributed terms are not handled because `subsumes_chk/2` is not considered well defined for attributed terms. Cyclic terms are not supported because this would require establishing a canonical cycle. That is, given  $A=[a\text{---}A]$  and  $B=[a,a\text{---}B]$ , *A* and *B* should produce the same hash. This is not (yet) implemented.

This hash was developed for lookup of solutions to a goal stored in a table. By using a cryptographic hash, heuristic algorithms can often ignore the possibility of hash collisions and thus avoid storing the goal term itself as well as testing using `=@=/2`.

**variant\_hash(+Term, -HashKey)** [det]

Similar to `variant_sha1/2`, but using a non-cryptographic hash and produces an integer result like `term_hash/2`. This version does deal with attributed variables, processing them as normal variables. This hash is primarily intended to speedup finding variant terms in a set of terms.<sup>42</sup>

## 4.15 Declaring predicate properties

This section describes directives which manipulate attributes of predicate definitions. The functors `dynamic/1`, `multifile/1`, `discontiguous/1` and `public/1` are operators of priority 1150 (see `op/3`), which implies that the list of predicates they involve can just be a comma-separated list:

```
:- dynamic
    foo/0,
    baz/2.
```

In SWI-Prolog all these directives are just predicates. This implies they can also be called by a program. Do not rely on this feature if you want to maintain portability to other Prolog implementations.

<sup>39</sup>Last change: version 5.10.4

<sup>40</sup>BUG: All arguments that (indirectly) lead to a cycle have the same hash key.

<sup>41</sup>BUG: The hash depends on word order (big/little-endian) and the wordsize (32/64 bits).

<sup>42</sup>BUG: As `variant_sha1/2`, cyclic terms result in an exception.

**dynamic** *:PredicateIndicator, ...*

[ISO]

Inform the interpreter that the definition of the predicate(s) may change during execution (using `assert/1` and/or `retract/1`). In the multithreaded version, the clauses of dynamic predicates are shared between the threads. The directive `thread_local/1` provides an alternative where each thread has its own clause list for the predicate. Dynamic predicates can be turned into static ones using `compile_predicates/1`.

**compile\_predicates**(*:ListOfPredicateIndicators*)

Compile a list of specified dynamic predicates (see `dynamic/1` and `assert/1`) into normal static predicates. This call tells the Prolog environment the definition will not change anymore and further calls to `assert/1` or `retract/1` on the named predicates raise a permission error. This predicate is designed to deal with parts of the program that are generated at runtime but do not change during the remainder of the program execution.<sup>43</sup>

**multifile** *:PredicateIndicator, ...*

[ISO]

Inform the system that the specified predicate(s) may be defined over more than one file. This stops `consult/1` from redefining a predicate when a new definition is found.

**discontiguous** *:PredicateIndicator, ...*

[ISO]

Inform the system that the clauses of the specified predicate(s) might not be together in the source file. See also `style_check/1`.

**public** *:PredicateIndicator, ...*

Instructs the cross-referencer that the predicate can be called. It has no semantics.<sup>44</sup> The public declaration can be queried using `predicate_property/2`. The `public/1` directive does *not* export the predicate (see `module/1` and `export/1`). The public directive is used for (1) direct calls into the module from, e.g., foreign code, (2) direct calls into the module from other modules, or (3) flag a predicate as being called if the call is generated by meta-calling constructs that are not analysed by the cross-referencer.

**non\_terminal** *:PredicateIndicator, ...*

Sets the `non_terminal` attribute on the predicate. This indicates that the predicate implements a *grammar rule*. Currently, predicates that are exported using *Name//Arity* syntax are flagged as non-terminals. Ideally we should add this flag to any predicate created from the expansion of a `-->` rule, but that is difficult without breaking compatibility for programs that reason about `expand_term/2,4`.

## 4.16 Examining the program

**current\_atom**(*-Atom*)

Successively unifies *Atom* with all atoms known to the system. Note that `current_atom/1` always succeeds if *Atom* is instantiated to an atom.

<sup>43</sup>The specification of this predicate is from Richard O’Keefe. The implementation is allowed to optimise the predicate. This is not yet implemented. In multithreaded Prolog, however, static code runs faster as it does not require synchronisation. This is particularly true on SMP hardware.

<sup>44</sup>This declaration is compatible with SICStus. In YAP, `public/1` instructs the compiler to keep the source. As the source is always available in SWI-Prolog, our current interpretation also enhances the compatibility with YAP.

**current\_blob(?Blob, ?Type)**

Examine the type or enumerate blobs of the given *Type*. Typed blobs are supported through the foreign language interface for storing arbitrary BLOBs (Binary Large Object) or handles to external entities. See section 12.4.8 for details.

**current\_functor(?Name, ?Arity)**

True when *Name/Arity* is a known functor. This means that at some point in time a term with name *Name* and *Arity* arguments was created. Functor objects are currently not subject to garbage collection. Due to timing, `t/2` below with instantiated *Name* and *Arity* can theoretically fail, i.e., a functor may be visible in instantiated mode while it is not yet visible in unbound mode. Considering that the only practical value of `current_functor/2` we are aware of is to analyse resource usage we accept this impure behaviour.

```
t(Name, Arity) :-
    (   current_functor(Name, Arity)
    ->  current_functor(N, A), N == Name, A == Arity
    ;   true
    ).
```

**current\_flag(-FlagKey)**

Successively unifies *FlagKey* with all keys used for flags (see `flag/3`).

**current\_key(-Key)**

Successively unifies *Key* with all keys used for records (see `recorda/3`, etc.).

**current\_predicate(:PredicateIndicator)**

[ISO]

True if *PredicateIndicator* is a currently defined predicate. A predicate is considered defined if it exists in the specified module, is imported into the module or is defined in one of the modules from which the predicate will be imported if it is called (see section 6.9). Note that `current_predicate/1` does *not* succeed for predicates that can be *autoloaded*. See also `current_predicate/2` and `predicate_property/2`.

If *PredicateIndicator* is not fully specified, the predicate only generates values that are defined in or already imported into the target module. Generating all callable predicates therefore requires enumerating modules using `current_module/1`. Generating predicates callable in a given module requires enumerating the import modules using `import_module/2` and the autoloadable predicates using the `predicate_property/2` `autoload`.

**current\_predicate(?Name, :Head)**

Classical pre-ISO implementation of `current_predicate/1`, where the predicate is represented by the head term. The advantage is that this can be used for checking the existence of a predicate before calling it without the need for `functor/3`:

```
call_if_exists(G) :-
    current_predicate(_, G),
    call(G).
```

Because of this intended usage, `current_predicate/2` also succeeds if the predicate can be autoloaded. Unfortunately, checking the autoloader makes this predicate relatively slow, in particular because a failed lookup of the autoloader will cause the autoloader to verify that its index is up-to-date.

### **predicate\_property(*Head*, ?*Property*)**

True when *Head* refers to a predicate that has property *Property*. With sufficiently instantiated *Head*, `predicate_property/2` tries to resolve the predicate the same way as calling it would do: if the predicate is not defined it scans the default modules (see `default_module/2`) and finally tries the autoloader. Unlike calling, failure to find the target predicate causes `predicate_property/2` to fail silently. If *Head* is not sufficiently bound, only currently locally defined and already imported predicates are enumerated. See `current_predicate/1` for enumerating all predicates. A common issue concerns *generating* all built-in predicates. This can be achieved using the code below:

```
generate_built_in(Name/Arity) :-
    predicate_property(system:Head, built_in),
    functor(Head, Name, Arity),
    \+ sub_atom(Name, 0, _, _, $).    % discard reserved names
```

*Property* is one of:

#### **autoload(*File*)**

True if the predicate can be autoloaded from the file *File*. Like `undefined`, this property is *not* generated.

#### **built\_in**

True if the predicate is locked as a built-in predicate. This implies it cannot be redefined in its definition module and it can normally not be seen in the tracer.

#### **defined**

True if the predicate is defined. This property is aware of sources being *reloaded*, in which case it claims the predicate defined only if it is defined in another source or it has seen a definition in the current source. See `compile_aux_clauses/1`.

#### **dynamic**

True if `assert/1` and `retract/1` may be used to modify the predicate. This property is set using `dynamic/1`.

#### **exported**

True if the predicate is in the public list of the context module.

#### **imported\_from(*Module*)**

Is true if the predicate is imported into the context module from module *Module*.

#### **file(*FileName*)**

Unify *FileName* with the name of the source file in which the predicate is defined. See also `source_file/2` and the property `line_count`. Note that this reports the file of the first clause of a predicate. A more robust interface can be achieved using `nth_clause/3` and `clause_property/2`.

#### **foreign**

True if the predicate is defined in the C language.

**implementation\_module(-Module)**

True when *Module* is the module in which *Head* is or will be defined. Resolving this property goes through the same search mechanism as when the an undefined predicate is encountered, but does not perform any loading. It searches (1) the module inheritance hierarchy (see `default_module/2`) and (2) the autoload index if the `unknown` flag is not set to `fail` in the target module.

**indexed(Indexes)**

*Indexes*<sup>45</sup> is a list of additional (hash) indexes on the predicate. Each element of the list is a term *ArgSpec-Index*. *ArgSpec* denotes the indexed argument(s) and is one of

**single(Argument)**

Hash on a single argument. *Argument* is the 1-based argument number.

**multi(ArgumentList)**

Hash on a combination of arguments.

**deep(Position)**

Index on a sub-argument. *Position* is a list holding first the argument of the predicate then the argument into the compound and recursively into deeper compound terms.

*Index* is a term `hash(Buckets, Speedup, Size, IsList)`. Here *Buckets* is the number of buckets in the hash and *Speedup* is the expected speedup relative to trying all clauses linearly, *Size* is the size of the index in memory in bytes and finally, *IsList* indicates that a list is created for all clauses with the same key. This is used to create *deep indexes* for the arguments of compound terms.

**interpreted**

True if the predicate is defined in Prolog. We return true on this because, although the code is actually compiled, it is completely transparent, just like interpreted code.

**iso**

True if the predicate is covered by the ISO standard (ISO/IEC 13211-1).

**line\_count(LineNumber)**

Unify *LineNumber* with the line number of the first clause of the predicate. Fails if the predicate is not associated with a file. See also `source_file/2`. See also the `file` property above, notably the reference to `clause_property/2`.

**multifile**

True if there may be multiple (or no) files providing clauses for the predicate. This property is set using `multifile/1`.

**meta\_predicate(Head)**

If the predicate is declared as a meta-predicate using `meta_predicate/1`, unify *Head* with the head-pattern. The head-pattern is a compound term with the same name and arity as the predicate where each argument of the term is a meta-predicate specifier. See `meta_predicate/1` for details.

**nodebug**

Details of the predicate are not shown by the debugger. This is the default for built-in predicates. User predicates can be compiled this way using the Prolog flag `generate_debug_info`.

<sup>45</sup>This predicate property should be used for analysis and statistics only. The exact representation of *Indexes* may change between versions.



**non\_terminal(*T*)**

true if the predicate implements a *grammar rule*. See `non_terminal/1`.

**notrace**

Do not show ports of this predicate in the debugger.

**number\_of\_clauses(*ClauseCount*)**

Unify *ClauseCount* to the number of clauses associated with the predicate. Fails for foreign predicates.

**number\_of\_rules(*RuleCount*)**

Unify *RuleCount* to the number of clauses associated with the predicate. A *rule* is defined as a clauses that has a body that is not just `true` (i.e., a *fact*). Fails for foreign predicates. This property is used to avoid analysing predicates with only facts in `prolog_codewalk`.

**last\_modified\_generation(*Generation*)**

Database generation at which the predicate was modified for the last time. Intended to quickly assesses the validity of caches.

**public**

Predicate is declared public using `public/1`. Note that without further definition, public predicates are considered undefined and this property is *not* reported.

**quasi\_quotation\_syntax**

The predicate (with arity 4) is declared to provide quasi quotation syntax with `quasi_quotation_syntax/1`.

**static**

The definition can *not* be modified using `assertz/1` and friends. This property is the opposite from `dynamic`, i.e., for each defined predicate, either `static` or `dynamic` is true but never both.

**thread\_local**

If true (only possible on the multithreaded version) each thread has its own clauses for the predicate. This property is set using `thread_local/1`.

**transparent**

True if the predicate is declared transparent using the `module_transparent/1` or `meta_predicate/1` declaration. In the latter case the property `meta_predicate(Head)` is also provided. See chapter 6 for details.

**undefined**

True if a procedure definition block for the predicate exists, but there are no clauses for it and it is not declared `dynamic` or `multifile`. This is true if the predicate occurs in the body of a loaded predicate, an attempt to call it has been made via one of the meta-call predicates, the predicate has been declared as e.g., a meta-predicate or the predicate had a definition in the past. Originally used to find missing predicate definitions. The current implementation of `list_undefined/0` used cross-referencing. Deprecated.

**visible**

True when predicate can be called without raising a predicate existence error. This means that the predicate is (1) defined, (2) can be inherited from one of the default modules (see `default_module/2`) or (3) can be autoloaded. The behaviour is logically consistent iff the property `visible` is provided explicitly. If the property is left unbound, only defined predicates are enumerated.

**volatile**

If true, the clauses are not saved into a saved state by `qsave_program/[1,2]`. This property is set using `volatile/1`.

**dwim\_predicate(+Term, -Dwim)**

‘Do What I Mean’ (‘dwim’) support predicate. *Term* is a term, whose name and arity are used as a predicate specification. *Dwim* is instantiated with the most general term built from *Name* and the arity of a defined predicate that matches the predicate specified by *Term* in the ‘Do What I Mean’ sense. See `dwim_match/2` for ‘Do What I Mean’ string matching. Internal system predicates are not generated, unless the access level is `system` (see `access_level`). Backtracking provides all alternative matches.

**clause(:Head, ?Body)**

[ISO]

True if *Head* can be unified with a clause head and *Body* with the corresponding clause body. Gives alternative clauses on backtracking. For facts, *Body* is unified with the atom *true*.

**clause(:Head, ?Body, ?Reference)**

Equivalent to `clause/2`, but unifies *Reference* with a unique reference to the clause (see also `assert/2`, `erase/1`). If *Reference* is instantiated to a reference the clause’s head and body will be unified with *Head* and *Body*.

**nth\_clause(?Pred, ?Index, ?Reference)**

Provides access to the clauses of a predicate using their index number. Counting starts at 1. If *Reference* is specified it unifies *Pred* with the most general term with the same name/arity as the predicate and *Index* with the index number of the clause. Otherwise the name and arity of *Pred* are used to determine the predicate. If *Index* is provided, *Reference* will be unified with the clause reference. If *Index* is unbound, backtracking will yield both the indexes and the references of all clauses of the predicate. The following example finds the 2nd clause of `append/3`:

```
?- use_module(library(lists)).
...
?- nth_clause(append(_,_,_), 2, Ref), clause(Head, Body, Ref).
Ref = <clause>(0x994290),
Head = lists:append([_G23|_G24], _G21, [_G23|_G27]),
Body = append(_G24, _G21, _G27).
```

**clause\_property(+ClauseRef, -Property)**

Queries properties of a clause. *ClauseRef* is a reference to a clause as produced by `clause/3`, `nth_clause/3` or `prolog_frame_attribute/3`. Unlike most other predicates that access clause references, `clause_property/2` may be used to get information about erased clauses that have not yet been reclaimed. *Property* is one of the following:

**file(FileName)**

Unify *FileName* with the name of the file from which the clause is loaded. Fails if the clause was not created by loading a file (e.g., clauses added using `assertz/1`). See also `source`.

**line\_count**(*LineNumber*)

Unify *LineNumber* with the line number of the clause. Fails if the clause is not associated to a file.

**size**(*SizeInBytes*)

True when *SizeInBytes* is the size that the clause uses in memory in bytes. The size required by a predicate also includes the predicate data record, a linked list of clauses, clause selection instructions and optionally one or more clause indexes.

**source**(*FileName*)

Unify *FileName* with the name of the source file that created the clause. This is the same as the `file` property, unless the file is loaded from a file that is textually included into source using `include/1`. In this scenario, `file` is the included file, while the `source` property refers to the *main* file.

**fact**

True if the clause has no body.

**erased**

True if the clause has been erased, but not yet reclaimed because it is referenced.

**predicate**(*PredicateIndicator*)

*PredicateIndicator* denotes the predicate to which this clause belongs. This is needed to obtain information on erased clauses because the usual way to obtain this information using `clause/3` fails for erased clauses.

**module**(*Module*)

*Module* is the context module used to execute the body of the clause. For normal clauses, this is the same as the module in which the predicate is defined. However, if a clause is compiled with a module qualified *head*, the clause belongs to the predicate with the qualified head, while the body is executed in the context of the module in which the clause was defined.

## 4.17 Input and output

SWI-Prolog provides two different packages for input and output. The native I/O system is based on the ISO standard predicates `open/3`, `close/1` and friends.<sup>46</sup> Being more widely portable and equipped with a clearer and more robust specification, new code is encouraged to use these predicates for manipulation of I/O streams.

Section 4.17.3 describes `tell/1`, `see/1` and friends, providing I/O in the spirit of the traditional Edinburgh standard. These predicates are layered on top of the ISO predicates. Both packages are fully integrated; the user may switch freely between them.

### 4.17.1 Predefined stream aliases

Each thread has five stream aliases: `user_input`, `user_output`, `user_error`, `current_input`, and `current_output`. Newly created threads inherit these stream aliases from their parent. The `user_input`, `user_output` and `user_error` aliases of the main thread are initially bound to the standard operating system I/O streams (*stdin*, *stdout* and *stderr*,

<sup>46</sup>Actually based on Quintus Prolog, providing this interface before the ISO standard existed.

normally bound to the POSIX file handles 0, 1 and 2). These aliases may be re-bound, for example if standard I/O refers to a window such as in the `swipl-win.exe` GUI executable for Windows. They can be re-bound by the user using `set_prolog_IO/3` and `set_stream/2` by setting the alias of a stream (e.g., `set_stream(S, alias(user_output))`). An example of rebinding can be found in library `prolog_server`, providing a telnet service. The aliases `current_input` and `current_output` define the source and destination for predicates that do not take a stream argument (e.g., `read/1`, `write/1`, `get_code/1`, ...). Initially, these are bound to the same stream as `user_input` and `user_error`. They are re-bound by `see/1`, `tell/1`, `set_input/1` and `set_output/1`. The `current_output` stream is also temporary re-bound by `with_output_to/2` or `format/3` using e.g., `format(atom(A), ...)`. Note that code which explicitly writes to the streams `user_output` and `user_error` will not be redirected by `with_output_to/2`.

**Compatibility** Note that the ISO standard only defines the `user_*` streams. The ‘current’ streams can be accessed using `current_input/1` and `current_output/1`. For example, an ISO compatible implementation of `write/1` is

```
write(Term) :- current_output(Out), write_term(Out, Term).
```

while SWI-Prolog additionally allows for

```
write(Term) :- write(current_output, Term).
```

### 4.17.2 ISO Input and Output Streams

The predicates described in this section provide ISO compliant I/O, where streams are explicitly created using the predicate `open/3`. The resulting stream identifier is then passed as a parameter to the reading and writing predicates to specify the source or destination of the data.

This schema is not vulnerable to filename and stream ambiguities as well as changes to the working directory. On the other hand, using the notion of current-I/O simplifies reusability of code without the need to pass arguments around. E.g., see `with_output_to/2`.

SWI-Prolog streams are, compatible with the ISO standard, either input or output streams. To accommodate portability to other systems, a pair of streams can be packed into a *stream-pair*. See `stream_pair/3` for details.

SWI-Prolog stream handles are unique symbols that have no syntactical representation. They are written as `<stream>(hex-number)`, which is not valid input for `read/1`. They are realised using a *blob* of type `stream` (see `blob/2` and section 12.4.8).

**open(+SrcDest, +Mode, -Stream, +Options)**

[ISO]

True when *SrcDest* can be opened in *Mode* and *Stream* is an I/O stream to/from the object. *SrcDest* is normally the name of a file, represented as an atom or string. *Mode* is one of `read`, `write`, `append` or `update`. *Mode* `append` opens the file for writing, positioning the file pointer at the end. *Mode* `update` opens the file for writing, positioning the file pointer at the beginning of the file without truncating the file. *Stream* is either a variable, in which case it

is bound to an integer identifying the stream, or an atom, in which case this atom will be the stream identifier.<sup>47</sup>

SWI-Prolog also allows *SrcDest* to be a term `pipe(Command)`. In this form, *Command* is started as a child process and if *Mode* is `write`, output written to *Stream* is sent to the standard input of *Command*. Viso versa, if *Mode* is `read`, data written by *Command* to the standard output may be read from *Stream*. On Unix systems, *Command* is handed to `popen()` which hands it to the Unix shell. On Windows, *Command* is executed directly. See also `process_create/3` from `process`.

If *SrcDest* is an IRI, i.e., starts with `<scheme>://`, where `<scheme>` is a non-empty sequence of lowercase ASCII letters `open/3,4` calls hooks registered by `register_iri_scheme/3`. Currently the only predefined IRI scheme is `res`, providing access to the *resource database*. See section 13.4.

The following *Options* are recognised by `open/4`:

#### **alias(Atom)**

Gives the stream a name. Below is an example. Be careful with this option as stream names are global. See also `set_stream/2`.

```
?- open(data, read, Fd, [alias(input)]).

    ...
    read(input, Term),
    ...
```

#### **bom(Bool)**

Check for a BOM (*Byte Order Marker*) or write one. If omitted, the default is `true` for mode `read` and `false` for mode `write`. See also `stream_property/2` and especially section 2.19.1 for a discussion of this feature.

#### **buffer(Buffering)**

Defines output buffering. The atom `full` (default) defines full buffering, `line` buffering by line, and `false` implies the stream is fully unbuffered. Smaller buffering is useful if another process or the user is waiting for the output as it is being produced. See also `flush_output/[0,1]`. This option is not an ISO option.

#### **close\_on\_abort(Bool)**

If `true` (default), the stream is closed on an abort (see `abort/0`). If `false`, the stream is not closed. If it is an output stream, however, it will be flushed. Useful for logfiles and if the stream is associated to a process (using the `pipe/1` construct).

#### **create(+List)**

Specifies how a new file is created when opening in `write`, `append` or `update` mode. Currently, *List* is a list of atoms that describe the permissions of the created file.<sup>48</sup> Defined values are below. Not recognised values are silently ignored, allowing for adding platform specific extensions to this set.

#### **read**

Allow read access to the file.

<sup>47</sup>New code should use the `alias(Alias)` option for compatibility with the ISO standard.

<sup>48</sup>Added after feedback from Joachim Shimpf and Per Mildner.

**write**

Allow write access to the file.

**execute**

Allow execution access to the file.

**default**

Allow read and write access to the file.

**all**

Allow any access provided by the OS.

Note that if *List* is empty, the created file has no associated access permissions. The create options map to the POSIX *mode* option of `open()`, where `read` map to 0444, `write` to 0222 and `execute` to 0111. On POSIX systems, the final permission is defined as `(mode & ~umask)`.

**encoding**(*Encoding*)

Define the encoding used for reading and writing text to this stream. The default encoding for type `text` is derived from the Prolog flag `encoding`. For binary streams the default encoding is `octet`. For details on encoding issues, see section 2.19.1.

**eof\_action**(*Action*)

Defines what happens if the end of the input stream is reached. The default value for *Action* is `eof_code`, which makes `get0/1` and `friends` return `-1`, and `read/1` and `friends` return the atom `end_of_file`. Repetitive reading keeps yielding the same result. *Action error* is like `eof_code`, but repetitive reading will raise an error. With *action reset*, Prolog will examine the file again and return more data if the file has grown.

**locale**(+*Locale*)

Set the locale that is used by notably `format/2` for output on this stream. See section 4.23.

**lock**(*LockingMode*)

Try to obtain a lock on the open file. Default is `none`, which does not lock the file. The value `read` or `shared` means other processes may read the file, but not write it. The value `write` or `exclusive` means no other process may read or write the file.

Locks are acquired through the POSIX function `fcntl()` using the command `F_SETLKW`, which makes a blocked call wait for the lock to be released. Please note that `fcntl()` locks are *advisory* and therefore only other applications using the same advisory locks honour your lock. As there are many issues around locking in Unix, especially related to NFS (network file system), please study the `fcntl()` manual page before trusting your locks!

The `lock` option is a SWI-Prolog extension.

**type**(*Type*)

Using type `text` (default), Prolog will write a text file in an operating system compatible way. Using type `binary` the bytes will be read or written without any translation. See also the option `encoding`.

**wait**(*Bool*)

This option can be combined with the `lock` option. If `false` (default `true`), the open call returns immediately with an exception if the file is locked. The exception has the format `permission_error(lock, source_sink, SrcDest)`.

The option `reposition` is not supported in SWI-Prolog. All streams connected to a file may be repositioned.

**open(+SrcDest, +Mode, -Stream)** [ISO]

Equivalent to `open/4` with an empty option list.

**open\_null\_stream(-Stream)**

Open an output stream that produces no output. All counting functions are enabled on such a stream. It can be used to discard output (like Unix `/dev/null`) or exploit the counting properties. The initial encoding of *Stream* is `utf8`, enabling arbitrary Unicode output. The encoding can be changed to determine byte counts of the output in a particular encoding or validate if output is possible in a particular encoding. For example, the code below determines the number of characters emitted when writing *Term*.

```
write_length(Term, Len) :-
    open_null_stream(Out),
    write(Out, Term),
    character_count(Out, Len0),
    close(Out),
    Len = Len0.
```

**close(+Stream)** [ISO]

Close the specified stream. If *Stream* is not open, an existence error is raised. See `stream_pair/3` for the implications of closing a *stream pair*.

If the closed stream is the current input, output or error stream, the stream alias is bound to the initial standard I/O streams of the process. Calling `close/1` on the initial standard I/O streams of the process is a no-op for an input stream and flushes an output stream without closing it.<sup>49</sup>

**close(+Stream, +Options)** [ISO]

Provides `close(Stream, [force(true)])` as the only option. Called this way, any resource errors (such as write errors while flushing the output buffer) are ignored.

**stream\_property(?Stream, ?StreamProperty)** [ISO]

True when *StreamProperty* is a property of *Stream*. If enumeration of streams or properties is demanded because either *Stream* or *StreamProperty* are unbound, the implementation enumerates all candidate streams and properties while locking the stream database. Properties are fetched without locking the stream and may be outdated before this predicate returns due to asynchronous activity.

**alias(Atom)**

If *Atom* is bound, test if the stream has the specified alias. Otherwise unify *Atom* with the first alias of the stream.<sup>50</sup>

**buffer(Buffering)**

SWI-Prolog extension to query the buffering mode of this stream. *Buffering* is one of `full`, `line` or `false`. See also `open/4`.

<sup>49</sup>This behaviour was defined with purely interactive usage of Prolog in mind. Applications should not count on this behaviour. Future versions may allow for closing the initial standard I/O streams.

<sup>50</sup>BUG: Backtracking does not give other aliases.

**buffer\_size(Integer)**

SWI-Prolog extension to query the size of the I/O buffer associated to a stream in bytes. Fails if the stream is not buffered.

**bom(Bool)**

If present and `true`, a BOM (*Byte Order Mark*) was detected while opening the file for reading, or a BOM was written while opening the stream. See section 2.19.1 for details.

**close\_on\_abort(Bool)**

Determine whether or not `abort/0` closes the stream. By default streams are closed.

**close\_on\_exec(Bool)**

Determine whether or not the stream is closed when executing a new process (`exec()` in Unix, `CreateProcess()` in Windows). Default is to close streams. This maps to `fcntl()` `F_SETFD` using the flag `FD_CLOEXEC` on Unix and (negated) `HANDLE_FLAG_INHERIT` on Windows.

**encoding(Encoding)**

Query the encoding used for text. See section 2.19.1 for an overview of wide character and encoding issues in SWI-Prolog.

**end\_of\_stream(E)**

If *Stream* is an input stream, unify *E* with one of the atoms `not`, `at` or `past`. See also `at_end_of_stream/[0,1]`.

**eof\_action(A)**

Unify *A* with one of `eof_code`, `reset` or `error`. See `open/4` for details.

**file\_name(Atom)**

If *Stream* is associated to a file, unify *Atom* to the name of this file.

**file\_no(Integer)**

If the stream is associated with a POSIX file descriptor, unify *Integer* with the descriptor number. SWI-Prolog extension used primarily for integration with foreign code. See also `Sfileno()` from `SWI-Stream.h`.

**input**

True if *Stream* has mode `read`.

**locale(Locale)**

True when *Locale* is the current locale associated with the stream. See section 4.23.

**mode(IOMode)**

Unify *IOMode* to the mode given to `open/4` for opening the stream. Values are: `read`, `write`, `append` and the SWI-Prolog extension `update`.

**newline(NewlineMode)**

One of `posix` or `dos`. If `dos`, text streams will emit `\r\n` for `\n` and discard `\r` from input streams. Default depends on the operating system.

**nlink(-Count)**

Number of hard links to the file. This expresses the number of ‘names’ the file has. Not supported on all operating systems and the value might be bogus. See the documentation of `fstat()` for your OS and the value `st_nlink`.

**output**

True if *Stream* has mode `write`, `append` or `update`.



**position(*Pos*)**

Unify *Pos* with the current stream position. A stream position is an opaque term whose fields can be extracted using `stream_position_data/3`. See also `set_stream_position/2`.

**reposition(*Bool*)**

Unify *Bool* with *true* if the position of the stream can be set (see `seek/4`). It is assumed the position can be set if the stream has a *seek-function* and is not based on a POSIX file descriptor that is not associated to a regular file.

**representation\_errors(*Mode*)**

Determines behaviour of character output if the stream cannot represent a character. For example, an ISO Latin-1 stream cannot represent Cyrillic characters. The behaviour is one of *error* (throw an I/O error exception), *prolog* (write `\... \` escape code) or *xml* (write `&#... ;` XML character entity). The initial mode is *prolog* for the user streams and *error* for all other streams. See also section 2.19.1 and `set_stream/2`.

**timeout(*-Time*)**

*Time* is the timeout currently associated with the stream. See `set_stream/2` with the same option. If no timeout is specified, *Time* is unified to the atom *infinite*.

**type(*Type*)**

Unify *Type* with *text* or *binary*.

**tty(*Bool*)**

This property is reported with *Bool* equal to *true* if the stream is associated with a terminal. See also `set_stream/2`.

**write\_errors(*Atom*)**

*Atom* is one of *error* (default) or *ignore*. The latter is intended to deal with service processes for which the standard output handles are not connected to valid streams. In these cases write errors may be ignored on *user\_error*.

**current\_stream(*?Object*, *?Mode*, *?Stream*)**

The predicate `current_stream/3` is used to access the status of a stream as well as to generate all open streams. *Object* is the name of the file opened if the stream refers to an open file, an integer file descriptor if the stream encapsulates an operating system stream, or the atom `[]` if the stream refers to some other object. *Mode* is one of *read* or *write*.

**is\_stream(*+Term*)**

True if *Term* is a stream name or valid stream handle. This predicate realises a safe test for the existence of a stream alias or handle.

**stream\_pair(*?StreamPair*, *?Read*, *?Write*)**

This predicate can be used in mode `(-,+,+)` to create a *stream-pair* from an input stream and an output stream. Mode `(+,-,-)` can be used to get access to the underlying streams. If a stream has already been closed, the corresponding argument is left unbound. If mode `(+,-,-)` is used on a single stream, either *Read* or *Write* is unified with the stream while the other argument is left unbound. This behaviour simplifies writing code that must operate both on streams and stream pairs.

Stream-pairs can be used by all I/O operations on streams, where the operation selects the appropriate member of the pair. The predicate `close/1` closes the still open streams of the

pair.<sup>51</sup> The output stream is closed before the input stream. If closing the output stream results in an error, the input stream is still closed. Success is only returned if both streams were closed successfully.

**set\_stream\_position(+Stream, +Pos)** [ISO]  
Set the current position of *Stream* to *Pos*. *Pos* is a term as returned by `stream_property/2` using the `position(Pos)` property. See also `seek/4`.

**stream\_position\_data(?Field, +Pos, -Data)**  
Extracts information from the opaque stream position term as returned by `stream_property/2` requesting the `position(Pos)` property. *Field* is one of `line_count`, `line_position`, `char_count` or `byte_count`. See also `line_count/2`, `line_position/2`, `character_count/2` and `byte_count/2`.<sup>52</sup>

**seek(+Stream, +Offset, +Method, -NewLocation)**  
Reposition the current point of the given *Stream*. *Method* is one of `bof`, `current` or `eof`, indicating positioning relative to the start, current point or end of the underlying object. *NewLocation* is unified with the new offset, relative to the start of the stream.

Positions are counted in ‘units’. A unit is 1 byte, except for text files using 2-byte Unicode encoding (2 bytes) or *wchar* encoding (`sizeof(wchar_t)`). The latter guarantees comfortable interaction with wide-character text objects. Otherwise, the use of `seek/4` on non-binary files (see `open/4`) is of limited use, especially when using multi-byte text encodings (e.g. UTF-8) or multi-byte newline files (e.g. DOS/Windows). On text files, SWI-Prolog offers reliable backup to an old position using `stream_property/2` and `set_stream_position/2`. Skipping *N* character codes is achieved calling `get_code/2` *N* times or using `copy_stream_data/3`, directing the output to a null stream (see `open_null_stream/1`). If the seek modifies the current location, the line number and character position in the line are set to 0.

If the stream cannot be repositioned, a `permission_error` is raised. If applying the offset would result in a file position less than zero, a `domain_error` is raised. Behaviour when seeking to positions beyond the size of the underlying object depend on the object and possibly the operating system. The predicate `seek/4` is compatible with Quintus Prolog, though the error conditions and signalling is ISO compliant. See also `stream_property/2` and `set_stream_position/2`.

**set\_stream(+Stream, +Attribute)**  
Modify an attribute of an existing stream. *Attribute* specifies the stream property to set. If stream is a *pair* (see `stream_pair/3`) both streams are modified, unless the property is only meaningful on one of the streams or setting both is not meaningful. In particular, `eof_action` only applies to the *read* stream, `representation_errors` only applies to the *write* stream and trying to set `alias` or `line_position` on a pair results in a `permission_error` exception. See also `stream_property/2` and `open/4`.

**alias(AliasName)**  
Set the alias of an already created stream. If *AliasName* is the name of one of the standard

<sup>51</sup> As of version 7.1.19, it is allowed to close one of the members of the stream directly and close the pair later.

<sup>52</sup> Introduced in version 5.6.4 after extending the position term with a byte count. Compatible with SICStus Prolog.

streams, this stream is rebound. Thus, `set_stream(S, current_input)` is the same as `set_input/1`, and by setting the alias of a stream to `user_input`, etc., all user terminal input is read from this stream. See also `interactor/0`.

**buffer**(*Buffering*)

Set the buffering mode of an already created stream. Buffering is one of `full`, `line` or `false`.

**buffer\_size**(+*Size*)

Set the size of the I/O buffer of the underlying stream to *Size* bytes.

**close\_on\_abort**(*Bool*)

Determine whether or not the stream is closed by `abort/0`. By default, streams are closed.

**close\_on\_exec**(*Bool*)

Set the `close_on_exec` property. See `stream_property/2`.

**encoding**(*Atom*)

Defines the mapping between bytes and character codes used for the stream. See section 2.19.1 for supported encodings. The value `bom` causes the stream to check whether the current character is a Unicode BOM marker. If a BOM marker is found, the encoding is set accordingly and the call succeeds. Otherwise the call fails.

**eof\_action**(*Action*)

Set end-of-file handling to one of `eof_code`, `reset` or `error`.

**file\_name**(*FileName*)

Set the filename associated to this stream. This call can be used to set the file for error locations if *Stream* corresponds to *FileName* and is not obtained by opening the file directly but, for example, through a network service.

**line\_position**(*LinePos*)

Set the line position attribute of the stream. This feature is intended to correct position management of the stream after sending a terminal escape sequence (e.g., setting ANSI character attributes). Setting this attribute raises a permission error if the stream does not record positions. See `line_position/2` and `stream_property/2` (property `position`).

**locale**(+*Locale*)

Change the locale of the stream. See section 4.23.

**newline**(*NewlineMode*)

Set input or output translation for newlines. See corresponding `stream_property/2` for details. In addition to the detected modes, an input stream can be set in mode `detect`. It will be set to `dos` if a `\r` character was removed.

**timeout**(*Seconds*)

This option can be used to make streams generate an exception if it takes longer than *Seconds* before any new data arrives at the stream. The value *infinite* (default) makes the stream block indefinitely. Like `wait_for_input/3`, this call only applies to streams that support the `select()` system call. For further information about timeout handling, see `wait_for_input/3`. The exception is of the form

```
error(timeout_error(read, Stream), _)
```

**type(*Type*)**

Set the type of the stream to one of `text` or `binary`. See also `open/4` and the encoding property of streams. Switching to `binary` sets the encoding to `octet`. Switching to `text` sets the encoding to the default text encoding.

**record\_position(*Bool*)**

Do/do not record the line count and line position (see `line_count/2` and `line_position/2`). Calling `set_stream(S, record_position(true))` resets the position the start of line 1.

**representation\_errors(*Mode*)**

Change the behaviour when writing characters to the stream that cannot be represented by the encoding. See also `stream_property/2` and section 2.19.1.

**tty(*Bool*)**

Modify whether Prolog thinks there is a terminal (i.e. human interaction) connected to this stream. On Unix systems the initial value comes from `isatty()`. On Windows, the initial user streams are supposed to be associated to a terminal. See also `stream_property/2`.

**set\_prolog\_IO(+*In*, +*Out*, +*Error*)**

Prepare the given streams for interactive behaviour normally associated to the terminal. *In* becomes the `user_input` and `current_input` of the calling thread. *Out* becomes `user_output` and `current_output`. If *Error* equals *Out* an unbuffered stream is associated to the same destination and linked to `user_error`. Otherwise *Error* is used for `user_error`. Output buffering for *Out* is set to `line` and buffering on *Error* is disabled. See also `prolog/0` and `set_stream/2`. The *clib* package provides the library `prolog_server`, creating a TCP/IP server for creating an interactive session to Prolog.

**4.17.3 Edinburgh-style I/O**

The package for implicit input and output destinations is (almost) compatible with Edinburgh DEC-10 and C-Prolog. The reading and writing predicates refer to, resp., the *current* input and output streams. Initially these streams are connected to the terminal. The current output stream is changed using `tell/1` or `append/1`. The current input stream is changed using `see/1`. The stream's current value can be obtained using `telling/1` for output and `seeing/1` for input.

Source and destination are either a file, `user`, or a term `'pipe(Command)'`. The reserved stream name `user` refers to the terminal.<sup>53</sup> In the predicate descriptions below we will call the source/destination argument *'SrcDest'*. Below are some examples of source/destination specifications.

```
?- see(data).           % Start reading from file 'data'.
?- tell(user).          % Start writing to the terminal.
?- tell(pipe(lpr)).     % Start writing to the printer.
```

Another example of using the `pipe/1` construct is shown below.<sup>54</sup> Note that the `pipe/1` construct is not part of Prolog's standard I/O repertoire.

<sup>53</sup>The ISO I/O layer uses `user_input`, `user_output` and `user_error`.

<sup>54</sup>As of version 5.3.15, the `pipe` construct is supported in the MS-Windows version, both for `swipl.exe` and `swipl-win.exe`. The implementation uses code from the LUA programming language (<http://www.lua.org>).

```
getwd(Wd) :-
    seeing(Old), see(pipe(pwd)),
    collect_wd(String),
    seen, see(Old),
    atom_codes(Wd, String).

collect_wd([C|R]) :-
    get0(C), C \== -1, !,
    collect_wd(R).
collect_wd([]).
```

The effect of `tell/1` is not undone on backtracking, and since the stream handle is not specified explicitly in further I/O operations when using Edinburgh-style I/O, you may write to unintended streams more easily than when using ISO compliant I/O. For example, the following query writes both "a" and "b" into the file 'out' :

```
?- (tell(out), write(a), false ; write(b)), told.
```

### Compatibility notes

Unlike Edinburgh Prolog systems, `telling/1` and `seeing/1` do not return the filename of the current input/output but rather the stream identifier, to ensure the design pattern below works under all circumstances.<sup>55</sup>

```
...,
telling(Old), tell(x),
...,
told, tell(Old),
...,
```

The predicates `tell/1` and `see/1` first check for user, the `pipe(command)` and a stream handle. Otherwise, if the argument is an atom it is first compared to open streams associated to a file with *exactly* the same name. If such a stream exists, created using `tell/1` or `see/1`, output (input) is switched to the open stream. Otherwise a file with the specified name is opened.

The behaviour is compatible with Edinburgh Prolog. This is not without problems. Changing directory, non-file streams, and multiple names referring to the same file easily lead to unexpected behaviour. New code, especially when managing multiple I/O channels, should consider using the ISO I/O predicates defined in section 4.17.2.

### `see(+SrcDest)`

Open *SrcDest* for reading and make it the current input (see `set_input/1`). If *SrcDest* is a stream handle, just make this stream the current input. See the introduction of section 4.17.3 for details.

<sup>55</sup> Filenames can be ambiguous and SWI-Prolog streams can refer to much more than just files.

**tell(+SrcDest)**

Open *SrcDest* for writing and make it the current output (see `set_output/1`). If *SrcDest* is a stream handle, just make this stream the current output. See the introduction of section 4.17.3 for details.

**append(+File)**

Similar to `tell/1`, but positions the file pointer at the end of *File* rather than truncating an existing file. The pipe construct is not accepted by this predicate.

**seeing(?SrcDest)**

Same as `current_input/1`, except that `user` is returned if the current input is the stream `user_input` to improve compatibility with traditional Edinburgh I/O. See the introduction of section 4.17.3 for details.

**telling(?SrcDest)**

Same as `current_output/1`, except that `user` is returned if the current output is the stream `user_output` to improve compatibility with traditional Edinburgh I/O. See the introduction of section 4.17.3 for details.

**seen**

Close the current input stream. The new input stream becomes `user_input`.

**told**

Close the current output stream. The new output stream becomes `user_output`.

### 4.17.4 Switching between Edinburgh and ISO I/O

The predicates below can be used for switching between the implicit and the explicit stream-based I/O predicates.

**set\_input(+Stream)**

[ISO]

Set the current input stream to become *Stream*. Thus, `open(file, read, Stream), set_input(Stream)` is equivalent to `see(file)`.

**set\_output(+Stream)**

[ISO]

Set the current output stream to become *Stream*. See also `with_output_to/2`.

**current\_input(-Stream)**

[ISO]

Get the current input stream. Useful for getting access to the status predicates associated with streams.

**current\_output(-Stream)**

[ISO]

Get the current output stream.

### 4.17.5 Adding IRI schemas

The file handling predicates may be *hooked* to deal with *IRIs*. An IRI starts with  $\langle scheme \rangle : //$ , where  $\langle scheme \rangle$  is a non-empty sequence of lowercase ASCII letters. After detecting the scheme the file manipulation predicates call a hook that is registered using `register_iri_scheme/3`.

Hooking the file operations using extensible IRI schemas allows us to place any resource that is accessed through Prolog I/O predicates on arbitrary devices such as web servers or the ZIP archive used to store program resources (see section 13.2). This is typically combined with `file_search_path/2` declarations to switch between accessing a set of resources from local files, from the program resource database, from a web-server, etc.

**register\_iri\_scheme(+Scheme, :Hook, +Options)**

Register *Hook* to be called by all file handling predicates if a name that starts with *Scheme*:: is encountered. The *Hook* is called by `call/4` using the *operation*, the *IRI* and a term that receives the *result* of the operation. The following operations are defined:

**open(Mode, Options)**

Called by `open/3,4`. The result argument must be unified with a stream.

**access(Mode)**

Called by `access_file/2`, `exists_file/1` (*Mode* is `file`) and `exists_directory/1` (*Mode* is `directory`). The result argument must be unified with a boolean.

**time**

Called by `time_file/2`. The result must be unified with a time stamp.

**size**

Called by `size_file/2`. The result must be unified with an integer representing the size in bytes.

#### 4.17.6 Write onto atoms, code-lists, etc.

**with\_output\_to(+Output, :Goal)**

Run *Goal* as `once/1`, while characters written to the current output are sent to *Output*. The predicate is SWI-Prolog-specific, inspired by various posts to the mailinglist. It provides a flexible replacement for predicates such as `sformat/3`, `swritef/3`, `term_to_atom/2`, `atom_number/2` converting numbers to atoms, etc. The predicate `format/3` accepts the same terms as output argument.

Applications should generally avoid creating atoms by breaking and concatenating other atoms, as the creation of large numbers of intermediate atoms generally leads to poor performance, even more so in multithreaded applications. This predicate supports creating difference lists from character data efficiently. The example below defines the DCG rule `term//1` to insert a term in the output:

```
term(Term, In, Tail) :-
    with_output_to(codes(In, Tail), write(Term)).

?- phrase(term(hello), X).

X = [104, 101, 108, 108, 111]
```

#### A Stream handle or alias

Temporarily switch current output to the given stream.      Redirection using

`without_output_to/2` guarantees the original output is restored, also if *Goal* fails or raises an exception. See also `call_cleanup/2`.

**atom(-Atom)**

Create an atom from the emitted characters. Please note the remark above.

**string(-String)**

Create a string object as defined in section 5.2.

**codes(-Codes)**

Create a list of character codes from the emitted characters, similar to `atom_codes/2`.

**codes(-Codes, -Tail)**

Create a list of character codes as a difference list.

**chars(-Chars)**

Create a list of one-character atoms from the emitted characters, similar to `atom_chars/2`.

**chars(-Chars, -Tail)**

Create a list of one-character atoms as a difference list.

#### 4.17.7 Fast binary term I/O

The predicates in this section provide fast binary I/O of arbitrary Prolog terms, including cyclic terms and terms holding attributed variables. Library `fast_rw` is a SICSTus/Ciao compatible library that extends the core primitives described below.

The binary representation the same as used by `PL_record_external()`. The use of these primitives instead of using `write_canonical/2` has advantages and disadvantages. Below are the main considerations:

- Using `write_canonical/2` allows or exchange of terms with other Prolog systems. The format is stable and, as it is text based, it can be inspected and corrected.
- Using the binary format improves the performance roughly 3 times.
- The size of both representations is comparable.
- The binary format can deal with cycles, sharing and attributes. Special precautions are needed to transfer such terms using `write_canonical/2`. See `term_factorized/3` and `copy_term/3`.
- In the current version, reading the binary format has only incomplete consistency checks. This implies a user must be able to **trust the source** as crafted messages may compromise the reading Prolog system.

**fast\_term\_serialized(?Term, ?String)**

(De-)serialize *Term* to/from *String*.

**fast\_write(+Output, +Term)**

Write *Term* using the fast serialization format to the *Output* stream. *Output must* be a binary stream.



**fast\_read(+Input, -Term)**

Read *Term* using the fast serialization format from the *Input* stream. *Input must* be a binary stream.<sup>56</sup>

**4.18 Status of streams****wait\_for\_input(+ListOfStreams, -ReadyList, +Timeout)***[det]*

Wait for input on one of the streams in *ListOfStreams* and return a list of streams on which input is available in *ReadyList*. Each element of *ListOfStreams* is either a stream or an integer. Integers are considered waitable OS handles. This can be used to wait (also) wait for handles that are not associated with Prolog streams such as UDP sockets. See `tcp_socket/2`.

This predicate waits for at most *Timeout* seconds. *Timeout* may be specified as a floating point number to specify fractions of a second. If *Timeout* equals `infinite`, `wait_for_input/3` waits indefinitely. If *Timeout* is 0 or 0.0 this predicate returns without waiting.<sup>57</sup>

This predicate can be used to implement timeout while reading and to handle input from multiple sources and is typically used to wait for multiple (network) sockets. On Unix systems it may be used on any stream that is associated with a system file descriptor. On Windows it can only be used on sockets. If *ListOfStreams* contains a stream that is not associated with a supported device, a `domain_error(waitable_stream, Stream)` is raised.

The example below waits for input from the user and an explicitly opened secondary terminal stream. On return, *Inputs* may hold `user_input` or *P4* or both.

```
?- open('/dev/tty4', read, P4),
   wait_for_input([user_input, P4], Inputs, 0).
```

When available, the implementation is based on the `poll()` system call. The `poll()` puts no additional restriction on the number of open files the process may have. It does limit the time to  $2^{31} - 1$  milliseconds (a bit less than 25 days). Specifying a too large timeout raises a `representation_error(timeout)` exception. If `poll()` is not supported by the OS, `select()` is used. The `select()` call can only handle file descriptors up to `FD_SETSIZE`. If the set contains a descriptor that exceeds this limit a `representation_error('FD_SETSIZE')` is raised.

Note that `wait_for_input/3` returns streams that have data waiting. This does not mean you can, for example, call `read/2` on the stream without blocking as the stream might hold an incomplete term. The predicate `set_stream/2` using the option `timeout(Seconds)` can be used to make the stream generate an exception if no new data arrives within the timeout period. Suppose two processes communicate by exchanging Prolog terms. The following code makes the server immune for clients that write an incomplete term:

```
...,
tcp_accept(Server, Socket, _Peer),
tcp_open(Socket, In, Out),
set_stream(In, timeout(10)),
```

<sup>56</sup>BUG: The predicate `fast_read/2` may crash on arbitrary input.

<sup>57</sup>Prior to 7.3.23, the integer value '0' was the same as `infinite`.

```
catch(read(In, Term), _, (close(Out), close(In), fail)),
    ...,
```

**byte\_count(+Stream, -Count)**

Byte position in *Stream*. For binary streams this is the same as `character_count/2`. For text files the number may be different due to multi-byte encodings or additional record separators (such as Control-M in Windows).

**character\_count(+Stream, -Count)**

Unify *Count* with the current character index. For input streams this is the number of characters read since the open; for output streams this is the number of characters written. Counting starts at 0.

**line\_count(+Stream, -Count)**

Unify *Count* with the number of lines read or written. Counting starts at 1.

**line\_position(+Stream, -Count)**

Unify *Count* with the position on the current line. Note that this assumes the position is 0 after the open. Tabs are assumed to be defined on each 8-th character, and backspaces are assumed to reduce the count by one, provided it is positive.

## 4.19 Primitive character I/O

See section 4.2 for an overview of supported character representations.

**nl***[ISO]*

Write a newline character to the current output stream. On Unix systems `nl/0` is equivalent to `put(10)`.

**nl(+Stream)***[ISO]*

Write a newline to *Stream*.

**put(+Char)**

Write *Char* to the current output stream. *Char* is either an integer expression evaluating to a character code or an atom of one character. Deprecated. New code should use `put_char/1` or `put_code/1`.

**put(+Stream, +Char)**

Write *Char* to *Stream*. See `put/1` for details.

**put\_byte(+Byte)***[ISO]*

Write a single byte to the output. *Byte* must be an integer between 0 and 255.

**put\_byte(+Stream, +Byte)***[ISO]*

Write a single byte to *Stream*. *Byte* must be an integer between 0 and 255.

**put\_char(+Char)***[ISO]*

Write a character to the current output, obeying the encoding defined for the current output stream. Note that this may raise an exception if the encoding of the output stream cannot represent *Char*.

- put\_char(+Stream, +Char)** [ISO]  
 Write a character to *Stream*, obeying the encoding defined for *Stream*. Note that this may raise an exception if the encoding of *Stream* cannot represent *Char*.
- put\_code(+Code)** [ISO]  
 Similar to `put_char/1`, but using a *character code*. *Code* is a non-negative integer. Note that this may raise an exception if the encoding of the output stream cannot represent *Code*.
- put\_code(+Stream, +Code)** [ISO]  
 Same as `put_code/1` but directing *Code* to *Stream*.
- tab(+Amount)**  
 Write *Amount* spaces on the current output stream. *Amount* should be an expression that evaluates to a positive integer (see section 4.27).
- tab(+Stream, +Amount)**  
 Write *Amount* spaces to *Stream*.
- flush\_output** [ISO]  
 Flush pending output on current output stream. `flush_output/0` is automatically generated by `read/1` and derivatives if the current input stream is `user` and the cursor is not at the left margin.
- flush\_output(+Stream)** [ISO]  
 Flush output on the specified stream. The stream must be open for writing.
- ttyflush**  
 Flush pending output on stream `user`. See also `flush_output/[0,1]`.
- get\_byte(-Byte)** [ISO]  
 Read the current input stream and unify the next byte with *Byte* (an integer between 0 and 255). *Byte* is unified with -1 on end of file.
- get\_byte(+Stream, -Byte)** [ISO]  
 Read the next byte from *Stream* and unify *Byte* with an integer between 0 and 255.
- get\_code(-Code)** [ISO]  
 Read the current input stream and unify *Code* with the character code of the next character. *Code* is unified with -1 on end of file. See also `get_char/1`.
- get\_code(+Stream, -Code)** [ISO]  
 Read the next character code from *Stream*.
- get\_char(-Char)** [ISO]  
 Read the current input stream and unify *Char* with the next character as a one-character atom. See also `atom_chars/2`. On end-of-file, *Char* is unified to the atom `end_of_file`.
- get\_char(+Stream, -Char)** [ISO]  
 Unify *Char* with the next character from *Stream* as a one-character atom. See also `get_char/2`, `get_byte/2` and `get_code/2`.

**get0(-Char)***[deprecated]*

Edinburgh version of the ISO `get_code/1` predicate. Note that Edinburgh Prolog didn't support wide characters and therefore technically speaking `get0/1` should have been mapped to `get_byte/1`. The intention of `get0/1`, however, is to read character codes.

**get0(+Stream, -Char)***[deprecated]*

Edinburgh version of the ISO `get_code/2` predicate. See also `get0/1`.

**get(-Char)***[deprecated]*

Read the current input stream and unify the next non-blank character with *Char*. *Char* is unified with -1 on end of file. The predicate `get/1` operates on character *codes*. See also `get0/1`.

**get(+Stream, -Char)***[deprecated]*

Read the next non-blank character from *Stream*. See also `get/1`, `get0/1` and `get0/2`.

**peek\_byte(-Byte)***[ISO]***peek\_byte(+Stream, -Byte)***[ISO]***peek\_code(-Code)***[ISO]***peek\_code(+Stream, -Code)***[ISO]***peek\_char(-Char)***[ISO]***peek\_char(+Stream, -Char)***[ISO]*

Read the next byte/code/char from the input without removing it. These predicates do not modify the stream's position or end-of-file status. These predicates require a buffered stream (see `set_stream/2`) and raise a permission error if the stream is unbuffered or the buffer is too small to hold the longest multi-byte sequence that might need to be buffered.

**peek\_string(+Stream, +Len, -String)**

Read the next *Len* characters (if the stream is a text stream) or bytes (if the stream is binary) from *Stream* without removing the data. If *Len* is larger than the stream buffer size, the buffer size is increased to *Len*. *String* can be shorter than *Len* if the stream contains less data. This predicate is intended to guess the content type of data read from non-repositionable streams.

**skip(+Code)**

Read the input until *Code* or the end of the file is encountered. A subsequent call to `get_code/1` will read the first character after *Code*.

**skip(+Stream, +Code)**

Skip input (as `skip/1`) on *Stream*.

**get\_single\_char(-Code)**

Get a single character from input stream 'user' (regardless of the current input stream). Unlike `get_code/1`, this predicate does not wait for a return. The character is not echoed to the user's terminal. This predicate is meant for keyboard menu selection, etc. If SWI-Prolog was started with the `--no-tty` option this predicate reads an entire line of input and returns the first non-blank character on this line, or the character code of the newline (10) if the entire line consisted of blank characters.

**at\_end\_of\_stream***[ISO]*

Succeeds after the last character of the current input stream has been read. Also succeeds if there is no valid current input stream.

**at\_end\_of\_stream(+Stream)***[ISO]*

Succeeds after the last character of the named stream is read, or *Stream* is not a valid input stream. The end-of-stream test is only available on buffered input streams (unbuffered input streams are rarely used; see `open/4`).

**set\_end\_of\_stream(+Stream)**

Set the size of the file opened as *Stream* to the current file position. This is typically used in combination with the open-mode `update`.

**copy\_stream\_data(+StreamIn, +StreamOut, +Len)**

Copy *Len* codes from *StreamIn* to *StreamOut*. Note that the copy is done using the semantics of `get_code/2` and `put_code/2`, taking care of possibly recoding that needs to take place between two text files. See section 2.19.1.

**copy\_stream\_data(+StreamIn, +StreamOut)**

Copy all (remaining) data from *StreamIn* to *StreamOut*.

**fill\_buffer(+Stream)***[det]*

Fill the *Stream*'s input buffer. Subsequent calls try to read more input until the buffer is completely filled. This predicate is used together with `read_pending_codes/3` to process input with minimal buffering.

**read\_pending\_codes(+StreamIn, -Codes, ?Tail)**

Read input pending in the input buffer of *StreamIn* and return it in the difference list *Codes-Tail*. That is, the available characters *codes* are used to create the list *Codes* ending in the tail *Tail*. On encountering end-of-file, both *Codes* and *Tail* are unified with the empty list (`[]`).

This predicate is intended for efficient unbuffered copying and filtering of input coming from network connections or devices. It also enables the library `pure_input`, which processes input from files and streams using a DCG.

The following code fragment realises efficient non-blocking copying of data from an input to an output stream. The `at_end_of_stream/1` call checks for end-of-stream and fills the input buffer. Note that the use of a `get_code/2` and `put_code/2` based loop requires a `flush_output/1` call after *each* `put_code/2`. The `copy_stream_data/2` does not allow for inspection of the copied data and suffers from the same buffering issues.

```
copy(In, Out) :-
    repeat,
        fill_buffer(In),
        read_pending_codes(In, Chars, Tail),
        \+ \+ ( Tail = [],
                format(Out, '~s', [Chars]),
                flush_output(Out)
            ),
        ( Tail == []
        -> !
        ; fail
        ).
```

**read\_pending\_chars**(+StreamIn, -Chars, ?Tail)

As `read_pending_codes/3`, but returns a difference list of one-character atoms.

## 4.20 Term reading and writing

This section describes the basic term reading and writing predicates. The predicates `format/[1,2]` and `writeln/2` provide formatted output. Writing to Prolog data structures such as atoms or code-lists is supported by `with_output_to/2` and `format/3`.

Reading is sensitive to the Prolog flag `character_escapes`, which controls the interpretation of the `\` character in quoted atoms and strings.

**write\_term**(+Term, +Options)

[ISO]

The predicate `write_term/2` is the generic form of all Prolog term-write predicates. Valid options are:

**attributes**(Atom)

Define how attributed variables (see section 8.1) are written. The default is determined by the Prolog flag `write_attributes`. Defined values are `ignore` (ignore the attribute), `dots` (write the attributes as `{...}`), `write` (simply hand the attributes recursively to `write_term/2`) and `portray` (hand the attributes to `attr_portray_hook/2`).

**back\_quotes**(Atom)

Fulfills the same role as the `back_quotes` prolog flag. Notably, the value `string` causes string objects to be printed between back quotes and `symbol_char` causes the backquote to be printed unquoted. In all other cases the backquote is printed as a quoted atom.

**brace\_terms**(Bool)

If `true` (default), write `{ } (X)` as `{X}`. See also `dotlists` and `ignore_ops`.

**blobs**(Atom)

Define how non-text blobs are handled. By default, this is left to the write handler specified with the blob type. Using `portray`, `portray/1` is called for each blob encountered. See section 12.4.8.

**character\_escapes**(Bool)

If `true` and `quoted(true)` is active, special characters in quoted atoms and strings are emitted as ISO escape sequences. Default is taken from the reference module (see below).

**cycles**(Bool)

If `true` (default), cyclic terms are written as `@(Template, Substitutions)`, where *Substitutions* is a list `Var = Value`. If `cycles` is `false`, `max_depth` is not given, and *Term* is cyclic, `write_term/2` raises a `domain_error`.<sup>58</sup> See also the `cycles` option in `read_term/2`.

**dotlists**(Bool)

If `true` (default `false`), write lists using the dotted term notation rather than the list notation.<sup>59</sup> Note that as of version 7, the list constructor is `'[]'`. Using `dotlists(true)`,

<sup>58</sup>The `cycles` option and the cyclic term representation using the `@`-term are copied from SICStus Prolog. However, the default in SICStus is set to `false` and SICStus writes an infinite term if not protected by, e.g., the `depth_limit` option.

<sup>59</sup>Copied from ECLiPSe.

`write_term/2` writes a list using ‘.’ as constructor. This is intended for communication with programs such as other Prolog systems, that rely on this notation.

#### **fullstop(*Bool*)**

If `true` (default `false`), add a fullstop token to the output. The dot is preceded by a space if needed and followed by a space (default) or newline if the `nl(true)` option is also given.<sup>60</sup>

#### **ignore\_ops(*Bool*)**

If `true`, the generic term representation  $\langle \langle \text{functor} \rangle \langle \langle \text{args} \rangle \dots \rangle \rangle$  will be used for all terms. Otherwise (default), operators will be used where appropriate.<sup>61</sup>

#### **max\_depth(*Integer*)**

If the term is nested deeper than *Integer*, print the remainder as ellipses (...). A 0 (zero) value (default) imposes no depth limit. This option also delimits the number of printed items in a list. Example:

```
?- write_term(a(s(s(s(s(0))))), [a,b,c,d,e,f]),
    [max_depth(3)]).
a(s(s(...)), [a, b|...])
true.
```

Used by the top level and debugger to limit screen output. See also the Prolog flags `answer_write_options` and `debugger_write_options`.

#### **module(*Module*)**

Define the reference module (default `user`). This defines the default value for the `character_escapes` option as well as the operator definitions to use. See also `op/3`.

#### **nl(*Bool*)**

Add a newline to the output. See also the `fullstop` option.

#### **numbervars(*Bool*)**

If `true`, terms of the format `$VAR(N)`, where *N* is a non-negative integer, will be written as a variable name. If *N* is an atom it is written without quotes. This extension allows for writing variables with user-provided names. The default is `false`. See also `numbervars/3` and the option `variable_names`.

#### **partial(*Bool*)**

If `true` (default `false`), do not reset the logic that inserts extra spaces that separate tokens where needed. This is intended to solve the problems with the code below. Calling `write_value(.)` writes `..`, which cannot be read. By adding `partial(true)` to the option list, it correctly emits `. ..`. Similar problems appear when emitting operators using multiple calls to `write_term/3`.

```
write_value(Value) :-
    write_term(Value, [partial(true)]),
    write('..'), nl.
```

#### **portray(*Bool*)**

Same as `portrayed(Bool)`. Deprecated.

<sup>60</sup>Compatible with [ECLiPSe](#)

<sup>61</sup>In traditional systems this flag also stops the syntactic sugar notation for lists and brace terms. In SWI-Prolog, these are controlled by the separate options `dotlists` and `brace_terms`

**portray\_goal(*Goal*)**

Implies `portray(true)`, but calls *Goal* rather than the predefined hook `portray/1`. *Goal* is called through `call/3`, where the first argument is *Goal*, the second is the term to be printed and the 3rd argument is the current write option list. The write option list is copied from the `write_term` call, but the list is guaranteed to hold an option `priority` that reflects the current priority.

**portrayed(*Bool*)**

If `true`, the hook `portray/1` is called before printing a term that is not a variable. If `portray/1` succeeds, the term is considered printed. See also `print/1`. The default is `false`. This option is an extension to the ISO `write_term` options.

**priority(*Integer*)**

An integer between 0 and 1200 representing the ‘context priority’. Default is 1200. Can be used to write partial terms appearing as the argument to an operator. For example:

```
format('~w = ', [VarName]),
write_term(Value, [quoted(true), priority(699)])
```

**quoted(*Bool*)**

If `true`, atoms and functors that need quotes will be quoted. The default is `false`.

**spacing(+*Spacing*)**

Determines whether and where extra white space is added to enhance readability. The default is `standard`, adding only space where needed for proper tokenization by `read_term/3`. Currently, the only other value is `next_argument`, adding a space after a comma used to separate arguments in a term or list.

**variable\_names(+*List*)**

Assign names to variables in *Term*. *List* is a list of terms *Name* = *Var*, where *Name* is an atom that represents a valid Prolog variable name. Terms where *Var* is bound or is a variable that does not appear in *Term* are ignored. Raises an error if *List* is not a list, one of the members is not a term *Name* = *Var*, *Name* is not an atom or *Name* does not represent a valid Prolog variable name.

The implementation binds the variables from *List* to a term ‘\$VAR’(*Name*). Like `write_canonical/1`, terms that were already bound to ‘\$VAR’(X) before `write_term/2` are printed normally, unless the option `numbervars(true)` is also provided. If the option `numbervars(true)` is used, the user is responsible for avoiding collisions between assigned names and numbered names. See also the `variable_names` option of `read_term/2`.

Possible variable attributes (see section 8.1) are ignored. In most cases one should use `copy_term/3` to obtain a copy that is free of attributed variables and handle the associated constraints as appropriate for the use-case.

**write\_term(+*Stream*, +*Term*, +*Options*)**

[ISO]

As `write_term/2`, but output is sent to *Stream* rather than the current output.

**write\_length(+*Term*, -*Length*, +*Options*)**

[semidet]

True when *Length* is the number of characters emitted for *write\_term*Term, Options. In addition to valid options for `write_term/2`, it processes the option:



**max\_length(+MaxLength)**

If provided, fail if *Length* would be larger than *MaxLength*. The implementation ensures that the runtime is limited when computing the length of a huge term with a bounded maximum.

**write\_canonical(+Term)**

[ISO]

Write *Term* on the current output stream using standard parenthesised prefix notation (i.e., ignoring operator declarations). Atoms that need quotes are quoted. Terms written with this predicate can always be read back, regardless of current operator declarations. Equivalent to `write_term/2` using the options `ignore_ops`, `quoted` and `numbervars` after `numbervars/4` using the `singletons` option.

Note that due to the use of `numbervars/4`, non-ground terms must be written using a *single* `write_canonical/1` call. This used to be the case anyhow, as garbage collection between multiple calls to one of the write predicates can change the `_G(NNN)` identity of the variables.

**write\_canonical(+Stream, +Term)**

[ISO]

Write *Term* in canonical form on *Stream*.

**write(+Term)**

[ISO]

Write *Term* to the current output, using brackets and operators where appropriate.

**write(+Stream, +Term)**

[ISO]

Write *Term* to *Stream*.

**writeln(+Term)**

[ISO]

Write *Term* to the current output, using brackets and operators where appropriate. Atoms that need quotes are quoted. Terms written with this predicate can be read back with `read/1` provided the currently active operator declarations are identical.

**writeln(+Stream, +Term)**

[ISO]

Write *Term* to *Stream*, inserting quotes.

**writeln(+Term)**

Equivalent to `write(Term), nl..` The output stream is locked, which implies no output from other threads can appear between the term and newline.

**writeln(+Stream, +Term)**

Equivalent to `write(Stream, Term), nl(Stream) ..` The output stream is locked, which implies no output from other threads can appear between the term and newline.

**print(+Term)**

Print a term for debugging purposes. The predicate `print/1` acts as if defined as below.

```
print(Term) :-
    current_prolog_flag(print_write_options, Options), !,
    write_term(Term, Options).
print(Term) :-
    write_term(Term, [ portray(true),
                      numbervars(true),
```

```
        quoted(true)
    ]).
```

The `print/1` predicate is used primarily through the `~p` escape sequence of `format/2`, which is commonly used in the recipes used by `print_message/2` to emit messages.

The classical definition of this predicate is equivalent to the ISO predicate `write_term/2` using the options `portray(true)` and `numbervars(true)`. The `portray(true)` option allows the user to implement application-specific printing of terms printed during debugging to facilitate easy understanding of the output. See also `portray/1` and `portray_text`. SWI-Prolog adds `quoted(true)` to (1) facilitate the copying/pasting of terms that are not affected by `portray/1` and to (2) allow numbers, atoms and strings to be more easily distinguished, e.g., `42`, `'42'` and `"42"`.

#### **print(+Stream, +Term)**

Print *Term* to *Stream*.

#### **portray(+Term)**

A dynamic predicate, which can be defined by the user to change the behaviour of `print/1` on (sub)terms. For each subterm encountered that is not a variable `print/1` first calls `portray/1` using the term as argument. For lists, only the list as a whole is given to `portray/1`. If `portray/1` succeeds `print/1` assumes the term has been written.

#### **read(-Term)**

[ISO]

Read the next Prolog term from the current input stream and unify it with *Term*. On a syntax error `read/1` displays an error message, attempts to skip the erroneous term and fails. On reaching end-of-file *Term* is unified with the atom `end_of_file`.

#### **read(+Stream, -Term)**

[ISO]

Read *Term* from *Stream*.

#### **read\_clause(+Stream, -Term, +Options)**

Equivalent to `read_term/3`, but sets options according to the current compilation context and optionally processes comments. Defined options:

##### **syntax\_errors(+Atom)**

See `read_term/3`, but the default is `dec10` (report and restart).

##### **term\_position(-TermPos)**

Same as for `read_term/3`.

##### **subterm\_positions(-TermPos)**

Same as for `read_term/3`.

##### **variable\_names(-Bindings)**

Same as for `read_term/3`.

##### **process\_comment(+Boolean)**

If `true` (default), call `prolog:comment_hook(Comments, TermPos, Term)` if this multifile hook is defined (see `prolog:comment_hook/3`). This is used to drive PDoc.

**comments(-Comments)**

If provided, unify *Comments* with the comments encountered while reading *Term*. This option implies `process_comment(false)`.

The `singletons` option of `read_term/3` is initialised from the active style-checking mode. The `module` option is initialised to the current compilation module (see `prolog_load_context/2`).

**read\_term(-Term, +Options)**

[ISO]

Read a term from the current input stream and unify the term with *Term*. The reading is controlled by options from the list of *Options*. If this list is empty, the behaviour is the same as for `read/1`. The options are upward compatible with Quintus Prolog. The argument order is according to the ISO standard. Syntax errors are always reported using exception-handling (see `catch/3`). Options:

**backquoted\_string(Bool)**

If `true`, read ``...`` to a string object (see section 5.2). The default depends on the Prolog flag `back_quotes`.

**character\_escapes(Bool)**

Defines how to read `\` escape sequences in quoted atoms. See the Prolog flag `character_escapes` in `current_prolog_flag/2`. (SWI-Prolog).

**comments(-Comments)**

Unify *Comments* with a list of *Position-Comment*, where *Position* is a stream position object (see `stream_position_data/3`) indicating the start of a comment and *Comment* is a string object containing the text including delimiters of a comment. It returns all comments from where the `read_term/2` call started up to the end of the term read.

**cycles(Bool)**

If `true` (default `false`), re-instantiate templates as produced by the corresponding `write_term/2` option. Note that the default is `false` to avoid misinterpretation of `@(Template, Substitutions)`, while the default of `write_term/2` is `true` because emitting cyclic terms without using the template construct produces an infinitely large term (read: it will generate an error after producing a huge amount of output).

**dotlists(Bool)**

If `true` (default `false`), read `.(a, [])` as a list, even if lists are internally not constructed using the dot as functor. This is primarily intended to read the output from `write_canonical/1` from other Prolog systems. See section 5.1.

**double\_quotes(Atom)**

Defines how to read `"..."` strings. See the Prolog flag `double_quotes`. (SWI-Prolog).

**module(Module)**

Specify *Module* for operators, `character_escapes` flag and `double_quotes` flag. The value of the latter two is overruled if the corresponding `read_term/3` option is provided. If no module is specified, the current 'source module' is used. (SWI-Prolog).

**quasi\_quotations(-List)**

If present, unify *List* with the quasi quotations (see section A.33) instead of evaluating

quasi quotations. Each quasi quotation is a term `quasi_quotation(+Syntax, +Quotation, +VarDict, -Result)`, where *Syntax* is the term in `{|Syntax||...|}`, *Quotation* is a list of character codes that represent the quotation, *VarDict* is a list of *Name=Variable* and *Result* is a variable that shares with the place where the quotation must be inserted. This option is intended to support tools that manipulate Prolog source text.

### **singletons(*Vars*)**

As `variable_names`, but only reports the variables occurring only once in the *Term* read (ISO). If *Vars* is the constant `warning`, singleton variables are reported using `print_message/2`. The variables appear in the order they have been read. The latter option provides backward compatibility and is used to read terms from source files. Not all singleton variables are reported as a warning. See section 2.16.1 for the rules that apply for warning about a singleton variable.<sup>62</sup>

### **syntax\_errors(*Atom*)**

If `error` (default), throw an exception on a syntax error. Other values are `fail`, which causes a message to be printed using `print_message/2`, after which the predicate fails, `quiet` which causes the predicate to fail silently, and `decl0` which causes syntax errors to be printed, after which `read_term/[2,3]` continues reading the next term. Using `decl0`, `read_term/[2,3]` never fails. (Quintus, SICStus).

### **subterm\_positions(*TermPos*)**

Describes the detailed layout of the term. The formats for the various types of terms are given below. All positions are character positions. If the input is related to a normal stream, these positions are relative to the start of the input; when reading from the terminal, they are relative to the start of the term.

#### *From-To*

Used for primitive types (atoms, numbers, variables).

### **string\_position(*From, To*)**

Used to indicate the position of a string enclosed in double quotes (").

### **brace\_term\_position(*From, To, Arg*)**

Term of the form `{...}`, as used in DCG rules. *Arg* describes the argument.

### **list\_position(*From, To, Elms, Tail*)**

A list. *Elms* describes the positions of the elements. If the list specifies the tail as `|<TailTerm>`, *Tail* is unified with the term position of the tail, otherwise with the atom `none`.

### **term\_position(*From, To, FFrom, FTo, SubPos*)**

Used for a compound term not matching one of the above. *FFrom* and *FTo* describe the position of the functor. *SubPos* is a list, each element of which describes the term position of the corresponding subterm.

### **dict\_position(*From, To, TagFrom, TagTo, KeyValuePosList*)**

Used for a dict (see section 5.4). The position of the key-value pairs is described by *KeyValuePosList*, which is a list of `key_value_position/7` terms. The `key_value_position/7` terms appear in the order of the input. Because maps do not preserve ordering, the key is provided in the position description.

<sup>62</sup>As of version 7.7.17, all variables starting with an underscore except for the truly anonymous variable are returned in *Vars*. Older versions only reported those that would have been reported if `warning` is used.

**key\_value\_position**(*From, To, SepFrom, SepTo, Key, KeyPos, ValuePos*)

Used for key-value pairs in a map (see section 5.4). It is similar to the `term_position/5` that would be created, except that the key and value positions do not need an intermediate list and the key is provided in *Key* to enable synchronisation of the file position data with the data structure.

**parentheses\_term\_position**(*From, To, ContentPos*)

Used for terms between parentheses. This is an extension compared to the original Quintus specification that was considered necessary for secure refactoring of terms.

**quasi\_quotation\_position**(*From, To, SyntaxFrom, SyntaxTo, ContentPos*)

Used for quasi quotations.

**term\_position**(*Pos*)

Unifies *Pos* with the starting position of the term read. *Pos* is of the same format as used by `stream_property/2`.

**var\_prefix**(*Bool*)

If `true`, demand variables to start with an underscore. See section 2.16.1.

**variables**(*Vars*)

Unify *Vars* with a list of variables in the term. The variables appear in the order they have been read. See also `term_variables/2`. (ISO).

**variable\_names**(*Vars*)

Unify *Vars* with a list of '*Name = Var*', where *Name* is an atom describing the variable name and *Var* is a variable that shares with the corresponding variable in *Term*. (ISO). The variables appear in the order they have been read.

**read\_term**(*+Stream, -Term, +Options*)

[ISO]

Read term with options from *Stream*. See `read_term/2`.

**read\_term\_from\_atom**(*+Atom, -Term, +Options*)

Use `read_term/3` to read the next term from *Atom*. *Atom* is either an atom or a string object (see section 5.2). It is not required for *Atom* to end with a full-stop. This predicate supersedes `atom_to_term/3`.

**read\_history**(*+Show, +Help, +Special, +Prompt, -Term, -Bindings*)

Similar to `read_term/2` using the option `variable_names`, but allows for history substitutions. `read_history/6` is used by the top level to read the user's actions. *Show* is the command the user should type to show the saved events. *Help* is the command to get an overview of the capabilities. *Special* is a list of commands that are not saved in the history. *Prompt* is the first prompt given. Continuation prompts for more lines are determined by `prompt/2`. A `%w` in the prompt is substituted by the event number. See section 2.7 for available substitutions.

SWI-Prolog calls `read_history/6` as follows:

```
read_history(h, '!h', [trace], '%w ?- ', Goal, Bindings)
```

**prompt**(*-Old, +New*)

Set prompt associated with `read/1` and its derivatives. *Old* is first unified with the current

prompt. On success the prompt will be set to *New* if this is an atom. Otherwise an error message is displayed. A prompt is printed if one of the read predicates is called and the cursor is at the left margin. It is also printed whenever a newline is given and the term has not been terminated. Prompts are only printed when the current input stream is *user*.

### **prompt1(+Prompt)**

Sets the prompt for the next line to be read. Continuation lines will be read using the prompt defined by `prompt/2`.

## 4.21 Analysing and Constructing Terms

### **functor(?Term, ?Name, ?Arity)**

[ISO]

True when *Term* is a term with functor *Name/Arity*. If *Term* is a variable it is unified with a new term whose arguments are all different variables (such a term is called a skeleton). If *Term* is atomic, *Arity* will be unified with the integer 0, and *Name* will be unified with *Term*. Raises `instantiation_error` if *Term* is unbound and *Name/Arity* is insufficiently instantiated.

SWI-Prolog also supports terms with arity 0, as in `a()` (see section 5). Such terms must be processed using `compound_name_arity/3`. The predicate `functor/3` and `=.. /2` raise a `domain_error` when faced with these terms. Without this precaution, the inconsistency demonstrated below could happen silently.<sup>63</sup>

```
?- functor(a(), N, A).
N = a, A = 0.
?- functor(T, a, 0).
T = a.
```

### **arg(?Arg, +Term, ?Value)**

[ISO]

*Term* should be instantiated to a term, *Arg* to an integer between 1 and the arity of *Term*. *Value* is unified with the *Arg*-th argument of *Term*. *Arg* may also be unbound. In this case *Value* will be unified with the successive arguments of the term. On successful unification, *Arg* is unified with the argument number. Backtracking yields alternative solutions.<sup>64</sup> The predicate `arg/3` fails silently if *Arg* = 0 or *Arg* > *arity* and raises the exception `domain_error(not_less_than_zero, Arg)` if *Arg* < 0.

### **?Term =.. ?List**

[ISO]

*List* is a list whose head is the functor of *Term* and the remaining arguments are the arguments of the term. Either side of the predicate may be a variable, but not both. This predicate is called ‘Univ’.

```
?- foo(hello, X) =.. List.
List = [foo, hello, X]
```

<sup>63</sup>Raising a domain error was suggested by Jeff Schultz.

<sup>64</sup>The instantiation pattern `(-, +, ?)` is an extension to ‘standard’ Prolog. Some systems provide `genarg/3` that covers this pattern.

```
?- Term =.. [baz, foo(1)].
Term = baz(foo(1))
```

SWI-Prolog also supports terms with arity 0, as in `a()` (see section 5). Such terms must be processed using `compound_name_arguments/3`. This predicate raises a domain error as shown below. See also `functor/3`.

```
?- a() =.. L.
ERROR: Domain error: 'compound_non_zero_arity' expected, found 'a()'
```

#### **compound\_name\_arity(?Compound, ?Name, ?Arity)**

Rationalized version of `functor/3` that only works for compound terms and can examine and create compound terms with zero arguments (e.g, `name()`). See also `compound_name_arguments/3`.

#### **compound\_name\_arguments(?Compound, ?Name, ?Arguments)**

Rationalized version of `=.. /2` that can compose and decompose compound terms with zero arguments. See also `compound_name_arity/3`.

#### **numbervars(+Term, +Start, -End)**

Unify the free variables in *Term* with a term `$VAR(N)`, where *N* is the number of the variable. Counting starts at *Start*. *End* is unified with the number that should be given to the next variable.<sup>65</sup> The example below illustrates this. Note that the toplevel prints '`$VAR`' (0) as *A* due to the `numbervars(true)` option used to print answers.

```
?- Term = f(X,Y,X),
   numbervars(Term, 0, End),
   write_canonical(Term), nl.
f('$VAR' (0), '$VAR' (1), '$VAR' (0))
Term = f(A, B, A),
X = A,
Y = B,
End = 2.
```

See also the `numbervars` option to `write_term/3` and `numbervars/4`.

#### **numbervars(+Term, +Start, -End, +Options)**

As `numbervars/3`, providing the following options:

##### **functor\_name(+Atom)**

Name of the functor to use instead of `$VAR`.

<sup>65</sup>BUG: Only *tagged integers* are supported (see the Prolog flag `max_tagged_integer`). This suffices to count all variables that can appear in the largest term that can be represented, but does not support arbitrary large integer values for *Start*. On overflow, a `representation_error(tagged_integer)` exception is raised.

**attvar(+Action)**

What to do if an attributed variable is encountered. Options are `skip`, which causes `numbervars/3` to ignore the attributed variable, `bind` which causes it to treat it as a normal variable and assign the next '`$VAR`' (N) term to it, or (default) `error` which raises a `type_error` exception.<sup>66</sup>

**singletons(+Bool)**

If `true` (default `false`), `numbervars/4` does singleton detection. Singleton variables are unified with '`$VAR`' ('\_'), causing them to be printed as `_` by `write_term/2` using the `numbervars` option. This option is exploited by `portray_clause/2` and `write_canonical/2`.<sup>67</sup>

**var\_number(@Term, -VarNumber)**

True if *Term* is numbered by `numbervars/3` and *VarNumber* is the number given to this variable. This predicate avoids the need for unification with '`$VAR`' (X) and opens the path for replacing this valid Prolog term by an internal representation that has no textual equivalent.

**term\_variables(+Term, -List)**

[ISO]

Unify *List* with a list of variables, each sharing with a unique variable of *Term*.<sup>68</sup> The variables in *List* are ordered in order of appearance traversing *Term* depth-first and left-to-right. See also `term_variables/3` and `nonground/2`. For example:

```
?- term_variables(a(X, b(Y, X), Z), L).
L = [X, Y, Z].
```

**nonground(+Term, -Var)**

[semidet]

True when *Var* is a variable in *Term*. Fails if *Term* is *ground* (see `ground/1`). This predicate is intended for coroutining to trigger a wakeup if *Term* becomes *ground*, e.g., using `when/2`. The current implementation always returns the first variable in depth-first left-right search. Ideally it should return a random member of the set of variables (see `term_variables/2`) to realise logarithmic complexity for the *ground* trigger. Compatible with ECLiPSe and hProlog.

**term\_variables(+Term, -List, ?Tail)**

Difference list version of `term_variables/2`. That is, *Tail* is the tail of the variable list *List*.

**term\_singletons(+Term, -List)**

Unify *List* with a list of variables, each sharing with a variable that appears only once in *Term*.<sup>69</sup> Note that, if a variable appears in a shared subterm, it is *not* considered singleton. Thus, *A* is *not* a singleton in the example below. See also the `singleton` option of `numbervars/4`.

<sup>66</sup>This behaviour was decided after a long discussion between David Reitter, Richard O'Keefe, Bart Demoen and Tom Schrijvers.

<sup>67</sup>BUG: Currently this option is ignored for cyclic terms.

<sup>68</sup>This predicate used to be called `free_variables/2`. The name `term_variables/2` is more widely used. The old predicate is still available from the library `backcomp`.

<sup>69</sup>BUG: In the current implementation *Term* must be acyclic. If not, a `representation_error` is raised.



```
?- S = a(A), term_singletons(t(S,S), L).
L = [].
```

**copy\_term(+In, -Out)***[ISO]*

Create a version of *In* with renamed (fresh) variables and unify it to *Out*. Attributed variables (see section 8.1) have their attributes copied. The implementation of `copy_term/2` can deal with infinite trees (cyclic terms). As pure Prolog cannot distinguish a ground term from another ground term with exactly the same structure, ground sub-terms are *shared* between *In* and *Out*. Sharing ground terms does affect `setarg/3`. SWI-Prolog provides `duplicate_term/2` to create a true copy of a term.

**4.21.1 Non-logical operations on terms**

Prolog is not able to *modify* instantiated parts of a term. Lacking that capability makes the language much safer, but unfortunately there are problems that suffer severely in terms of time and/or memory usage. Always try hard to avoid the use of these primitives, but they can be a good alternative to using dynamic predicates. See also section 4.33, discussing the use of global variables.

**setarg(+Arg, +Term, +Value)**

Extra-logical predicate. Assigns the *Arg*-th argument of the compound term *Term* with the given *Value*. The assignment is undone if backtracking brings the state back into a position before the `setarg/3` call. See also `nb_setarg/3`.

This predicate may be used for destructive assignment to terms, using them as an extra-logical storage bin. Always try hard to avoid the use of `setarg/3` as it is not supported by many Prolog systems and one has to be very careful about unexpected copying as well as unexpected noncopying of terms. A good practice to improve somewhat on this situation is to make sure that terms whose arguments are subject to `setarg/3` have one unused and unshared variable in addition to the used arguments. This variable avoids unwanted sharing in, e.g., `copy_term/2`, and causes the term to be considered as non-ground. An alternative is to use `put_attr/3` to attach information to attributed variables (see section 8.1).

**nb\_setarg(+Arg, +Term, +Value)**

Assigns the *Arg*-th argument of the compound term *Term* with the given *Value* as `setarg/3`, but on backtracking the assignment is *not* reversed. If *Value* is not atomic, it is duplicated using `duplicate_term/2`. This predicate uses the same technique as `nb_setval/2`. We therefore refer to the description of `nb_setval/2` for details on non-backtrackable assignment of terms. This predicate is compatible with GNU-Prolog `setarg(A,T,V,false)`, removing the type restriction on *Value*. See also `nb_linkarg/3`. Below is an example for counting the number of solutions of a goal. Note that this implementation is thread-safe, reentrant and capable of handling exceptions. Realising these features with a traditional implementation based on `assert/retract` or `flag/3` is much more complicated.

```
:- meta_predicate
    succeeds_n_times(0, -).
```

```

succeeds_n_times(Goal, Times) :-
    Counter = counter(0),
    (   Goal,
        arg(1, Counter, N0),
        N is N0 + 1,
        nb_setarg(1, Counter, N),
        fail
    ;   arg(1, Counter, Times)
    ).

```

**nb\_linkarg(+Arg, +Term, +Value)**

As `nb_setarg/3`, but like `nb_linkval/2` it does *not* duplicate *Value*. Use with extreme care and consult the documentation of `nb_linkval/2` before use.

**duplicate\_term(+In, -Out)**

Version of `copy_term/2` that also copies ground terms and therefore ensures that destructive modification using `setarg/3` does not affect the copy. See also `nb_setval/2`, `nb_linkval/2`, `nb_setarg/3` and `nb_linkarg/3`.

**same\_term(@T1, @T2)**

[semidet]

True if *T1* and *T2* are equivalent and will remain equivalent, even if `setarg/3` is used on either of them. This means *T1* and *T2* are the same variable, equivalent atomic data or a compound term allocated at the same address.

## 4.22 Analysing and Constructing Atoms

These predicates convert between Prolog constants and lists of character codes. The predicates `atom_codes/2`, `number_codes/2` and `name/2` behave the same when converting from a constant to a list of character codes. When converting the other way around, `atom_codes/2` will generate an atom, `number_codes/2` will generate a number or exception and `name/2` will return a number if possible and an atom otherwise.

The ISO standard defines `atom_chars/2` to describe the ‘broken-up’ atom as a list of one-character atoms instead of a list of codes. Up to version 3.2.x, SWI-Prolog’s `atom_chars/2` behaved like `atom_codes`, compatible with Quintus and SICStus Prolog. As of 3.3.x, SWI-Prolog `atom_codes/2` and `atom_chars/2` are compliant to the ISO standard.

To ease the pain of all variations in the Prolog community, all SWI-Prolog predicates behave as flexible as possible. This implies the ‘list-side’ accepts either a code-list or a char-list and the ‘atom-side’ accepts all atomic types (atom, number and string).

**atom\_codes(?Atom, ?String)**

[ISO]

Convert between an atom and a list of character codes. If *Atom* is instantiated, it will be translated into a list of character codes and the result is unified with *String*. If *Atom* is unbound and *String* is a list of character codes, *Atom* will be unified with an atom constructed from this list.

**atom\_chars(?Atom, ?CharList)**

[ISO]

As `atom_codes/2`, but *CharList* is a list of one-character atoms rather than a list of character

codes.<sup>70</sup>

```
?- atom_chars(hello, X) .

X = [h, e, l, l, o]
```

**char\_code**(?Atom, ?Code)

[ISO]

Convert between character and character code for a single character.<sup>71</sup>

**number\_chars**(?Number, ?CharList)

[ISO]

Similar to `atom_chars/2`, but converts between a number and its representation as a list of one-character atoms. If *CharList* is a *proper list*, i.e., not unbound or a *partial list*, *CharList* is parsed according to the Prolog syntax for numbers and the resulting number is unified with *Number*. Otherwise, if *Number* is a number, *Number* is serialized and the result is unified with *CharList*.

If *CharList* is parsed, it is parsed using the Prolog syntax for numbers. Following the ISO standard, it allows for *leading* white space (including newlines) and does not allow for *trailing* white space.<sup>72</sup> A `syntax_error` exception is raised if *CharList* does not represent a valid Prolog number.

**number\_codes**(?Number, ?CodeList)

[ISO]

As `number_chars/2`, but converts to a list of character codes rather than one-character atoms. In the mode `(-,+)`, both predicates behave identically to improve handling of non-ISO source.

**atom\_number**(?Atom, ?Number)

Realises the popular combination of `atom_codes/2` and `number_codes/2` to convert between atom and number (integer or float) in one predicate, avoiding the intermediate list. Unlike the ISO `number_codes/2` predicates, `atom_number/2` fails silently in mode `(+,-)` if *Atom* does not represent a number.<sup>73</sup> See also `atomic_list_concat/2` for assembling an atom from atoms and numbers.

**name**(?Atomic, ?CodeList)

*CodeList* is a list of character codes representing the same text as *Atomic*. Each of the arguments may be a variable, but not both. When *CodeList* describes an integer or floating point number and *Atomic* is a variable, *Atomic* will be unified with the numeric value described by *CodeList* (e.g., `name(N, "300")`, `400 is N + 100` succeeds). If *CodeList* is not a representation of a number, *Atomic* will be unified with the atom with the name given by the character code list. If *Atomic* is an atom or number, the unquoted print representation of it as a character code list is unified with *CodeList*.

<sup>70</sup>Up to version 3.2.x, `atom_chars/2` behaved as the current `atom_codes/2`. The current definition is compliant with the ISO standard.

<sup>71</sup>This is also called `atom_char/2` in older versions of SWI-Prolog as well as some other Prolog implementations. The `atom_char/2` predicate is available from the library `backcomp.pl`.

<sup>72</sup>ISO also allows for Prolog comments in leading white space. We—and most other implementations—believe this is incorrect. We also believe it would have been better not to allow for white space, or to allow for both leading and trailing white space. Prolog syntax-based conversion can also be achieved using `format/3` and `read_from_chars/2`.

<sup>73</sup>Versions prior to 6.1.7 raised a syntax error, compliant to `number_codes/2`.

This predicate is part of the Edinburgh tradition. It should be considered *deprecated* although, given its long tradition, it is unlikely to be removed from the system. It still has some value for converting input to, depending on the syntax, a number or atom. New code should consider the ISO predicates `atom_codes/2`, `number_codes/2` or the SWI-Prolog predicate `atom_number/2`.

**term\_to\_atom(?Term, ?Atom)**

True if *Atom* describes a term that unifies with *Term*. When *Atom* is instantiated, *Atom* is parsed and the result unified with *Term*. If *Atom* has no valid syntax, a `syntax_error` exception is raised. Otherwise *Term* is “written” on *Atom* using `writeln_term/2` with the option `quoted(true)`. See also `format/3`, `write_output_to/2` and `term_string/2`.

**atom\_to\_term(+Atom, -Term, -Bindings)**

[deprecated]

Use *Atom* as input to `read_term/2` using the option `variable_names` and return the read term in *Term* and the variable bindings in *Bindings*. *Bindings* is a list of *Name* = *Var* couples, thus providing access to the actual variable names. See also `read_term/2`. If *Atom* has no valid syntax, a `syntax_error` exception is raised. New code should use `read_term_from_atom/3`.

**atom\_concat(?Atom1, ?Atom2, ?Atom3)**

[ISO]

*Atom3* forms the concatenation of *Atom1* and *Atom2*. At least two of the arguments must be instantiated to atoms. This predicate also allows for the mode `(-, -, +)`, non-deterministically splitting the 3rd argument into two parts (as `append/3` does for lists). SWI-Prolog allows for atomic arguments. Portable code must use `atomic_concat/3` if non-atom arguments are involved.

**atomic\_concat(+Atomic1, +Atomic2, -Atom)**

*Atom* represents the text after converting *Atomic1* and *Atomic2* to text and concatenating the result:

```
?- atomic_concat(name, 42, X).
X = name42.
```

**atomic\_list\_concat(+List, -Atom)**

[commons]

*List* is a list of strings, atoms, integers or floating point numbers. Succeeds if *Atom* can be unified with the concatenated elements of *List*. Equivalent to `atomic_list_concat(List, "", Atom)`.

**atomic\_list\_concat(+List, +Separator, -Atom)**

[commons]

Creates an atom just like `atomic_list_concat/2`, but inserts *Separator* between each pair of inputs. For example:

```
?- atomic_list_concat([gnu, gnat], ' ', A).

A = 'gnu, gnat'
```

The SWI-Prolog version of this predicate can also be used to split atoms by instantiating *Separator* and *Atom* as shown below. We kept this functionality to simplify porting old SWI-Prolog

code where this predicate was called `concat_atom/3`. When used in mode `(-,+,+)`, *Separator* must be a non-empty atom. See also `split_string/4`.

```
?- atomic_list_concat(L, -, 'gnu-gnat').

L = [gnu, gnat]
```

### **atom\_length(+Atom, -Length)**

[ISO]

True if *Atom* is an atom of *Length* characters. The SWI-Prolog version accepts all atomic types, as well as code-lists and character-lists. New code should avoid this feature and use `write_length/3` to get the number of characters that would be written if the argument was handed to `write_term/3`.

### **atom\_prefix(+Atom, +Prefix)**

[deprecated]

True if *Atom* starts with the characters from *Prefix*. Its behaviour is equivalent to `?- sub_atom(Atom, 0, -, -, Prefix)`. Deprecated.

### **sub\_atom(+Atom, ?Before, ?Len, ?After, ?Sub)**

[ISO]

ISO predicate for breaking atoms. It maintains the following relation: *Sub* is a sub-atom of *Atom* that starts at *Before*, has *Len* characters, and *Atom* contains *After* characters after the match.

```
?- sub_atom(abc, 1, 1, A, S).

A = 1, S = b
```

The implementation minimises non-determinism and creation of atoms. This is a flexible predicate that can do search, prefix- and suffix-matching, etc.

### **sub\_atom\_icasechk(+Haystack, ?Start, +Needle)**

[semidet]

True when *Needle* is a sub atom of *Haystack* starting at *Start*. The match is ‘half case insensitive’, i.e., uppercase letters in *Needle* only match themselves, while lowercase letters in *Needle* match case insensitively. *Start* is the first 0-based offset inside *Haystack* where *Needle* matches.<sup>74</sup>

## **4.23 Localization (locale) support**

SWI-Prolog provides (currently limited) support for localized applications.

- The predicates `char_type/2` and `code_type/2` query character classes depending on the locale.
- The predicates `collation_key/2` and `locale_sort/2` can be used for locale dependent sorting of atoms.

<sup>74</sup>This predicate replaces `$apropos_match/2`, used by the help system, while extending it with locating the (first) match and performing case insensitive prefix matching. We are still not happy with the name and interface.

- The predicate `format_time/3` can be used to format time and date representations, where some of the specifiers are locale dependent.
- The predicate `format/2` provides locale-specific formatting of numbers. This functionality is based on a more fine-grained localization model that is the subject of this section.

A locale is a (optionally named) read-only object that provides information to locale specific functions.<sup>75</sup> The system creates a default locale object named `default` from the system locale. This locale is used as the initial locale for the three standard streams as well as the `main` thread. Locale sensitive output predicates such as `format/3` get their locale from the stream to which they deliver their output. New streams get their locale from the thread that created the stream. Threads get their locale from the thread that created them.

**locale\_create(-Locale, +Default, +Options)**

Create a new locale object. *Default* is either an existing locale or a string that denotes the name of a locale provided by the system, such as `"en_EN.UTF-8"`. The values read from the default locale can be modified using *Options*. *Options* provided are:

**alias(+Atom)**

Give the locale a name.

**decimal\_point(+Atom)**

Specify the decimal point to use.

**thousands\_sep(+Atom)**

Specify the string that delimits digit groups. Only effective if `grouping` is also specified.

**grouping(+List)**

Specify the grouping of digits. Groups are created from the right (least significant) digits, left of the decimal point. *List* is a list of integers, specifying the number of digits in each group, counting from the right. If the last element is `repeat(Count)`, the remaining digits are grouped in groups of size *Count*. If the last element is a normal integer, digits further to the left are not grouped.

For example, the English locale uses

```
[ decimal_point('.') , thousands_sep(',') , grouping([repeat(3)]) ]
```

Named locales exist until they are destroyed using `locale_destroy/1` and they are no longer referenced. Unnamed locales are subject to (atom) garbage collection.

**locale\_destroy(+Locale)**

Destroy a locale. If the locale is named, this removes the name association from the locale, after which the locale is left to be reclaimed by garbage collection.

**locale\_property(?Locale, ?Property)**

True when *Locale* has *Property*. Properties are the same as the *Options* described with `locale_create/3`.

<sup>75</sup>The locale interface described in this section and its effect on `format/2` and reading integers from digit groups was discussed on the SWI-Prolog mailinglist. Most input in this discussion is from Ulrich Neumerkel and Richard O'Keefe. The predicates in this section were designed by Jan Wielemaker.

**set\_locale(+*Locale*)**

Set the default locale for the current thread, as well as the locale for the standard streams (`user_input`, `user_output`, `user_error`, `current_output` and `current_input`). This locale is used for new streams, unless overruled using the `locale(Locale)` option of `open/4` or `set_stream/2`.

**current\_locale(-*Locale*)**

True when *Locale* is the locale of the calling thread.

## 4.24 Character properties

SWI-Prolog offers two comprehensive predicates for classifying characters and character codes. These predicates are defined as built-in predicates to exploit the C-character classification's handling of *locale* (handling of local character sets). These predicates are fast, logical and deterministic if applicable.

In addition, there is the library `ctypes` providing compatibility with some other Prolog systems. The predicates of this library are defined in terms of `code_type/2`.

**char\_type(?*Char*, ?*Type*)**

Tests or generates alternative *Types* or *Chars*. The character types are inspired by the standard C `<ctype.h>` primitives. Note that the mode `(-,+)` is only efficient if the *Type* has a parameter, e.g., `char_type(C, digit(8))`. With an atomic *Type* the whole unicode range (0..0x1ffff) is generated and tested against the C character classification function.

**alnum**

*Char* is a letter (upper- or lowercase) or digit.

**alpha**

*Char* is a letter (upper- or lowercase).

**csym**

*Char* is a letter (upper- or lowercase), digit or the underscore (`_`). These are valid C and Prolog symbol characters.

**csymf**

*Char* is a letter (upper- or lowercase) or the underscore (`_`). These are valid first characters for C and Prolog symbols.

**ascii**

*Char* is a 7-bit ASCII character (0..127).

**white**

*Char* is a space or tab, i.e. white space inside a line.

**cntrl**

*Char* is an ASCII control character (0..31), ASCII DEL character (127), or non-ASCII character in the range 128..159 or 8232..8233.

**digit**

*Char* is a digit.

**digit(*Weight*)**

*Char* is a digit with value *Weight*. I.e. `char_type(X, digit(6))` yields `X = '6'`. Useful for parsing numbers.

**xdigit(*Weight*)**

*Char* is a hexadecimal digit with value *Weight*. I.e. `char_type(a, xdigit(X))` yields *X* = '10'. Useful for parsing numbers.

**graph**

*Char* produces a visible mark on a page when printed. Note that the space is not included!

**lower**

*Char* is a lowercase letter.

**lower(*Upper*)**

*Char* is a lowercase version of *Upper*. Only true if *Char* is lowercase and *Upper* uppercase.

**to\_lower(*Upper*)**

*Char* is a lowercase version of *Upper*. For non-letters, or letter without case, *Char* and *Lower* are the same. See also `upcase_atom/2` and `downcase_atom/2`.

**upper**

*Char* is an uppercase letter.

**upper(*Lower*)**

*Char* is an uppercase version of *Lower*. Only true if *Char* is uppercase and *Lower* lowercase.

**to\_upper(*Lower*)**

*Char* is an uppercase version of *Lower*. For non-letters, or letter without case, *Char* and *Lower* are the same. See also `upcase_atom/2` and `downcase_atom/2`.

**punct**

*Char* is a punctuation character. This is a `graph` character that is not a letter or digit.

**space**

*Char* is some form of layout character (tab, vertical tab, newline, etc.).

**end\_of\_file**

*Char* is -1.

**end\_of\_line**

*Char* ends a line (ASCII: 10..13).

**newline**

*Char* is a newline character (10).

**period**

*Char* counts as the end of a sentence (.,!,?).

**quote**

*Char* is a quote character (" , ' , `).

**paren(*Close*)**

*Char* is an open parenthesis and *Close* is the corresponding close parenthesis.

**prolog\_var\_start**

*Char* can start a Prolog variable name.

**prolog\_atom\_start**

*Char* can start a unquoted Prolog atom that is not a symbol.



**prolog\_identifier\_continue**

*Char* can continue a Prolog variable name or atom.

**prolog\_symbol**

*Char* is a Prolog symbol character. Sequences of Prolog symbol characters glue together to form an unquoted atom. Examples are `= . . , \=`, etc.

**code\_type(?Code, ?Type)**

As `char_type/2`, but uses character codes rather than one-character atoms. Please note that both predicates are as flexible as possible. They handle either representation if the argument is instantiated and will instantiate only with an integer code or a one-character atom, depending of the version used. See also the Prolog flag `double_quotes`, `atom_chars/2` and `atom_codes/2`.

**4.24.1 Case conversion**

There is nothing in the Prolog standard for converting case in textual data. The SWI-Prolog predicates `code_type/2` and `char_type/2` can be used to test and convert individual characters. We have started some additional support:

**downcase\_atom(+AnyCase, -LowerCase)**

Converts the characters of *AnyCase* into lowercase as `char_type/2` does (i.e. based on the defined *locale* if Prolog provides locale support on the hosting platform) and unifies the lowercase atom with *LowerCase*.

**upcase\_atom(+AnyCase, -UpperCase)**

Converts, similar to `downcase_atom/2`, an atom to uppercase.

**4.24.2 White space normalization****normalize\_space(-Out, +In)**

Normalize white space in *In*. All leading and trailing white space is removed. All non-empty sequences for Unicode white space characters are replaced by a single space (`\u0020`) character. *Out* uses the same conventions as `with_output_to/2` and `format/3`.

**4.24.3 Language-specific comparison**

This section deals with predicates for language-specific string comparison operations.

**collation\_key(+Atom, -Key)**

Create a *Key* from *Atom* for locale-specific comparison. The key is defined such that if the key of atom *A* precedes the key of atom *B* in the standard order of terms, *A* is alphabetically smaller than *B* using the sort order of the current locale.

The predicate `collation_key/2` is used by `locale_sort/2` from `library(sort)`. Please examine the implementation of `locale_sort/2` as an example of using this call.

The *Key* is an implementation-defined and generally unreadable string. On systems that do not support locale handling, *Key* is simply unified with *Atom*.

**locale\_sort(+List, -Sorted)**

Sort a list of atoms using the current locale. *List* is a list of atoms or string objects (see section 5.2). *Sorted* is unified with a list containing all atoms of *List*, sorted to the rules of the current locale. See also `collation_key/2` and `setlocale/3`.

**4.25 Operators**

Operators are defined to improve the readability of source code. For example, without operators, to write `2*3+4*5` one would have to write `+(*(2,3),*(4,5))`. In Prolog, a number of operators have been predefined. All operators, except for the comma (`,`) can be redefined by the user.

Some care has to be taken before defining new operators. Defining too many operators might make your source ‘natural’ looking, but at the same time using many operators can make it hard to understand the limits of your syntax.

In SWI-Prolog, operators are local to the module in which they are defined. Operators can be exported from modules using a term `op(Precedence, Type, Name)` in the export list as specified by `module/2`. Many modern Prolog systems have module specific operators. Unfortunately, there is no established interface for exporting and importing operators. SWI-Prolog’s convention has been adopted by YAP.

The module table of the module `user` acts as default table for all modules and can be modified explicitly from inside a module to achieve compatibility with other Prolog that do not have module-local operators:

```
:- module(prove,
    [ prove/1
    ]).

:- op(900, xfx, user:(=>)).
```

Although operators are module-specific and the predicates that define them (`op/3`) or rely on them such as `current_op/3`, `read/1` and `write/1` are module sensitive, they are not proper meta-predicates. If they were proper meta predicates `read/1` and `write/1` would use the module from which they are called, breaking compatibility with other Prolog systems. The following rules apply:

1. If the module is explicitly specified by qualifying the third argument (`op/3`, `current_op/3`) or specifying a `module(Module)` option (`read_term/3`, `write_term/3`), this module is used.
2. While compiling, the module into which the compiled code is loaded applies.
3. Otherwise, the *typein module* applies. This is normally `user` and may be changed using `module/1`.

In SWI-Prolog, a *quoted atom* never acts as an operator. Note that the portable way to stop an atom acting as an operator is to enclose it in parentheses like this: `(myop)`. See also section 5.3.1.

**op(+Precedence, +Type, :Name)***[ISO]*

Declare *Name* to be an operator of type *Type* with precedence *Precedence*. *Name* can also be

a list of names, in which case all elements of the list are declared to be identical operators. *Precedence* is an integer between 0 and 1200. Precedence 0 removes the declaration. *Type* is one of: `xf`, `yf`, `xfx`, `xfy`, `yfx`, `fy` or `fx`. The ‘f’ indicates the position of the functor, while `x` and `y` indicate the position of the arguments. ‘y’ should be interpreted as “on this position a term with precedence lower or equal to the precedence of the functor should occur”. For ‘x’ the precedence of the argument must be strictly lower. The precedence of a term is 0, unless its principal functor is an operator, in which case the precedence is the precedence of this operator. A term enclosed in parentheses ( . . . ) has precedence 0.

The predefined operators are shown in table 4.2. Operators can be redefined, unless prohibited by one of the limitations below. Applications must be careful with (re-)defining operators because changing operators may cause (other) files to be interpreted **differently**. Often this will lead to a syntax error. In other cases, text is read silently into a different term which may lead to subtle and difficult to track errors.

- It is not allowed to redefine the comma ( , ).
- The bar (|) can only be (re-)defined as infix operator with priority not less than 1001.
- It is not allowed to define the empty list ([]) or the curly-bracket pair ({ }) as operators.

In SWI-Prolog, operators are *local* to a module (see also section 6.8). Keeping operators in modules and using controlled import/export of operators as described with the `module/2` directive keep the issues manageable. The module `system` provides the operators from table 4.2 and these operators cannot be modified. Files that are loaded from the SWI-Prolog directories resolve operators and predicates from this `system` module rather than `user`, which makes the semantics of the library and development system modules independent of operator changes to the `user` module. See section 4.25 for details about the relation between operators and modules.

**current\_op**(?Precedence, ?Type, ?Name)

[ISO]

True if *Name* is currently defined as an operator of type *Type* with precedence *Precedence*. See also `op/3`. Note that an *unqualified Name* does **not** resolve to the calling context but, when compiling, to the compiler’s target module and otherwise to the *typein module*. See section 4.25 for details.

## 4.26 Character Conversion

Although I wouldn’t really know why you would like to use these features, they are provided for ISO compliance.

**char\_conversion**(+CharIn, +CharOut)

[ISO]

Define that term input (see `read_term/3`) maps each character read as *CharIn* to the character *CharOut*. Character conversion is only executed if the Prolog flag `char_conversion` is set to `true` and not inside quoted atoms or strings. The initial table maps each character onto itself. See also `current_char_conversion/2`.

**current\_char\_conversion**(?CharIn, ?CharOut)

[ISO]

Queries the current character conversion table. See `char_conversion/2` for details.

|      |            |  |
|------|------------|--|
| 1200 | <i>xfx</i> | -->, :-  |
| 1200 | <i>fx</i>  | :-, ?-   |
| 1150 | <i>fx</i>  | dynamic, discontinuous, initialization,<br>metapredicate, module_transparent, multifile,<br>public, thread_local, thread_initialization,<br>volatile |
| 1100 | <i>xfy</i> | !,   |
| 1050 | <i>xfy</i> | ->, *->  |
| 1000 | <i>xfy</i> | ,  |
| 990  | <i>xfx</i> | :=   |
| 900  | <i>fy</i>  | \+   |
| 700  | <i>xfx</i> | <, =, =.., =@=, \@=, =:=, =<, ==, =\=, >, >=, @<, @=<, @>,<br>@>=, \=, \==, as, is, >:<, :<  |
| 600  | <i>xfy</i> | :  |
| 500  | <i>yfx</i> | +, -, /\, \/ , xor   |
| 500  | <i>fx</i>  | ?  |
| 400  | <i>yfx</i> | *, /, //, div, rdiv, <<, >>, mod, rem  |
| 200  | <i>xfx</i> | **   |
| 200  | <i>xfy</i> | ^  |
| 200  | <i>fy</i>  | +, -, \  |
| 100  | <i>yfx</i> | .  |
| 1    | <i>fx</i>  | \$   |

Table 4.2: System operators

## 4.27 Arithmetic

Arithmetic can be divided into some special purpose integer predicates and a series of general predicates for integer, floating point and rational arithmetic as appropriate. The general arithmetic predicates all handle *expressions*. An expression is either a simple number or a *function*. The arguments of a function are expressions. The functions are described in section 4.27.2.

### 4.27.1 Special purpose integer arithmetic

The predicates in this section provide more logical operations between integers. They are not covered by the ISO standard, although they are ‘part of the community’ and found as either library or built-in in many other Prolog systems.

#### **between(+Low, +High, ?Value)**

*Low* and *High* are integers,  $High \geq Low$ . If *Value* is an integer,  $Low \leq Value \leq High$ . When *Value* is a variable it is successively bound to all integers between *Low* and *High*. If *High* is `inf` or `infinite`<sup>76</sup> `between/3` is true iff  $Value \geq Low$ , a feature that is particularly interesting for generating integers from a certain value.

#### **succ(?Int1, ?Int2)**

True if  $Int2 = Int1 + 1$  and  $Int1 \geq 0$ . At least one of the arguments must be instantiated to a natural number. This predicate raises the domain error `not_less_than_zero` if called with a negative integer. E.g. `succ(X, 0)` fails silently and `succ(X, -1)` raises a domain error.<sup>77</sup>

#### **plus(?Int1, ?Int2, ?Int3)**

True if  $Int3 = Int1 + Int2$ . At least two of the three arguments must be instantiated to integers.

#### **divmod(+Dividend, +Divisor, -Quotient, -Remainder)**

This predicate is a shorthand for computing both the *Quotient* and *Remainder* of two integers in a single operation. This allows for exploiting the fact that the low level implementation for computing the quotient also produces the remainder. Timing confirms that this predicate is almost twice as fast as performing the steps independently. Semantically, `divmod/4` is defined as below.

```
divmod(Dividend, Divisor, Quotient, Remainder) :-
    Quotient is Dividend div Divisor,
    Remainder is Dividend mod Divisor.
```

Note that this predicate is only available if SWI-Prolog is compiled with unbounded integer support. This is the case for all packaged versions.

#### **nth\_integer\_root\_and\_remainder(+N, +I, -Root, -Remainder)**

True when  $Root^N + Remainder = I$ . *N* and *I* must be integers.<sup>78</sup> *N* must be one or more. If *I* is negative and *N* is *odd*, *Root* and *Remainder* are negative, i.e., the following holds for  $I < 0$ :

<sup>76</sup>We prefer `infinite`, but some other Prolog systems already use `inf` for infinity; we accept both for the time being.

<sup>77</sup>The behaviour to deal with natural numbers only was defined by Richard O’Keefe to support the common count-down-to-zero in a natural way. Up to 5.1.8, `succ/2` also accepted negative integers.

<sup>78</sup>This predicate was suggested by Markus Triska. The final name and argument order is by Richard O’Keefe. The decision to include the remainder is by Jan Wielemaker. Including the remainder makes this predicate about twice as slow if *Root* is not exact.

```
% I < 0,
% N mod 2 =\= 0,
nth_integer_root_and_remainder(
    N, I, Root, Remainder),
IPos is -I,
nth_integer_root_and_remainder(
    N, IPos, RootPos, RemainderPos),
Root =:= -RootPos,
Remainder =:= -RemainderPos.
```

#### 4.27.2 General purpose arithmetic

The general arithmetic predicates are optionally compiled (see `set_prolog_flag/2` and the `-O` command line option). Compiled arithmetic reduces global stack requirements and improves performance. Unfortunately compiled arithmetic cannot be traced, which is why it is optional.

**`+Expr1 > +Expr2`** [ISO]

True if expression *Expr1* evaluates to a larger number than *Expr2*.

**`+Expr1 < +Expr2`** [ISO]

True if expression *Expr1* evaluates to a smaller number than *Expr2*.

**`+Expr1 <= +Expr2`** [ISO]

True if expression *Expr1* evaluates to a smaller or equal number to *Expr2*.

**`+Expr1 >= +Expr2`** [ISO]

True if expression *Expr1* evaluates to a larger or equal number to *Expr2*.

**`+Expr1 =\= +Expr2`** [ISO]

True if expression *Expr1* evaluates to a number non-equal to *Expr2*.

**`+Expr1 =:= +Expr2`** [ISO]

True if expression *Expr1* evaluates to a number equal to *Expr2*.

**`-Number is +Expr`** [ISO]

True when *Number* is the value to which *Expr* evaluates. Typically, `is/2` should be used with unbound left operand. If equality is to be tested, `=:=/2` should be used. For example:

```
?- 1 is sin(pi/2).    Fails! sin(pi/2) evaluates to the float 1.0,
                      which does not unify with the integer 1.
?- 1 =:= sin(pi/2).   Succeeds as expected.
```

#### Arithmetic types

SWI-Prolog defines the following numeric types:

- *integer*

If SWI-Prolog is built using the *GNU multiple precision arithmetic library* (GMP), integer arithmetic is *unbounded*, which means that the size of integers is limited by available memory only. Without GMP, SWI-Prolog integers are 64-bits, regardless of the native integer size of the platform. The type of integer support can be detected using the Prolog flags `bounded`, `min_integer` and `max_integer`. As the use of GMP is default, most of the following descriptions assume unbounded integer arithmetic.

Internally, SWI-Prolog has three integer representations. Small integers (defined by the Prolog flag `max_tagged_integer`) are encoded directly. Larger integers are represented as 64-bit values on the global stack. Integers that do not fit in 64 bits are represented as serialised GNU MPZ structures on the global stack.

- *rational number*

Rational numbers ( $Q$ ) are quotients of two integers. Rational arithmetic is only provided if GMP is used (see above). Rational numbers are currently not supported by a Prolog type. They are represented by the compound term `rdiv(N,M)`. Rational numbers that are returned from `is/2` are *canonical*, which means  $M$  is positive and  $N$  and  $M$  have no common divisors. Rational numbers are introduced in the computation using the `rational/1`, `rationalize/1` or the `rdiv/2` (rational division) function. Using the same functor for rational division and for representing rational numbers allows for passing rational numbers between computations as well as for using `format/3` for printing.

In the long term, it is likely that rational numbers will become *atomic* as well as a subtype of *number*. User code that creates or inspects the `rdiv(M,N)` terms will not be portable to future versions. Rationals are created using one of the functions mentioned above and inspected using `rational/3`.

- *float*

Floating point numbers are represented using the C type `double`. On most of today's platforms these are 64-bit IEEE floating point numbers.

Arithmetic functions that require integer arguments accept, in addition to integers, rational numbers with (canonical) denominator '1'. If the required argument is a float the argument is converted to float. Note that conversion of integers to floating point numbers may raise an overflow exception. In all other cases, arguments are converted to the same type using the order below.

integer  $\rightarrow$  rational number  $\rightarrow$  floating point number

### Rational number examples

The use of rational numbers with unbounded integers allows for exact integer or *fixed point* arithmetic under addition, subtraction, multiplication and division. To exploit rational arithmetic `rdiv/2` should be used instead of `'/'` and floating point numbers must be converted to rational using `rational/1`. Omitting the `rational/1` on floats will convert a rational operand to float and continue the arithmetic using floating point numbers. Here are some examples.

|                               |               |
|-------------------------------|---------------|
| A is 2 rdiv 6                 | A = 1 rdiv 3  |
| A is 4 rdiv 3 + 1             | A = 7 rdiv 3  |
| A is 4 rdiv 3 + 1.5           | A = 2.83333   |
| A is 4 rdiv 3 + rational(1.5) | A = 17 rdiv 6 |





**+Expr1 / +Expr2** [ISO]  
 $Result = \frac{Expr1}{Expr2}$ . If the flag `iso` is `true`, both arguments are converted to float and the return value is a float. Otherwise (default), if both arguments are integers the operation returns an integer if the division is exact. If at least one of the arguments is rational and the other argument is integer, the operation returns a rational number. In all other cases the return value is a float. See also `//2` and `rdiv/2`.

**+IntExpr1 mod +IntExpr2** [ISO]  
 Modulo, defined as  $Result = IntExpr1 - (IntExpr1 \text{ div } IntExpr2) \times IntExpr2$ , where `div` is *floored* division.

**+IntExpr1 rem +IntExpr2** [ISO]  
 Remainder of integer division. Behaves as if defined by  
 $Result$  is  $IntExpr1 - (IntExpr1 // IntExpr2) \times IntExpr2$

**+IntExpr1 // +IntExpr2** [ISO]  
 Integer division, defined as  $Result$  is  $rnd_I(Expr1/Expr2)$ . The function  $rnd_I$  is the default rounding used by the C compiler and available through the Prolog flag `integer_rounding_function`. In the C99 standard, C-rounding is defined as `towards_zero`.<sup>79</sup>

**div(+IntExpr1, +IntExpr2)** [ISO]  
 Integer division, defined as  $Result$  is  $(IntExpr1 - IntExpr1 \text{ mod } IntExpr2) // IntExpr2$ . In other words, this is integer division that rounds towards -infinity. This function guarantees behaviour that is consistent with `mod/2`, i.e., the following holds for every pair of integers  $X, Y$  where  $Y \neq 0$ .

Q is `div(X, Y)`,  
 M is `mod(X, Y)`,  
 $X = Y * Q + M$ .

**+RatExpr rdiv +RatExpr**  
 Rational number division. This function is only available if SWI-Prolog has been compiled with rational number support. See section 4.27.2 for details.

**+IntExpr1 gcd +IntExpr2**  
 Result is the greatest common divisor of  $IntExpr1, IntExpr2$ .

**abs(+Expr)** [ISO]  
 Evaluate  $Expr$  and return the absolute value of it.

**sign(+Expr)** [ISO]  
 Evaluate to -1 if  $Expr < 0$ , 1 if  $Expr > 0$  and 0 if  $Expr = 0$ . If  $Expr$  evaluates to a float, the return value is a float (e.g., -1.0, 0.0 or 1.0). In particular, note that `sign(-0.0)` evaluates to 0.0. See also `copysign/2`

<sup>79</sup>Future versions might guarantee rounding towards zero.

**copysign(+Expr1, +Expr2)**

[ISO]

Evaluate to  $X$ , where the absolute value of  $X$  equals the absolute value of  $Expr1$  and the sign of  $X$  matches the sign of  $Expr2$ . This function is based on `copysign()` from C99, which works on double precision floats and deals with handling the sign of special floating point values such as  $-0.0$ . Our implementation follows C99 if both arguments are floats. Otherwise, `copysign/2` evaluates to  $Expr1$  if the sign of both expressions matches or  $-Expr1$  if the signs do not match. Here, we use the extended notion of signs for floating point numbers, where the sign of  $-0.0$  and other special floats is negative.

**max(+Expr1, +Expr2)**

[ISO]

Evaluate to the larger of  $Expr1$  and  $Expr2$ . Both arguments are compared after converting to the same type, but the return value is in the original type. For example, `max(2.5, 3)` compares the two values after converting to float, but returns the integer 3.

**min(+Expr1, +Expr2)**

[ISO]

Evaluate to the smaller of  $Expr1$  and  $Expr2$ . See `max/2` for a description of type handling.

**.(+Int, [I])**

A list of one element evaluates to the element. This implies "a" evaluates to the character code of the letter 'a' (97) using the traditional mapping of double quoted string to a list of character codes. Arithmetic evaluation also translates a string object (see section 5.2) of one character length into the character code for that character. This implies that expression "a" also works if the Prolog flag `double_quotes` is set to `string`. The recommended way to specify the character code of the letter 'a' is `0'a`.

**random(+IntExpr)**

Evaluate to a random integer  $i$  for which  $0 \leq i < IntExpr$ . The system has two implementations. If it is compiled with support for unbounded arithmetic (default) it uses the GMP library random functions. In this case, each thread keeps its own random state. The default algorithm is the *Mersenne Twister* algorithm. The seed is set when the first random number in a thread is generated. If available, it is set from `/dev/random`.<sup>80</sup> Otherwise it is set from the system clock. If unbounded arithmetic is not supported, random numbers are shared between threads and the seed is initialised from the clock when SWI-Prolog was started. The predicate `set_random/1` can be used to control the random number generator.

**Warning!** Although properly seeded (if supported on the OS), the Mersenne Twister algorithm does *not* produce cryptographically secure random numbers. To generate cryptographically secure random numbers, use `crypto_n_random_bytes/2` from library `crypto` provided by the `ssl` package.

**random\_float**

Evaluate to a random float  $I$  for which  $0.0 < i < 1.0$ . This function shares the random state with `random/1`. All remarks with the function `random/1` also apply for `random_float/0`. Note that both sides of the domain are *open*. This avoids evaluation errors on, e.g., `log/1` or `//2` while no practical application can expect 0.0.<sup>81</sup>

<sup>80</sup>On Windows the state is initialised from `CryptGenRandom()`.

<sup>81</sup>Richard O’Keefe said: “If you *are* generating IEEE doubles with the claimed uniformity, then 0 has a  $1$  in  $2^{53} = 1\text{in}9,007,199,254,740,992$  chance of turning up. No program that expects  $[0.0,1.0)$  is going to be surprised when 0.0 fails to turn up in a few millions of millions of trials, now is it? But a program that expects  $(0.0,1.0)$  could be devastated if 0.0 did turn up.”

**round(+Expr)***[ISO]*

Evaluate *Expr* and round the result to the nearest integer. According to ISO, `round/1` is defined as `floor(Expr+1/2)`, i.e., rounding *down*. This is an unconventional choice under which the relation `round(Expr) == -round(-Expr)` does not hold. SWI-Prolog rounds *outward*, e.g., `round(1.5) == 2` and `round(-1.5) == -2`.

**integer(+Expr)**

Same as `round/1` (backward compatibility).

**float(+Expr)***[ISO]*

Translate the result to a floating point number. Normally, Prolog will use integers whenever possible. When used around the 2nd argument of `is/2`, the result will be returned as a floating point number. In other contexts, the operation has no effect.

**rational(+Expr)**

Convert the *Expr* to a rational number or integer. The function returns the input on integers and rational numbers. For floating point numbers, the returned rational number *exactly* represents the float. As floats cannot exactly represent all decimal numbers the results may be surprising. In the examples below, doubles can represent 0.25 and the result is as expected, in contrast to the result of `rational(0.1)`. The function `rationalize/1` remedies this. See section 4.27.2 for more information on rational number support.

```
?- A is rational(0.25).
A is 1 rdiv 4
?- A is rational(0.1).
A = 3602879701896397 rdiv 36028797018963968
```

**rationalize(+Expr)**

Convert the *Expr* to a rational number or integer. The function is similar to `rational/1`, but the result is only accurate within the rounding error of floating point numbers, generally producing a much smaller denominator.<sup>82</sup>

```
?- A is rationalize(0.25).
A = 1 rdiv 4
?- A is rationalize(0.1).
A = 1 rdiv 10
```

**float\_fractional\_part(+Expr)***[ISO]*

Fractional part of a floating point number. Negative if *Expr* is negative, rational if *Expr* is rational and 0 if *Expr* is integer. The following relation is always true:  $X \text{ is\_float\_fractional\_part}(X) + \text{float\_integer\_part}(X)$ .

<sup>82</sup>The names `rational/1` and `rationalize/1` as well as their semantics are inspired by Common Lisp.

- float\_integer\_part(+Expr)** [ISO]  
Integer part of floating point number. Negative if *Expr* is negative, *Expr* if *Expr* is integer.
- truncate(+Expr)** [ISO]  
Truncate *Expr* to an integer. If  $Expr \geq 0$  this is the same as `floor(Expr)`. For  $Expr < 0$  this is the same as `ceil(Expr)`. That is, `truncate/1` rounds towards zero.
- floor(+Expr)** [ISO]  
Evaluate *Expr* and return the largest integer smaller or equal to the result of the evaluation.
- ceiling(+Expr)** [ISO]  
Evaluate *Expr* and return the smallest integer larger or equal to the result of the evaluation.
- ceil(+Expr)**  
Same as `ceiling/1` (backward compatibility).
- +IntExpr1 >> +IntExpr2** [ISO]  
Bitwise shift *IntExpr1* by *IntExpr2* bits to the right. The operation performs *arithmetic shift*, which implies that the inserted most significant bits are copies of the original most significant bits.
- +IntExpr1 << +IntExpr2** [ISO]  
Bitwise shift *IntExpr1* by *IntExpr2* bits to the left.
- +IntExpr1 \/ +IntExpr2** [ISO]  
Bitwise ‘or’ *IntExpr1* and *IntExpr2*.
- +IntExpr1 /\ +IntExpr2** [ISO]  
Bitwise ‘and’ *IntExpr1* and *IntExpr2*.
- +IntExpr1 xor +IntExpr2** [ISO]  
Bitwise ‘exclusive or’ *IntExpr1* and *IntExpr2*.
- \ +IntExpr** [ISO]  
Bitwise negation. The returned value is the one’s complement of *IntExpr*.
- sqrt(+Expr)** [ISO]  
 $Result = \sqrt{Expr}$
- sin(+Expr)** [ISO]  
 $Result = \sin Expr$ . *Expr* is the angle in radians.
- cos(+Expr)** [ISO]  
 $Result = \cos Expr$ . *Expr* is the angle in radians.
- tan(+Expr)** [ISO]  
 $Result = \tan Expr$ . *Expr* is the angle in radians.
- asin(+Expr)** [ISO]  
 $Result = \arcsin Expr$ . *Result* is the angle in radians.
- acos(+Expr)** [ISO]  
 $Result = \arccos Expr$ . *Result* is the angle in radians.

**atan(+Expr)** [ISO]

*Result* =  $\arctan Expr$ . *Result* is the angle in radians.

**atan2(+YExpr, +XExpr)** [ISO]

*Result* =  $\arctan \frac{YExpr}{XExpr}$ . *Result* is the angle in radians. The return value is in the range  $[-\pi \dots \pi]$ . Used to convert between rectangular and polar coordinate system.

Note that the ISO Prolog standard demands `atan2(0.0,0.0)` to raise an evaluation error, whereas the C99 and POSIX standards demand this to evaluate to 0.0. SWI-Prolog follows C99 and POSIX.

**atan(+YExpr, +XExpr)**

Same as `atan2/2` (backward compatibility).

**sinh(+Expr)**

*Result* =  $\sinh Expr$ . The hyperbolic sine of  $X$  is defined as  $\frac{e^X - e^{-X}}{2}$ .

**cosh(+Expr)**

*Result* =  $\cosh Expr$ . The hyperbolic cosine of  $X$  is defined as  $\frac{e^X + e^{-X}}{2}$ .

**tanh(+Expr)**

*Result* =  $\tanh Expr$ . The hyperbolic tangent of  $X$  is defined as  $\frac{\sinh X}{\cosh X}$ .

**asinh(+Expr)**

*Result* =  $\operatorname{arcsinh}(Expr)$  (inverse hyperbolic sine).

**acosh(+Expr)**

*Result* =  $\operatorname{arccosh}(Expr)$  (inverse hyperbolic cosine).

**atanh(+Expr)**

*Result* =  $\operatorname{arctanh}(Expr)$ . (inverse hyperbolic tangent).

**log(+Expr)** [ISO]

Natural logarithm. *Result* =  $\ln Expr$

**log10(+Expr)**

Base-10 logarithm. *Result* =  $\lg Expr$

**exp(+Expr)** [ISO]

*Result* =  $e^{Expr}$

**+Expr1 \*\* +Expr2** [ISO]

*Result* =  $Expr1^{Expr2}$ . The result is a float, unless SWI-Prolog is compiled with unbounded integer support and the inputs are integers and produce an integer result. The integer expressions  $0^I$ ,  $1^I$  and  $-1^I$  are guaranteed to work for any integer  $I$ . Other integer base values generate a resource error if the result does not fit in memory.

The ISO standard demands a float result for all inputs and introduces `^/2` for integer exponentiation. The function `float/1` can be used on one or both arguments to force a floating point result. Note that casting the *input* result in a floating point computation, while casting the *output* performs integer exponentiation followed by a conversion to float.

$+Expr1 \wedge +Expr2$

[ISO]

In SWI-Prolog,  $\wedge/2$  is equivalent to  $**/2$ . The ISO version is similar, except that it produces a evaluation error if both *Expr1* and *Expr2* are integers and the result is not an integer. The table below illustrates the behaviour of the exponentiation functions in ISO and SWI.

| <i>Expr1</i> | <i>Expr2</i> | Function   | SWI          | ISO          |
|--------------|--------------|------------|--------------|--------------|
| Int          | Int          | $**/2$     | Int or Float | Float        |
| Int          | Float        | $**/2$     | Float        | Float        |
| Rational     | Int          | $**/2$     | Rational     | -            |
| Float        | Int          | $**/2$     | Float        | Float        |
| Float        | Float        | $**/2$     | Float        | Float        |
| Int          | Int          | $\wedge/2$ | Int or Float | Int or error |
| Int          | Float        | $\wedge/2$ | Float        | Float        |
| Rational     | Int          | $\wedge/2$ | Rational     | -            |
| Float        | Int          | $\wedge/2$ | Float        | Float        |
| Float        | Float        | $\wedge/2$ | Float        | Float        |

**powm**(+IntExprBase, +IntExprExp, +IntExprMod)

*Result* = (*IntExprBase*<sup>*IntExprExp*</sup>) modulo *IntExprMod*. Only available when compiled with unbounded integer support. This formula is required for Diffie-Hellman key-exchange, a technique where two parties can establish a secret key over a public network. *IntExprBase* and *IntExprExp* must be non-negative ( $\geq 0$ ), *IntExprMod* must be positive ( $> 0$ ).<sup>83</sup>

**lgamma**(+Expr)

Return the natural logarithm of the absolute value of the Gamma function.<sup>84</sup>

**erf**(+Expr)

[Wikipedia](#): “In mathematics, the error function (also called the Gauss error function) is a special function (non-elementary) of sigmoid shape which occurs in probability, statistics and partial differential equations.”

**erfc**(+Expr)

[Wikipedia](#): “The complementary error function.”

**pi**

[ISO]

Evaluate to the mathematical constant  $\pi$  (3.14159...).

**e**

Evaluate to the mathematical constant  $e$  (2.71828...).

**epsilon**

Evaluate to the difference between the float 1.0 and the first larger floating point number.

**inf**

Evaluate to positive infinity. See section 2.16.1. This value can be negated using  $-/1$ .

<sup>83</sup>The underlying GMP `mpz_powm()` function allows negative values under some conditions. As the conditions are expensive to pre-compute, error handling from GMP is non-trivial and negative values are not needed for Diffie-Hellman key-exchange we do not support these.

<sup>84</sup>Some interfaces also provide the sign of the Gamma function. We cannot do that in an arithmetic function. Future versions may provide a *predicate* `lgamma/3` that returns both the value and the sign.

**nan**

Evaluate to *Not a Number*. See section 2.16.1.

**cputime**

Evaluate to a floating point number expressing the CPU time (in seconds) used by Prolog up till now. See also `statistics/2` and `time/1`.

**eval(+Expr)**

Evaluate *Expr*. Although ISO standard dictates that ‘*A*=1+2, *B* is *A*’ works and unifies *B* to 3, it is widely felt that source level variables in arithmetic expressions should have been limited to numbers. In this view the `eval` function can be used to evaluate arbitrary expressions.<sup>85</sup>

**Bitvector functions** The functions below are not covered by the standard. The `msb/1` function also appears in `hProlog` and `SICStus Prolog`. The `getbit/2` function also appears in `ECLiPSe`, which also provides `setbit(Vector,Index)` and `clrbits(Vector,Index)`. The others are SWI-Prolog extensions that improve handling of —unbounded— integers as bit-vectors.

**msb(+IntExpr)**

Return the largest integer *N* such that  $(\text{IntExpr} \gg N) \wedge 1 = 1$ . This is the (zero-origin) index of the most significant 1 bit in the value of *IntExpr*, which must evaluate to a positive integer. Errors for 0, negative integers, and non-integers.

**lsb(+IntExpr)**

Return the smallest integer *N* such that  $(\text{IntExpr} \gg N) \wedge 1 = 1$ . This is the (zero-origin) index of the least significant 1 bit in the value of *IntExpr*, which must evaluate to a positive integer. Errors for 0, negative integers, and non-integers.

**popcount(+IntExpr)**

Return the number of 1s in the binary representation of the non-negative integer *IntExpr*.

**getbit(+IntExprV, +IntExprI)**

Evaluates to the bit value (0 or 1) of the *IntExprI*-th bit of *IntExprV*. Both arguments must evaluate to non-negative integers. The result is equivalent to  $(\text{IntExprV} \gg \text{IntExprI}) \wedge 1$ , but more efficient because materialization of the shifted value is avoided. Future versions will optimise  $(\text{IntExprV} \gg \text{IntExprI}) \wedge 1$  to a call to `getbit/2`, providing both portability and performance.<sup>86</sup>

## 4.28 Misc arithmetic support predicates

**set\_random(+Option)**

Controls the random number generator accessible through the *functions* `random/1` and `random_float/0`. Note that the library `random` provides an alternative API to the same random primitives.

<sup>85</sup>The `eval/1` function was first introduced by `ECLiPSe` and is under consideration for YAP.

<sup>86</sup>This issue was fiercely debated at the ISO standard mailinglist. The name *getbit* was selected for compatibility with `ECLiPSe`, the only system providing this support. Richard O’Keefe disliked the name and argued that efficient handling of the above implementation is the best choice for this functionality.

**seed(+Seed)**

Set the seed of the random generator for this thread. *Seed* is an integer or the atom `random`. If `random`, repeat the initialization procedure described with the function `random/1`. Here is an example:

```
?- set_random(seed(111)), A is random(6).
A = 5.
?- set_random(seed(111)), A is random(6).
A = 5.
```

**state(+State)**

Set the generator to a state fetched using the state property of `random_property/1`. Using other values may lead to undefined behaviour.<sup>87</sup>

**random\_property(?Option)**

True when *Option* is a current property of the random generator. Currently, this predicate provides access to the state. This predicate is not present on systems where the state is inaccessible.

**state(-State)**

Describes the current state of the random generator. State is a normal Prolog term that can be asserted or written to a file. Applications should make no other assumptions about its representation. The only meaningful operation is to use as argument to `set_random/1` using the `state(State)` option.<sup>88</sup>

**current\_arithmetic\_function(?Head)**

True when *Head* is an evaluable function. For example:

```
?- current_arithmetic_function(sin(_)).
true.
```

## 4.29 Built-in list operations

Most list operations are defined in the library `lists` described in section A.19. Some that are implemented with more low-level primitives are built-in and described here.

**is\_list(+Term)**

True if *Term* is bound to the empty list `[]` or a term with functor `'[]'`<sup>89</sup> and arity 2 and the second argument is a list.<sup>90</sup> This predicate acts as if defined by the definition below on *acyclic* terms. The implementation *fails* safely if *Term* represents a cyclic list.

<sup>87</sup>The limitations of the underlying (GMP) library are unknown, which makes it impossible to validate the *State*.

<sup>88</sup>BUG: GMP provides no portable mechanism to fetch and restore the state. The current implementation works, but the state depends on the platform. I.e., it is generally not possible to reuse the state with another version of GMP or on a CPU with different datasizes or endian-ness.

<sup>89</sup>The traditional list functor is the dot `(' . ')`. This is still the case of the command line option `--traditional` is given. See also section 5.1.

<sup>90</sup>In versions before 5.0.1, `is_list/1` just checked for `[]` or `[_|_]` and `proper_list/1` had the role of the current `is_list/1`. The current definition conforms to the de facto standard. Assuming proper coding standards, there should only be very few cases where a quick-and-dirty `is_list/1` is a good choice. Richard O'Keefe pointed at this issue.



```

is_list(X) :-
    var(X), !,
    fail.
is_list([]).
is_list(_|T) :-
    is_list(T).

```

**memberchk(?Elem, +List)***[semidet]*

True when *Elem* is an element of *List*. This ‘chk’ variant of *member/2* is semi deterministic and typically used to test membership of a list. Raises a type error if scanning *List* encounters a non-list. Note that *memberchk/2* does *not* perform a full list typecheck. For example, *memberchk(a, [a|b])* succeeds without error. If *List* is cyclic and *Elem* is not a member of *List*, *memberchk/2* eventually raises a type error.<sup>91</sup>

**length(?List, ?Int)***[ISO]*

True if *Int* represents the number of elements in *List*. This predicate is a true relation and can be used to find the length of a list or produce a list (holding variables) of length *Int*. The predicate is non-deterministic, producing lists of increasing length if *List* is a *partial list* and *Int* is unbound. It raises errors if

- *Int* is bound to a non-integer.
- *Int* is a negative integer.
- *List* is neither a list nor a partial list. This error condition includes cyclic lists.<sup>92</sup>

This predicate fails if the tail of *List* is equivalent to *Int* (e.g., *length(L, L)*).<sup>93</sup>

**sort(+List, -Sorted)***[ISO]*

True if *Sorted* can be unified with a list holding the elements of *List*, sorted to the standard order of terms (see section 4.7). Duplicates are removed. The implementation is in C, using *natural merge sort*.<sup>94</sup> The *sort/2* predicate can sort a cyclic list, returning a non-cyclic version with the same elements.

Note that *List* may contain non-ground terms. If *Sorted* is unbound at call-time, for each consecutive pair of elements in *Sorted*, the relation  $E1 @< E2$  will hold. However, unifying a variable in *Sorted* may cause this relation to become invalid, *even* unifying a variable in *Sorted* with another (older) variable. See also section 4.7.1.

**sort(+Key, +Order, +List, -Sorted)**

True when *Sorted* can be unified with a list holding the element of *List*. *Key* determines which

<sup>91</sup>Eventually here means it will scan as many elements as the longest list that may exist given the current stack usage before raising the exception.

<sup>92</sup>ISO demands failure here. We think an error is more appropriate.

<sup>93</sup>This is logically correct. An exception would be more appropriate, but to our best knowledge, current practice in Prolog does not describe a suitable candidate exception term.

<sup>94</sup>Contributed by Richard O’Keefe.

part of each element in *List* is used for comparing two term and *Order* describes the relation between each set of consecutive elements in *Sorted*.<sup>95</sup>

If *Key* is the integer zero (0), the entire term is used to compare two elements. Using *Key*=0 can be used to sort arbitrary Prolog terms. Other values for *Key* can only be used with compound terms or dicts (see section 5.4). An integer key extracts the *Key*-th argument from a compound term. An integer or atom key extracts the value from a dict that is associated with the given key. A `type_error` is raised if the list element is of the wrong type and an `existence_error` is raised if the compound has not enough argument or the dict does not contain the requested key.

Deeper nested elements of structures can be selected by using a list of keys for the *Key* argument.

The *Order* argument is described in the table below<sup>96</sup>

| Order | Ordering   | Duplicate handling |
|-------|------------|--------------------|
| @<    | ascending  | remove             |
| @=<   | ascending  | keep               |
| @>    | descending | remove             |
| @>=   | descending | keep               |

The sort is *stable*, which implies that, if duplicates are kept, the order of duplicates is not changed. If duplicates are removed, only the first element of a sequence of duplicates appears in *Sorted*.

This predicate supersedes most of the other sorting primitives, for example:

```
sort(List, Sorted)      :- sort(0, @<, List, Sorted).
msort(List, Sorted)    :- sort(0, @=<, List, Sorted).
keysort(Pairs, Sorted) :- sort(1, @=<, Pairs, Sorted).
```

The following example sorts a list of rows, for example resulting from `csv_read_file/2`) ascending on the 3th column and descending on the 4th column:

```
sort(4, @>=, Rows0, Rows1),
sort(3, @=<, Rows1, Sorted).
```

See also `sort/2 (ISO)`, `msort/2`, `keysort/2`, `predsort/3` and `order_by/2`.

#### **msort(+List, -Sorted)**

Equivalent to `sort/2`, but does not remove duplicates. Raises a `type_error` if *List* is a cyclic list or not a list.

#### **keysort(+List, -Sorted)**

[ISO]

Sort a list of *pairs*. *List* must be a list of *Key-Value* pairs, terms whose principal functor is `(-)/2`. *List* is sorted on *Key* according to the standard order of terms (see section 4.7.1). Duplicates are

<sup>95</sup>The definition of this predicate was established after discussion with Joachim Schimpf from the ECLiPSe team. ECLiPSe currently only accepts `<`, `=<`, `>` and `>=` for the *Order* argument but this is likely to change. SWI-Prolog extends this predicate to deal with dicts.

<sup>96</sup>For compatibility with ECLiPSe, the values `<`, `=<`, `>` and `>=` are allowed as synonyms.

not removed. Sorting is *stable* with regard to the order of the *Values*, i.e., the order of multiple elements that have the same *Key* is not changed.

The `keysort/2` predicate is often used together with library `pairs`. It can be used to sort lists on different or multiple criteria. For example, the following predicates sorts a list of atoms according to their length, maintaining the initial order for atoms that have the same length.

```
:- use_module(library(pairs)).

sort_atoms_by_length(Atoms, ByLength) :-
    map_list_to_pairs(atom_length, Atoms, Pairs),
    keysort(Pairs, Sorted),
    pairs_values(Sorted, ByLength).
```

#### **predsort(+Pred, +List, -Sorted)**

Sorts similar to `sort/2`, but determines the order of two terms by calling `Pred(-Delta, +E1, +E2)`. This call must unify *Delta* with one of `<`, `>` or `=`. If the built-in predicate `compare/3` is used, the result is the same as `sort/2`. See also `keysort/2`.

### 4.30 Finding all Solutions to a Goal

#### **findall(+Template, :Goal, -Bag)**

[ISO]

Create a list of the instantiations *Template* gets successively on backtracking over *Goal* and unify the result with *Bag*. Succeeds with an empty list if *Goal* has no solutions. `findall/3` is equivalent to `bagof/3` with all free variables bound with the existential operator (`^`), except that `bagof/3` fails when *Goal* has no solutions.

#### **findall(+Template, :Goal, -Bag, +Tail)**

As `findall/3`, but returns the result as the difference list *Bag-Tail*. The 3-argument version is defined as

```
findall(Templ, Goal, Bag) :-
    findall(Templ, Goal, Bag, []).
```

#### **findnsols(+N, @Template, :Goal, -List)**

[nondet]

#### **findnsols(+N, @Template, :Goal, -List, ?Tail)**

[nondet]

As `findall/3` and `findall/4`, but generates at most *N* solutions. If *N* solutions are returned, this predicate succeeds with a choice point if *Goal* has a choice point. Backtracking returns the next chunk of (at most) *N* solutions. In addition to passing a plain integer for *N*, a term of the form `count(N)` is accepted. Using `count(N)`, the size of the next chunk can be controlled using `nb_setarg/3`. The non-deterministic behaviour used to implement the *chunk* option in `pengines`. Based on `Ciao`, but the `Ciao` version is deterministic. Portability can be achieved by wrapping the goal in `once/1`. Below are three examples. The first illustrates standard chunking of answers. The second illustrates that the chunk size can be adjusted dynamically and the last illustrates that no choice point is left if *Goal* leaves no choice-point after the last solution.

```

?- findnsols(5, I, between(1, 12, I), L).
L = [1, 2, 3, 4, 5] ;
L = [6, 7, 8, 9, 10] ;
L = [11, 12].

?- State = count(2),
   findnsols(State, I, between(1, 12, I), L),
   nb_setarg(1, State, 5).
State = count(5), L = [1, 2] ;
State = count(5), L = [3, 4, 5, 6, 7] ;
State = count(5), L = [8, 9, 10, 11, 12].

?- findnsols(4, I, between(1, 4, I), L).
L = [1, 2, 3, 4].

```

**bagof(+Template, :Goal, -Bag)***[ISO]*

Unify *Bag* with the alternatives of *Template*. If *Goal* has free variables besides the one sharing with *Template*, `bagof/3` will backtrack over the alternatives of these free variables, unifying *Bag* with the corresponding alternatives of *Template*. The construct `+Var^Goal` tells `bagof/3` not to bind *Var* in *Goal*. `bagof/3` fails if *Goal* has no solutions.

The example below illustrates `bagof/3` and the `^` operator. The variable bindings are printed together on one line to save paper.

```

2 ?- listing(foo).
foo(a, b, c).
foo(a, b, d).
foo(b, c, e).
foo(b, c, f).
foo(c, c, g).
true.

3 ?- bagof(C, foo(A, B, C), Cs).
A = a, B = b, C = G308, Cs = [c, d] ;
A = b, B = c, C = G308, Cs = [e, f] ;
A = c, B = c, C = G308, Cs = [g].

4 ?- bagof(C, A^foo(A, B, C), Cs).
A = G324, B = b, C = G326, Cs = [c, d] ;
A = G324, B = c, C = G326, Cs = [e, f, g].

5 ?-

```

**setof(+Template, +Goal, -Set)***[ISO]*

Equivalent to `bagof/3`, but sorts the result using `sort/2` to get a sorted list of alternatives without duplicates.

## 4.31 Forall

**forall**(:Cond, :Action)

[semidet]

For all alternative bindings of *Cond*, *Action* can be proven. The example verifies that all arithmetic statements in the given list are correct. It does not say which is wrong if one proves wrong.

```
?- forall(member(Result = Formula, [2 = 1 + 1, 4 = 2 * 2]),
          Result == Formula).
```

The predicate forall/2 is implemented as \+ ( Cond, \+ Action), i.e., *There is no instantiation of Cond for which Action is false.* The use of double negation implies that forall/2 *does not change any variable bindings*. It proves a relation. The forall/2 control structure can be used for its side-effects. E.g., the following asserts relations in a list into the dynamic database:

```
?- forall(member(Child-Parent, ChildPairs),
          assertz(child_of(Child, Parent))).
```

Using forall/2 as forall(*Generator*, *SideEffect*) is preferred over the classical *failure driven loop* as shown below because it makes it explicit which part of the construct is the generator and which part creates the side effects. Also, unexpected failure of the side effect causes the construct to fail. Failure makes it evident that there is an issue with the code, while a failure driven loop would succeed with an erroneous result.

```
...,
( Generator,
  SideEffect,
  fail
; true
)
```

If your intent is to create variable bindings, the forall/2 control structure is inadequate. Possibly you are looking for maplist/2, findall/3 or foreach/2.

## 4.32 Formatted Write

The current version of SWI-Prolog provides two formatted write predicates. The ‘writef’ family (writef/1, writef/2, swritef/3), is compatible with Edinburgh C-Prolog and should be considered *deprecated*. The ‘format’ family (format/1, format/2, format/3), was defined by Quintus Prolog and currently available in many Prolog systems, although the details vary.

### 4.32.1 Writef

**writef**(+Atom)

[deprecated]

Equivalent to writef(Atom, []). See writef/2 for details.

**writeln(+Format, +Arguments)***[deprecated]*

Formatted write. *Format* is an atom whose characters will be printed. *Format* may contain certain special character sequences which specify certain formatting and substitution actions. *Arguments* provides all the terms required to be output.

Escape sequences to generate a single special character:

|                   |  |
|-------------------|--|
| <code>\n</code>   | Output a newline character (see also <code>nl/[0,1]</code> )   |
| <code>\l</code>   | Output a line separator (same as <code>\n</code> )   |
| <code>\r</code>   | Output a carriage return character (ASCII 13)  |
| <code>\t</code>   | Output the ASCII character TAB (9)   |
| <code>\\</code>   | The character <code>\</code> is output   |
| <code>\%</code>   | The character <code>%</code> is output   |
| <code>\nnn</code> | where <code>&lt;nnn&gt;</code> is an integer (1-3 digits); the character with code <code>&lt;nnn&gt;</code> is output (NB : <code>&lt;nnn&gt;</code> is read as <b>decimal</b> ) |

Note that `\l`, `\nnn` and `\\` are interpreted differently when character escapes are in effect. See section [2.16.1](#).

Escape sequences to include arguments from *Arguments*. Each time a `%` escape sequence is found in *Format* the next argument from *Arguments* is formatted according to the specification.

|                  |  |
|------------------|--|
| <code>%t</code>  | <code>print/1</code> the next item (mnemonic: term)  |
| <code>%w</code>  | <code>write/1</code> the next item   |
| <code>%q</code>  | <code>writeln/1</code> the next item   |
| <code>%d</code>  | Write the term, ignoring operators. See also <code>write_term/2</code> . Mnemonic: old Edinburgh display/1   |
| <code>%p</code>  | <code>print/1</code> the next item (identical to <code>%t</code> )   |
| <code>%n</code>  | Put the next item as a character (i.e., it is a character code)  |
| <code>%r</code>  | Write the next item <i>N</i> times where <i>N</i> is the second item (an integer)  |
| <code>%s</code>  | Write the next item as a String (so it must be a list of characters)   |
| <code>%f</code>  | Perform a <code>ttyflush/0</code> (no items used)  |
| <code>%Nc</code> | Write the next item Centered in <i>N</i> columns   |
| <code>%Nl</code> | Write the next item Left justified in <i>N</i> columns   |
| <code>%Nr</code> | Write the next item Right justified in <i>N</i> columns. <i>N</i> is a decimal number with at least one digit. The item must be an atom, integer, float or string. |

**swriteln(-String, +Format, +Arguments)***[deprecated]*

Equivalent to `writeln/2`, but “writes” the result on *String* instead of the current output stream.  
Example:



- c Interpret the next argument as a character code and add it to the output. This argument must be a valid Unicode character code. Note that the actually emitted bytes are defined by the character encoding of the output stream and an exception may be raised if the output stream is not capable of representing the requested Unicode character. See section 2.19.1 for details.
- d Output next argument as a decimal number. It should be an integer. If a numeric argument is specified, a dot is inserted *argument* positions from the right (useful for doing fixed point arithmetic with integers, such as handling amounts of money).  
The colon modifier (e.g., ~:d) causes the number to be printed according to the locale of the output stream. See section 4.23.
- D Same as **d**, but makes large values easier to read by inserting a comma every three digits left or right of the dot. This is the same as ~:d, but using the fixed English locale.
- e Output next argument as a floating point number in exponential notation. The numeric argument specifies the precision. Default is 6 digits. Exact representation depends on the C library function printf(). This function is invoked with the format %.<precision>e.
- E Equivalent to **e**, but outputs a capital E to indicate the exponent.
- f Floating point in non-exponential notation. The numeric argument defines the number of digits right of the decimal point. If the colon modifier (:) is used, the float is formatted using conventions from the current locale, which may define the decimal point as well as grouping of digits left of the decimal point.
- g Floating point in **e** or **f** notation, whichever is shorter.
- G Floating point in **E** or **f** notation, whichever is shorter.
- i Ignore next argument of the argument list. Produces no output.
- I Emit a decimal number using Prolog digit grouping (the underscore, \_). The argument describes the size of each digit group. The default is 3. See also section 2.16.1. For example:
 

```
?- A is 1<<100, format('~10I', [A]).
1_2676506002_2822940149_6703205376
```
- k Give the next argument to write\_canonical/1.
- n Output a newline character.
- N Only output a newline if the last character output on this stream was not a newline. Not properly implemented yet.
- p Give the next argument to print/1.
- q Give the next argument to writeq/1.
- r Print integer in radix numeric argument notation. Thus ~16r prints its argument hexadecimal. The argument should be in the range [2, ..., 36]. Lowercase letters are used for digits above 9. The colon modifier may be used to form locale-specific digit groups.
- R Same as **r**, but uses uppercase letters for digits above 9.
- s Output text from a list of character codes or a string (see string/1 and section 5.2) from the next argument.<sup>99</sup>

<sup>99</sup>The **s** modifier also accepts an atom for compatibility. This is deprecated due to the ambiguity of [].



- @ Interpret the next argument as a goal and execute it. Output written to the `current_output` stream is inserted at this place. Goal is called in the module calling `format/3`. This option is not present in the original definition by Quintus, but supported by some other Prolog systems.
- t All remaining space between 2 tab stops is distributed equally over `~t` statements between the tab stops. This space is padded with spaces by default. If an argument is supplied, it is taken to be the character code of the character used for padding. This can be used to do left or right alignment, centering, distributing, etc. See also `~|` and `~+` to set tab stops. A tab stop is assumed at the start of each line.
- | Set a tab stop on the current position. If an argument is supplied set a tab stop on the position of that argument. This will cause all `~t`'s to be distributed between the previous and this tab stop.
- + Set a tab stop (as `~|`) relative to the last tab stop or the beginning of the line if no tab stops are set before the `~+`. This constructs can be used to fill fields. The partial format sequence below prints an integer right-aligned and padded with zeros in 6 columns. The ... sequences in the example illustrate that the integer is aligned in 6 columns regardless of the remainder of the format specification.

```
format('...~|~\0t~d~6+', [..., Integer, ...])
```

- w Give the next argument to `write/1`.
- W Give the next two arguments to `write_term/2`. For example, `format('~W', [Term, [numbervars(true)])]`. This option is SWI-Prolog specific.

Example:

```
simple_statistics :-
    <obtain_statistics>           % left to the user
    format('~tStatistics~t~72|~n~n'),
    format('Runtime: ~\t ~2f~34| Inferences: ~\t ~D~72|~n',
           [RunT, Inf]),
    ....
```

will output

```

                                Statistics
Runtime: ..... 3.45  Inferences: ..... 60,345
```

#### **format(+Output, +Format, :Arguments)**

As `format/2`, but write the output on the given *Output*. The de-facto standard only allows *Output* to be a stream. The SWI-Prolog implementation allows all valid arguments for `with_output_to/2`.<sup>100</sup> For example:

<sup>100</sup>Earlier versions defined `sformat/3`. These predicates have been moved to the library `backcomp`.

```
?- format(atom(A), '~D', [1000000]).
A = '1,000,000'
```

### 4.32.3 Programming Format

#### **format\_predicate(+Char, +Head)**

If a sequence `~c` (tilde, followed by some character) is found, the `format/3` and friends first check whether the user has defined a predicate to handle the format. If not, the built-in formatting rules described above are used. *Char* is either a character code or a one-character atom, specifying the letter to be (re)defined. *Head* is a term, whose name and arity are used to determine the predicate to call for the redefined formatting character. The first argument to the predicate is the numeric argument of the format command, or the atom `default` if no argument is specified. The remaining arguments are filled from the argument list. The example below defines `~T` to print a timestamp in ISO8601 format (see `format_time/3`). The subsequent block illustrates a possible call.

```
:- format_predicate('T', format_time(_Arg, _Time)).

format_time(_Arg, Stamp) :-
    must_be(number, Stamp),
    format_time(current_output, '%FT%T%z', Stamp).
```

```
?- get_time(Now),
    format('Now, it is ~T~n', [Now]).
Now, it is 2012-06-04T19:02:01+0200
Now = 1338829321.6620328.
```

#### **current\_format\_predicate(?Code, ?Head)**

True when `~Code` is handled by the user-defined predicate specified by *Head*.

## 4.33 Global variables

Global variables are associations between names (atoms) and terms. They differ in various ways from storing information using `assert/1` or `recorda/3`.

- The value lives on the Prolog (global) stack. This implies that lookup time is independent of the size of the term. This is particularly interesting for large data structures such as parsed XML documents or the CHR global constraint store.
- They support both global assignment using `nb_setval/2` and backtrackable assignment using `b_setval/2`.
- Only one value (which can be an arbitrary complex Prolog term) can be associated to a variable at a time.

- Their value cannot be shared among threads. Each thread has its own namespace and values for global variables.
- Currently global variables are scoped globally. We may consider module scoping in future versions.

Both `b_setval/2` and `nb_setval/2` implicitly create a variable if the referenced name does not already refer to a variable.

Global variables may be initialised from directives to make them available during the program lifetime, but some considerations are necessary for saved states and threads. Saved states do not store global variables, which implies they have to be declared with `initialization/1` to recreate them after loading the saved state. Each thread has its own set of global variables, starting with an empty set. Using `threadinitialization/1` to define a global variable it will be defined, restored after reloading a saved state and created in all threads that are created *after* the registration. Finally, global variables can be initialised using the exception hook `exception/3`. The latter technique is used by CHR (see chapter 9).

#### **b\_setval(+Name, +Value)**

Associate the term *Value* with the atom *Name* or replace the currently associated value with *Value*. If *Name* does not refer to an existing global variable, a variable with initial value `[]` is created (the empty list). On backtracking the assignment is reversed.

#### **b\_getval(+Name, -Value)**

Get the value associated with the global variable *Name* and unify it with *Value*. Note that this unification may further instantiate the value of the global variable. If this is undesirable the normal precautions (double negation or `copy_term/2`) must be taken. The `b_getval/2` predicate generates errors if *Name* is not an atom or the requested variable does not exist.

#### **nb\_setval(+Name, +Value)**

Associates a copy of *Value* created with `duplicate_term/2` with the atom *Name*. Note that this can be used to set an initial value other than `[]` prior to backtrackable assignment.

#### **nb\_getval(+Name, -Value)**

The `nb_getval/2` predicate is a synonym for `b_getval/2`, introduced for compatibility and symmetry. As most scenarios will use a particular global variable using either non-backtrackable or backtrackable assignment, using `nb_getval/2` can be used to document that the variable is non-backtrackable. Raises `existence_error(variable, Name)` if the variable does not exist. Alternatively, `nb_current/2` can be used to query a global variable. This version *fails* if the variable does not exist rather than raising an exception.

#### **nb\_linkval(+Name, +Value)**

Associates the term *Value* with the atom *Name* without copying it. This is a fast special-purpose variation of `nb_setval/2` intended for expert users only because the semantics on backtracking to a point before creating the link are poorly defined for compound terms. The principal term is always left untouched, but backtracking behaviour on arguments is undone if the original assignment was *tailed* and left alone otherwise, which implies that the history that created the term affects the behaviour on backtracking. Consider the following example:

```
demo_nb_linkval :-
    T = nice(N),
    (   N = world,
        nb_linkval(myvar, T),
        fail
    ;   nb_getval(myvar, V),
        writeln(V)
    ).
```

**nb\_current(?Name, ?Value)**

Enumerate all defined variables with their value. The order of enumeration is undefined. Note that `nb_current/2` can be used as an alternative for `nb_getval/2` to request the value of a variable and fail silently if the variable does not exist.

**nb\_delete(+Name)**

Delete the named global variable. Succeeds also if the named variable does not exist.

**4.33.1 Compatibility of SWI-Prolog Global Variables**

Global variables have been introduced by various Prolog implementations recently. The implementation of them in SWI-Prolog is based on hProlog by Bart Demoen. In discussion with Bart it was decided that the semantics of hProlog `nb_setval/2`, which is equivalent to `nb_linkval/2`, is not acceptable for normal Prolog users as the behaviour is influenced by how built-in predicates that construct terms (`read/1`, `=./2`, etc.) are implemented.

GNU-Prolog provides a rich set of global variables, including arrays. Arrays can be implemented easily in SWI-Prolog using `functor/3` and `setarg/3` due to the unrestricted arity of compound terms.

**4.34 Terminal Control**

The following predicates form a simple access mechanism to the Unix termcap library to provide terminal-independent I/O for screen terminals. These predicates are only available on Unix machines. The SWI-Prolog Windows console accepts the ANSI escape sequences.

**tty\_get\_capability(+Name, +Type, -Result)**

Get the capability named *Name* from the termcap library. See `termcap(5)` for the capability names. *Type* specifies the type of the expected result, and is one of `string`, `number` or `bool`. String results are returned as an atom, number results as an integer, and bool results as the atom `on` or `off`. If an option cannot be found, this predicate fails silently. The results are only computed once. Successive queries on the same capability are fast.

**tty\_goto(+X, +Y)**

Goto position (*X*, *Y*) on the screen. Note that the predicates `line_count/2` and `line_position/2` will not have a well-defined behaviour while using this predicate.

**tty\_put(+Atom, +Lines)**

Put an atom via the termcap library function `tputs()`. This function decodes padding information in the strings returned by `tty_get_capability/3` and should be used to output these strings. *Lines* is the number of lines affected by the operation, or 1 if not applicable (as in almost all cases).

**tty\_size(-Rows, -Columns)**

Determine the size of the terminal. Platforms:

**Unix** If the system provides *ioctl* calls for this, these are used and `tty_size/2` properly reflects the actual size after a user resize of the window. The *ioctl* is issued on the file descriptor associated with the `user_input` stream. As a fallback, the system uses `tty_get_capability/3` using `li` and `co` capabilities. In this case the reported size reflects the size at the first call and is not updated after a user-initiated resize of the terminal.

**Windows** Getting the size of the terminal is provided for `swipl-win.exe`. The requested value reflects the current size. For the multithreaded version the console that is associated with the `user_input` stream is used.

## 4.35 Operating System Interaction

The predicates in this section provide basic access to the operating system that has been part of the Prolog legacy tradition. Note that more advanced access to low-level OS features is provided by several libraries from the `clib` package, notably library `process`, `socket`, `unix` and `filesex`.

**shell(+Command)**

Equivalent to `'shell(Command, 0)'`. See `shell/2` for details.

**shell(+Command, -Status)**

Execute *Command* on the operating system. *Command* is given to the Bourne shell (`/bin/sh`). *Status* is unified with the exit status of the command.

On Windows, `shell/[1,2]` executes the command using the `CreateProcess()` API and waits for the command to terminate. If the command ends with a `&` sign, the command is handed to the `WinExec()` API, which does not wait for the new task to terminate. See also `win_exec/2` and `win_shell/2`. Please note that the `CreateProcess()` API does **not** imply the Windows command interpreter (`cmd.exe` and therefore commands that are built in the command interpreter can only be activated using the command interpreter. For example, a file can be compiled using the command below.

```
?- shell('cmd.exe /C copy file1.txt file2.txt').
```

Note that many of the operations that can be achieved using the shell built-in commands can easily be achieved using Prolog primitives. See `make_directory/1`, `delete_file/1`, `rename_file/2`, etc. The `clib` package provides `filesex`, implementing various high level file operations such as `copy_file/2`. Using Prolog primitives instead of shell commands improves the portability of your program.

The library `process` provides `process_create/3` and several related primitives that support more fine-grained interaction with processes, including I/O redirection and management of asynchronous processes.

**getenv(+Name, -Value)**

Get environment variable. Fails silently if the variable does not exist. Please note that environment variable names are case-sensitive on Unix systems and case-insensitive on Windows.

**setenv(+Name, +Value)**

Set an environment variable. *Name* and *Value* must be instantiated to atoms or integers. The environment variable will be passed to `shell/[0-2]` and can be requested using `getenv/2`. They also influence `expand_file_name/2`. Environment variables are shared between threads. Depending on the underlying C library, `setenv/2` and `unsetenv/1` may not be thread-safe and may cause memory leaks. Only changing the environment once and before starting threads is safe in all versions of SWI-Prolog.

**unsetenv(+Name)**

Remove an environment variable from the environment. Some systems lack the underlying `unsetenv()` library function. On these systems `unsetenv/1` sets the variable to the empty string.

**setlocale(+Category, -Old, +New)**

Set/Query the *locale* setting which tells the C library how to interpret text files, write numbers, dates, etc. *Category* is one of `all`, `collate`, `ctype`, `messages`, `monetary`, `numeric` or `time`. For details, please consult the C library locale documentation. See also section 2.19.1. Please note that the locale is shared between all threads and thread-safe usage of `setlocale/3` is in general not possible. Do locale operations before starting threads or thoroughly study threading aspects of locale support in your environment before using in multi-threaded environments. Locale settings are used by `format_time/3`, `collation_key/2` and `locale_sort/2`.

**unix(+Command)**

This predicate comes from the Quintus compatibility library and provides a partial implementation thereof. It provides access to some operating system features and unlike the name suggests, is not operating system specific. Defined *Command*'s are below.

**system(+Command)**

Equivalent to calling `shell/1`. Use for compatibility only.

**shell(+Command)**

Equivalent to calling `shell/1`. Use for compatibility only.

**shell**

Equivalent to calling `shell/0`. Use for compatibility only.

**cd**

Equivalent to calling `working_directory/2` to the expansion (see `expand_file_name/2`) of `~`. For compatibility only.

**cd(+Directory)**

Equivalent to calling `working_directory/2`. Use for compatibility only.

**argv(-Argv)**

Unify *Argv* with the list of command line arguments provided to this Prolog run. Please note that Prolog system arguments and application arguments are separated by `--`. Integer arguments are passed as Prolog integers, float arguments and Prolog floating point numbers and all other arguments as Prolog atoms. New applications should use the Prolog flag `argv`. See also the Prolog flag `argv`.

**4.35.1 Windows-specific Operating System Interaction**

The predicates in this section are only available on the Windows version of SWI-Prolog. Their use is discouraged if there are portably alternatives. For example, `win_exec/2` and `win_shell/2` can often be replaced by the more portable `shell/2` or the more powerful `process_create/3`.

**win\_exec(+Command, +Show)**

Windows only. Spawns a Windows task without waiting for its completion. *Show* is one of the Win32 `SW_*` constants written in lowercase without the `SW_*`: `hide` `maximize` `minimize` `restore` `show` `showdefault` `showmaximized` `showminimized` `showminnoactive` `showna` `shownoactive` `shownormal`. In addition, `iconic` is a synonym for `minimize` and `normal` for `shownormal`.

**win\_shell(+Operation, +File, +Show)**

Windows only. Opens the document *File* using the Windows shell rules for doing so. *Operation* is one of `open`, `print` or `explore` or another operation registered with the shell for the given document type. On modern systems it is also possible to pass a URL as *File*, opening the URL in Windows default browser. This call interfaces to the Win32 API `ShellExecute()`. The *Show* argument determines the initial state of the opened window (if any). See `win_exec/2` for defined values.

**win\_shell(+Operation, +File)**

Same as `win_shell(Operation, File, normal)`

**win\_registry\_get\_value(+Key, +Name, -Value)**

Windows only. Fetches the value of a Windows registry key. *Key* is an atom formed as a path name describing the desired registry key. *Name* is the desired attribute name of the key. *Value* is unified with the value. If the value is of type `DWORD`, the value is returned as an integer. If the value is a string, it is returned as a Prolog atom. Other types are currently not supported. The default 'root' is `HKEY_CURRENT_USER`. Other roots can be specified explicitly as `HKEY_CLASSES_ROOT`, `HKEY_CURRENT_USER`, `HKEY_LOCAL_MACHINE` or `HKEY_USERS`. The example below fetches the extension to use for Prolog files (see `README.TXT` on the Windows version):

```
?- win_registry_get_value(
    'HKEY_LOCAL_MACHINE/Software/SWI/Prolog',
    fileExtension,
    Ext).

Ext = pl
```

**win\_folder(?Name, -Directory)**

True if *Name* is the Windows ‘CSIDL’ of *Directory*. If *Name* is unbound, all known Windows special paths are generated. *Name* is the CSIDL after deleting the leading CSIDL\_ and mapping the constant to lowercase. Check the Windows documentation for the function SHGetSpecialFolderPath() for a description of the defined constants. This example extracts the ‘My Documents’ folder:

```
?- win_folder(personal, MyDocuments).

MyDocuments = 'C:/Documents and Settings/jan/My Documents'
```

**win\_add\_dll\_directory(+AbsDir)**

This predicate adds a directory to the search path for dependent DLL files. If possible, this is achieved with win\_add\_dll\_directory/2. Otherwise, %PATH% is extended with the provided directory. *AbsDir* may be specified in the Prolog canonical syntax. See prolog\_to\_os\_filename/2. Note that use\_foreign\_library/1 passes an absolute path to the DLL if the destination DLL can be located from the specification using absolute\_file\_name/3.

**win\_add\_dll\_directory(+AbsDir, -Cookie)**

This predicate adds a directory to the search path for dependent DLL files. If the call is successful it unifies *Cookie* with a handle that must be passed to win\_remove\_dll\_directory/1 to remove the directory from the search path. Error conditions:

- This predicate is available in the Windows port of SWI-Prolog starting from 6.3.8/6.2.6.
- This predicate *fails* if Windows does not yet support the underlying primitives. These are available in recently patched Windows 7 systems and later.
- This predicate throws an exception if the provided path is invalid or the underlying Windows API returns an error.

If open\_shared\_object/2 is passed an *absolute* path to a DLL on a Windows installation that supports AddDllDirectory() and friends,<sup>101</sup> SWI-Prolog uses LoadLibraryEx() with the flags LOAD\_LIBRARY\_SEARCH\_DLL\_LOAD\_DIR and LOAD\_LIBRARY\_SEARCH\_DEFAULT\_DIRS. In this scenario, directories from %PATH% and *not* searched. Additional directories can be added using win\_add\_dll\_directory/2.

**win\_remove\_dll\_directory(-Cookie)**

Remove a DLL search directory installed using win\_add\_dll\_directory/2.

**4.35.2 Dealing with time and date**

Representing time in a computer system is surprisingly complicated. There are a large number of time representations in use, and the correct choice depends on factors such as compactness, resolution and desired operations. Humans tend to think about time in hours, days, months, years or centuries. Physicists think about time in seconds. But, a month does not have a defined number of seconds.

<sup>101</sup>Windows 7 with up-to-date patches or Windows 8.



Even a day does not have a defined number of seconds as sometimes a leap-second is introduced to synchronise properly with our earth's rotation. At the same time, resolution demands a range from better than pico-seconds to millions of years. Finally, civilizations have a wide range of calendars. Although there exist libraries dealing with most of this complexity, our desire to keep Prolog clean and lean stops us from fully supporting these.

For human-oriented tasks, time can be broken into years, months, days, hours, minutes, seconds and a timezone. Physicists prefer to have time in an arithmetic type representing seconds or fraction thereof, so basic arithmetic deals with comparison and durations. An additional advantage of the physicist's approach is that it requires much less space. For these reasons, SWI-Prolog uses an arithmetic type as its prime time representation.

Many C libraries deal with time using fixed-point arithmetic, dealing with a large but finite time interval at constant resolution. In our opinion, using a floating point number is a more natural choice as we can use a natural unit and the interface does not need to be changed if a higher resolution is required in the future. Our unit of choice is the second as it is the scientific unit.<sup>102</sup> We have placed our origin at 1970-1-1T0:0:0Z for compatibility with the POSIX notion of time as well as with older time support provided by SWI-Prolog.

Where older versions of SWI-Prolog relied on the POSIX conversion functions, the current implementation uses `libtai` to realise conversion between time-stamps and calendar dates for a period of 10 million years.

### Time and date data structures

We use the following time representations

#### TimeStamp

A TimeStamp is a floating point number expressing the time in seconds since the Epoch at 1970-1-1.

#### `date(Y,M,D,H,Mn,S,Off,TZ,DST)`

We call this term a *date-time* structure. The first 5 fields are integers expressing the year, month (1..12), day (1..31), hour (0..23) and minute (0..59). The *S* field holds the seconds as a floating point number between 0.0 and 60.0. *Off* is an integer representing the offset relative to UTC in seconds, where positive values are west of Greenwich. If converted from local time (see `stamp_date_time/3`), *TZ* holds the name of the local timezone. If the timezone is not known, *TZ* is the atom `-`. *DST* is `true` if daylight saving time applies to the current time, `false` if daylight saving time is relevant but not effective, and `-` if unknown or the timezone has no daylight saving time.

#### `date(Y,M,D)`

Date using the same values as described above. Extracted using `date_time_value/3`.

#### `time(H,Mn,S)`

Time using the same values as described above. Extracted using `date_time_value/3`.

<sup>102</sup>Using Julian days is a choice made by the Eclipse team. As conversion to dates is needed for a human readable notation of time and Julian days cannot deal naturally with leap seconds, we decided for the second as our unit.

### Time and date predicates

#### **get\_time**(-*TimeStamp*)

Return the current time as a *TimeStamp*. The granularity is system-dependent. See section 4.35.2.

#### **stamp\_date\_time**(+*TimeStamp*, -*DateTime*, +*TimeZone*)

Convert a *TimeStamp* to a *DateTime* in the given timezone. See section 4.35.2 for details on the data types. *TimeZone* describes the timezone for the conversion. It is one of `local` to extract the local time, `'UTC'` to extract a UTC time or an integer describing the seconds west of Greenwich.

#### **date\_time\_stamp**(+*DateTime*, -*TimeStamp*)

Compute the timestamp from a date/9 term. Values for month, day, hour, minute or second need not be normalized. This flexibility allows for easy computation of the time at any given number of these units from a given timestamp. Normalization can be achieved following this call with `stamp_date_time/3`. This example computes the date 200 days after 2006-7-14:

```
?- date_time_stamp(date(2006,7,214,0,0,0,0,-,-), Stamp),
   stamp_date_time(Stamp, D, 0),
   date_time_value(date, D, Date).
Date = date(2007, 1, 30)
```

When computing a time stamp from a local time specification, the UTC offset (arg 7), TZ (arg 8) and DST (arg 9) argument may be left unbound and are unified with the proper information. The example below, executed in Amsterdam, illustrates this behaviour. On the 25th of March at 01:00, DST does not apply. At 02:00, the clock is advanced by one hour and thus both 02:00 and 03:00 represent the same time stamp.

```
1 ?- date_time_stamp(date(2012,3,25,1,0,0,UTCOff,TZ,DST),
   Stamp).
UTCOff = -3600,
TZ = 'CET',
DST = false,
Stamp = 1332633600.0.

2 ?- date_time_stamp(date(2012,3,25,2,0,0,UTCOff,TZ,DST),
   Stamp).
UTCOff = -7200,
TZ = 'CEST',
DST = true,
Stamp = 1332637200.0.

3 ?- date_time_stamp(date(2012,3,25,3,0,0,UTCOff,TZ,DST),
   Stamp).
UTCOff = -7200,
TZ = 'CEST',
```

```
DST = true,
Stamp = 1332637200.0.
```

Note that DST and offset calculation are based on the POSIX function `mktime()`. If `mktime()` returns an error, a `representation_error dst` is generated.

#### **date\_time\_value(?Key, +DateTime, ?Value)**

Extract values from a `date/9` term. Provided keys are:

| key             | value                                       |
|-----------------|---|
| year            | Calendar year as an integer                 |
| month           | Calendar month as an integer 1..12          |
| day             | Calendar day as an integer 1..31            |
| hour            | Clock hour as an integer 0..23              |
| minute          | Clock minute as an integer 0..59            |
| second          | Clock second as a float 0.0..60.0           |
| utc_offset      | Offset to UTC in seconds (positive is west) |
| time_zone       | Name of timezone; fails if unknown          |
| daylight_saving | Bool (true) if dst is in effect             |
| date            | Term <code>date(Y,M,D)</code>               |
| time            | Term <code>time(H,M,S)</code>               |

#### **format\_time(+Out, +Format, +StampOrDateTime)**

Modelled after POSIX `strftime()`, using GNU extensions. *Out* is a destination as specified with `with_output_to/2`. *Format* is an atom or string with the following conversions. Conversions start with a percent (%) character.<sup>103</sup> *StampOrDateTime* is either a numeric time-stamp, a term `date(Y,M,D,H,M,S,O,TZ,DST)` or a term `date(Y,M,D)`.

- a The abbreviated weekday name according to the current locale. Use `format_time/4` for POSIX locale.
- A The full weekday name according to the current locale. Use `format_time/4` for POSIX locale.
- b The abbreviated month name according to the current locale. Use `format_time/4` for POSIX locale.
- B The full month name according to the current locale. Use `format_time/4` for POSIX locale.
- c The preferred date and time representation for the current locale.
- C The century number (year/100) as a 2-digit integer.
- d The day of the month as a decimal number (range 01 to 31).
- D Equivalent to `%m/%d/%y`. (For Americans only. Americans should note that in other countries `%d/%m/%y` is rather common. This means that in an international context this format is ambiguous and should not be used.)

<sup>103</sup>Descriptions taken from Linux Programmer's Manual

- e Like %d, the day of the month as a decimal number, but a leading zero is replaced by a space.
- E Modifier. Not implemented.
- f Number of microseconds. The f can be prefixed by an integer to print the desired number of digits. E.g., %3f prints milliseconds. This format is not covered by any standard, but available with different format specifiers in various incarnations of the strftime() function.
- F Equivalent to %Y-%m-%d (the ISO 8601 date format).
- g Like %G, but without century, i.e., with a 2-digit year (00-99).
- G The ISO 8601 year with century as a decimal number. The 4-digit year corresponding to the ISO week number (see %V). This has the same format and value as %y, except that if the ISO week number belongs to the previous or next year, that year is used instead.
- V The ISO 8601:1988 week number of the current year as a decimal number, range 01 to 53, where week 1 is the first week that has at least 4 days in the current year, and with Monday as the first day of the week. See also %U and %W.
- h Equivalent to %b.
- H The hour as a decimal number using a 24-hour clock (range 00 to 23).
- I The hour as a decimal number using a 12-hour clock (range 01 to 12).
- j The day of the year as a decimal number (range 001 to 366).
- k The hour (24-hour clock) as a decimal number (range 0 to 23); single digits are preceded by a blank. (See also %H.)
- l The hour (12-hour clock) as a decimal number (range 1 to 12); single digits are preceded by a blank. (See also %I.)
- m The month as a decimal number (range 01 to 12).
- M The minute as a decimal number (range 00 to 59).
- n A newline character.
- O Modifier to select locale-specific output. Not implemented.
- p Either 'AM' or 'PM' according to the given time value, or the corresponding strings for the current locale. Noon is treated as 'pm' and midnight as 'am'.<sup>104</sup>
- P Like %p but in lowercase: 'am' or 'pm' or a corresponding string for the current locale.
- r The time in a.m. or p.m. notation. In the POSIX locale this is equivalent to '%I:%M:%S %p'.
- R The time in 24-hour notation (%H:%M). For a version including the seconds, see %T below.
- s The number of seconds since the Epoch, i.e., since 1970-01-01 00:00:00 UTC.
- S The second as a decimal number (range 00 to 60). (The range is up to 60 to allow for occasional leap seconds.)
- t A tab character.
- T The time in 24-hour notation (%H:%M:%S).

---

<sup>104</sup>Despite the above claim, some locales yield am or pm in lower case.

- u The day of the week as a decimal, range 1 to 7, Monday being 1. See also %w.
- U The week number of the current year as a decimal number, range 00 to 53, starting with the first Sunday as the first day of week 01. See also %V and %W.
- w The day of the week as a decimal, range 0 to 6, Sunday being 0. See also %u.
- W The week number of the current year as a decimal number, range 00 to 53, starting with the first Monday as the first day of week 01.
- x The preferred date representation for the current locale without the time.
- X The preferred time representation for the current locale without the date.
- y The year as a decimal number without a century (range 00 to 99).
- Y The year as a decimal number including the century.
- z The timezone as hour offset from GMT using the format HHmm. Required to emit RFC822-conforming dates (using '%a, %d %b %Y %T %z'). Our implementation supports %:z, which modifies the output to HH:mm as required by XML-Schema. Note that both notations are valid in ISO 8601. The sequence %:z is compatible to the GNU date(1) command.
- Z The timezone or name or abbreviation.
- + The date and time in date(1) format.
- % A literal '%' character.

The table below gives some format strings for popular time representations. RFC1123 is used by HTTP. The full implementation of `http_timestamp/2` as available from `http/http_header` is [here](#).

```
http_timestamp(Time, Atom) :-
    stamp_date_time(Time, Date, 'UTC'),
    format_time(atom(Atom),
                '%a, %d %b %Y %T GMT',
                Date, posix).
```

| Standard       | Format string         |
|----------------|-----------------------|
| <b>xsd</b>     | '%FT%T%:z'            |
| <b>ISO8601</b> | '%FT%T%z'             |
| <b>RFC822</b>  | '%a, %d %b %Y %T %z'  |
| <b>RFC1123</b> | '%a, %d %b %Y %T GMT' |

#### **format\_time(+Out, +Format, +StampOrDateTime, +Locale)**

Format time given a specified *Locale*. This predicate is a work-around for lacking proper portable and thread-safe time and locale handling in current C libraries. In its current implementation the only value allowed for *Locale* is `posix`, which currently only modifies the behaviour of the `a`, `A`, `b` and `B` format specifiers. The predicate is used to be able to emit POSIX locale week and month names for emitting standardised time-stamps such as RFC1123.

#### **parse\_time(+Text, -Stamp)**

Same as `parse_time(Text, _Format, Stamp)`. See `parse_time/3`.

**parse\_time(+Text, ?Format, -Stamp)**

Parse a textual time representation, producing a time-stamp. Supported formats for *Text* are in the table below. If the format is known, it may be given to reduce parse time and avoid ambiguities. Otherwise, *Format* is unified with the format encountered.

| Name     | Example   |
|----------|---|
| rfc_1123 | Fri, 08 Dec 2006 15:29:44 GMT<br>Fri, 08 Dec 2006 15:29:44 +0000  |
| iso_8601 | 2006-12-08T17:29:44+02:00<br>20061208T172944+0200<br>2006-12-08T15:29Z<br>2006-12-08<br>20061208<br>2006-12<br>2006-W49-5<br>2006-342 |

**day\_of\_the\_week(+Date, -DayOfTheWeek)**

Computes the day of the week for a given date. *Date* = `date(Year, Month, Day)`. Days of the week are numbered from one to seven: Monday = 1, Tuesday = 2, ..., Sunday = 7.

**4.35.3 Controlling the swipl-win.exe console window**

The Windows executable `swipl-win.exe` console has a number of predicates to control the appearance of the console. Being totally non-portable, we do not advise using it for your own application, but use XPCE or another portable GUI platform instead. We give the predicates for reference here.

**window\_title(-Old, +New)**

Unify *Old* with the title displayed in the console and change the title to *New*.<sup>105</sup>

**win\_window\_pos(+ListOfOptions)**

Interface to the MS-Windows `SetWindowPos()` function, controlling size, position and stacking order of the window. *ListOfOptions* is a list that may hold any number of the terms below:

**size(W, H)**

Change the size of the window. *W* and *H* are expressed in character units.

**position(X, Y)**

Change the top-left corner of the window. The values are expressed in pixel units.

**zorder(ZOrder)**

Change the location in the window stacking order. Values are `bottom`, `top`, `topmost` and `notopmost`. *Topmost* windows are displayed above all other windows.

**show(Bool)**

If `true`, show the window, if `false` hide the window.

**activate**

If present, activate the window.

<sup>105</sup>BUG: This predicate should have been called `win_window_title` for consistent naming.

**win\_has\_menu**

True if `win_insert_menu/2` and `win_insert_menu_item/4` are present.

**win\_insert\_menu(+Label, +Before)**

Insert a new entry (pulldown) in the menu. If the menu already contains this entry, nothing is done. The *Label* is the label and, using the Windows convention, a letter prefixed with & is underlined and defines the associated accelerator key. *Before* is the label before which this one must be inserted. Using `-` adds the new entry at the end (right). For example, the call below adds an *Application* entry just before the *Help* menu.

```
win_insert_menu('&Application', '&Help')
```

**win\_insert\_menu\_item(+Pulldown, +Label, +Before, :Goal)**

Add an item to the named *Pulldown* menu. *Label* and *Before* are handled as in `win_insert_menu/2`, but the label `-` inserts a *separator*. *Goal* is called if the user selects the item.

## 4.36 File System Interaction

**access\_file(+File, +Mode)**

True if *File* exists and can be accessed by this Prolog process under mode *Mode*. *Mode* is one of the atoms `read`, `write`, `append`, `exist`, `none` or `execute`. *File* may also be the name of a directory. Fails silently otherwise. `access_file(File, none)` simply succeeds without testing anything.

If *Mode* is `write` or `append`, this predicate also succeeds if the file does not exist and the user has write access to the directory of the specified location.

The behaviour is backed up by the POSIX `access()` API. The Windows replacement (`_waccess()`) returns incorrect results because it does not consider ACLs (Access Control Lists). The Prolog flag `win_file_access_check` may be used to control the level of checking performed by Prolog. Please note that checking access never provides a guarantee that a subsequent open succeeds without errors due to inherent concurrency in file operations. It is generally more robust to try and open the file and handle possible exceptions. See `open/4` and `catch/3`.

**exists\_file(+File)**

True if *File* exists and is a *regular* file. This does not imply the user has read or write access to the file. See also `exists_directory/1` and `access_file/2`.

**file\_directory\_name(+File, -Directory)**

Extracts the directory part of *File*. This predicate removes the longest match for the regular expression `/*[^\/*]*$`. If the result is empty it binds *Directory* to `/` if the first character of *File* is `/` and `.` otherwise. The behaviour is consistent with the POSIX `dirname` program.<sup>106</sup>

See also `directory_file_path/3` from `filesex`. The system ensures that for every valid *Path* using the Prolog (POSIX) directory separators, following is true on systems with a sound implementation of `same_file/2`.<sup>107</sup> See also `prolog_to_os_filename/2`.

<sup>106</sup>Before SWI-Prolog 7.7.13 trailing `/` where *not* removed, translation `/a/b/` into `/a/b`. Volker Wisk pointed at this incorrect behaviour.

<sup>107</sup>On some systems, *Path* and *Path2* refer to the same entry in the file system, but `same_file/2` may fail.

```

... ,
file_directory_name(Path, Dir),
file_base_name(Path, File),
directory_file_path(Dir, File, Path2),
same_file(Path, Path2).

```

**file\_base\_name(+Path, -File)**

Extracts the file name part from a path. Similar to `file_directory_name/2` the extraction is based on the regex `/*([^\/]*)/*$`, now capturing the non-`/` segment. If the segment is empty it unifies `File` with `/` if `Path` starts with `/` and the empty atom (`' '`) otherwise. The behaviour is consistent with the POSIX `basename` program.<sup>108</sup>

**same\_file(+File1, +File2)**

True if both filenames refer to the same physical file. That is, if `File1` and `File2` are the same string or both names exist and point to the same file (due to hard or symbolic links and/or relative vs. absolute paths). On systems that provide `stat()` with meaningful values for `st_dev` and `st_inode`, `same_file/2` is implemented by comparing the device and inode identifiers. On Windows, `same_file/2` compares the strings returned by the `GetFullPathName()` system call.

**exists\_directory(+Directory)**

True if `Directory` exists and is a directory. This does not imply the user has read, search or write permission for the directory.

**delete\_file(+File)**

Remove `File` from the file system.

**rename\_file(+File1, +File2)**

Rename `File1` as `File2`. The semantics is compatible to the POSIX semantics of the `rename()` system call as far as the operating system allows. Notably, if `File2` exists, the operation succeeds (except for possible permission errors) and is *atomic* (meaning there is no window where `File2` does not exist).

**size\_file(+File, -Size)**

Unify `Size` with the size of `File` in bytes.

**time\_file(+File, -Time)**

Unify the last modification time of `File` with `Time`. `Time` is a floating point number expressing the seconds elapsed since Jan 1, 1970. See also `convert_time/[2, 8]` and `get_time/1`.

**absolute\_file\_name(+File, -Absolute)**

Expand a local filename into an absolute path. The absolute path is canonicalised: references to `.` and `..` are deleted. This predicate ensures that expanding a filename returns the same absolute path regardless of how the file is addressed. SWI-Prolog uses absolute filenames to register source files independent of the current working directory. See also `absolute_file_name/3` and `expand_file_name/2`.

<sup>108</sup>Before SWI-Prolog 7.7.13, if `argPath` ended with a `/` `File` was unified with the empty atom.



**absolute\_file\_name(+Spec, -Absolute, +Options)**

Convert the given file specification into an absolute path. *Spec* is a term `Alias(Relative)` (e.g., `(library(lists))`), a relative filename or an absolute filename. The primary intention of this predicate is to resolve files specified as `Alias(Relative)`. *Option* is a list of options to guide the conversion:

**extensions(ListOfExtensions)**

List of file extensions to try. Default is `''`. For each extension, `absolute_file_name/3` will first add the extension and then verify the conditions imposed by the other options. If the condition fails, the next extension on the list is tried. Extensions may be specified both as `.ext` or plain `ext`.

**relative\_to(+FileOrDir)**

Resolve the path relative to the given directory or the directory holding the given file. Without this option, paths are resolved relative to the working directory (see `working_directory/2`) or, if *Spec* is atomic and `absolute_file_name/[2,3]` is executed in a directive, it uses the current source file as reference.

**access(Mode)**

Imposes the condition `access_file(File, Mode)`. *Mode* is one of `read`, `write`, `append`, `execute`, `exist` or `none`. See also `access_file/2`.

**file\_type(Type)**

Defines extensions. Current mapping: `txt` implies `['']`, `prolog` implies `['.pl', '']`, `executable` implies `['.so', '']`, `qlf` implies `['.qlf', '']` and `directory` implies `['']`. The file type source is an alias for `prolog` for compatibility with SICStus Prolog. See also `prolog_file_type/2`. This predicate only returns non-directories, unless the option `file_type(directory)` is specified.

**file\_errors(fail/error)**

If `error` (default), throw an `existence_error` exception if the file cannot be found. If `fail`, stay silent.<sup>109</sup>

**solutions(first/all)**

If `first` (default), the predicate leaves no choice point. Otherwise a choice point will be left and backtracking may yield more solutions.

**expand(Boolean)**

If `true` (default is `false`) and *Spec* is atomic, call `expand_file_name/2` followed by `member/2` on *Spec* before proceeding. This is a SWI-Prolog extension intended to minimise porting effort after SWI-Prolog stopped expanding environment variables and the `~` by default. This option should be considered deprecated. In particular the use of *wildchart* patterns such as `*` should be avoided.

The Prolog flag `verbose_file_search` can be set to `true` to help debugging Prolog's search for files.

This predicate is derived from Quintus Prolog. In Quintus Prolog, the argument order was `absolute_file_name(+Spec, +Options, -Path)`. The argument order has been changed for compatibility with ISO and SICStus. The Quintus argument order is still accepted.

<sup>109</sup>Silent operation was the default up to version 3.2.6.

**is\_absolute\_file\_name(+File)**

True if *File* specifies an absolute path name. On Unix systems, this implies the path starts with a *'/'*. For Microsoft-based systems this implies the path starts with  $\langle letter \rangle :$ . This predicate is intended to provide platform-independent checking for absolute paths. See also `absolute_file_name/2` and `prolog_to_os_filename/2`.

**file\_name\_extension(?Base, ?Extension, ?Name)**

This predicate is used to add, remove or test filename extensions. The main reason for its introduction is to deal with different filename properties in a portable manner. If the file system is case-insensitive, testing for an extension will also be done case-insensitive. *Extension* may be specified with or without a leading dot (*.*). If an *Extension* is generated, it will not have a leading dot.

**directory\_files(+Directory, -Entries)**

Unify *Entries* with a list of entries in *Directory*. Each member of *Entries* is an atom denoting an entry relative to *Directory*. *Entries* contains all entries, including hidden files and, if supplied by the OS, the special entries *.* and *...* See also `expand_file_name/2`.<sup>110</sup>

**expand\_file\_name(+WildCard, -List)**

Unify *List* with a sorted list of files or directories matching *WildCard*. The normal Unix wildcard constructs *'?'*, *'\*'*, *'[...]'* and *'{...}'* are recognised. The interpretation of *'{...}'* is slightly different from the C shell (`csh(1)`). The comma-separated argument can be arbitrary patterns, including *'{...}'* patterns. The empty pattern is legal as well: *'\{.pl, \}'* matches either *'pl'* or the empty string.

If the pattern contains wildcard characters, only existing files and directories are returned. Expanding a *'pattern'* without wildcard characters returns the argument, regardless of whether or not it exists.

Before expanding wildcards, the construct *'\\${arg}{var}'* is expanded to the value of the environment variable *var*, and a possible leading *~* character is expanded to the user's home directory.<sup>111</sup>

**prolog\_to\_os\_filename(?PrologPath, ?OsPath)**

Convert between the internal Prolog path name conventions and the operating system path name conventions. The internal conventions follow the POSIX standard, which implies that this predicate is equivalent to `=/2` (unify) on POSIX (e.g., Unix) systems. On Windows systems it changes the directory separator from *'\'* into *'/'*.

**read\_link(+File, -Link, -Target)**

If *File* points to a symbolic link, unify *Link* with the value of the link and *Target* to the file the link is pointing to. *Target* points to a file, directory or non-existing entry in the file system, but never to a link. Fails if *File* is not a link. Fails always on systems that do not support symbolic links.

<sup>110</sup>This predicate should be considered a misnomer because it returns entries rather than files. We stick to this name for compatibility with, e.g., SICStus, Ciao and YAP.

<sup>111</sup>On Windows, the home directory is determined as follows: if the environment variable `HOME` exists, this is used. If the variables `HOMEDRIVE` and `HOMEPATH` exist (Windows-NT), these are used. At initialisation, the system will set the environment variable `HOME` to point to the SWI-Prolog home directory if neither `HOME` nor `HOMEPATH` and `HOMEDRIVE` are defined.

**tmp\_file(+Base, -TmpName)***[deprecated]*

Create a name for a temporary file. *Base* is an identifier for the category of file. The *TmpName* is guaranteed to be unique. If the system halts, it will automatically remove all created temporary files. *Base* is used as part of the final filename. Portable applications should limit themselves to alphanumeric characters.

Because it is possible to guess the generated filename, attackers may create the filesystem entry as a link and possibly create a security issue. New code should use `tmp_file_stream/3`.

**tmp\_file\_stream(+Encoding, -FileName, -Stream)****tmp\_file\_stream(-FileName, -Stream, +Options)**

Create a temporary filename *FileName*, open it for writing and unify *Stream* with the output stream. If the OS supports it, the created file is only accessible to the current user and the file is created using the `open()`-flag `O_EXCL`, which guarantees that the file did not exist before this call. The following options are processed:

**encoding(+Encoding)**

Encoding of *Stream*. Default is the value of the Prolog flag `encoding`. The value `binary` opens the file in binary mode.

**extension(+Ext)**

Ensure the created file has the given extension. Default is no extension. Using an extension may be necessary to run external programs on the file.

This predicate is a safe replacement of `tmp_file/2`. Note that in those cases where the temporary file is needed to store output from an external command, the file must be closed first. E.g., the following downloads a file from a URL to a temporary file and opens the file for reading (on Unix systems you can delete the file for cleanup after opening it for reading):

```
open_url(URL, In) :-
    tmp_file_stream(text, File, Stream),
    close(Stream),
    process_create(curl, ['-o', File, URL], []),
    open(File, read, In),
    delete_file(File).                % Unix-only
```

Temporary files created using this call are removed if the Prolog process terminates *gracefully*. Calling `delete_file/1` using *FileName* removes the file and removes the entry from the administration of files-to-be-deleted.

**make\_directory(+Directory)**

Create a new directory (folder) on the filesystem. Raises an exception on failure. On Unix systems, the directory is created with default permissions (defined by the process *umask* setting).

**delete\_directory(+Directory)**

Delete directory (folder) from the filesystem. Raises an exception on failure. Please note that in general it will not be possible to delete a non-empty directory.

**working\_directory(-Old, +New)**

Unify *Old* with an absolute path to the current working directory and change working directory to *New*. Use the pattern `working_directory(CWD, CWD)` to get the current directory. See also `absolute_file_name/2` and `chdir/1`.<sup>112</sup> Note that the working directory is shared between all threads.

**chdir(+Path)**

Compatibility predicate. New code should use `working_directory/2`.

## 4.37 User Top-level Manipulation

**break**

Recursively start a new Prolog top level. This Prolog top level shares everything from the environment it was started in. Debugging is switched off on entering a break and restored on leaving one. The break environment is terminated by typing the system's end-of-file character (control-D). If that is somehow not functional, the term `end_of_file.` can be entered to return from the break environment. If the `-t toplevel` command line option is given, this goal is started instead of entering the default interactive top level (`prolog/0`).

Notably the gui based versions (`swipl-win` on Windows and MacOS) provide the menu Run/New thread that opens a new toplevel that runs concurrently with the initial toplevel. The concurrent toplevel can be used to examine the program, in particular global dynamic predicates. It can not access *global variables* or thread-local dynamic predicates (see `thread_local/1`) of the main thread.

**abort**

Abort the Prolog execution and restart the top level. If the `-t toplevel` command line option is given, this goal is restarted instead of entering the default interactive top level.

Aborting is implemented by throwing the reserved exception '`$aborted`'. This exception can be caught using `catch/3`, but the recovery goal is wrapped with a predicate that prunes the choice points of the recovery goal (i.e., as `once/1`) and re-throws the exception. This is illustrated in the example below, where we press control-C and 'a'. See also section 4.11.1.

```
?- catch((repeat, fail), E, true).
^CAction (h for help) ? abort
% Execution Aborted
```

**halt**

[ISO]

Terminate Prolog execution. This is the same as `halt(0)`. See `halt/1` for details.

**halt(+Status)**

[ISO]

Terminate Prolog execution with *Status*. This predicate calls `PL_halt()` which preforms the following steps:

1. Set the Prolog flag `exit_status` to *Status*.

<sup>112</sup>BUG: Some of the file I/O predicates use local filenames. Changing directory while file-bound streams are open causes wrong results on `telling/1`, `seeing/1` and `current_stream/3`.

2. Call all hooks registered using `at_halt/1`. If *Status* equals 0 (zero), any of these hooks calls `cancel_halt/1`, termination is cancelled.
3. Call all hooks registered using `PLat_halt()`. In the future, if any of these hooks returns non-zero, termination will be cancelled. Currently, this only prints a warning.
4. Perform the following system cleanup actions:
  - Cancel all threads, calling `thread_at_exit/1` registered termination hooks. Threads not responding within 1 second are cancelled forcefully.
  - Flush I/O and close all streams except for standard I/O.
  - Reset the terminal if its properties were changed.
  - Remove temporary files and incomplete compilation output.
  - Reclaim memory.
5. Call `exit(Status)` to terminate the process

**prolog**

This goal starts the default interactive top level. Queries are read from the stream `user_input`. See also the Prolog flag `history`. The `prolog/0` predicate is terminated (succeeds) by typing the end-of-file character (typically control-D).

The following two hooks allow for expanding queries and handling the result of a query. These hooks are used by the top level variable expansion mechanism described in section 2.8.

**expand\_query(+Query, -Expanded, +Bindings, -ExpandedBindings)**

Hook in module `user`, normally not defined. *Query* and *Bindings* represents the query read from the user and the names of the free variables as obtained using `read_term/3`. If this predicate succeeds, it should bind *Expanded* and *ExpandedBindings* to the query and bindings to be executed by the top level. This predicate is used by the top level (`prolog/0`). See also `expand_answer/2` and `term_expansion/2`.

**expand\_answer(+Bindings, -ExpandedBindings)**

Hook in module `user`, normally not defined. Expand the result of a successfully executed top-level query. *Bindings* is the query  $\langle Name \rangle = \langle Value \rangle$  binding list from the query. *ExpandedBindings* must be unified with the bindings the top level should print.

## 4.38 Creating a Protocol of the User Interaction

SWI-Prolog offers the possibility to log the interaction with the user on a file.<sup>113</sup> All Prolog interaction, including warnings and tracer output, are written to the protocol file.

**protocol(+File)**

Start protocolling on file *File*. If there is already a protocol file open, then close it first. If *File* exists it is truncated.

**protocola(+File)**

Equivalent to `protocol/1`, but does not truncate the *File* if it exists.

<sup>113</sup>A similar facility was added to Edinburgh C-Prolog by Wouter Jansweijer.

**noproTOCOL**

Stop making a protocol of the user interaction. Pending output is flushed on the file.

**protocolling(-File)**

True if a protocol was started with `protocol/1` or `protocola/1` and unifies *File* with the current protocol output file.

## 4.39 Debugging and Tracing Programs

This section is a reference to the debugger interaction predicates. A more use-oriented overview of the debugger is in section 2.9.

If you have installed XPCE, you can use the graphical front-end of the tracer. This front-end is installed using the predicate `guitracer/0`.

**trace**

Start the tracer. `trace/0` itself cannot be seen in the tracer. Note that the Prolog top level treats `trace/0` special; it means ‘trace the next goal’.

**tracing**

True if the tracer is currently switched on. `tracing/0` itself cannot be seen in the tracer.

**notrace**

Stop the tracer. `notrace/0` itself cannot be seen in the tracer.

**guitracer**

Installs hooks (see `prolog_trace_interception/4`) into the system that redirect tracing information to a GUI front-end providing structured access to variable bindings, graphical overview of the stack and highlighting of relevant source code.

**noguitracer**

Revert back to the textual tracer.

**trace(+Pred)**

Equivalent to `trace(Pred, +all)`.

**trace(+Pred, +Ports)**

Put a trace point on all predicates satisfying the predicate specification *Pred*. *Ports* is a list of port names (`call`, `redo`, `exit`, `fail`). The atom `all` refers to all ports. If the port is preceded by a `-` sign, the trace point is cleared for the port. If it is preceded by a `+`, the trace point is set.

The predicate `trace/2` activates debug mode (see `debug/0`). Each time a port (of the 4-port model) is passed that has a trace point set, the goal is printed as with `trace/0`. Unlike `trace/0`, however, the execution is continued without asking for further information. Examples:

|                                      |   |
|--------------------------------------|---|
| <code>?- trace(hello).</code>        | Trace all ports of <code>hello</code> with any arity in any module. |
| <code>?- trace(foo/2, +fail).</code> | Trace failures of <code>foo/2</code> in any module.                 |
| <code>?- trace(bar/1, -all).</code>  | Stop tracing <code>bar/1</code> .                                   |

The predicate `debugging/0` shows all currently defined trace points.

#### **notrace(:Goal)**

Call *Goal*, but suspend the debugger while *Goal* is executing. The current implementation cuts the choice points of *Goal* after successful completion. See `once/1`. Later implementations may have the same semantics as `call/1`.

#### **debug**

Start debugger. In debug mode, Prolog stops at spy and trace points, disables last-call optimisation and aggressive destruction of choice points to make debugging information accessible. Implemented by the Prolog flag `debug`.

Note that the `min_free` parameter of all stacks is enlarged to 8 K cells if debugging is switched off in order to avoid excessive GC. GC complicates tracing because it renames the `_G(NNN)` variables and replaces unreachable variables with the atom `<garbage_collected>`. Calling `nodebug/0` does *not* reset the initial free-margin because several parts of the top level and debugger disable debugging of system code regions. See also `set_prolog_stack/2`.

#### **nodebug**

Stop debugger. Implemented by the Prolog flag `debug`. See also `debug/0`.

#### **debugging**

Print debug status and spy points on current output stream. See also the Prolog flag `debug`.

#### **spy(+Pred)**

Put a spy point on all predicates meeting the predicate specification *Pred*. See section 4.5.

#### **nospy(+Pred)**

Remove spy point from all predicates meeting the predicate specification *Pred*.

#### **nospyall**

Remove all spy points from the entire program.

#### **leash(?Ports)**

Set/query leashing (ports which allow for user interaction). *Ports* is one of `+Name`, `-Name`, `?Name` or a list of these. `+Name` enables leashing on that port, `-Name` disables it and `?Name` succeeds or fails according to the current setting. Recognised ports are `call`, `redo`, `exit`, `fail` and `unify`. The special shorthand `all` refers to all ports, `full` refers to all ports except for the unify port (default). `half` refers to the `call`, `redo` and `fail` port.

#### **visible(+Ports)**

Set the ports shown by the debugger. See `leash/1` for a description of the *Ports* specification. Default is `full`.

#### **unknown(-Old, +New)**

Edinburgh-Prolog compatibility predicate, interfacing to the ISO Prolog flag `unknown`. Values are `trace` (meaning `error`) and `fail`. If the `unknown` flag is set to `warning`, `unknown/2` reports the value as `trace`.

#### **style\_check(+Spec)**

Modify/query style checking options. *Spec* is one of the terms below or a list of these.

- `+Style` enables a style check
- `-Style` disables a style check
- `?(Style)` queries a style check (note the brackets). If *Style* is unbound, all active style check options are returned on backtracking.

Loading a file using `load_files/2` or one of its derived predicates reset the style checking options to their value before loading the file, scoping the option to the remainder of the file and all files loaded *after* changing the style checking.

#### **singleton(true)**

The predicate `read_clause/3` (used by the compiler to read source code) warns on variables appearing only once in a term (clause) which have a name not starting with an underscore. See section 2.16.1 for details on variable handling and warnings.

#### **no\_effect(true)**

This warning is generated by the compiler for BIPs (built-in predicates) that are inlined by the compiler and for which the compiler can prove that they are meaningless. An example is using `==/2` against a not-yet-initialised variable as illustrated in the example below. This comparison is always *false*.

```
always_false(X) :-
    X == Y,
    write(Y) .
```

#### **var\_branches(false)**

Verifies that if a variable is introduced in a branch and used *after* the branch, it is introduced in all branches. This code aims at bugs following the skeleton below, where `p(Next)` may be called with *Next* unbound.

```
p(Arg) :-
    ( Cond
    -> Next = value1
    ; true
    ),
    p(Next) .
```

If a variable *V* is intended to be left unbound, one can use `V=_`. This construct is removed by the compiler and thus has no implications for the performance of your program.

This check was suggested together with *semantic* singleton checking. The SWI-Prolog libraries contain about a hundred clauses that are triggered by this style check. Unlike semantic singleton analysis, only a tiny fraction of these clauses proofed faulty. In most cases, the branches failing to bind the variable fail or raise an exception or the caller handles the case where the variable is unbound. The status of this style check is unclear. It might be removed in the future or it might be enhanced with a deeper analysis to be more precise.

#### **discontiguous(true)**

Warn if the clauses for a predicate are not together in the same source file. It is advised to disable the warning for discontiguous predicates using the `discontiguous/1` directive.



**charset(false)**

Warn on atoms and variable names holding non-ASCII characters that are not quoted.  
See also section 2.16.1.

## 4.40 Obtaining Runtime Statistics

**statistics(+Key, -Value)**

Unify system statistics determined by *Key* with *Value*. The possible keys are given in the table 4.3. This predicate supports additional keys for compatibility reasons. These keys are described in table 4.4.

**statistics**

Display a table of system statistics on the stream `user_error`.

**time(:Goal)**

Execute *Goal* just like `call/1` and print time used, number of logical inferences and the average number of *lips* (logical inferences per second). Note that SWI-Prolog counts the actual executed number of inferences rather than the number of passes through the call and redo ports of the theoretical 4-port model. If *Goal* is non-deterministic, print statistics for each solution, where the reported values are relative to the previous answer.

## 4.41 Execution profiling

This section describes the hierarchical execution profiler. This profiler is based on ideas from `gprof` described in [Graham *et al.*, 1982]. The profiler consists of two parts: the information-gathering component built into the kernel,<sup>114</sup> and a presentation component which is defined in the `statistics` library. The latter can be hooked, which is used by the XPCE module `swi/pce_profile` to provide an interactive graphical frontend for the results.

### 4.41.1 Profiling predicates

The following predicates are defined to interact with the profiler.

**profile(:Goal)**

Execute *Goal* just like `once/1`, collecting profiling statistics, and call `show_profile([])`. With XPCE installed this opens a graphical interface to examine the collected profiling data.

**profile(:Goal, +Options)**

Execute *Goal* just like `once/1`. Collect profiling statistics according to *Options* and call `show_profile/1` with *Options*. The default collects CPU profiling and opens a graphical interface when provided, printing the ‘plain’ time usage of the top 25 predicates as a ballback. Options are described below. Remaining options are passed to `show_profile/1`.

**time(+Which)**

If *Which* is `cpu` (default), collect CPU timing statistics. If `wall`, collect wall time

<sup>114</sup>There are two implementations; one based on `setitimer()` using the `SIGPROF` signal and one using Windows Multi Media (MM) timers. On other systems the profiler is not provided.

| Native keys (times as float in seconds) |  |
|---|--|
| agc                                     | Number of atom garbage collections performed   |
| agc_gained                              | Number of atoms removed  |
| agc_time                                | Time spent in atom garbage collections   |
| atoms                                   | Total number of defined atoms  |
| c_stack                                 | System (C-) stack limit. 0 if not known.   |
| cgc                                     | Number of clause garbage collections performed   |
| cgc_gained                              | Number of clauses reclaimed  |
| cgc_time                                | Time spent in clause garbage collections   |
| clauses                                 | Total number of clauses in the program   |
| codes                                   | Total size of (virtual) executable code in words   |
| cputime                                 | (User) CPU time since thread was started in seconds  |
| epoch                                   | Time stamp when thread was started   |
| functors                                | Total number of defined name/arity pairs   |
| global                                  | Allocated size of the global stack in bytes  |
| globalused                              | Number of bytes in use on the global stack   |
| globallimit                             | Size to which the global stack is allowed to grow  |
| global_shifts                           | Number of global stack expansions  |
| heapused                                | Bytes of heap in use by Prolog (0 if not maintained)   |
| inferences                              | Total number of passes via the call and redo ports since Prolog was started  |
| modules                                 | Total number of defined modules  |
| local                                   | Allocated size of the local stack in bytes   |
| local_shifts                            | Number of local stack expansions   |
| locallimit                              | Size to which the local stack is allowed to grow   |
| localused                               | Number of bytes in use on the local stack  |
| table_space_used                        | Amount of bytes in use by the thread's answer tables   |
| trail                                   | Allocated size of the trail stack in bytes   |
| trail_shifts                            | Number of trail stack expansions   |
| traillimit                              | Size to which the trail stack is allowed to grow   |
| trailused                               | Number of bytes in use on the trail stack  |
| shift_time                              | Time spent in stack-shifts   |
| stack                                   | Total memory in use for stacks in all threads  |
| predicates                              | Total number of predicates. This includes predicates that are undefined or not yet resolved.   |
| indexes_created                         | Number of clause index tables creates.   |
| indexes_destroyed                       | Number of clause index tables destroyed.   |
| process_epoch                           | Time stamp when Prolog was started   |
| process_cputime                         | (User) CPU time since Prolog was started in seconds  |
| thread_cputime                          | MT-version: Seconds CPU time used by finished threads. Basically non-portable. Works on Linux, MacOSX, Windows and probably some more. |
| threads                                 | MT-version: number of active threads   |
| threads_created                         | MT-version: number of created threads  |
| engines                                 | MT-version: number of existing engines   |
| engines_created                         | MT-version: number of created engines  |

Table 4.3: Keys for `statistics/2`. Space is expressed in bytes. Time is expressed in seconds, represented as a floating point number.

| Compatibility keys (times in milliseconds) |   |
|--|---|
| runtime                                    | [ CPU time, CPU time since last ] (milliseconds, excluding time spent in garbage collection)  |
| system_time                                | [ System CPU time, System CPU time since last ] (milliseconds)  |
| real_time                                  | [ Wall time, Wall time since last ] (integer seconds. See <code>get_time/1</code> )   |
| walltime                                   | [ Wall time since start, Wall time since last ] (milliseconds, SICStus compatibility)   |
| memory                                     | [ Total unshared data, free memory ] (Used is based on <code>ru_idrss</code> from <code>getrusage()</code> . Free is based on <code>RLIMIT_DATA</code> from <code>getrlimit()</code> . Both are reported as zero if the OS lacks support.)  |
| stacks                                     | [ global use, local use ]   |
| program                                    | [ heap, 0 ]   |
| global_stack                               | [ global use, global free ]   |
| local_stack                                | [ local use, local free ]   |
| trail                                      | [ trail use, trail free ]   |
| garbage_collection                         | [ number of GC, bytes gained, time spent, bytes left ] The last column is a SWI-Prolog extension. It contains the sum of the memory left after each collection, which can be divided by the count to find the average working set size after GC. Use [Count, Gained, Time -] for compatibility. |
| stack_shifts                               | [ global shifts, local shifts, time spent ]   |
| atoms                                      | [ number, memory use, 0 ]   |
| atom_garbage_collection                    | [ number of AGC, bytes gained, time spent ]   |
| clause_garbage_collection                  | [ number of CGC, clauses gained, time spent ]   |
| core                                       | Same as memory  |

Table 4.4: Compatibility keys for `statistics/2`. Time is expressed in milliseconds.

statistics based on a 5 millisecond sampling rate. Wall time statistics can be useful if *Goal* calls blocking system calls.

#### **show\_profile(+Options)**

This predicate first calls `prolog:show_profile_hook/1`. If XPCPCE is loaded, this hook is used to activate a GUI interface to visualise the profile results. If not, a report is printed to the terminal according to *Options*:

##### **top(+N)**

Show the only top *N* predicates. Default is 25.

##### **cumulative(+Bool)**

If `true` (default `false`), include the time spent in children in the time reported for a predicate.

#### **profiler(-Old, +New)**

Query or change the status of the profiler. The status is one of

##### **false**

The profiler is not activated.

##### **cputime**

The profiler collects CPU statistics.

##### **walltime**

The profiler collects wall time statistics.

The value `true` is accepted as a synonym for `cputime` for compatibility reasons.

#### **reset\_profiler**

Switches the profiler to `false` and clears all collected statistics.

#### **noprofile(+Name/+Arity, ...)**

Declares the predicate *Name/Arity* to be invisible to the profiler. The time spent in the named predicate is added to the caller, and the callees are linked directly to the caller. This is particularly useful for simple meta-predicates such as `call/1`, `ignore/1`, `catch/3`, etc.

### 4.41.2 Visualizing profiling data

Browsing the annotated call-tree as described in section 4.41.3 itself is not very attractive. Therefore, the results are combined per predicate, collecting all *callers* and *callees* as well as the propagation of time and activations in both directions. Figure 4.1 illustrates this. The central yellowish line is the ‘current’ predicate with counts for time spent in the predicate (‘Self’), time spent in its children (‘Siblings’), activations through the call and redo ports. Above that are the *callers*. Here, the two time fields indicate how much time is spent serving each of the callers. The columns sum to the time in the yellowish line. The caller `<recursive>` is the number of recursive calls. Below the yellowish lines are the *callees*, with the time spent in the callee itself for serving the current predicate and the time spent in the callees of the callee (‘Siblings’), so the whole time-block adds up to the ‘Siblings’ field of the current predicate. The ‘Access’ fields show how many times the current predicate accesses each of the callees.



Figure 4.1: Execution profiler showing the activity of the predicate `chat:inv_map_list/5`.

The predicates have a menu that allows changing the view of the detail window to the given caller or callee, showing the documentation (if it is a built-in) and/or jumping to the source.

The statistics shown in the report field of figure 4.1 show the following information:

- *samples*  
Number of times the call-tree was sampled for collecting time statistics. On most hardware, the resolution of SIGPROF is 1/100 second. This number must be sufficiently large to get reliable timing figures. The Time menu allows viewing time as samples, relative time or absolute time.
- *sec*  
Total user CPU time with the profiler active.
- *predicates*  
Total count of predicates that have been called at least one time during the profile.
- *nodes*  
Number of nodes in the call-tree.
- *distortion*  
How much of the time is spent building the call-tree as a percentage of the total execution time. Timing samples while the profiler is building the call-tree are not added to the call-tree.

#### 4.41.3 Information gathering

While the program executes under the profiler, the system builds a *dynamic* call-tree. It does this using three hooks from the kernel: one that starts a new goal (*profCall*), one that tells the system which goal is resumed after an *exit* (*profExit*) and one that tells the system which goal is resumed after a *fail* (i.e., which goal is used to *retry* (*profRedo*)). The *profCall*() function finds or creates the subnode for the argument predicate below the current node, increments the call-count of this link and returns the sub-node which is recorded in the Prolog stack-frame. Choice-points are marked with the current profiling node. *profExit*() and *profRedo*() pass the profiling node where execution resumes.

Just using the above algorithm would create a much too big tree due to recursion. For this reason the system performs detection of recursion. In the simplest case, recursive procedures increment the ‘recursive’ count on the current node. Mutual recursion, however, is not easily detected. For example, `call/1` can call a predicate that uses `call/1` itself. This can be viewed as a recursive invocation,

but this is generally not desirable. Recursion is currently assumed if the same predicate *with the same parent* appears higher in the call-graph. Early experience with some non-trivial programs are promising.

The last part of the profiler collects statistics on the CPU time used in each node. On systems providing `setitimer()` with `SIGPROF`, it ‘ticks’ the current node of the call-tree each time the timer fires. On Windows, a MM-timer in a separate thread checks 100 times per second how much time is spent in the profiled thread and adds this to the current node. See section 4.41.3 for details.

### Profiling in the Windows Implementation

Profiling in the Windows version is similar, but as profiling is a statistical process it is good to be aware of the implementation<sup>115</sup> for proper interpretation of the results.

Windows does not provide timers that fire asynchronously, frequent and proportional to the CPU time used by the process. Windows does provide multi-media timers that can run at high frequency. Such timers, however, run in a separate thread of execution and they are fired on the wall clock rather than the amount of CPU time used. The profiler installs such a timer running, for saving CPU time, rather inaccurately at about 100 Hz. Each time it is fired, it determines the CPU time in milliseconds used by Prolog since the last time it was fired. If this value is non-zero, active predicates are incremented with this value.

## 4.42 Memory Management

### `garbage_collect`

Invoke the global and trail stack garbage collector. Normally the garbage collector is invoked automatically if necessary. Explicit invocation might be useful to reduce the need for garbage collections in time-critical segments of the code. After the garbage collection `trim_stacks/0` is invoked to release the collected memory resources.

### `garbage_collect_atoms`

Reclaim unused atoms. Normally invoked after `agc_margin` (a Prolog flag) atoms have been created. On multithreaded versions the actual collection is delayed until there are no threads performing normal garbage collection. In this case `garbage_collect_atoms/0` returns immediately. Note that there is no guarantee it will *ever* happen, as there may always be threads performing garbage collection.

### `garbage_collect_clauses`

Reclaim retracted clauses. During normal operation, retracting a clause implies setting the *erased generation* to the current *generation* of the database and increment the generation. Keeping the clause around is both needed to realise the *logical update view* and deal with the fact that other threads may be executing the clause. Both static and dynamic code is processed this way.<sup>116</sup>

The clause garbage collector (CGC) scans the environment stacks of all threads for referenced dirty predicates and at which generation this reference accesses the predicate. It then removes the references for clauses that have been retracted before the oldest access generation from the

<sup>115</sup>We hereby acknowledge Lionel Fourquaux, who suggested the design described here after a newsmail enquiry.

<sup>116</sup>Up to version 7.3.11, dynamic code was handled using *reference counts*.

clause list as well as the secondary clauses indexes of the predicate. If the clause list is not being scanned, the clause references and ultimately the clause itself is reclaimed.

The clause garbage collector is called under three conditions, (1) after *reloading* a source file, (2) if the memory occupied by retracted but not yet reclaimed clauses exceeds 12.5% of the program store, or (3) if skipping dead clauses in the clause lists becomes too costly. The cost of clause garbage collection is proportional with the total size of the local stack of all threads (the scanning phase) and the number of clauses in all ‘dirty’ predicates (the reclaiming phase).

#### **set\_prolog\_gc\_thread(+Status)**

Control whether or not atom and clause garbage collection are executed in a dedicated thread. The default is `true`. Values for *Status* are `true`, `false` and `stop`. The latter stops the `gc` thread but allows it to be recreated lazily. This is used by e.g., `fork/1` to avoid forking a multi-threaded application. See also `gc_thread`.

#### **trim\_stacks**

Release stack memory resources that are not in use at this moment, returning them to the operating system. It can be used to release memory resources in a backtracking loop, where the iterations require typically seconds of execution time and very different, potentially large, amounts of stack space. Such a loop can be written as follows:

```
loop :-
    generator,
        trim_stacks,
        potentially_expensive_operation,
    stop_condition, !.
```

The Prolog top-level loop is written this way, reclaiming memory resources after every user query.

#### **set\_prolog\_stack(+Stack, +KeyValue)**

Set a parameter for one of the Prolog runtime stacks. *Stack* is one of `local`, `global` or `trail`. The table below describes the *Key(Value)* pairs.

Current settings can be retrieved with `prolog_stack_property/2`.

#### **min\_free(+Cells)**

Minimum amount of free space after trimming or shifting the stack. Setting this value higher can reduce the number of garbage collections and stack-shifts at the cost of higher memory usage. The amount is reported and specified in *cells*. A cell is 4 bytes in the 32-bit version and 8 bytes on the 64-bit version. See `address_bits`. See also `trim_stacks/0` and `debug/0`.

#### **low(+Cells)**

#### **factor(+Number)**

These two figures determine whether, if the stacks are low, a stack *shift* (expansion) or garbage collection is performed. This depends on these two parameters, the current stack usage and the amount of stack used after the last garbage collection. A garbage collection is started if  $used > factor \times lastused + low$ .

**spare(+Cells)**

All stacks trigger overflow before actually reaching the limit, so the resulting error can be handled gracefully. The spare stack is used for `print_message/2` from the garbage collector and for handling exceptions. The default suffices, unless the user redefines related hooks. Do **not** specify large values for this because it reduces the amount of memory available for your real task.

Related hooks are `message_hook/3` (redefining GC messages), `prolog_trace_interception/4` and `prolog_exception_hook/4`.

**prolog\_stack\_property(?Stack, ?KeyValue)**

True if *KeyValue* is a current property of *Stack*. See `set_prolog_stack/2` for defined properties.

The total space limit for all stacks is controlled using the prolog flag `stack_limit`.

**4.43 Windows DDE interface**

The predicates in this section deal with MS-Windows ‘Dynamic Data Exchange’ or DDE protocol.<sup>117</sup> A Windows DDE conversation is a form of interprocess communication based on sending reserved window events between the communicating processes.

Failing DDE operations raise an error of the structure below, where *Operation* is the name of the (partial) operation that failed and *Message* is a translation of the operator error code. For some errors, *Context* provides additional comments.

```
error(dde_error(Operation, Message), Context)
```

**4.43.1 DDE client interface**

The DDE client interface allows Prolog to talk to DDE server programs. We will demonstrate the use of the DDE interface using the Windows PROGMAN (Program Manager) application:

```
1 ?- open_dde_conversation(progman, progman, C).

C = 0
2 ?- dde_request(0, groups, X)

--> Unifies X with description of groups

3 ?- dde_execute(0, '[CreateGroup("DDE Demo")]').
true.

4 ?- close_dde_conversation(0).
true.
```

<sup>117</sup>This interface is contributed by Don Dwiggins.



For details on interacting with `progman`, use the SDK online manual section on the Shell DDE interface. See also the Prolog library `(progman)`, which may be used to write simple Windows setup scripts in Prolog.

**`open_dde_conversation(+Service, +Topic, -Handle)`**

Open a conversation with a server supporting the given service name and topic (atoms). If successful, *Handle* may be used to send transactions to the server. If no willing server is found this predicate fails silently.

**`close_dde_conversation(+Handle)`**

Close the conversation associated with *Handle*. All opened conversations should be closed when they're no longer needed, although the system will close any that remain open on process termination.

**`dde_request(+Handle, +Item, -Value)`**

Request a value from the server. *Item* is an atom that identifies the requested data, and *Value* will be a string (CF\_TEXT data in DDE parlance) representing that data, if the request is successful.

**`dde_execute(+Handle, +Command)`**

Request the DDE server to execute the given command string. Succeeds if the command could be executed and fails with an error message otherwise.

**`dde_poke(+Handle, +Item, +Command)`**

Issue a POKE command to the server on the specified *Item*. *command* is passed as data of type CF\_TEXT.

### 4.43.2 DDE server mode

The `library(dde)` defines primitives to realise simple DDE server applications in SWI-Prolog. These features are provided as of version 2.0.6 and should be regarded as prototypes. The C part of the DDE server can handle some more primitives, so if you need features not provided by this interface, please study `library(dde)`.

**`dde_register_service(+Template, +Goal)`**

Register a server to handle DDE request or DDE execute requests from other applications. To register a service for a DDE request, *Template* is of the form:

`+Service(+Topic, +Item, +Value)`

*Service* is the name of the DDE service provided (like `progman` in the client example above). *Topic* is either an atom, indicating *Goal* only handles requests on this topic, or a variable that also appears in *Goal*. *Item* and *Value* are variables that also appear in *Goal*. *Item* represents the request data as a Prolog atom.<sup>118</sup>

The example below registers the Prolog `current_prolog_flag/2` predicate to be accessible from other applications. The request may be given from the same Prolog as well as from another application.

---

<sup>118</sup>Up to version 3.4.5 this was a list of character codes. As recent versions have atom garbage collection there is no need for this anymore.

```

?- dde_register_service(prolog(current_prolog_flag, F, V),
                        current_prolog_flag(F, V)).

?- open_dde_conversation(prolog, current_prolog_flag, Handle),
   dde_request(Handle, home, Home),
   close_dde_conversation(Handle).

Home = '/usr/local/lib/pl-2.0.6/'

```

Handling DDE `execute` requests is very similar. In this case the template is of the form:

`+Service(+Topic, +Item)`

Passing a *Value* argument is not needed as `execute` requests either succeed or fail. If *Goal* fails, a ‘not processed’ is passed back to the caller of the DDE request.

**dde\_unregister\_service(+Service)**

Stop responding to *Service*. If Prolog is halted, it will automatically call this on all open services.

**dde\_current\_service(-Service, -Topic)**

Find currently registered services and the topics served on them.

**dde\_current\_connection(-Service, -Topic)**

Find currently open conversations.

## 4.44 Miscellaneous

**dwim\_match(+Atom1, +Atom2)**

True if *Atom1* matches *Atom2* in the ‘Do What I Mean’ sense. Both *Atom1* and *Atom2* may also be integers or floats. The two atoms match if:

- They are identical
- They differ by one character (`spy`  $\equiv$  `spu`)
- One character is inserted/deleted (`debug`  $\equiv$  `deug`)
- Two characters are transposed (`trace`  $\equiv$  `tarce`)
- ‘Sub-words’ are glued differently (`existsfile`  $\equiv$  `existsFile`  $\equiv$  `exists_file`)
- Two adjacent sub-words are transposed (`existsFile`  $\equiv$  `fileExists`)

**dwim\_match(+Atom1, +Atom2, -Difference)**

Equivalent to `dwim_match/2`, but unifies *Difference* with an atom identifying the difference between *Atom1* and *Atom2*. The return values are (in the same order as above): `equal`, `mismatched_char`, `inserted_char`, `transposed_char`, `separated` and `transposed_word`.

**wildcard\_match(+Pattern, +String)**

True if *String* matches the wildcard pattern *Pattern*. *Pattern* is very similar to the Unix `cs`h pattern matcher. The patterns are given below:

- ? Matches one arbitrary character.
- \* Matches any number of arbitrary characters.
- [...] Matches one of the characters specified between the brackets.  
     $\langle char1 \rangle - \langle char2 \rangle$  indicates a range.
- {...} Matches any of the patterns of the comma-separated list between the braces.

Example:

```
?- wildcard_match('[a-z]*.{pro,pl}[%~]', 'a_hello.pl%').  
true.
```

### **sleep(+Time)**

Suspend execution *Time* seconds. *Time* is either a floating point number or an integer. Granularity is dependent on the system's timer granularity. A negative time causes the timer to return immediately. On most non-realtime operating systems we can only ensure execution is suspended for **at least** *Time* seconds.

On Unix systems the `sleep/1` predicate is realised—in order of preference—by `nanosleep()`, `usleep()`, `select()` if the time is below 1 minute, or `sleep()`. On Windows systems `Sleep()` is used.

# 5

## SWI-Prolog extensions

---

This chapter describes extensions to the Prolog language introduced with SWI-Prolog version 7. The changes bring more modern syntactical conventions to Prolog such as key-value maps, called *dicts* as primary citizens and a restricted form of *functional notation*. They also extend Prolog basic types with strings, providing a natural notation to textual material as opposed to identifiers (atoms) and lists.

These extensions make the syntax more intuitive to new users, simplify the integration of domain specific languages (DSLs) and facilitate a more natural Prolog representation for popular exchange languages such as XML and JSON.

While many programs run unmodified in SWI-Prolog version 7, especially those that pass double quoted strings to general purpose list processing predicates require modifications. We provide a tool (`list_strings/0`) that we used to port a huge code base in half a day.

### 5.1 Lists are special

As of version 7, SWI-Prolog lists can be distinguished unambiguously at runtime from `./2` terms and the atom `'[]'`. The constant `[]` is special constant that is not an atom. It has the following properties:

```
?- atom([]).
false.
?- atomic([]).
true.
?- [] == '[]'.
false.
?- [] == [].
true.
```

The `'cons'` operator for creating list cells has changed from the pretty atom `'.'` to the ugly atom `'[]'`, so we can use the `'.'` for other purposes. See section [5.4.1](#).

This modification has minimal impact on typical Prolog code. It does affect foreign code (see section [12](#)) that uses the normal atom and compound term interface for manipulation lists. In most cases this can be avoided by using the dedicated list functions. For convenience, the macros `ATOM_nil` and `ATOM_dot` are provided by `SWI-Prolog.h`.

Another place that is affected is `write_canonical/1`. Impact is minimized by using the list syntax for lists. The predicates `read_term/2` and `write_term/2` support the option `dotlists(true)`, which causes `read_term/2` to read `.(a, [])` as `[a]` and `write_term/2` to write `[a]` as `.(a, [])`.

### 5.1.1 Motivating '[]' and [] for lists

Representing lists the conventional way using `./2` as cons-cell and `'[]'` as list terminator both (independently) poses conflicts, while these conflicts are easily avoided.

- Using `./2` prevents using this commonly used symbol as an operator because `a.B` cannot be distinguished from `[a|B]`. Freeing `./2` provides us with a unique term that we can use for functional notation on dicts as described in section 5.4.1.
- Using `'[]'` as list terminator prevents dynamic distinction between atoms and lists. As a result, we cannot use type polymorphism that involve both atoms and lists. For example, we cannot use *multi lists* (arbitrary deeply nested lists) of atoms. Multi lists of atoms are in some situations a good representation of a flat list that is assembled from sub sequences. The alternative, using difference lists or DCGs is often less natural and sometimes demands for 'opening' proper lists (i.e., copying the list while replacing the terminating empty list with a variable) that have to be added to the sequence. The ambiguity of atom and list is particularly painful when mapping external data representations that do not suffer from this ambiguity.

At the same time, avoiding `'[]'` as a list terminator makes the various text representations unambiguous, which allows us to write predicates that require a textual argument to accept both atoms, strings, and lists of character codes or one-character atoms. Traditionally, the empty list can be interpreted both as the string `""` and `''`.

## 5.2 The string type and its double quoted syntax

As of SWI-Prolog version 7, text enclosed in double quotes (e.g., `"Hello world"`) is read as objects of the type *string*. A string is a compact representation of a character sequence that lives on the global (term) stack. Strings represent sequences of Unicode characters including the character code 0 (zero). The length strings is limited by the available space on the global (term) stack (see `set_prolog_stack/2`). Strings are distinct from lists, which makes it possible to detect them at runtime and print them using the string syntax, as illustrated below:

```
?- write("Hello world!").
Hello world!

?- writeq("Hello world!").
"Hello world!"
```

*Back quoted* text (as in ``text``) is mapped to a list of character codes in version 7. The settings for the flags that control how double and back quoted text is read is summarised in table 5.1. Programs that aim for compatibility should realise that the ISO standard defines back quoted text, but does not define the `back_quotes` Prolog flag and does not define the term that is produced by back quoted text.

Section 5.2.4 motivates the introduction of strings and mapping double quoted text to this type.

| Mode              | double_quotes | back_quotes |
|-------------------|---------------|-------------|
| Version 7 default | string        | codes       |
| --traditional     | codes         | symbol_char |

Table 5.1: Mapping of double and back quoted text in the two modes.

### 5.2.1 Predicates that operate on strings

Strings may be manipulated by a set of predicates that is similar to the manipulation of atoms. In addition to the list below, `string/1` performs the type check for this type and is described in section 4.6.

SWI-Prolog's string primitives are being synchronized with [ECLiPSe](#). We expect the set of predicates documented in this section to be stable, although it might be expanded. In general, SWI-Prolog's text manipulation predicates accept any form of text as input argument and produce the type indicated by the predicate name as output. This policy simplifies migration and writing programs that can run unmodified or with minor modifications on systems that do not support strings. Code should avoid relying on this feature as much as possible for clarity as well as to facilitate a more strict mode and/or type checking in future releases.

#### **atom\_string(?Atom, ?String)**

Bi-directional conversion between an atom and a string. At least one of the two arguments must be instantiated. *Atom* can also be an integer or floating point number.

#### **number\_string(?Number, ?String)**

Bi-directional conversion between a number and a string. At least one of the two arguments must be instantiated. Besides the type used to represent the text, this predicate differs in several ways from its ISO cousin:<sup>1</sup>

- If *String* does not represent a number, the predicate *fails* rather than throwing a syntax error exception.
- Leading white space and Prolog comments are *not* allowed.
- Numbers may start with '+' or '-'.
- It is *not* allowed to have white space between a leading '+' or '-' and the number.
- Floating point numbers in exponential notation do not require a dot before exponent, i.e., "1e10" is a valid number.

#### **term\_string(?Term, ?String)**

Bi-directional conversion between a term and a string. If *String* is instantiated, it is parsed and the result is unified with *Term*. Otherwise *Term* is 'written' using the option `quoted(true)` and the result is converted to *String*.

#### **term\_string(?Term, ?String, +Options)**

As `term_string/2`, passing *Options* to either `read_term/2` or `write_term/2`. For example:

<sup>1</sup>Note that SWI-Prolog's syntax for numbers is not ISO compatible either.

```
?- term_string(Term, 'a(A)', [variable_names(VNames)]).
Term = a(_G1466),
VNames = ['A'=_G1466].
```

**string\_chars(?String, ?Chars)**

Bi-directional conversion between a string and a list of characters (one-character atoms). At least one of the two arguments must be instantiated.

**string\_codes(?String, ?Codes)**

Bi-directional conversion between a string and a list of character codes. At least one of the two arguments must be instantiated.

**text\_to\_string(+Text, -String)***[det]*

Converts *Text* to a string. *Text* is an atom, string or list of characters (codes or chars). When running in `--traditional` mode, `' [] '` is ambiguous and interpreted as an empty string.

**string\_length(+String, -Length)**

Unify *Length* with the number of characters in *String*. This predicate is functionally equivalent to `atom_length/2` and also accepts atoms, integers and floats as its first argument.

**string\_code(?Index, +String, ?Code)**

True when *Code* represents the character at the 1-based *Index* position in *String*. If *Index* is unbound the string is scanned from index 1. Raises a domain error if *Index* is negative. Fails silently if *Index* is zero or greater than the length of *String*. The mode `string_code(-,+,+)` is deterministic if the searched-for *Code* appears only once in *String*. See also `sub_string/5`.

**get\_string\_code(+Index, +String, -Code)**

Semi-deterministic version of `string_code/3`. In addition, this version provides strict range checking, throwing a domain error if *Index* is less than 1 or greater than the length of *String*. ECLiPSe provides this to support `String[Index]` notation.

**string\_concat(?String1, ?String2, ?String3)**

Similar to `atom_concat/3`, but the unbound argument will be unified with a string object rather than an atom. Also, if both *String1* and *String2* are unbound and *String3* is bound to text, it breaks *String3*, unifying the start with *String1* and the end with *String2* as `append` does with lists. Note that this is not particularly fast on long strings, as for each redo the system has to create two entirely new strings, while the list equivalent only creates a single new list-cell and moves some pointers around.

**split\_string(+String, +SepChars, +PadChars, -SubStrings)***[det]*

Break *String* into *SubStrings*. The *SepChars* argument provides the characters that act as separators and thus the length of *SubStrings* is one more than the number of separators found if *SepChars* and *PadChars* do not have common characters. If *SepChars* and *PadChars* are equal, sequences of adjacent separators act as a single separator. Leading and trailing characters for each substring that appear in *PadChars* are removed from the substring. The input arguments can be either atoms, strings or char/code lists. Compatible with ECLiPSe. Below are some examples:

```
% a simple split
?- split_string("a.b.c.d", ".", "", L).
L = ["a", "b", "c", "d"].
% Consider sequences of separators as a single one
?- split_string("/home//jan//nice/path", "/", "/", L).
L = ["home", "jan", "nice", "path"].
% split and remove white space
?- split_string("SWI-Prolog, 7.0", ",", " ", L).
L = ["SWI-Prolog", "7.0"].
% only remove leading and trailing white space
?- split_string("  SWI-Prolog  ", "", "\s\t\n", L).
L = ["SWI-Prolog"].
```

In the typical use cases, *SepChars* either does not overlap *PadChars* or is equivalent to handle multiple adjacent separators as a single (often white space). The behaviour with partially overlapping sets of padding and separators should be considered undefined. See also `read_string/5`.

**sub\_string(+String, ?Before, ?Length, ?After, ?SubString)**

*SubString* is a substring of *String*. There are *Before* characters in *String* before *SubString*, *SubString* contains *Length* character and is followed by *After* characters in *String*. If not enough information is provided to compute the start of the match, *String* is scanned left-to-right. This predicate is functionally equivalent to `sub_atom/5`, but operates on strings. The following example splits a string of the form  $\langle name \rangle = \langle value \rangle$  into the name part (an atom) and the value (a string).

```
name_value(String, Name, Value) :-
    sub_string(String, Before, _, After, "="), !,
    sub_string(String, 0, Before, _, NameString),
    atom_string(Name, NameString),
    sub_string(String, _, After, 0, Value).
```

**atomics\_to\_string(+List, -String)**

*List* is a list of strings, atoms, integers or floating point numbers. Succeeds if *String* can be unified with the concatenated elements of *List*. Equivalent to `atomics_to_string(List, "", String)`.

**atomics\_to\_string(+List, +Separator, -String)**

Creates a string just like `atomics_to_string/2`, but inserts *Separator* between each pair of inputs. For example:

```
?- atomics_to_string([gnu, "gnat", 1], ', ', A).

A = "gnu, gnat, 1"
```



**string\_upper(+String, -UpperCase)**

Convert *String* to upper case and unify the result with *UpperCase*.

**string\_lower(+String, LowerCase)**

Convert *String* to lower case and unify the result with *LowerCase*.

**read\_string(+Stream, ?Length, -String)**

Read at most *Length* characters from *Stream* and return them in the string *String*. If *Length* is unbound, *Stream* is read to the end and *Length* is unified with the number of characters read.

**read\_string(+Stream, +SepChars, +PadChars, -Sep, -String)**

Read a string from *Stream*, providing functionality similar to `split_string/4`. The predicate performs the following steps:

1. Skip all characters that match *PadChars*
2. Read up to a character that matches *SepChars* or end of file
3. Discard trailing characters that match *PadChars* from the collected input
4. Unify *String* with a string created from the input and *Sep* with the separator character read. If input was terminated by the end of the input, *Sep* is unified with -1.

The predicate `read_string/5` called repeatedly on an input until *Sep* is -1 (end of file) is equivalent to reading the entire file into a string and calling `split_string/4`, provided that *SepChars* and *PadChars* are not *partially overlapping*.<sup>2</sup> Below are some examples:

```
% Read a line
read_string(Input, "\n", "\r", End, String)
% Read a line, stripping leading and trailing white space
read_string(Input, "\n", "\r\t ", End, String)
% Read upto , or ), unifying End with 0', or 0'
read_string(Input, ",)", "\t ", End, String)
```

**open\_string(+String, -Stream)**

True when *Stream* is an input stream that accesses the content of *String*. *String* can be any text representation, i.e., string, atom, list of codes or list of characters.

### 5.2.2 Representing text: strings, atoms and code lists

With the introduction of strings as a Prolog data type, there are three main ways to represent text: using strings, atoms or code lists. This section explains what to choose for what purpose. Both strings and atoms are *atomic* objects: you can only look inside them using dedicated predicates. Lists of character codes are compound datastructures.

**Lists of character codes** is what you need if you want to *parse* text using Prolog grammar rules (DCGs, see `phrase/3`). Most of the text reading predicates (e.g., `read_line_to_codes/2`) return a list of character codes because most applications need to parse these lines before the data can be processed.

<sup>2</sup>Behaviour that is fully compatible would require unlimited look-ahead.

**Atoms** are *identifiers*. They are typically used in cases where identity comparison is the main operation and that are typically not composed nor taken apart. Examples are RDF resources (URIs that identify something), system identifiers (e.g., 'Boeing 747'), but also individual words in a natural language processing system. They are also used where other languages would use *enumerated types*, such as the names of days in the week. Unlike enumerated types, Prolog atoms do not form not a fixed set and the same atom can represent different things in different contexts.

**Strings** typically represents text that is processed as a unit most of the time, but which is not an identifier for something. Format specifications for `format/3` is a good example. Another example is a descriptive text provided in an application. Strings may be composed and decomposed using e.g., `string_concat/3` and `sub_string/5` or converted for parsing using `string_codes/2` or created from codes generated by a generative grammar rule, also using `string_codes/2`.

### 5.2.3 Adapting code for double quoted strings

The predicates in this section can help adapting your program to the new convention for handling double quoted strings. We have adapted a huge code base with which we were not familiar in about half a day.

#### **list\_strings**

This predicate may be used to assess compatibility issues due to the representation of double quoted text as string objects. See section 5.2 and section 5.2.4. To use it, load your program into Prolog and run `list_strings/0`. The predicate lists source locations of string objects encountered in the program that are not considered safe. Such string need to be examined manually, after which one of the actions below may be appropriate:

- Rewrite the code. For example, change `[X] = "a"` into `X = 0'a`.
- If a particular module relies heavily on representing strings as lists of character code, consider adding the following directive to the module. Note that this flag only applies to the module in which it appears.

```
:- set_prolog_flag(double_quotes, codes).
```

- Use a back quoted string (e.g., ``text``). Note that this will not make your code run regardless of the `--traditional` command line option and code exploiting this mapping is also not portable to ISO compliant systems.
- If the strings appear in facts and usage is safe, add a clause to the multifile predicate `check:string_predicate/1` to silence `list_strings/0` on all clauses of that predicate.
- If the strings appear as an argument to a predicate that can handle string objects, add a clause to the multifile predicate `check:valid_string_goal/1` to silence `list_strings/0`.

#### **check:string\_predicate(:PredicateIndicator)**

Declare that *PredicateIndicator* has clauses that contain strings, but that this is safe. For example, if there is a predicate `help_info/2`, where the second argument contains a double

quoted string that is handled properly by the predicates of the applications' help system, add the following declaration to stop `list_strings/0` from complaining:

```
:- multifile check:string_predicate/1.

check:string_predicate(user:help_info/2) .
```

### **check:valid\_string\_goal(:Goal)**

Declare that calls to *Goal* are safe. The module qualification is the actual module in which *Goal* is defined. For example, a call to `format/3` is resolved by the predicate `system:format/3`. and the code below specifies that the second argument may be a string (system predicates that accept strings are defined in the library).

```
:- multifile check:valid_string_goal/1.

check:valid_string_goal(system:format(_, S, _)) :- string(S) .
```

#### **5.2.4 Why has the representation of double quoted text changed?**

Prolog defines two forms of quoted text. Traditionally, single quoted text is mapped to atoms while double quoted text is mapped to a list of *character codes* (integers) or characters represented as 1-character atoms. Representing text using atoms is often considered inadequate for several reasons:

- It hides the conceptual difference between text and program symbols. Where content of text often matters because it is used in I/O, program symbols are merely identifiers that match with the same symbol elsewhere. Program symbols can often be consistently replaced, for example to obfuscate or compact a program.
- Atoms are globally unique identifiers. They are stored in a shared table. Volatile strings represented as atoms come at a significant price due to the required cooperation between threads for creating atoms. Reclaiming temporary atoms using *Atom garbage collection* is a costly process that requires significant synchronisation.
- Many Prolog systems (not SWI-Prolog) put severe restrictions on the length of atoms or the maximum number of atoms.

Representing text as a list of character codes or 1-character atoms also comes at a price:

- It is not possible to distinguish (at runtime) a list of integers or atoms from a string. Sometimes this information can be derived from (implicit) typing. In other cases the list must be embedded in a compound term to distinguish the two types. For example, `s("hello world")` could be used to indicate that we are dealing with a string.

Lacking runtime information, debuggers and the toplevel can only use heuristics to decide whether to print a list of integers as such or as a string (see `portray_text/1`).

While experienced Prolog programmers have learned to cope with this, we still consider this an unfortunate situation.

- Lists are expensive structures, taking 2 cells per character (3 for SWI-Prolog in its current form). This stresses memory consumption on the stacks while pushing them on the stack and dealing with them during garbage collection is unnecessarily expensive.

We observe that in many programs, most strings are only handled as a single unit during their life-time. Examining real code tells us that double quoted strings typically appear in one of the following roles:

**A DCG literal** Although represented as a list of codes is the correct representation for handling in DCGs, the DCG translator can recognise the literal and convert it to the proper representation. Such code need not be modified.

**A format string** This is a typical example of text that is conceptually not a program identifier. Format is designed to deal with alternative representations of the format string. Such code need not be modified.

**Getting a character code** The construct `[X] = "a"` is a commonly used template for getting the character code of the letter 'a'. ISO Prolog defines the syntax `0'a` for this purpose. Code using this must be modified. The modified code will run on any ISO compliant processor.

**As argument to list predicates to operate on strings** Here, we see code such as `append("name:", Rest, Codes)`. Such code needs to be modified. In this particular example, the following is a good portable alternative: `phrase("name:", Codes, Rest)`

**Checks for a character to be in a set** Such tests are often performed with code such as this: `memberchk(C, "~!@#\$")`. This is a rather inefficient check in a traditional Prolog system because it pushes a list of character codes cell-by-cell the Prolog stack and then traverses this list cell-by-cell to see whether one of the cells unifies with `C`. If the test is successful, the string will eventually be subject to garbage collection. The best code for this is to write a predicate as below, which pushes nothing on the stack and performs an indexed lookup to see whether the character code is in 'my\_class'.

```
my_class(0'~).
my_class(0'!).
...
```

An alternative to reach the same effect is to use term expansion to create the clauses:

```
term_expansion(my_class(_), Clauses) :-
    findall(my_class(C),
            string_code(_, "~!@#\$", C),
            Clauses).

my_class(_).
```

Finally, the predicate `string_code/3` can be exploited directly as a replacement for the `memberchk/2` on a list of codes. Although the string is still pushed onto the stack, it is more compact and only a single entity.

We offer the predicate `list_strings/0` to help porting your program.

## 5.3 Syntax changes

### 5.3.1 Operators and quoted atoms

As of SWI-Prolog version 7, quoted atoms loose their operator property. This means that expressions such as `A = 'dynamic'/1` are valid syntax, regardless of the operator definitions. From questions on the mailinglist this is what people expect.<sup>3</sup> To accomodate for real quoted operators, a quoted atom that *needs* quotes can still act as an operator.<sup>4</sup> A good use-case for this is a unit library<sup>5</sup>, which allows for expressions such as below.

```
?- Y isu 600kcal - 1h*200'W'.
Y = 1790400.0'J'.
```

### 5.3.2 Compound terms with zero arguments

As of SWI-Prolog version 7, the system supports compound terms that have no arguments. This implies that e.g., `name()` is valid syntax. This extension aims at functions on dicts (see section 5.4) as well as the implementation of domain specific languages (DSLs). To minimise the consequences, the classic predicates `functor/3` and `=../2` have not been modified. The predicates `compound_name_arity/3` and `compound_name_arguments/3` have been added. These predicates operate only on compound terms and behave consistently for compounds with zero arguments. Code that *generalises* a term using the sequence below should generally be changed to use `compound_name_arity/3`.

```
...,
functor(Specific, Name, Arity),
functor(General, Name, Arity),
...,
```

Replacement of `=../2` by `compound_name_arguments/3` is typically needed to deal with code that follow the skeleton below.

```
...,
Term0 =.. [Name|Args0],
maplist(convert, Args0, Args),
Term =.. [Name|Args],
...,
```

<sup>3</sup>We believe that most users expect an operator declaration to define a new token, which would explain why the operator name is often quoted in the declaration, but not while the operator is used. We are afraid that allowing for this easily creates ambiguous syntax. Also, many development environments are based on tokenization. Having dynamic tokenization due to operator declarations would make it hard to support Prolog in such editors.

<sup>4</sup>Suggested by Joachim Schimpf.

<sup>5</sup>[https://groups.google.com/d/msg/comp.lang.prolog/ozqdzI-gi\\_g/2G16GYLIS0IJ](https://groups.google.com/d/msg/comp.lang.prolog/ozqdzI-gi_g/2G16GYLIS0IJ)

For predicates, goals and arithmetic functions (evaluatable terms),  $\langle name \rangle$  and  $\langle name \rangle()$  are *equivalent*. Below are some examples that illustrate this behaviour.

```
go() :- format('Hello world~n').

?- go().
Hello world

?- go.
Hello world

?- Pi is pi().
Pi = 3.141592653589793.

?- Pi is pi.
Pi = 3.141592653589793.
```

Note that the *canonical* representation of predicate heads and functions without arguments is an atom. Thus, `clause(go(), Body)` returns the clauses for `go/0`, but `clause(-Head, -Body, +Ref)` unifies *Head* with an atom if the clause specified by *Ref* is part of a predicate with zero arguments.

### 5.3.3 Block operators

Introducing curly bracket and array subscripting.<sup>6</sup> The symbols `[]` and `{}` may be declared as an operator, which has the following effect:

`[]`

This operator is typically declared as a low-priority `yf` postfix operator, which allows for `array[index]` notation. This syntax produces a term `[]([index], array)`.

`{}`

This operator is typically declared as a low-priority `xf` postfix operator, which allows for `head(arg) { body }` notation. This syntax produces a term `{ }({body}, head(arg))`.

Below is an example that illustrates the representation of a typical ‘curly bracket language’ in Prolog.

```
?- op(100, xf, {}).
?- op(100, yf, []).
?- op(1100, yf, ;).

?- displayq(func(arg))
```

<sup>6</sup>Introducing block operators was proposed by Jose Morales. It was discussed in the Prolog standardization mailing list, but there were too many conflicts with existing extensions (ECLiPSe and B-Prolog) and doubt about their need to reach an agreement. Increasing need to get to some solution resulted in what is documented in this section. These extensions are also implemented in recent versions of YAP.

```

        { a[10] = 5;
          update();
        } ).
    {} ( { ; (= ([ ] ([10], a), 5), ; (update())) ), func(arg) )

```

## 5.4 Dicts: structures with named arguments

SWI-Prolog version 7 introduces dicts as an abstract object with a concrete modern syntax and functional notation for accessing members and as well as access functions defined by the user. The syntax for a dict is illustrated below. *Tag* is either a variable or an atom. As with compound terms, there is **no** space between the tag and the opening brace. The keys are either atoms or small integers (up to `max_tagged_integer`). The values are arbitrary Prolog terms which are parsed using the same rules as used for arguments in compound terms.

Tag{Key1:Value1, Key2:Value2, ...}

A dict can *not* hold duplicate keys. The dict is transformed into an opaque internal representation that does *not* respect the order in which the key-value pairs appear in the input text. If a dict is written, the keys are written according to the standard order of terms (see section 4.7.1). Here are some examples, where the second example illustrates that the order is not maintained and the third illustrates an anonymous dict.

```

?- A = point{x:1, y:2}.
A = point{x:1, y:2}.

?- A = point{y:2, x:1}.
A = point{x:1, y:2}.

?- A = _{first_name:"Mel", last_name:"Smith"}.
A = _G1476{first_name:"Mel", last_name:"Smith"}.

```

Dicts can be unified following the standard symmetric Prolog unification rules. As dicts use an internal canonical form, the order in which the named keys are represented is not relevant. This behaviour is illustrated by the following example.

```

?- point{x:1, y:2} = Tag{y:2, x:X}.
Tag = point,
X = 1.

```

**Note** In the current implementation, two dicts unify only if they have the same set of keys and the tags and values associated with the keys unify. In future versions, the notion of unification between dicts could be modified such that two dicts unify if their tags and the values associated with *common* keys unify, turning both dicts into a new dict that has the union of the keys of the two original dicts.

### 5.4.1 Functions on dicts

The infix operator dot (`op(100, yfx, .)`) is used to extract values and evaluate functions on dicts. Functions are recognised if they appear in the argument of a *goal* in the source text, possibly nested in a term. The keys act as field selector, which is illustrated in this example.

```
?- X = point{x:1,y:2}.x.
X = 1.

?- Pt = point{x:1,y:2}, write(Pt.y) .
2
Pt = point{x:1,y:2}.

?- X = point{x:1,y:2}.C.
X = 1,
C = x ;
X = 2,
C = y.
```

The compiler translates a goal that contains `./2` terms in its arguments into a conjunction of calls to `./3` defined in the `system` module. Terms `functor./2` that appears in the head are replaced with a variable and calls to `./3` are inserted at the start of the body. Below are two examples, where the first extracts the `x` key from a dict and the second extends a dict containing an address with the postal code, given a `find_postal_code/4` predicate.

```
dict_x(X, X.x) .

add_postal_code(Dict, Dict.put(postal_code, Code)) :-
    find_postal_code(Dict.city,
                     Dict.street,
                     Dict.house_number,
                     Code) .
```

Note that expansion of `./2` terms implies that such terms cannot be created by writing them explicitly in your source code. Such terms can still be created with `functor/3`, `=./2`, `compound_name_arity/3` and `compound_name_arguments/3`.<sup>7</sup>

#### `.(+Dict, +Function, -Result)`

This predicate is called to evaluate `./2` terms found in the arguments of a goal. This predicate evaluates the field extraction described above, which is mapped to `get_dict_lex/3`. If *Function* is a compound term, it checks for the predefined functions on dicts described in section 5.4.1 or executes a user defined function as described in section 5.4.1.

<sup>7</sup>Traditional code is unlikely to use `./2` terms because they were practically reserved for usage in lists. We do not provide a quoting mechanism as found in functional languages because it would only be needed to quote `./2` terms, such terms are rare and term manipulation provides an escape route.



**User defined functions on dicts**

The tag of a dict associates the dict to a module. If the dot notation uses a compound term, this calls the goal below.

$$\langle module \rangle : \langle name \rangle (Arg1, \dots, +Dict, -Value)$$

Functions are normal Prolog predicates. The dict infrastructure provides a more convenient syntax for representing the head of such predicates without worrying about the argument calling conventions. The code below defines a function `multiply(Times)` on a point that creates a new point by multiplying both coordinates. and `len`<sup>8</sup> to compute the length from the origin. The `.` and `:=` operators are used to abstract the location of the predicate arguments. It is allowed to define multiple a function with multiple clauses, providing overloading and non-determinism.

```
:- module(point, []).

M.multiply(F) := point{x:X, y:Y} :-
    X is M.x*F,
    Y is M.y*F.

M.len() := Len :-
    Len is sqrt(M.x**2 + M.y**2).
```

After these definitions, we can evaluate the following functions:

```
?- X = point{x:1, y:2}.multiply(2).
X = point{x:2, y:4}.

?- X = point{x:1, y:2}.multiply(2).len().
X = 4.47213595499958.
```

**Predefined functions on dicts**

Dicts currently define the following reserved functions:

**get(?Key)**

Same as *Dict.Key*, but maps to `get_dict/3` instead of `get_dict_ex/3`. This implies that the function evaluation fails silently if *Key* does not appear in *Dict*. See also `</2`, which can be used to test for existence and unify multiple key values from a dict. For example:

```
?- write(t{a:x}.get(a)).
x
?- write(t{a:x}.get(b)).
false.
```

<sup>8</sup>as `length` would result in a predicate `length/2`, this name cannot be used. This might change in future versions.

**put(+New)**

Evaluates to a new dict where the key-values in *New* replace or extend the key-values in the original dict. See `put_dict/3`.

**put(+KeyPath, +Value)**

Evaluates to a new dict where the *KeyPath-Value* replaces or extends the key-values in the original dict. *KeyPath* is either a key or a term *KeyPath/Key*,<sup>9</sup> replacing the value associated with *Key* in a sub-dict of the dict on which the function operates. See `put_dict/4`. Below are some examples:

```
?- A = _{}.put(a, 1).
A = _G7359{a:1}.

?- A = _{a:1}.put(a, 2).
A = _G7377{a:2}.

?- A = _{a:1}.put(b/c, 2).
A = _G1395{a:1, b:_G1584{c:2}}.

?- A = _{a:_{b:1}}.put(a/b, 2).
A = _G1429{a:_G1425{b:2}}.

?- A = _{a:1}.put(a/b, 2).
A = _G1395{a:_G1578{b:2}}.
```

**5.4.2 Predicates for managing dicts**

This section documents the predicates that are defined on dicts. We use the naming and argument conventions of the traditional `assoc`.

**is\_dict(@Term)**

True if *Term* is a dict. This is the same as `is_dict(Term, _)`.

**is\_dict(@Term, -Tag)**

True if *Term* is a dict of *Tag*.

**get\_dict(?Key, +Dict, -Value)**

Unify the value associated with *Key* in dict with *Value*. If *Key* is unbound, all associations in *Dict* are returned on backtracking. The order in which the associations are returned is undefined. This predicate is normally accessed using the functional notation `Dict.Key`. See section 5.4.1.

Fails silently if *Key* does not appear in *Dict*. This is different from the behavior of the functional ‘-notation, which throws an existence error in that case.

**get\_dict\_ex(?Key, +Dict, -Value)**

As `get_dict/3`, but throws an existence exception if *Key* cannot be found in dict. This is used when evaluating *Dict.Key* as a function.

<sup>9</sup>Note that we do not use the ‘.’ functor here, because the `./2` would *evaluate*.

**get\_dict(+Key, +Dict, -Value, -NewDict, +NewValue)***[semidet]*

Create a new dict after updating the value for *Key*. Fails if *Value* does not unify with the current value associated with *Key*. *Dict* is either a dict or a list the can be converted into a dict.

Has the behavior as if defined in the following way:

```
get_dict(Key, Dict, Value, NewDict, NewValue) :-
    get_dict(Key, Dict, Value),
    put_dict(Key, Dict, NewValue, NewDict).
```

**dict\_create(-Dict, +Tag, +Data)**

Create a dict in *Tag* from *Data*. *Data* is a list of attribute-value pairs using the syntax *Key:Value*, *Key=Value*, *Key-Value* or *Key(Value)*. An exception is raised if *Data* is not a proper list, one of the elements is not of the shape above, a key is neither an atom nor a small integer or there is a duplicate key.

**dict\_pairs(?Dict, ?Tag, ?Pairs)**

Bi-directional mapping between a dict and an ordered list of pairs (see section [A.27](#)).

**put\_dict(+New, +DictIn, -DictOut)**

*DictOut* is a new dict created by replacing or adding key-value pairs from *New* to *Dict*. *New* is either a dict or a valid input for `dict_create/3`. This predicate is normally accessed using the functional notation. Below are some examples:

```
?- A = point{x:1, y:2}.put(_{x:3}).
A = point{x:3, y:2}.

?- A = point{x:1, y:2}.put([x=3]).
A = point{x:3, y:2}.

?- A = point{x:1, y:2}.put([x=3, z=0]).
A = point{x:3, y:2, z:0}.
```

**put\_dict(+Key, +DictIn, +Value, -DictOut)**

*DictOut* is a new dict created by replacing or adding *Key-Value* to *DictIn*. For example:

```
?- A = point{x:1, y:2}.put(x, 3).
A = point{x:3, y:2}.
```

This predicate can also be accessed by using the functional notation, in which case *Key* can also be a *\*path\** of keys. For example:

```
?- Dict = _{}.put(a/b, c).
Dict = _6096{a:_6200{b:c}}.
```

**del\_dict(+Key, +DictIn, ?Value, -DictOut)**

True when *Key-Value* is in *DictIn* and *DictOut* contains all associations of *DictIn* except for *Key*.

**+Select :< +From***[semidet]*

True when *Select* is a ‘sub dict’ of *From*: the tags must unify and all keys in *Select* must appear with unifying values in *From*. *From* may contain keys that are not in *Select*. This operation is frequently used to *match* a dict and at the same time extract relevant values from it. For example:

```
plot(Dict, On) :-
    _{x:X, y:Y, z:Z} :< Dict, !,
    plot_xyz(X, Y, Z, On).
plot(Dict, On) :-
    _{x:X, y:Y} :< Dict, !,
    plot_xy(X, Y, On).
```

The goal `Select :< From` is equivalent to `select_dict(Select, From, _)`.

**select\_dict(+Select, +From, -Rest)***[semidet]*

True when the tags of *Select* and *From* have been unified, all keys in *Select* appear in *From* and the corresponding values have been unified. The key-value pairs of *From* that do not appear in *Select* are used to form an anonymous dict, which is unified with *Rest*. For example:

```
?- select_dict(P{x:0, y:Y}, point{x:0, y:1, z:2}, R).
P = point,
Y = 1,
R = _G1705{z:2}.
```

See also `select_dict/2` to ignore *Rest* and `>:</2` for a symmetric partial unification of two dicts.

**+Dict1 >:< +Dict2**

This operator specifies a *partial unification* between *Dict1* and *Dict2*. It is true when the tags and the values associated with all *common* keys have been unified. The values associated to keys that do not appear in the other dict are ignored. Partial unification is symmetric. For example, given a list of dicts, find dicts that represent a point with X equal to zero:

```
member(Dict, List),
Dict >:< point{x:0, y:Y}.
```

See also `>:</2` and `select_dict/3`.

**Destructive assignment in dicts**

This section describes the destructive update operations defined on dicts. These actions can only *update* keys and not add or remove keys. If the requested key does not exist the predicate raises `existence_error(key, Key, Dict)`. Note the additional argument.

Destructive assignment is a non-logical operation and should be used with care because the system may copy or share identical Prolog terms at any time. Some of this behaviour can be avoided by adding an additional unbound value to the dict. This prevents unwanted sharing and ensures that `copy_term/2` actually copies the dict. This pitfall is demonstrated in the example below:

```
?- A = a{a:1}, copy_term(A,B), b_set_dict(a, A, 2).
A = B, B = a{a:2}.

?- A = a{a:1,dummy:_}, copy_term(A,B), b_set_dict(a, A, 2).
A = a{a:2, dummy:_G3195},
B = a{a:1, dummy:_G3391}.
```

**b\_set\_dict(+Key, !Dict, +Value)**

[det]

Destructively update the value associated with *Key* in *Dict* to *Value*. The update is trailed and undone on backtracking. This predicate raises an existence error if *Key* does not appear in *Dict*. The update semantics are equivalent to `setarg/3` and `b_setval/2`.

**nb\_set\_dict(+Key, !Dict, +Value)**

[det]

Destructively update the value associated with *Key* in *Dict* to a copy of *Value*. The update is *not* undone on backtracking. This predicate raises an existence error if *Key* does not appear in *Dict*. The update semantics are equivalent to `nb_setarg/3` and `nb_setval/2`.

**nb\_link\_dict(+Key, !Dict, +Value)**

[det]

Destructively update the value associated with *Key* in *Dict* to *Value*. The update is *not* undone on backtracking. This predicate raises an existence error if *Key* does not appear in *Dict*. The update semantics are equivalent to `nb_linkarg/3` and `nb_linkval/2`. Use with extreme care and consult the documentation of `nb_linkval/2` before use.

### 5.4.3 When to use dicts?

Dicts are a new type in the Prolog world. They compete with several other types and libraries. In the list below we have a closer look at these relations. We will see that dicts are first of all a good replacement for compound terms with a high or not clearly fixed arity, library `record` and option processing.

**Compound terms** Compound terms with positional arguments form the traditional way to package data in Prolog. This representation is well understood, fast and compound terms are stored efficiently. Compound terms are still the representation of choice, provided that the number of arguments is low and fixed or compactness or performance are of utmost importance.

A good example of a compound term is the representation of RDF triples using the term `rdf(Subject, Predicate, Object)` because RDF triples are defined to have precisely these three arguments and they are always referred to in this order. An application processing information about persons should probably use dicts because the information that is related to a person is not so fixed. Typically we see first and last name. But there may also be title, middle name, gender, date of birth, etc. The number of arguments becomes unmanagable when using a compound term, while adding or removing an argument leads to many changes in the program.

**Library record** Using `library record` relieves the maintenance issues associated with using compound terms significantly. The library generates access and modification predicates for each field in a compound term from a declaration. The library provides sound access to compound terms with many arguments. One of its problems is the verbose syntax needed to access or modify fields which results from long names for the generated predicates and the restriction that each field needs to be extracted with a separate goal. Consider the example below, where the first uses `library record` and the second uses `dicts`.

```
...,
person_first_name(P, FirstName),
person_last_name(P, LastName),
format('Dear ~w ~w,~n~n', [FirstName, LastName]).

...,
format('Dear ~w ~w,~n~n', [Dict.first_name, Dict.last_name])).
```

Records have a fixed number of arguments and (non-)existence of an argument must be represented using a value that is outside the normal domain. This leads to unnatural code. For example, suppose our person also has a title. If we know the first name we use this and else we use the title. The code samples below illustrate this.

```
salutation(P) :-
    person_first_name(P, FirstName), nonvar(FirstName), !,
    person_last_name(P, LastName),
    format('Dear ~w ~w,~n~n', [FirstName, LastName]).
salutation(P) :-
    person_title(P, Title), nonvar(Title), !,
    person_last_name(P, LastName),
    format('Dear ~w ~w,~n~n', [Title, LastName]).

salutation(P) :-
    _{first_name:FirstName, last_name:LastName} :< P, !,
    format('Dear ~w ~w,~n~n', [FirstName, LastName]).
salutation(P) :-
    _{title:Title, last_name:LastName} :< P, !,
    format('Dear ~w ~w,~n~n', [Title, LastName]).
```

**Library assoc** This library implements a balanced binary tree. Dicts can replace the use of this library if the association is fairly static (i.e., there are few update operations), all keys are atoms or (small) integers and the code does not rely on ordered operations.

**Library option** Option lists are introduced by ISO Prolog, for example for `read_term/3`, `open/4`, etc. The `option` library provides operations to extract options, merge options lists, etc. Dicts are well suited to replace option lists because they are cheaper, can be processed faster and have a more natural syntax.

**Library `pairs`** This library is commonly used to process large name-value associations. In many cases this concerns short-lived datastructures that result from `findall/3`, `maplist/3` and similar list processing predicates. Dicts may play a role if frequent random key lookups are needed on the resulting association. For example, the skeleton ‘create a pairs list’, ‘use `list_to_assoc/2` to create an assoc’, followed by frequent usage of `get_assoc/3` to extract key values can be replaced using `dict_pairs/3` and the dict access functions. Using dicts in this scenario is more efficient and provides a more pleasant access syntax.

#### 5.4.4 A motivation for dicts as primary citizens

Dicts, or key-value associations, are a common data structure. A good old example are *property lists* as found in Lisp, while a good recent example is formed by JavaScript *objects*. Traditional Prolog does not offer native property lists. As a result, people are using a wide range of data structures for key-value associations:

- Using compound terms and positional arguments, e.g., `point(1,2)`.
- Using compound terms with library `record`, which generates access predicates for a term using positional arguments from a description.
- Using lists of terms `Name=Value`, `Name-Value`, `Name:Value` or `Name(Value)`.
- Using library `assoc` which represents the associations as a balanced binary tree.

This situation is unfortunate. Each of these have their advantages and disadvantages. E.g., compound terms are compact and fast, but inflexible and using positional arguments quickly breaks down. Library `record` fixes this, but the syntax is considered hard to use. Lists are flexible, but expensive and the alternative key-value representations that are used complicate the matter even more. Library `assoc` allows for efficient manipulation of changing associations, but the syntactical representation of an assoc is complex, which makes them unsuitable for e.g., *options lists* as seen in predicates such as `open/4`.

#### 5.4.5 Implementation notes about dicts

Although dicts are designed as an abstract data type and we deliberately reserve the possibility to change the representation and even use multiple representations, this section describes the current implementation.

Dicts are currently represented as a compound term using the functor `'dict '`. The first argument is the tag. The remaining arguments create an array of sorted key-value pairs. This representation is compact and guarantees good locality. Lookup is order  $\log N$ , while adding values, deleting values and merging with other dicts has order  $N$ . The main disadvantage is that changing values in large dicts is costly, both in terms of memory and time.

Future versions may share keys in a separate structure or use a binary trees to allow for cheaper updates. One of the issues is that the representation must either be kept canonical or unification must be extended to compensate for alternate representations.

## 5.5 Integration of strings and dicts in the libraries

While lacking proper string support and dicts when designed, many predicates and libraries use interfaces that must be classified as suboptimal. Changing these interfaces is likely to break much more code than the changes described in this chapter. This section discusses some of these issues. Roughly, there are two cases. There where key-value associations or text is required as *input*, we can facilitate the new features by overloading the accepted types. Interfaces that produce text or key-value associations as their *output* however must make a choice. We plan to resolve that using either options that specify the desired output or provide an alternative library.

### 5.5.1 Dicts and option processing

System predicates and predicates based on library `options` process dicts as an alternative to traditional option lists.

### 5.5.2 Dicts in core data structures

Some predicates now produce structured data using compound terms and access predicates. We consider migrating these to dicts. Below is a tentative list of candidates. Portable code should use the provided access predicates and not rely on the term representation.

- Stream position terms
- Date and time records

### 5.5.3 Dicts, strings and XML

The XML representation could benefit significantly from the new features. In due time we plan to provide an set of alternative predicates and options to existing predicates that can be used to exploit the new types. We propose the following changes to the data representation:

- The attribute list of the `element(Name, Attributes, Content)` will become a dict.
- Attribute values will remain atoms
- CDATA in element content will be represented as strings

### 5.5.4 Dicts, strings and JSON

The JSON representation could benefit significantly from the new features. In due time we plan to provide an set of alternative predicates and options to existing predicates that can be used to exploit the new types. We propose the following changes to the data representation:

- Instead of using `json(KeyValueList)`, the new interface will translate JSON objects to a dict. The type of this dict will be `json`.
- String values in JSON will be mapped to strings.
- The values `true`, `false` and `null` will be represented as atoms.



### 5.5.5 Dicts, strings and HTTP

The HTTP library and related data structures would profit from exploiting dicts. Below is a list of data structures that might be affected by future changes. Code can be made more robust by using the `option` library functions for extracting values from these structures.

- The HTTP request structure
- The HTTP parameter interface
- URI components
- Attributes to HTML elements

## 5.6 Remaining issues

The changes and extensions described in this chapter resolve a many limitations of the Prolog language we have encountered. Still, there are remaining issues for which we seek solutions in the future.

**Text representation** Although strings resolve this issue for many applications, we are still faced with the representation of text as lists of characters which we need for parsing using DCGs. The ISO standard provides two representations, a list of *character codes* ('codes' for short) and a list of *one-character atoms* ('chars' for short). There are two sets of predicates, named `*_code(s)` and `*_char(s)` that provide the same functionality (e.g., `atom_codes/2` and `atom_chars/2`) using their own representation of characters. Codes can be used in arithmetic expressions, while chars are more readable. Neither can unambiguously be interpreted as a representation for text because codes can be interpreted as a list of integers and chars as a list of atoms.

We have not found a convincing way out. One of the options could be the introduction of a 'char' type. This type can be allowed in arithmetic and with the `0'⟨char⟩` syntax we have a concrete syntax for it.

**Arrays** Although lists are generally a much cleaner alternative for Prolog, real arrays with direct access to elements can be useful for particular tasks. The problem of integrating arrays is twofold. First of all, there is no good one-size-fits-all data representation for arrays. Many tasks that involve arrays require *mutable* arrays, while Prolog data is immutable by design. Second, standard Prolog has no good syntax support for arrays. SWI-Prolog version 7 has 'block operators' (see section 5.3.3) which can resolve the syntactic issues. Block operators have been adopted by YAP.

**Lambda expressions** Although many alternatives<sup>10</sup> have been proposed, we still feel uneasy with them.

**Loops** Many people have explored routes to avoid the need for recursion in Prolog for simple iterations over data. ECLiPSe have proposed *logical loops* [Schimpf, 2002], while B-Prolog introduced *declarative loops* and *list comprehension*<sup>11</sup>. The above mentioned lambda expressions, combined with `maplist/2` can achieve similar results.

<sup>10</sup>See e.g., <http://www.complang.tuwien.ac.at/ulrich/Prolog-inedit/ISO-Hiord>

<sup>11</sup><http://www.probp.com/download/loops.pdf>

# 6

## Modules

---

A Prolog module is a collection of predicates which defines a public interface by means of a set of provided predicates and operators. Prolog modules are defined by an ISO standard. Unfortunately, the standard is considered a failure and, as far as we are aware, not implemented by any concrete Prolog implementation. The SWI-Prolog module system syntax is derived from the Quintus Prolog module system. The Quintus module system has been the starting point for the module systems of a number of mainstream Prolog systems, such as SICStus, Ciao and YAP. The underlying primitives of the SWI-Prolog module system differ from the mentioned systems. These primitives allow for multiple modules in a file, hierarchical modules, emulation of other modules interfaces, etc.

This chapter motivates and describes the SWI-Prolog module system. Novices can start using the module system after reading section 6.2 and section 6.3. The primitives defined in these sections suffice for basic usage until one needs to export predicates that call or manage other predicates dynamically (e.g., use `call/1`, `assert/1`, etc.). Such predicates are called *meta predicates* and are discussed in section 6.4. Section 6.5 to section 6.8 describe more advanced issues. Starting with section 6.9, we discuss more low-level aspects of the SWI-Prolog module system that are used to implement the visible module system, and can be used to build other code reuse mechanisms.

### 6.1 Why Use Modules?

In classic Prolog systems, all predicates are organised in a single namespace and any predicate can call any predicate. Because each predicate in a file can be called from anywhere in the program, it becomes very hard to find the dependencies and enhance the implementation of a predicate without risking to break the overall application. This is true for any language, but even worse for Prolog due to its frequent need for ‘helper predicates’.

A Prolog module encapsulates a set of predicates and defines an *interface*. Modules can import other modules, which makes the dependencies explicit. Given explicit dependencies and a well-defined interface, it becomes much easier to change the internal organisation of a module without breaking the overall application.

Explicit dependencies can also be used by the development environment. The SWI-Prolog library `prolog_xref` can be used to analyse completeness and consistency of modules. This library is used by the built-in editor PceEmacs for syntax highlighting, jump-to-definition, etc.

### 6.2 Defining a Module

Modules are normally created by loading a *module file*. A module file is a file holding a `module/2` directive as its first term. The `module/2` directive declares the name and the public (i.e., externally visible) predicates of the module. The rest of the file is loaded into the module. Below is an example

of a module file, defining `reverse/2` and hiding the helper predicate `rev/3`. A module can use all built-in predicates and, by default, cannot redefine system predicates.

```
:- module(reverse, [reverse/2]).

reverse(List1, List2) :-
    rev(List1, [], List2).

rev([], List, List).
rev([Head|List1], List2, List3) :-
    rev(List1, [Head|List2], List3).
```

The module is named `reverse`. Typically, the name of a module is the same as the name of the file by which it is defined without the filename extension, but this naming is not enforced. Modules are organised in a single and flat namespace and therefore module names must be chosen with some care to avoid conflicts. As we will see, typical applications of the module system rarely use the name of a module explicitly in the source text.

#### **`:- module(+Module, +PublicList)`**

This directive can only be used as the first term of a source file. It declares the file to be a *module file*, defining a module named *Module*. Note that a module name is an atom. The module exports the predicates of *PublicList*. *PublicList* is a list of predicate indicators (name/arity or name//arity pairs) or operator declarations using the format `op(Precedence, Type, Name)`. Operators defined in the export list are available inside the module as well as to modules importing this module. See also section 4.25.

Compatible to Ciao Prolog, if *Module* is unbound, it is unified with the basename without extension of the file being loaded.

#### **`:- module(+Module, +PublicList, +Dialect)`**

Same as `module/2`. The additional *Dialect* argument provides a list of *language options*. Each atom in the list *Dialect* is mapped to a `use_module/1` goal as given below. See also section C. The third argument is supported for compatibility with the [Prolog Commons project](#).

```
:- use_module(library(dialect/LangOption)).
```

## 6.3 Importing Predicates into a Module

Predicates can be added to a module by *importing* them from another module. Importing adds predicates to the namespace of a module. An imported predicate can be called exactly the same as a locally defined predicate, although its implementation remains part of the module in which it has been defined.

Importing the predicates from another module is achieved using the directives `use_module/1` or `use_module/2`. Note that both directives take *filename(s)* as arguments. That is, modules are imported based on their filename rather than their module name.

**use\_module(+Files)**

Load the file(s) specified with *Files* just like `ensure_loaded/1`. The files must all be module files. All exported predicates from the loaded files are imported into the module from which this predicate is called. This predicate is equivalent to `ensure_loaded/1`, except that it raises an error if *Files* are not module files.

The imported predicates act as *weak symbols* in the module into which they are imported. This implies that a local definition of a predicate overrides (clobbers) the imported definition. If the flag `warn_override_implicit_import` is `true` (default), a warning is printed. Below is an example of a module that uses `library(lists)`, but redefines `flatten/2`, giving it a totally different meaning:

```
:- module(shapes, []).
:- use_module(library(lists)).

flatten(cube, square).
flatten(ball, circle).
```

Loading the above file prints the following message:

```
Warning: /home/janw/Bugs/Import/t.pl:5:
        Local definition of shapes:flatten/2
        overrides weak import from lists
```

This warning can be avoided by (1) using `use_module/2` to only import the predicates from the `lists` library that are actually used in the ‘shapes’ module, (2) using the `except([flatten/2])` option of `use_module/2`, (3) use `:- abolish(flatten/2).` before the local definition or (4) setting `warn_override_implicit_import` to `false`. Globally disabling this warning is only recommended if overriding imported predicates is common as a result of design choices or the program is ported from a system that silently overrides imported predicates.

Note that it is always an error to import two modules with `use_module/1` that export the same predicate. Such conflicts must be resolved with `use_module/2` as described above.

**use\_module(+File, +ImportList)**

Load *File*, which must be a module file, and import the predicates as specified by *ImportList*. *ImportList* is a list of predicate indicators specifying the predicates that will be imported from the loaded module. *ImportList* also allows for renaming or import-everything-except. See also the `import` option of `load_files/2`. The first example below loads `member/2` from the `lists` library and `append/2` under the name `list_concat`, which is how this predicate is named in YAP. The second example loads all exports from `library` option except for `meta_options/3`. These renaming facilities are generally used to deal with portability issues with as few changes as possible to the actual code. See also section C and section 6.7.

```
:- use_module(library(lists), [ member/2,
                               append/2 as list_concat
```

```

    ]).
:- use_module(library(option), except([meta_options/3])).

```

In most cases a module is imported because some of its predicates are being used. However, sometimes a module is imported for other reasons, e.g., for its declarations. In such cases it is best practice to use `use_module/2` with empty `ImportList`. This distinguishes an imported module that is used, although not for its predicates, from a module that is needlessly imported.

The `module/2`, `use_module/1` and `use_module/2` directives are sufficient to partition a simple Prolog program into modules. The SWI-Prolog graphical cross-referencing tool `gxref/0` can be used to analyse the dependencies between non-module files and propose module declarations for each file.

## 6.4 Defining a meta-predicate

A meta-predicate is a predicate that calls other predicates dynamically, modifies a predicate, or reasons about properties of a predicate. Such predicates use either a compound term or a *predicate indicator* to describe the predicate they address, e.g., `assert(name(jan))` or `abolish(name/1)`. With modules, this simple schema no longer works as each module defines its own mapping from `name+arity` to predicate. This is resolved by wrapping the original description in a term `<module>:<term>`, e.g., `assert(person:name(jan))` or `abolish(person:name/1)`.

Of course, when calling `assert/1` from inside a module, we expect to assert to a predicate local to this module. In other words, we do not wish to provide this `:/2` wrapper by hand. The `meta_predicate/1` directive tells the compiler that certain arguments are terms that will be used to look up a predicate and thus need to be wrapped (qualified) with `<module>:<term>`, unless they are already wrapped.

In the example below, we use this to define `maplist/3` inside a module. The argument ‘2’ in the `meta_predicate` declaration means that the argument is module-sensitive and refers to a predicate with an arity that is two more than the term that is passed in. The compiler only distinguishes the values 0..9 and `:`, which denote module-sensitive arguments, from `+`, `-` and `?`, which denote *modes*. The values 0..9 are used by the *cross-referencer* and syntax highlighting. Note that the helper predicate `maplist_/3` does not need to be declared as a meta-predicate because the `maplist/3` wrapper already ensures that *Goal* is qualified as `<module>:Goal`. See the description of `meta_predicate/1` for details.

```

:- module(maplist, [maplist/3]).
:- meta_predicate maplist(2, ?, ?).

%%      maplist(:Goal, +List1, ?List2)
%
%      True if Goal can successfully be applied to all
%      successive pairs of elements from List1 and List2.

maplist(Goal, L1, L2) :-
    maplist_(L1, L2, Goal).

maplist_([], [], _).

```

```
maplist_([H0|T0], [H|T], Goal) :-
    call(Goal, H0, H),
    maplist_(T0, T, Goal).
```

### meta\_predicate +Head, ...

Define the predicates referenced by the comma-separated list *Head* as *meta-predicates*. Each argument of each head is a *meta argument specifier*. Defined specifiers are given below. Only 0..9, :, and ^ are interpreted; the mode declarations +, - and ? are ignored.

#### 0..9

The argument is a term that is used to reference a predicate with *N* more arguments than the given argument term. For example: `call(0)` or `maplist(1, +)`.

:

The argument is module-sensitive, but does not directly refer to a predicate. For example: `consult(:)`.

-

The argument is not module-sensitive and unbound on entry.

?

The argument is not module-sensitive and the mode is unspecified.

\*

The argument is not module-sensitive and the mode is unspecified. The specification \* is equivalent to ?. It is accepted for compatibility reasons. The predicate `predicate_property/2` reports arguments declared using \* with ?.

+

The argument is not module-sensitive and bound (i.e., `nonvar`) on entry.

^

This extension is used to denote the possibly ^-annotated goal of `setof/3`, `bagof/3`, `aggregate/3` and `aggregate/4`. It is processed similar to '0', but leaving the ^/2 intact.

//

The argument is a DCG body. See `phrase/3`.

Each argument that is module-sensitive (i.e., marked 0..9, :, or ^) is qualified with the context module of the caller if it is not already qualified. The implementation ensures that the argument is passed as `<module>:term`, where `<module>` is an atom denoting the name of a module and `<term>` itself is not a `:/2` term where the first argument is an atom. Below is a simple declaration and a number of queries.

```
:- meta_predicate
    meta(0, +).

meta(Module:Term, _Arg) :-
    format('Module=~w, Term = ~q~n', [Module, Term]).
```

```

?- meta(test, x).
Module=user, Term = test
?- meta(m1:test, x).
Module=m1, Term = test
?- m2:meta(test, x).
Module=m2, Term = test
?- m1:meta(m2:test, x).
Module=m2, Term = test
?- meta(m1:m2:test, x).
Module=m2, Term = test
?- meta(m1:42:test, x).
Module=42, Term = test

```

The `meta_predicate/1` declaration is the portable mechanism for defining meta-predicates and replaces the old SWI-Prolog specific mechanism provided by the deprecated predicates `module_transparent/1`, `context_module/1` and `strip_module/3`. See also section 6.15.

## 6.5 Overruling Module Boundaries

The module system described so far is sufficient to distribute programs over multiple modules. There are, however, cases in which we would like to be able to overrule this schema and explicitly call a predicate in some module or assert explicitly into some module. Calling in a particular module is useful for debugging from the user's top level or to access multiple implementations of the same interface that reside in multiple modules. Accessing the same interface from multiple modules cannot be achieved using importing because importing a predicate with the same name and arity from two modules results in a name conflict. Asserting in a different module can be used to create models dynamically in a new module. See section 6.12.

Direct addressing of modules is achieved using a `:/2` explicitly in a program and relies on the module qualification mechanism described in section 6.4. Here are a few examples:

```

?- assert(world:done).    % asserts done/0 into module world
?- world:asserta(done).  % the same
?- world:done.           % calls done/0 in module world

```

Note that the second example is the same due to the Prolog flag `colon_sets_calling_context`. The system predicate `asserta/1` is called in the module `world`, which is possible because system predicates are *visible* in all modules. At the same time, the *calling context* is set to `world`. Because meta arguments are qualified with the calling context, the resulting call is the same as the first example.

### 6.5.1 Explicit manipulation of the calling context

Quintus' derived module systems have no means to separate the lookup module (for finding predicates) from the calling context (for qualifying meta arguments). Some other Prolog implementations (e.g., ECLiPSe and IF/Prolog) distinguish these operations, using `@/2` for setting the calling context of a goal. This is provided by SWI-Prolog, currently mainly to support compatibility layers.

**@(:Goal, +Module)**

Execute *Goal*, setting the calling context to *Module*. Setting the calling context affects meta-predicates, for which meta arguments are qualified with *Module* and transparent predicates (see `module_transparent/1`). It has no implications for other predicates.

For example, the code `asserta(done)@world` is the same as `asserta(world:done)`. Unlike in `world:asserta(done)`, `asserta/1` is resolved in the current module rather than the module `world`. This makes no difference for system predicates, but usually does make a difference for user predicates.

Not that SWI-Prolog does not define `@` as an operator. Some systems define this construct using `op(900, xfx, @)`.

## 6.6 Interacting with modules from the top level

Debugging often requires interaction with predicates that reside in modules: running them, setting spy points on them, etc. This can be achieved using the `<module>:<term>` construct explicitly as described above. In SWI-Prolog, you may also wish to omit the module qualification. Setting a spy point (`spy/1`) on a plain predicate sets a spy point on any predicate with that name in any module. Editing (`edit/1`) or calling an unqualified predicate invokes the DWIM (Do What I Mean) mechanism, which generally suggests the correct qualified query.

Mainly for compatibility, we provide `module/1` to switch the module with which the interactive top level interacts:

**module(+Module)**

The call `module(Module)` may be used to switch the default working module for the interactive top level (see `prolog/0`). This may be used when debugging a module. The example below lists the clauses of `file_of_label/2` in the module `tex`.

```
1 ?- module(tex).
true.
tex: 2 ?- listing(file_of_label/2).
...
```

## 6.7 Composing modules from other modules

The predicates in this section are intended to create new modules from the content of other modules. Below is an example to define a *composite* module. The example exports all public predicates of `module_1`, `module_2` and `module_3`, `pred/1` from `module_4`, all predicates from `module_5` except `do_not_use/1` and all predicates from `module_6` while renaming `pred/1` into `mypred/1`.

```
:- module(my_composite, []).
:- reexport([ module_1,
              module_2,
              module_3,
              pred/1,
              mypred/1
            ]).
```



```
:- reexport(module_4, [ pred/1 ]).
:- reexport(module_5, except([do_not_use/1])).
:- reexport(module_6, except([pred/1 as mypred])).
```

**reexport(+Files)**

Load and import predicates as `use_module/1` and re-export all imported predicates. The reexport declarations must immediately follow the module declaration.

**reexport(+File, +Import)**

Import from *File* as `use_module/2` and re-export the imported predicates. The reexport declarations must immediately follow the module declaration.

## 6.8 Operators and modules

Operators (section 4.25) are local to modules, where the initial table behaves as if it is copied from the module `user` (see section 6.10). A specific operator can be disabled inside a module using `:- op(0, Type, Name)`. Inheritance from the public table can be restored using `:- op(-1, Type, Name)`.

In addition to using the `op/3` directive, operators can be declared in the `module/2` directive as shown below. Such operator declarations are visible inside the module, and importing such a module makes the operators visible in the target module. Exporting operators is typically used by modules that implement sub-languages such as `chr` (see chapter 9). The example below is copied from the library `clpfd`.

```
:- module(clpfd,
    [ op(760, yfx, #<==>),
      op(750, xfy, #==>),
      op(750, yfx, #<==),
      op(740, yfx, #\ /),
      ...
      (#<==>)/2,
      (#==>)/2,
      (#<==)/2,
      (#\ /)/2,
      ...
    ]).
```

## 6.9 Dynamic importing using import modules

Until now we discussed the public module interface that is, at least to some extent, portable between Prolog implementations with a module system that is derived from Quintus Prolog. The remainder of this chapter describes the underlying mechanisms that can be used to emulate other module systems or implement other code-reuse mechanisms.

In addition to built-in predicates, imported predicates and locally defined predicates, SWI-Prolog modules can also call predicates from its *import modules*. Each module has a (possibly empty) list of import modules. In the default setup, each new module has a single import module, which is `user` for all normal user modules and `system` for all system library modules. Module `user` imports from `system` where all built-in predicates reside. These special modules are described in more detail in section 6.10.

The list of import modules can be manipulated and queried using the following predicates, as well as using `set_module/1`.

**import\_module(+Module, -Import)** [nondet]  
 True if *Module* inherits directly from *Import*. All normal modules only import from `user`, which imports from `system`. The predicates `add_import_module/3` and `delete_import_module/2` can be used to manipulate the import list. See also `default_module/2`.

**default\_module(+Module, -Default)** [multi]  
 True if predicates and operators in *Default* are visible in *Module*. Modules are returned in the same search order used for predicates and operators. That is, *Default* is first unified with *Module*, followed by the depth-first transitive closure of `import_module/2`.

**add\_import\_module(+Module, +Import, +StartOrEnd)**  
 If *Import* is not already an import module for *Module*, add it to this list at the start or end depending on *StartOrEnd*. See also `import_module/2` and `delete_import_module/2`.

**delete\_import\_module(+Module, +Import)**  
 Delete *Import* from the list of import modules for *Module*. Fails silently if *Import* is not in the list.

One usage scenario of import modules is to define a module that is a copy of another, but where one or more predicates have an alternative definition.

## 6.10 Reserved Modules and using the ‘user’ module

As mentioned above, SWI-Prolog contains two special modules. The first one is the module `system`. This module contains all built-in predicates. Module `system` has no import module. The second special module is the module `user`. This module forms the initial working space of the user. Initially it is empty. The import module of module `user` is `system`, making all built-in predicates available.

All other modules import from the module `user`. This implies they can use all predicates imported into `user` without explicitly importing them. If an application loads all modules from the `user` module using `use_module/1`, one achieves a scoping system similar to the C-language, where every module can access all exported predicates without any special precautions.

## 6.11 An alternative import/export interface

The `use_module/1` predicate from section 6.3 defines import and export relations based on the filename from which a module is loaded. If modules are created differently, such as by asserting predicates into a new module as described in section 6.12, this interface cannot be used. The interface below provides for import/export from modules that are not created using a module file.

**export(+PredicateIndicator, ...)**

Add predicates to the public list of the context module. This implies the predicate will be imported into another module if this module is imported with `use_module/[1,2]`. Note that predicates are normally exported using the directive `module/2`. `export/1` is meant to handle export from dynamically created modules.

**import(+PredicateIndicator, ...)**

Import predicates *PredicateIndicator* into the current context module. *PredicateIndicator* must specify the source module using the `<module>:<pi>` construct. Note that predicates are normally imported using one of the directives `use_module/[1,2]`. The `import/1` alternative is meant for handling imports into dynamically created modules. See also `export/1` and `export_list/2`.

## 6.12 Dynamic Modules

So far, we discussed modules that were created by loading a module file. These modules have been introduced to facilitate the development of large applications. The modules are fully defined at load-time of the application and normally will not change during execution. Having the notion of a set of predicates as a self-contained world can be attractive for other purposes as well. For example, assume an application that can reason about multiple worlds. It is attractive to store the data of a particular world in a module, so we extract information from a world simply by invoking goals in this world.

Dynamic modules can easily be created. Any built-in predicate that tries to locate a predicate in a specific module will create this module as a side-effect if it did not yet exist. For example:

```
?- assert(world_a:consistent),
   set_prolog_flag(world_a:unknown, fail).
```

These calls create a module called ‘world\_a’ and make the call ‘world\_a:consistent’ succeed. Undefined predicates will not raise an exception for this module (see `unknown`).

Import and export from a dynamically created world can be achieved using `import/1` and `export/1` or by specifying the import module as described in section 6.9.

```
?- world_b:export(solve/2).           % exports solve/2 from world_b
?- world_c:import(world_b:solve/2).  % and import it to world_c
```

## 6.13 Transparent predicates: definition and context module

*The ‘module-transparent’ mechanism is still underlying the actual implementation. Direct usage by programmers is deprecated. Please use `meta_predicate/1` to deal with meta-predicates.*

The qualification of module-sensitive arguments described in section 6.4 is realised using *transparent* predicates. It is now deprecated to use this mechanism directly. However, studying the underlying mechanism helps to understand SWI-Prolog’s modules. In some respect, the transparent mechanism is more powerful than meta-predicate declarations.

Each predicate of the program is assigned a module, called its *definition module*. The definition module of a predicate is always the module in which the predicate was originally defined. Each active goal in the Prolog system has a *context module* assigned to it.

The context module is used to find predicates for a Prolog term. By default, the context module is the definition module of the predicate running the goal. For transparent predicates, however, this is the context module of the goal inherited from the parent goal. Below, we implement `maplist/3` using the transparent mechanism. The code of `maplist/3` and `maplist_/3` is the same as in section 6.4, but now we must declare both the main predicate and the helper as transparent to avoid changing the context module when calling the helper.

```
:- module(maplist, maplist/3).

:- module_transparent
    maplist/3,
    maplist_/3.

maplist(Goal, L1, L2) :-
    maplist_(L1, L2, G).

maplist_([], [], _).
maplist_([H0|T0], [H|T], Goal) :-
    call(Goal, H0, H),
    maplist_(T0, T, Goal).
```

Note that *any* call that translates terms into predicates is subject to the transparent mechanism, not just the terms passed to module-sensitive arguments. For example, the module below counts the number of unique atoms returned as bindings for a variable. It works as expected. If we use the directive `:- module_transparent count_atom_results/3.` instead, `atom_result/2` is called wrongly in the module *calling* `count_atom_results/3`. This can be solved using `strip_module/3` to create a qualified goal and a non-transparent helper predicate that is defined in the same module.

```
:- module(count_atom_results,
    [ count_atom_results/3
    ]).
:- meta_predicate count_atom_results(-,0,-).

count_atom_results(A, Goal, Count) :-
    setof(A, atom_result(A, Goal), As), !,
    length(As, Count).
count_atom_results(_, _, 0).

atom_result(Var, Goal) :-
    call(Goal),
    atom(Var).
```

The following predicates support the module-transparent interface:

**`:- module_transparent(+Preds)`**

*Preds* is a comma-separated list of name/arity pairs (like `dynamic/1`). Each goal associated with a transparent-declared predicate will inherit the *context module* from its parent goal.

**`context_module(-Module)`**

Unify *Module* with the context module of the current goal. `context_module/1` itself is, of course, transparent.

**`strip_module(+Term, -Module, -Plain)`**

Used in module-transparent predicates or meta-predicates to extract the referenced module and plain term. If *Term* is a module-qualified term, i.e. of the format *Module:Plain*, *Module* and *Plain* are unified to these values. Otherwise, *Plain* is unified to *Term* and *Module* to the context module.

## 6.14 Module properties

The following predicates can be used to query the module system for reflexive programming:

**`current_module(?Module)`**

[nondet]

True if *Module* is a currently defined module. This predicate enumerates all modules, whether loaded from a file or created dynamically. Note that modules cannot be destroyed in the current version of SWI-Prolog.

**`module_property(?Module, ?Property)`**

True if *Property* is a property of *Module*. Defined properties are:

**`class(-Class)`**

True when *Class* is the class of the module. Defined classes are

**`user`**

Default for user-defined modules.

**`system`**

Module `system` and modules from `<home>/boot`.

**`library`**

Other modules from the system directories.

**`temporary`**

Module is temporary.

**`test`**

Modules that create tests.

**`development`**

Modules that only support the development environment.

**`file(?File)`**

True if *Module* was loaded from *File*.

**`line_count(-Line)`**

True if *Module* was loaded from the N-th line of file.

**exports(-ListOfPredicateIndicators)**

True if *Module* exports the given predicates. Predicate indicators are in canonical form (i.e., always using name/arity and never the DCG form name//arity). Future versions may also use the DCG form and include public operators. See also `predicate_property/2`.

**exported\_operators(-ListOfOperators)**

True if *Module* exports the given operators. Each exported operator is represented as a term `op(Pri,Assoc,Name)`.

**program\_size(-Bytes)**

Memory (in bytes) used for storing the predicates of this module. This figure includes the predicate header and clauses. Future versions might give a more precise number, including e.g., the clause index tables.

**program\_space(-Bytes)**

If present, this number limits the `program_size`. See `set_module/1`.

**last\_modified\_generation(-Generation)**

Integer expression the last database generation where a clause was added or removed from a predicate that is implemented in this module. See also `predicate_property/2`.

**set\_module(:Property)**

Modify properties of the module. Currently, the following properties may be modified:

**base(+Base)**

Set the default import module of the current module to *Module*. Typically, *Module* is one of `user` or `system`. See section 6.9.

**class(+Class)**

Set the class of the module. See `module_property/2`.

**program\_space(+Bytes)**

Maximum amount of memory used to store the predicates defined inside the module. Raises a permission error if the current usage is above the requested limit. Setting the limit to 0 (zero) removes the limit. An attempt to assert clauses that causes the limit to be exceeded causes a `resource_error(program_space)` exception. See `assertz/1` and `module_property/2`.

## 6.15 Compatibility of the Module System

The SWI-Prolog module system is largely derived from the Quintus Prolog module system, which is also adopted by SICStus, Ciao and YAP. Originally, the mechanism for defining meta-predicates in SWI-Prolog was based on the `module_transparent/1` directive and `strip_module/3`. Since 5.7.4 it supports the de-facto standard `meta_predicate/1` directive for implementing meta-predicates, providing much better compatibility.

The support for the `meta_predicate/1` mechanism, however, is considerably different. On most systems, the *caller* of a meta-predicate is compiled differently to provide the required `<module>:<term>` qualification. This implies that the meta-declaration must be available to the compiler when compiling code that calls a meta-predicate. In practice, this implies that other systems pose the following restrictions on meta-predicates:

- Modules that provide meta-predicates for a module to be compiled must be loaded explicitly by that module.
- The meta-predicate directives of exported predicates must follow the `module/2` directive immediately.
- After changing a meta-declaration, all modules that *call* the modified predicates need to be recompiled.

In SWI-Prolog, meta-predicates are also *module-transparent*, and qualifying the module-sensitive arguments is done inside the meta-predicate. As a result, the caller need not be aware that it is calling a meta-predicate and none of the above restrictions hold for SWI-Prolog. However, code that aims at portability must obey the above rules.

Other differences are listed below.

- If a module does not define a predicate, it is searched for in the *import modules*. By default, the import module of any user-defined module is the `user` module. In turn, the `user` module imports from the `module system` that provides all built-in predicates. The auto-import hierarchy can be changed using `add_import_module/3` and `delete_import_module/2`.

This mechanism can be used to realise a simple object-oriented system or a hierarchical module system.

- Operator declarations are local to a module and may be exported. In Quintus and SICStus all operators are global. YAP and Ciao also use local operators. SWI-Prolog provides global operator declarations from within a module by explicitly qualifying the operator name with the `user` module. I.e., operators are inherited from the *import modules* (see above).

```
:- op(precedence, type, user:(operatorname)).
```

# Tabled execution (SLG resolution)

---

This chapter describes SWI-Prolog's support for *Tabled execution* for one or more Prolog predicates, also called *SLG resolution*. Tabling a predicate provides two properties:

1. Re-evaluation of a tabled predicate is avoided by *memoizing* the answers. This can realise huge performance enhancements as illustrated in section 7.1. It also comes with two downsides: the memoized answers are not automatically updated or invalidated if the world (set of predicates on which the answers depend) changes and the answer tables must be stored (in memory).
2. *Left recursion*, a goal calling a *variant* of itself recursively and thus *looping* under the normal Prolog SLD resolution is avoided by suspending the variant call and resuming it with answers from the table. This is illustrated in section 7.2.

Tabling is particularly suited to simplify inference over a highly entangled set of predicates that express axioms and rules in a static (not changing) world. When using SLD resolution for such problems, it is hard to ensure termination and avoid frequent recomputation of intermediate results. A solution is to use Datalog style bottom-up evaluation, i.e., applying rules on the axioms and derived facts until a fixed point is reached. However, bottom-up evaluation typically derives many facts that are never used. Tabling provides a *goal oriented* resolution strategy for such problems and is enabled simply by adding a `table/1` directive to the program.

## 7.1 Example 1: using tabling for memoizing

As a first classical example we use tabling for *memoizing* intermediate results. We use Fibonacci numbers to illustrate the approach. The Fibonacci number  $I$  is defined as the sum of the Fibonacci numbers for  $I - 1$  and  $I - 2$ , while the Fibonacci number of 0 and 1 are both defined to be 1. This can be translated naturally into Prolog:

```
fib(0, 1) :- !.
fib(1, 1) :- !.
fib(N, F) :-
    N > 1,
    N1 is N-1,
    N2 is N-2,
    fib(N1, F1),
    fib(N2, F2),
    F is F1+F2.
```

The complexity of executing this using SLD resolution however is  $2^N$  and thus becomes prohibitively slow rather quickly, e.g., the execution time for  $N = 30$  is already 0.4 seconds. Using tabling,



`fib(N,F)` for each value of  $N$  is computed only once and the algorithm becomes linear. Tabling effectively inverts the execution order for this case: it suspends the final addition ( $F$  is  $F1+F2$ ) until the two preceding Fibonacci numbers have been added to the answer tables. Thus, we can reduce the complexity from the show-stopping  $2^N$  to linear by adding a tabling directive and otherwise not changing the algorithm. The code becomes:

```
:- use_module(library(tabling)).
:- table fib/2.

fib(0, 1) :- !.
fib(1, 1) :- !.
fib(N, F) :-
    N > 1,
    N1 is N-1,
    N2 is N-2,
    fib(N1, F1),
    fib(N2, F2),
    F is F1+F2.
```

The price that we pay is that a table `fib(I,F)` is created for each  $I$  in  $0..N$ . The execution time for  $N = 30$  is now 1 millisecond and computing the Fibonacci number for  $N = 1000$  is doable (output edited for readability).

```
1 ?- time(fib(1000, X)).
% 52,991 inferences, 0.013 CPU in 0.013 seconds
X = 70330367711422815821835254877183549770181269836358
    73274260490508715453711819693357974224949456261173
    34877504492417659910881863632654502236471060120533
    74121273867339111198139373125598767690091902245245
    323403501.
```

In the case of Fibonacci numbers we can still rather easily achieve linear complexity using program transformation, where we use bottom-up instead of top-down evaluation, i.e., we compute `fib(N,F)` for growing  $N$ , where we pass the last two Fibonacci numbers to the next iteration. Not having to create the tables and not having to suspend and resume goals makes this implementation about 25 times faster than the tabled one. However, even in this simple case the transformation is not obvious and it is far more difficult to recognise the algorithm as an implementation of Fibonacci numbers.

```
fib(0, 1) :- !.
fib(1, 1) :- !.
fib(N, F) :-
    fib(1,1,1,N,F).

fib(_F, F1, N, N, F1) :- !.
fib(F0, F1, I, N, F) :-
    F2 is F0+F1,
```

```
I2 is I + 1,
fib(F1, F2, I2, N, F).
```

## 7.2 Example 2: avoiding non-termination

SLD resolution easily results in an infinite loop due to *left recursion*, a goal that (indirectly) calls a variant of itself or cycles in the input data. Thus, if we have a series of `connection/2` statements that define railway connections between two cities, we cannot use the most natural logical definition to express that we can travel between two cities:

```
% :- use_module(library(tabling)).
% :- table connection/2.

connection(X, Y) :-
    connection(X, Z),
    connection(Z, Y).
connection(X, Y) :-
    connection(Y, X).

connection('Amsterdam', 'Schiphol').
connection('Amsterdam', 'Haarlem').
connection('Schiphol', 'Leiden').
connection('Haarlem', 'Leiden').
```

After enabling tabling however, the above works just fine as illustrated in the session below. Where is the magic and what is the price we paid? The magic is, again, the fact that new goals to the tabled predicate suspend. So, all recursive goals are suspended. Eventually, a table for `connection('Amsterdam', X)` is created with the two direct connections from Amsterdam. Now, it resumes the first clause using the tabled solutions, continuing the last `connection/2` subgoal with `connection('Schiphol', X)` and `connection('Haarlem', X)`. These two go through the same process, creating new suspended recursive calls and creating tables for the connections from Schiphol and Haarlem. Eventually, we end up with a set of tables for each call variant that is involved in computing the transitive closure of the network starting in Amsterdam. However, if the Japanese rail network would have been in our data as well, we would not have produced tables for that.

```
1 ?- connection('Amsterdam', X).
X = 'Haarlem' ;
X = 'Schiphol' ;
X = 'Amsterdam' ;
X = 'Leiden'.
```

Again, the fact that a simple `table/1` directive turns the pure logical specification into a fairly efficient algorithm is a clear advantage. Without tabling the program needs to be *stratified*, introducing a base layer with the raw connections, a second layer that introduces the *commutative* property of a

railway (if you can travel from  $A$  to  $B$  you can also travel from  $B$  to  $A$  and a final layer that realises *transitivity* (if you can travel from  $A$  to  $B$  and from  $B$  to  $C$  you can also travel from  $A$  to  $C$ ). The third and final layer must keep track which cities you have already visited to avoid traveling in circles. The transformed program however uses little memory (the list of already visited cities and the still open choices) and does not need to deal with maintaining consistency between the tables and ground facts.

### 7.3 Answer subsumption or mode directed tabling

Tabling as defined above has a serious limitation. Although the definition of `connection/2` from section 7.2 can compute the transitive closure of connected cities, it cannot provide you with a route to travel. The reason is that there are infinitely many routes if there are cycles in the network and each new route found will be added to the answer table and cause the tabled execution's completion algorithm to search for more routes, eventually running out of memory.

The solution to this problem is called *mode directed tabling* or *answer subsumption*.<sup>1</sup> In this execution model one or more arguments are *not* added to the table. Instead, we remember a single *aggregated* value for these arguments. The example below is derived from section 7.2 and returns the connection as a list of cities. This argument is defined as a *moded* argument using the `lattice(PI)` mode.<sup>2</sup> This causes the tabling engine each time that it finds an new path to call `shortest/3` and keep the shortest route.

```
:- use_module(library(tabling)).
:- table
    connection(_,_,lattice(shortest/3)).

shortest(P1, P2, P):-
    length(P1, L1),
    length(P2, L2),
    (   L1 < L2
    ->  P = P1
    ;   P = P2
    ).

connection(X, Y, [X,Y]) :-
    connection(X, Y).
connection(X, Y, P) :-
    connection(X, Z, P0),
    connection(Z, Y),
    append(P0, [Y], P).
```

The mode declation scheme is equivalent to XSB with partial compatibility support for YAP and B-Prolog. The `lattice(PI)` mode is the most general mode. The YAP `all` (B-Prolog `@`) mode is not yet supported. The list below describes the supported modes and indicates the portability.

<sup>1</sup>The term *answer subsumption* is used by XSB and *mode directed tabling* by YAP and B-Prolog. The idea is that some arguments are considered 'outputs', where multiple values for the same 'input' are combined. Possibly *answer aggregation* would have been a better name.

<sup>2</sup>This mode is compatible to XSB Prolog.

**Var**  
**+**

### index

A variable (XSB), the atom `index` (YAP) or a `+` (B-Prolog, YAP) declare that the argument is tabled normally.

### lattice(*PI*)

*PI* must be the predicate indicator of a predicate with arity 3. On each answer, *PI* is called with three arguments: the current aggregated answer and the new answer are inputs. The last argument must be unified with a term that represents the new aggregated answer. In SWI-Prolog the arity (3) may be omitted. See the example above.

### po(*PI*)

*Partial Ordering.* The new answer is added iff `call(PI, +Old, +Answer)` succeeds. For example, `po('<'/2)` accumulates the largest result. In SWI-Prolog the arity (2) may be omitted, resulting in `po(<)`.

**–**  
**first**

The atom `–` (B-Prolog, YAP) and `first` (YAP) declare to keep the first answer for this argument.

### last

The atom `last` (YAP) declares to keep the last answer.

### min

The atom `min` (YAP) declares to keep the smallest answer according to the standard order of terms (see @</2). Note that in SWI-Prolog the standard order of terms orders numbers by value.

### max

The atom `max` (YAP) declares to keep the largest answer according to the standard order of terms (see @>/2). Note that in SWI-Prolog the standard order of terms orders numbers by value.

### sum

The atom `sum` (YAP) declares to sum numeric answers.

## 7.4 Tabling predicate reference

### **:- table(+PredicateIndicators)**

Prepare the given *PredicateIndicators* for tabling. The example below prepares the predicate `edge/2` and the non-terminal statement//1 for tabled execution.

```
:- table edge/2, statement//1.
```

In addition to using *predicate indicators*, a predicate can be declared for *mode directed tabling* using a term where each argument declares the intended mode. For example:

```
:- table connection(_,_,min).
```

*Mode directed tabling* is discussed in the general introduction section of chapter 7.

**current\_table(:Variant, -Trie)**

True when *Trie* is the answer table for *Variant*.

**abolish\_all\_tables**

Remove all tables. This is normally used to free up the space or recompute the result after predicates on which the result for some tabled predicates depend. Raises a `permission_error` when tabling is in progress.

**abolish\_table\_subgoals(:Subgoal)**

Abolish all tables that unify with *SubGoal*.

## 7.5 About the tabling implementation

The SWI-Prolog implementation uses *Delimited continuations* (see section 4.10) to realise suspension of variant calls. The initial version was written by Benoit Desouter and described in [Desouter et al., 2015]. We moved the main data structures required for tabling, the *answer tables* (see section 4.14.4) and the *worklist* to SWI-Prolog's C core. *Mode directed tabling* (section 7.3) is based on a prototype implementation by Fabrizio Riguzzi.

The `table/1` directive causes the creation of a wrapper calling the renamed original predicate. For example, the program in section 7.2 is translated into the following program. We give this information to improve your understanding of the current tabling implementation. Future versions are likely to use a more low-level translation that is not based on wrappers.

```
connection(A, B) :-
    start_tabling(user:connection(A, B),
                  'connection tabled'(A, B)).

'connection tabled'(X, Y) :-
    connection(X, Z),
    connection(Z, Y).
'connection tabled'(X, Y) :-
    connection(Y, X).

'connection tabled'('Amsterdam', 'Schiphol').
'connection tabled'('Amsterdam', 'Haarlem').
'connection tabled'('Schiphol', 'Leiden').
'connection tabled'('Haarlem', 'Leiden').
```

**Status of tabling**

The current implementation is merely a first prototype. It needs several enhancements before we can consider it a serious competitor to Prolog systems with mature tabling such as XSB, YAP and B-Prolog. In particular,

- The performance needs to be improved.
- Memory usage needs to be reduced.
- Tables must be shared between threads, both to reduce space and avoid recomputation.
- Tables must be invalidated and reclaimed automatically.
- Notably XSB supports incremental tabling and well-founded semantics under negation.

# Constraint Logic Programming

---

# 8

This chapter describes the extensions primarily designed to support **constraint logic programming** (CLP), an important declarative programming paradigm with countless practical applications.

CLP( $X$ ) stands for constraint logic programming over the domain  $X$ . Plain Prolog can be regarded as CLP( $H$ ), where  $H$  stands for *Herbrand terms*. Over this domain, `=/2` and `dif/2` are the most important constraints that express, respectively, equality and disequality of terms. Plain Prolog can thus be regarded as a special case of CLP.

There are dedicated constraint solvers for several important domains:

- CLP(FD) for **integers** (section [A.9](#))
- CLP(B) for **Boolean** variables (section [A.8](#))
- CLP(Q) for **rational** numbers (section [A.10](#))
- CLP(R) for **floating point** numbers (section [A.10](#)).

In addition, CHR (chapter [9](#)) provides a general purpose constraint handling language to reason over user-defined constraints.

Constraints blend in naturally into Prolog programs, and behave exactly like plain Prolog predicates in those cases that can also be expressed without constraints. However, there are two key differences between constraints and plain Prolog predicates:

- Constraints can *delay* checks until their truth can be safely decided. This feature can significantly increase the *generality* of your programs, and preserves their relational nature.
- Constraints can take into account everything you state about the entities you reason about, independent of the order in which you state it, both *before* and also *during* any search for concrete solutions. Using available information to prune parts of the search space is called constraint *propagation*, and it is performed automatically by the available constraint solvers for their respective domains. This feature can significantly increase the *performance* of your programs.

Due to these two key advantages over plain Prolog, CLP has become an extremely important declarative programming paradigm in practice.

Among its most important and typical instances is CLP(FD), constraint logic programming over *integers*. For example, using constraints, you can state in the most general way that a variable  $X$  is an integer greater than 0. If, later,  $X$  is bound to a concrete integer, the constraint solver automatically ensures this. If you in addition constrain  $X$  to integers less than 3, the constraint solver combines the existing knowledge to infer that  $X$  is either 1 or 2 (see below). To obtain concrete values for  $X$ , you can ask the solver to *label*  $X$  and produce 1 and 2 on backtracking. See section [A.9](#).

```

?- use_module(library(clpfd)).
...
true.

?- X #> 0, X #< 3.
X in 1..2.

?- X #> 0, X #< 3, indomain(X).
X = 1 ;
X = 2.

```

Contrast this with plain Prolog, which has no efficient means to deal with (integer)  $X > 0$  and  $X < 3$ . At best it could translate  $X > 0$  to `between(1, infinite, X)` and a similar primitive for  $X < 3$ . If the two are combined it has no choice but to generate and test over this infinite two-dimensional space.

Using constraints therefore makes your program more *declarative* in that it frees you from some procedural aspects and limitations of Prolog.

When working with constraints, keep in mind the following:

- As with plain Prolog, `!/0` also destroys the declarative semantics of constraints. A cut after a goal that is delayed may prematurely prune the search space, because the truth of delayed goals is not yet established. There are several ways to avoid cuts in constraint logic programs, retaining both generality and determinism of your programs. See for example `zcompare/3`.
- Term-copying operations (`assertz/1`, `retract/1`, `findall/3`, `copy_term/2`, etc.) generally also copy constraints. The effect varies from ok, silent copying of huge constraint networks to violations of the internal consistency of constraint networks. As a rule of thumb, copying terms holding attributes must be deprecated. If you need to reason about a term that is involved in constraints, use `copy_term/3` to obtain the constraints as Prolog goals, and use these goals for further processing.

All of the mentioned constraint solvers are implemented using the attributed variables interface described in section 8.1. These are lower-level predicates that are mainly intended for library authors, not for typical Prolog programmers.

## 8.1 Attributed variables

*Attributed variables* provide a technique for extending the Prolog unification algorithm [Holzbaaur, 1992] by hooking the binding of attributed variables. There is no consensus in the Prolog community on the exact definition and interface to attributed variables. The SWI-Prolog interface is identical to the one realised by Bart Demoen for hProlog [Demoen, 2002]. This interface is simple and available on all Prolog systems that can run the Leuven CHR system (see chapter 9 and the Leuven CHR page).

Binding an attributed variable schedules a goal to be executed at the first possible opportunity. In the current implementation the hooks are executed immediately after a successful unification of the clause-head or successful completion of a foreign language (built-in) predicate. Each attribute is associated to a module, and the hook (`attr_unify_hook/2`) is executed in this module. The example below realises a very simple and incomplete finite domain reasoner:



```

:- module(domain,
    [ domain/2                                % Var, ?Domain
    ]).
:- use_module(library(ordsets)).

domain(X, Dom) :-
    var(Dom), !,
    get_attr(X, domain, Dom).
domain(X, List) :-
    list_to_ord_set(List, Domain),
    put_attr(Y, domain, Domain),
    X = Y.

%      An attributed variable with attribute value Domain has been
%      assigned the value Y

attr_unify_hook(Domain, Y) :-
    (   get_attr(Y, domain, Dom2)
    ->  ord_intersection(Domain, Dom2, NewDomain),
        (   NewDomain == []
        ->  fail
        ;   NewDomain = [Value]
        ->  Y = Value
        ;   put_attr(Y, domain, NewDomain)
        )
    ;   var(Y)
    ->  put_attr(Y, domain, Domain)
    ;   ord_memberchk(Y, Domain)
    ).

%      Translate attributes from this module to residual goals

attribute_goals(X) -->
    { get_attr(X, domain, List) },
    [domain(X, List)].

```

Before explaining the code we give some example queries:

```

?- domain(X, [a,b]), X = c                fail
?- domain(X, [a,b]), domain(X, [a,c]).    X = a
?- domain(X, [a,b,c]), domain(X, [a,c]).  domain(X, [a, c])

```

The predicate `domain/2` fetches (first clause) or assigns (second clause) the variable a *domain*, a set of values the variable can be unified with. In the second clause, `domain/2` first associates the domain with a fresh variable (`Y`) and then unifies `X` to this variable to deal with the possibility that `X` already has a domain. The predicate `attr_unify_hook/2` (see below) is a hook called after a

variable with a domain is assigned a value. In the simple case where the variable is bound to a concrete value, we simply check whether this value is in the domain. Otherwise we take the intersection of the domains and either fail if the intersection is empty (first example), assign the value if there is only one value in the intersection (second example), or assign the intersection as the new domain of the variable (third example). The nonterminal attribute\_goals//1 is used to translate remaining attributes to user-readable goals that, when called, reinstate these attributes or attributes that correspond to equivalent constraints.

Implementing constraint solvers (chapter 8) is the most common, but not the only use case for attributed variables: If you implement algorithms that require efficient destructive modifications, then using attributed variables is often a more convenient and somewhat more declarative alternative for `setarg/3` and related predicates whose sharing semantics are harder to understand. In particular, attributed variables make it easy to express graph networks and graph-oriented algorithms, since each variable can store pointers to further variables in its attributes. In such cases, the use of attributed variables should be confined within a module that exposes its functionality via more declarative interface predicates.

### 8.1.1 Attribute manipulation predicates

#### **attvar(@Term)**

Succeeds if *Term* is an attributed variable. Note that `var/1` also succeeds on attributed variables. Attributed variables are created with `put_attr/3`.

#### **put\_attr(+Var, +Module, +Value)**

If *Var* is a variable or attributed variable, set the value for the attribute named *Module* to *Value*. If an attribute with this name is already associated with *Var*, the old value is replaced. Backtracking will restore the old value (i.e., an attribute is a mutable term; see also `setarg/3`). This predicate raises an un instantiation error if *Var* is not a variable, and a type error if *Module* is not an atom.

#### **get\_attr(+Var, +Module, -Value)**

Request the current *value* for the attribute named *Module*. If *Var* is not an attributed variable or the named attribute is not associated to *Var* this predicate fails silently. If *Module* is not an atom, a type error is raised.

#### **del\_attr(+Var, +Module)**

Delete the named attribute. If *Var* loses its last attribute it is transformed back into a traditional Prolog variable. If *Module* is not an atom, a type error is raised. In all other cases this predicate succeeds regardless of whether or not the named attribute is present.

### 8.1.2 Attributed variable hooks

Attribute names are linked to modules. This means that certain operations on attributed variables cause *hooks* to be called in the module whose name matches the attribute name.

#### **attr\_unify\_hook(+AttValue, +VarValue)**

A hook that must be defined in the module to which an attributed variable refers. It is called *after* the attributed variable has been unified with a non-var term, possibly another attributed variable. *AttValue* is the attribute that was associated to the variable in this module and *VarValue*

is the new value of the variable. If this predicate fails, the unification fails. If *VarValue* is another attributed variable the hook often combines the two attributes and associates the combined attribute with *VarValue* using `put_attr/3`.

**To be done** The way in which this hook currently works makes the implementation of important classes of constraint solvers impossible or at least extremely impractical. For increased generality and convenience, simultaneous unifications as in  $[X, Y] = [0, 1]$  should be processed sequentially by the Prolog engine, or a more general hook should be provided in the future. See [Triska, 2016] for more information.

#### **attribute\_goals(+Var) //**

This nonterminal is the main mechanism in which residual constraints are obtained. It is called in every module where it is defined, and *Var* has an attribute. Its argument is that variable. In each module, `attribute_goals//1` must describe a list of Prolog goals that are declaratively equivalent to the goals that caused the attributes of that module to be present and in their current state. It is always possible to do this (since these attributes stem from such goals), and it is the responsibility of constraint library authors to provide this mapping without exposing any library internals. Ideally and typically, remaining relevant attributes are mapped to *pure* and potentially simplified Prolog goals that satisfy both of the following:

- They are declaratively equivalent to the constraints that were originally posted.
- They use only predicates that are themselves exported and documented in the modules they stem from.

The latter property ensures that users can reason about residual goals, and see for themselves whether a constraint library behaves correctly. It is this property that makes it possible to thoroughly test constraint solvers by contrasting obtained residual goals with expected answers.

This nonterminal is used by `copy_term/3`, on which the Prolog top level relies to ensure the basic invariant of pure Prolog programs: The answer is *declaratively equivalent* to the query.

Note that instead of *defaulty* representations, a Prolog *list* is used to represent residual goals. This simplifies processing and reasoning about residual goals throughout all programs that need this functionality.

#### **project\_attributes(+QueryVars, +ResidualVars)**

A hook that can be defined in each module to project constraints on newly introduced variables back to the query variables. *QueryVars* is the list of variables occurring in the query and *ResidualVars* is a list of variables that have attributes attached. There may be variables that occur in both lists. If possible, `project_attributes/2` should change the attributes so that all constraints are expressed as residual goals that refer only to *QueryVars*, while other variables are existentially quantified.

#### **attr\_portray\_hook(+AttValue, +Var)**

[deprecated]

Called by `write_term/2` and friends for each attribute if the option `attributes(portray)` is in effect. If the hook succeeds the attribute is considered printed. Otherwise `Module = ...` is printed to indicate the existence of a variable. This predicate is deprecated because it cannot work with pure interface predicates like `copy_term/3`. Use `attribute_goals//1` instead to map attributes to residual goals.

### 8.1.3 Operations on terms with attributed variables

#### **copy\_term(+Term, -Copy, -Gs)**

Create a regular term *Copy* as a copy of *Term* (without any attributes), and a list *Gs* of goals that represents the attributes. The goal `maplist(call, Gs)` recreates the attributes for *Copy*. The nonterminal attribute `goals/1`, as defined in the modules the attributes stem from, is used to convert attributes to lists of goals.

This building block is used by the top level to report pending attributes in a portable and understandable fashion. This predicate is the preferred way to reason about and communicate terms with constraints.

The form `copy_term(Term, Term, Gs)` can be used to reason about the constraints in which *Term* is involved.

#### **copy\_term\_nat(+Term, -Copy)**

As `copy_term/2`. Attributes, however, are *not* copied but replaced by fresh variables.

#### **term\_attvars(+Term, -AttVars)**

*AttVars* is a list of all attributed variables in *Term* and its attributes. That is, `term_attvars/2` works recursively through attributes. This predicate is cycle-safe. The goal `term_attvars(Term, [])` is an efficient test that *Term* has *no* attributes; scanning the term is aborted after the first attributed variable is found.

### 8.1.4 Special purpose predicates for attributes

Normal user code should deal with `put_attr/3`, `get_attr/3` and `del_attr/2`. The routines in this section fetch or set the entire attribute list of a variable. Use of these predicates is anticipated to be restricted to printing and other special purpose operations.

#### **get\_attrs(+Var, -Attributes)**

Get all attributes of *Var*. *Attributes* is a term of the form `att(Module, Value, MoreAttributes)`, where *MoreAttributes* is `[]` for the last attribute.

#### **put\_attrs(+Var, -Attributes)**

Set all attributes of *Var*. See `get_attrs/2` for a description of *Attributes*.

#### **del\_attrs(+Var)**

If *Var* is an attributed variable, delete *all* its attributes. In all other cases, this predicate succeeds without side-effects.

## 8.2 Coroutining

Coroutining allows us to delay the execution of Prolog goals until their truth can be safely decided.

Among the most important coroutining predicates is `dif/2`, which expresses *disequality* of terms in a sound way. The actual test is delayed until the terms are sufficiently different, or have become identical. For example:

```
?- dif(X, Y), X = a, Y = b.
X = a,
```

```
Y = b.

?- dif(X, Y), X = a, Y = a.
false.
```

There are also lower-level corouting predicates that are intended as building blocks for higher-level constraints. For example, we can use `freeze/2` to define a variable that can only be assigned an atom:

```
?- freeze(X, atom(X)), X = a.
X = a.
```

In this case, calling `atom/1` earlier causes the whole query to fail:

```
?- atom(X), X = a.
false.
```

If available, domain-specific constraints should be used in such cases. For example, to state that a variable can only assume even integers, use the CLP(FD) constraint `#=/2`:

```
?- X mod 2 #= 0.
X mod 2#=0.
```

Importantly, domain-specific constraints can apply stronger propagation by exploiting logical properties of their respective domains. For example:

```
?- X mod 2 #= 0, X in 1..3.
X = 2.
```

Remaining constraints, such as `X mod 2#=0` in the example above, are called *residual* goals. They are said to *flounder*, because their truth is not yet decided. Declaratively, the query is only true if all residual goals are satisfiable. Use `call_residue_vars/2` to collect all variables that are involved in constraints.

### **dif(@A, @B)**

The `dif/2` predicate is a *constraint* that is true if and only if *A* and *B* are different terms. If *A* and *B* can never unify, `dif/2` succeeds deterministically. If *A* and *B* are identical, it fails immediately. Finally, if *A* and *B* can unify, goals are delayed that prevent *A* and *B* to become equal. It is this last property that makes `dif/2` a more general and more declarative alternative for `\=/2` and related predicates.

This predicate behaves as if defined by `dif(X, Y) :- when(?(X, Y), X \== Y)`. See also `?=/2`. The implementation can deal with cyclic terms.

The `dif/2` predicate is realised using attributed variables associated with the module `dif`. It is an autoloaded predicate that is defined in the library `dif`.

**freeze(+Var, :Goal)**

Delay the execution of *Goal* until *Var* is bound (i.e. is not a variable or attributed variable). If *Var* is bound on entry `freeze/2` is equivalent to `call/1`. The `freeze/2` predicate is realised using an attributed variable associated with the module `freeze`. Use `frozen(Var, Goal)` to find out whether and which goals are delayed on *Var*.

**frozen(@Var, -Goal)**

Unify *Goal* with the goal or conjunction of goals delayed on *Var*. If no goals are frozen on *Var*, *Goal* is unified to `true`.

**when(@Condition, :Goal)**

Execute *Goal* when *Condition* becomes true. *Condition* is one of `?(X, Y)`, `nonvar(X)`, `ground(X)`, `,` (*Cond1*, *Cond2*) or `;` (*Cond1*, *Cond2*). See also `freeze/2` and `dif/2`. The implementation can deal with cyclic terms in *X* and *Y*.

The `when/2` predicate is realised using attributed variables associated with the module `when`. It is defined in the autoload library `when`.

**call\_residue\_vars(:Goal, -Vars)**

Find residual attributed variables left by *Goal*. This predicate is intended for reasoning about and debugging programs that use coroutining or constraints. To see why this predicate is necessary, consider a predicate that poses contradicting constraints on a variable, and where that variable does not appear in any argument of the predicate and hence does not yield any residual goals on the toplevel when the predicate is invoked. Such programs should fail, but sometimes succeed because the constraint solver is too weak to detect the contradiction. Ideally, delayed goals and constraints are all executed at the end of the computation. The meta predicate `call_residue_vars/2` finds variables that are given attributes or whose attributes are modified by *Goal*, regardless of whether or not these variables are reachable from the arguments of *Goal*.<sup>1</sup>

---

<sup>1</sup>The implementation of `call_residue_vars/2` is completely redone in version 7.3.2 (7.2.1) after discussion with Bart Demoen. The current implementation no longer performs full scans of the stacks. The overhead is proportional to the number of attributed variables on the stack, dead or alive.

# CHR: Constraint Handling Rules

# 9

This chapter is written by Tom Schrijvers, K.U. Leuven, and adjustments by Jan Wielemaker.

The CHR system of SWI-Prolog is the *K.U.Leuven CHR system*. The runtime environment is written by Christian Holzbaur and Tom Schrijvers while the compiler is written by Tom Schrijvers. Both are integrated with SWI-Prolog and licensed under compatible conditions with permission from the authors.

The main reference for the K.U.Leuven CHR system is:

- T. Schrijvers, and B. Demoen, *The K.U.Leuven CHR System: Implementation and Application*, First Workshop on Constraint Handling Rules: Selected Contributions (Frühwirth, T. and Meister, M., eds.), pp. 1–5, 2004.

On the K.U.Leuven CHR website (<http://dtai.cs.kuleuven.be/CHR/>) you can find more related papers, references and example programs.

## 9.1 Introduction

Constraint Handling Rules (CHR) is a committed-choice rule-based language embedded in Prolog. It is designed for writing constraint solvers and is particularly useful for providing application-specific constraints. It has been used in many kinds of applications, like scheduling, model checking, abduction, and type checking, among many others.

CHR has previously been implemented in other Prolog systems (SICStus, Eclipse, Yap), Haskell and Java. This CHR system is based on the compilation scheme and runtime environment of CHR in SICStus.

In this documentation we restrict ourselves to giving a short overview of CHR in general and mainly focus on elements specific to this implementation. For a more thorough review of CHR we refer the reader to [Frühwirth, 2009]. More background on CHR can be found at [Frühwirth, ].

In section 9.2 we present the syntax of CHR in Prolog and explain informally its operational semantics. Next, section 9.3 deals with practical issues of writing and compiling Prolog programs containing CHR. Section 9.4 explains the (currently primitive) CHR debugging facilities. Section 9.4.3 provides a few useful predicates to inspect the constraint store, and section 9.5 illustrates CHR with two example programs. Section 9.6 describes some compatibility issues with older versions of this system and SICStus' CHR system. Finally, section 9.7 concludes with a few practical guidelines for using CHR.

## 9.2 Syntax and Semantics

### 9.2.1 Syntax of CHR rules

```

rules --> rule, rules ; [].

rule --> name, actual_rule, pragma, [atom('.')].

name --> atom, [atom('@')] ; [].

actual_rule --> simplification_rule.
actual_rule --> propagation_rule.
actual_rule --> simpagation_rule.

simplification_rule --> head, [atom('<=>')], guard, body.
propagation_rule --> head, [atom('==>')], guard, body.
simpagation_rule --> head, [atom('\')], head, [atom('<=>')],
                    guard, body.

head --> constraints.

constraints --> constraint, constraint_id.
constraints --> constraint, constraint_id,
                [atom(',')], constraints.

constraint --> compound_term.

constraint_id --> [].
constraint_id --> [atom('#')], variable.
constraint_id --> [atom('#')], [atom('passive')] .

guard --> [] ; goal, [atom('|')].

body --> goal.

pragma --> [].
pragma --> [atom('pragma')], actual_pragmas.

actual_pragmas --> actual_pragma.
actual_pragmas --> actual_pragma, [atom(',')], actual_pragmas.

actual_pragma --> [atom('passive(')], variable, [atom(')')].

```

Note that the guard of a rule may not contain any goal that binds a variable in the head of the rule with a non-variable or with another variable in the head of the rule. It may, however, bind variables that do not appear in the head of the rule, e.g. an auxiliary variable introduced in the guard.



### 9.2.2 Semantics

In this subsection the operational semantics of CHR in Prolog are presented informally. They do not differ essentially from other CHR systems.

When a constraint is called, it is considered an active constraint and the system will try to apply the rules to it. Rules are tried and executed sequentially in the order they are written.

A rule is conceptually tried for an active constraint in the following way. The active constraint is matched with a constraint in the head of the rule. If more constraints appear in the head, they are looked for among the suspended constraints, which are called passive constraints in this context. If the necessary passive constraints can be found and all match with the head of the rule and the guard of the rule succeeds, then the rule is committed and the body of the rule executed. If not all the necessary passive constraints can be found, or the matching or the guard fails, then the body is not executed and the process of trying and executing simply continues with the following rules. If for a rule there are multiple constraints in the head, the active constraint will try the rule sequentially multiple times, each time trying to match with another constraint.

This process ends either when the active constraint disappears, i.e. it is removed by some rule, or after the last rule has been processed. In the latter case the active constraint becomes suspended.

A suspended constraint is eligible as a passive constraint for an active constraint. The other way it may interact again with the rules is when a variable appearing in the constraint becomes bound to either a non-variable or another variable involved in one or more constraints. In that case the constraint is triggered, i.e. it becomes an active constraint and all the rules are tried.

**Rule Types** There are three different kinds of rules, each with its specific semantics:

- *simplification*  
The simplification rule removes the constraints in its head and calls its body.
- *propagation*  
The propagation rule calls its body exactly once for the constraints in its head.
- *simpagation*  
The simpagation rule removes the constraints in its head after the  $\backslash$  and then calls its body. It is an optimization of simplification rules of the form:

$$constraints_1, constraints_2 \leq => constraints_1, body$$

Namely, in the simpagation form:

$$constraints_1 \backslash constraints_2 \leq => body$$

The  $constraints_1$  constraints are not called in the body.

**Rule Names** Naming a rule is optional and has no semantic meaning. It only functions as documentation for the programmer.

**Pragmas** The semantics of the pragmas are:

#### **passive**(*Identifier*)

The constraint in the head of a rule *Identifier* can only match a passive constraint in that rule. There is an abbreviated syntax for this pragma. Instead of:

```
..., c # Id, ... <=> ... pragma passive(Id)
```

you can also write

```
..., c # passive, ... <=> ...
```

Additional pragmas may be released in the future.

#### **`:- chr_option(+Option, +Value)`**

It is possible to specify options that apply to all the CHR rules in the module. Options are specified with the `chr_option/2` declaration:

```
:- chr_option(Option, Value).
```

and may appear in the file anywhere after the first constraints declaration.

Available options are:

##### **check\_guard\_bindings**

This option controls whether guards should be checked for (illegal) variable bindings or not. Possible values for this option are `on` to enable the checks, and `off` to disable the checks. If this option is on, any guard fails when it binds a variable that appears in the head of the rule. When the option is off (default), the behaviour of a binding in the guard is undefined.

##### **optimize**

This option controls the degree of optimization. Possible values are `full` to enable all available optimizations, and `off` (default) to disable all optimizations. The default is derived from the SWI-Prolog flag `optimise`, where `true` is mapped to `full`. Therefore the command line option `-O` provides full CHR optimization. If optimization is enabled, debugging must be disabled.

##### **debug**

This option enables or disables the possibility to debug the CHR code. Possible values are `on` (default) and `off`. See section 9.4 for more details on debugging. The default is derived from the Prolog flag `generate_debug_info`, which is `true` by default. See `-nodebug`. If debugging is enabled, optimization must be disabled.

## **9.3 CHR in SWI-Prolog Programs**

### **9.3.1 Embedding in Prolog Programs**

The CHR constraints defined in a `.pl` file are associated with a module. The default module is `user`. One should never load different `.pl` files with the same CHR module name.

### 9.3.2 Constraint declaration

#### **`:- chr_constraint(+Specifier)`**

Every constraint used in CHR rules has to be declared with a `chr_constraint/1` declaration by the *constraint specifier*. For convenience multiple constraints may be declared at once with the same `chr_constraint/1` declaration followed by a comma-separated list of constraint specifiers.

A constraint specifier is, in its compact form,  $F/A$  where  $F$  and  $A$  are respectively the functor name and arity of the constraint, e.g.:

```
:- chr_constraint foo/1.
:- chr_constraint bar/2, baz/3.
```

In its extended form, a constraint specifier is  $c(A_1, \dots, A_n)$  where  $c$  is the constraint's functor,  $n$  its arity and the  $A_i$  are argument specifiers. An argument specifier is a mode, optionally followed by a type. Example:

```
:- chr_constraint get_value(+, ?).
:- chr_constraint domain(?int, +list(int)),
   alldifferent(?list(int)).
```

**Modes** A mode is one of:

–

The corresponding argument of every occurrence of the constraint is always unbound.

+

The corresponding argument of every occurrence of the constraint is always ground.

?

The corresponding argument of every occurrence of the constraint can have any instantiation, which may change over time. This is the default value.

**Types** A type can be a user-defined type or one of the built-in types. A type comprises a (possibly infinite) set of values. The type declaration for a constraint argument means that for every instance of that constraint the corresponding argument is only ever bound to values in that set. It does not state that the argument necessarily has to be bound to a value.

The built-in types are:

**int**

The corresponding argument of every occurrence of the constraint is an integer number.

**dense int**

The corresponding argument of every occurrence of the constraint is an integer that can be used as an array index. Note that if this argument takes values in  $[0, n]$ , the array takes  $O(n)$  space.

**float**

... a floating point number.

**number**

... a number.

**natural**

... a positive integer.

**any**

The corresponding argument of every occurrence of the constraint can have any type. This is the default value.

**`:- chr_type(+TypeDeclaration)`**

User-defined types are algebraic data types, similar to those in Haskell or the discriminated unions in Mercury. An algebraic data type is defined using `chr_type/1`:

```
:- chr_type type ---> body.
```

If the type term is a functor of arity zero (i.e. one having zero arguments), it names a monomorphic type. Otherwise, it names a polymorphic type; the arguments of the functor must be distinct type variables. The body term is defined as a sequence of constructor definitions separated by semi-colons.

Each constructor definition must be a functor whose arguments (if any) are types. Discriminated union definitions must be transparent: all type variables occurring in the body must also occur in the type.

Here are some examples of algebraic data type definitions:

```
:- chr_type color ---> red ; blue ; yellow ; green.

:- chr_type tree ---> empty ; leaf(int) ; branch(tree, tree).

:- chr_type list(T) ---> [] ; [T | list(T)].

:- chr_type pair(T1, T2) ---> (T1 - T2).
```

Each algebraic data type definition introduces a distinct type. Two algebraic data types that have the same bodies are considered to be distinct types (name equivalence).

Constructors may be overloaded among different types: there may be any number of constructors with a given name and arity, so long as they all have different types.

Aliases can be defined using `==`. For example, if your program uses lists of lists of integers, you can define an alias as follows:

```
:- chr_type lli == list(list(int)).
```

**Type Checking** Currently two complementary forms of type checking are performed:

1. Static type checking is always performed by the compiler. It is limited to CHR rule heads and CHR constraint calls in rule bodies.

Two kinds of type error are detected. The first is where a variable has to belong to two types. For example, in the program:

```
:-chr_type foo ---> foo.
:-chr_type bar ---> bar.

:-chr_constraint abc(?foo).
:-chr_constraint def(?bar).

foobar @ abc(X) <=> def(X).
```

the variable `X` has to be of both type `foo` and `bar`. This is reported as a type clash error:

```
CHR compiler ERROR:
  '--> Type clash for variable _ in rule foobar:
        expected type foo in body goal def(_, _)
        expected type bar in head def(_, _)
```

The second kind of error is where a functor is used that does not belong to the declared type. For example in:

```
:- chr_type foo ---> foo.
:- chr_type bar ---> bar.

:- chr_constraint abc(?foo).

foo @ abc(bar) <=> true.
```

`bar` appears in the head of the rule where something of type `foo` is expected. This is reported as:

```
CHR compiler ERROR:
  '--> Invalid functor in head abc(bar) of rule foo:
        found 'bar',
        expected type 'foo'!
```

No runtime overhead is incurred in static type checking.

2. Dynamic type checking checks at runtime, during program execution, whether the arguments of CHR constraints respect their declared types. The `when/2` co-routining library is used to delay dynamic type checks until variables are instantiated.

The kind of error detected by dynamic type checking is where a functor is used that does not belong to the declared type. For example, for the program:

```
:-chr_type foo ---> foo.  
  
:-chr_constraint abc(?foo).
```

we get the following error in an erroneous query:

```
?- abc(bar).  
ERROR: Type error: 'foo' expected, found 'bar'  
      (CHR Runtime Type Error)
```

Dynamic type checking is weaker than static type checking in the sense that it only checks the particular program execution at hand rather than all possible executions. It is stronger in the sense that it tracks types throughout the whole program.

Note that it is enabled only in debug mode, as it incurs some (minor) runtime overhead.

### 9.3.3 Compilation

The SWI-Prolog CHR compiler exploits `term_expansion/2` rules to translate the constraint handling rules to plain Prolog. These rules are loaded from the library `chr`. They are activated if the compiled file has the `.chr` extension or after finding a declaration in the following format:

```
:- chr_constraint ...
```

It is advised to define CHR rules in a module file, where the module declaration is immediately followed by including the library(`chr`) library as exemplified below:

```
:- module(zebra, [ zebra/0 ]).  
:- use_module(library(chr)).  
  
:- chr_constraint ...
```

Using this style, CHR rules can be defined in ordinary Prolog `.pl` files and the operator definitions required by CHR do not leak into modules where they might cause conflicts.

## 9.4 Debugging

The CHR debugging facilities are currently rather limited. Only tracing is currently available. To use the CHR debugging facilities for a CHR file it must be compiled for debugging. Generating debug info is controlled by the CHR option `debug`, whose default is derived from the SWI-Prolog flag `generate_debug_info`. Therefore debug info is provided unless the `-nodebug` is used.

### 9.4.1 Ports

For CHR constraints the four standard ports are defined:

**call**

A new constraint is called and becomes active.

**exit**

An active constraint exits: it has either been inserted in the store after trying all rules or has been removed from the constraint store.

**fail**

An active constraint fails.

**redo**

An active constraint starts looking for an alternative solution.

In addition to the above ports, CHR constraints have five additional ports:

**wake**

A suspended constraint is woken and becomes active.

**insert**

An active constraint has tried all rules and is suspended in the constraint store.

**remove**

An active or passive constraint is removed from the constraint store.

**try**

An active constraint tries a rule with possibly some passive constraints. The try port is entered just before committing to the rule.

**apply**

An active constraint commits to a rule with possibly some passive constraints. The apply port is entered just after committing to the rule.

### 9.4.2 Tracing

Tracing is enabled with the `chr_trace/0` predicate and disabled with the `chr_notrace/0` predicate.

When enabled the tracer will step through the `call`, `exit`, `fail`, `wake` and `apply` ports, accepting debug commands, and simply write out the other ports.

The following debug commands are currently supported:

CHR debug options:

|                         |                        |                |                    |
|-------------------------|------------------------|----------------|--------------------|
| <code>&lt;cr&gt;</code> | <code>creep</code>     | <code>c</code> | <code>creep</code> |
| <code>s</code>          | <code>skip</code>      |                |                    |
| <code>g</code>          | <code>ancestors</code> |                |                    |
| <code>n</code>          | <code>nodebug</code>   |                |                    |
| <code>b</code>          | <code>break</code>     |                |                    |

|   |       |   |      |
|---|-------|---|------|
| a | abort |   |      |
| f | fail  |   |      |
| ? | help  | h | help |

Their meaning is:

**creep**

Step to the next port.

**skip**

Skip to exit port of this call or wake port.

**ancestors**

Print list of ancestor call and wake ports.

**nodebug**

Disable the tracer.

**break**

Enter a recursive Prolog top level. See `break/0`.

**abort**

Exit to the top level. See `abort/0`.

**fail**

Insert failure in execution.

**help**

Print the above available debug options.

### 9.4.3 CHR Debugging Predicates

The `chr` module contains several predicates that allow inspecting and printing the content of the constraint store.

**chr\_trace**

Activate the CHR tracer. By default the CHR tracer is activated and deactivated automatically by the Prolog predicates `trace/0` and `notrace/0`.

**chr\_notrace**

Deactivate the CHR tracer. By default the CHR tracer is activated and deactivated automatically by the Prolog predicates `trace/0` and `notrace/0`.

**chr\_leash(+Spec)**

Define the set of CHR ports on which the CHR tracer asks for user intervention (i.e. stops). *Spec* is either a list of ports as defined in section 9.4.1 or a predefined ‘alias’. Defined aliases are: `full` to stop at all ports, `none` or `off` to never stop, and `default` to stop at the `call`, `exit`, `fail`, `wake` and `apply` ports. See also `leash/1`.



**chr\_show\_store(+Mod)**

Prints all suspended constraints of module *Mod* to the standard output. This predicate is automatically called by the SWI-Prolog top level at the end of each query for every CHR module currently loaded. The Prolog flag `chr_toplevel_show_store` controls whether the top level shows the constraint stores. The value `true` enables it. Any other value disables it.

**find\_chr\_constraint(-Constraint)**

Returns a constraint in the constraint store. Via backtracking, all constraints in the store can be enumerated.

## 9.5 Examples

Here are two example constraint solvers written in CHR.

- The program below defines a solver with one constraint, `leq/2`, which is a less-than-or-equal constraint, also known as a partial order constraint.

```
:- module(leq, [leq/2]).
:- use_module(library(chr)).

:- chr_constraint leq/2.
reflexivity @ leq(X,X) <=> true.
antisymmetry @ leq(X,Y), leq(Y,X) <=> X = Y.
idempotence @ leq(X,Y) \ leq(X,Y) <=> true.
transitivity @ leq(X,Y), leq(Y,Z) ==> leq(X,Z).
```

When the above program is saved in a file and loaded in SWI-Prolog, you can call the `leq/2` constraints in a query, e.g.:

```
?- leq(X,Y), leq(Y,Z).
leq(_G23837, _G23841)
leq(_G23838, _G23841)
leq(_G23837, _G23838)
true .
```

When the query succeeds, the SWI-Prolog top level prints the content of the CHR constraint store and displays the bindings generated during the query. Some of the query variables may have been bound to attributed variables, as you see in the above example.

- The program below implements a simple finite domain constraint solver.

```
:- module(dom, [dom/2]).
:- use_module(library(chr)).

:- chr_constraint dom(?int, +list(int)).
:- chr_type list(T) ---> [] ; [T|list(T)].
```

```

dom(X, []) <=> fail.
dom(X, [Y]) <=> X = Y.
dom(X, L) <=> nonvar(X) | memberchk(X, L).
dom(X, L1), dom(X, L2) <=> intersection(L1, L2, L3), dom(X, L3).

```

When the above program is saved in a file and loaded in SWI-Prolog, you can call the `dom/2` constraints in a query, e.g.:

```

?- dom(A, [1, 2, 3]), dom(A, [3, 4, 5]).
A = 3.

```

## 9.6 Backwards Compatibility

### 9.6.1 The Old SICStus CHR implementation

There are small differences between the current K.U.Leuven CHR system in SWI-Prolog, older versions of the same system, and SICStus' CHR system.

The current system maps old syntactic elements onto new ones and ignores a number of no longer required elements. However, for each a *deprecated* warning is issued. You are strongly urged to replace or remove deprecated features.

Besides differences in available options and pragmas, the following differences should be noted:

- *The constraints/1 declaration*  
This declaration is deprecated. It has been replaced with the `chr_constraint/1` declaration.
- *The option/2 declaration*  
This declaration is deprecated. It has been replaced with the `chr_option/2` declaration.
- *The handler/1 declaration*  
In SICStus every CHR module requires a `handler/1` declaration declaring a unique handler name. This declaration is valid syntax in SWI-Prolog, but will have no effect. A warning will be given during compilation.
- *The rules/1 declaration*  
In SICStus, for every CHR module it is possible to only enable a subset of the available rules through the `rules/1` declaration. The declaration is valid syntax in SWI-Prolog, but has no effect. A warning is given during compilation.
- *Guard bindings*  
The `check_guard_bindings` option only turns invalid calls to unification into failure. In SICStus this option does more: it intercepts instantiation errors from Prolog built-ins such as `is/2` and turns them into failure. In SWI-Prolog, we do not go this far, as we like to separate concerns more. The CHR compiler is aware of the CHR code, the Prolog system, and the programmer should be aware of the appropriate meaning of the Prolog goals used in guards and bodies of CHR rules.

### 9.6.2 The Old ECLiPSe CHR implementation

The old ECLiPSe CHR implementation features a `label_with/1` construct for labeling variables in CHR constraints. This feature has long since been abandoned. However, a simple transformation is all that is required to port the functionality.

```
label_with Constraint1 if Condition1.
...
label_with ConstraintN if ConditionN.
Constraint1 :- Body1.
...
ConstraintN :- BodyN.
```

is transformed into

```
:- chr_constraint my_labeling/0.

my_labeling \ Constraint1 <=> Condition1 | Body1.
...
my_labeling \ ConstraintN <=> ConditionN | BodyN.
my_labeling <=> true.
```

Be sure to put this code after all other rules in your program! With `my_labeling/0` (or another predicate name of your choosing) the labeling is initiated, rather than ECLiPSe's `chr_labeling/0`.

## 9.7 Programming Tips and Tricks

In this section we cover several guidelines on how to use CHR to write constraint solvers and how to do so efficiently.

- *Check guard bindings yourself*  
It is considered bad practice to write guards that bind variables of the head and to rely on the system to detect this at runtime. It is inefficient and obscures the working of the program.
- *Set semantics*  
The CHR system allows the presence of identical constraints, i.e. multiple constraints with the same functor, arity and arguments. For most constraint solvers, this is not desirable: it affects efficiency and possibly termination. Hence appropriate simpagation rules should be added of the form:  
$$constraint \backslash constraint \leq => true$$
- *Multi-headed rules*  
Multi-headed rules are executed more efficiently when the constraints share one or more variables.
- *Mode and type declarations*  
Provide mode and type declarations to get more efficient program execution. Make sure to disable debug (`-nodebug`) and enable optimization (`-O`).

- *Compile once, run many times*

Does consulting your CHR program take a long time in SWI-Prolog? Probably it takes the CHR compiler a long time to compile the CHR rules into Prolog code. When you disable optimizations the CHR compiler will be a lot quicker, but you may lose performance. Alternatively, you can just use SWI-Prolog's `qcompile/1` to generate a `.qlf` file once from your `.pl` file. This `.qlf` contains the generated code of the CHR compiler (be it in a binary format). When you consult the `.qlf` file, the CHR compiler is not invoked and consultation is much faster.

- *Finding Constraints*

The `find_chr_constraint/1` predicate is fairly expensive. Avoid it, if possible. If you must use it, try to use it with an instantiated top-level constraint symbol.

## 9.8 Compiler Errors and Warnings

In this section we summarize the most important error and warning messages of the CHR compiler.

### 9.8.1 CHR Compiler Errors

**Type clash** for variable ... in rule ...

This error indicates an inconsistency between declared types; a variable can not belong to two types. See static type checking.

**Invalid functor** in head ... of rule ...

This error indicates an inconsistency between a declared type and the use of a functor in a rule. See static type checking.

**Cyclic alias** definition: ... == ...

You have defined a type alias in terms of itself, either directly or indirectly.

**Ambiguous type aliases** You have defined two overlapping type aliases.

**Multiple definitions** for type

You have defined the same type multiple times.

**Non-ground type** in constraint definition: ...

You have declared a non-ground type for a constraint argument.

**Could not find type definition** for ...

You have used an undefined type in a type declaration.

**Illegal mode/type declaration** You have used invalid syntax in a constraint declaration.

**Constraint multiply defined** There is more than one declaration for the same constraint.

**Undeclared constraint** ... in head of ...

You have used an undeclared constraint in the head of a rule. This often indicates a misspelled constraint name or wrong number of arguments.

**Invalid pragma** ... in ... Pragma should not be a variable.

You have used a variable as a pragma in a rule. This is not allowed.

**Invalid identifier** ... in pragma passive in ...

You have used an identifier in a passive pragma that does not correspond to an identifier in the head of the rule. Likely the identifier name is misspelled.

**Unknown pragma** ... in ...

You have used an unknown pragma in a rule. Likely the pragma is misspelled or not supported.

**Something unexpected** happened in the CHR compiler

You have most likely bumped into a bug in the CHR compiler. Please contact Tom Schrijvers to notify him of this error.

# Multithreaded applications

---

SWI-Prolog multithreading is based on standard C language multithreading support. It is not like *ParLog* or other parallel implementations of the Prolog language. Prolog threads have their own stacks and only share the Prolog *heap*: predicates, records, flags and other global non-backtrackable data. SWI-Prolog thread support is designed with the following goals in mind.

- *Multithreaded server applications*  
Today's computing services often focus on (internet) server applications. Such applications often have need for communication between services and/or fast non-blocking service to multiple concurrent clients. The shared heap provides fast communication, and thread creation is relatively cheap.<sup>1</sup>
- *Interactive applications*  
Interactive applications often need to perform extensive computation. If such computations are executed in a new thread, the main thread can process events and allow the user to cancel the ongoing computation. User interfaces can also use multiple threads, each thread dealing with input from a distinct group of windows. See also section 10.7.
- *Natural integration with foreign code*  
Each Prolog thread runs in a native thread of the operating system, automatically making them cooperate with *MT-safe* foreign code. In addition, any foreign thread can create its own Prolog engine for dealing with calling Prolog from C code.

SWI-Prolog multithreading is based on the POSIX thread standard [Butenhof, 1997] used on most popular systems except for MS-Windows. On Windows it uses the `pthread-win32` emulation of POSIX threads mixed with the Windows native API for smoother and faster operation. The SWI-Prolog thread implementation has been discussed in the ISO WG17 working group and is largely adopted by YAP and XSB Prolog.<sup>2</sup>

## 10.1 Creating and destroying Prolog threads

**thread.create(:Goal, -Id)**

Shorthand for `thread.create(Goal, Id, [])`. See `thread.create/3`.

**thread.create(:Goal, -Id, +Options)**

Create a new Prolog thread (and underlying operating system thread) and start it by executing

<sup>1</sup>On an Intel i7-2600K, running Ubuntu Linux 12.04, SWI-Prolog 6.2 creates and joins 32,000 threads per second elapsed time.

<sup>2</sup>The latest version of the ISO draft can be found at <http://logtalk.org/plstd/threads.pdf>. It appears to have dropped from the ISO WG17 agenda.

*Goal.* If the thread is created successfully, the thread identifier of the created thread is unified to *Id*.

*Id* is the *alias* name if the option `alias(name)` is given. Otherwise it is a *blob* of type `thread`. The anonymous blobs are subject to atom garbage collection. If a thread handle is garbage collected and the thread is not *detached*, it is *joined* if it has already terminated (see `thread_join/2`) and *detached* otherwise (see `thread_detach/1`).<sup>3</sup> The thread identifier blobs are printed as `<thread> (I,Ptr)`, where *I* is the internal thread identifier and *Ptr* is the unique address of the identifier. The *I* is accepted as input argument for all thread APIs that accept a thread identifier for convenient interaction from the toplevel. See also `thread_property/2`.

*Options* is a list of options. The currently defined options are below. Stack size options can also take the value `inf` or `infinite`, which is mapped to the maximum stack size supported by the platform.

#### **affinity(+CpuSet)**

Specify that the thread should only run on the specified CPUs (cores). *CpuSet* is a list of integers between 0 (zero) and the known number of CPUs (see `cpu_count`). If *CpuSet* is empty a `domain_error` is raised. Referring to CPUs equal to or higher than the known number of CPUs returns an `existence_error`.

This option is currently implemented for systems that provide `pthread_attr_setaffinity_np()`. The option is silently ignored on other systems.<sup>4</sup>

#### **alias(AliasName)**

Associate an ‘alias name’ with the thread. This name may be used to refer to the thread and remains valid until the thread is joined (see `thread_join/2`). If the OS supports it (e.g., Linux), the operating system thread is named as well.

#### **at\_exit(:AtExit)**

Register *AtExit* as using `thread_at_exit/1` before entering the thread goal. Unlike calling `thread_at_exit/1` as part of the normal *Goal*, this *ensures* the *AtExit* is called. Using `thread_at_exit/1`, the thread may be signalled or run out of resources before `thread_at_exit/1` is reached. See `thread_at_exit/1` for details.

#### **debug(+Bool)**

Enable/disable debugging the new thread. If `false` (default `true`), the new thread is created with the property `debug(false)` and debugging is disabled before the new thread is started. The thread debugging predicates such as `tspy/1` and `tdebug/0` do not signal threads with the debug property set to `false`.<sup>5</sup>

#### **detached(Bool)**

If `false` (default), the thread can be waited for using `thread_join/2`. `thread_join/2` must be called on this thread to reclaim all resources associated with the thread. If `true`, the system will reclaim all associated resources automatically

<sup>3</sup>Up to version 7.3.23, anonymous thread handles were integers. Using integers did not allow for safe checking of the thread’s status as the thread may have died and the handle may have been reused and did not allow for garbage collection to take care of forgotten threads.

<sup>4</sup>BUG: There is currently no way to discover whether this option is supported.

<sup>5</sup>Currently, the flag is only used as a hint for the the various debugging primitives, i.e., the system does not really enforce that the target thread stays in *nodebug* mode.

after the thread finishes. Please note that thread identifiers are freed for reuse after a detached thread finishes or a normal thread has been joined. See also `thread_join/2` and `thread_detach/1`.

If a detached thread dies due to failure or exception of the initial goal, the thread prints a message using `print_message/2`. If such termination is considered normal, the code must be wrapped using `ignore/1` and/or `catch/3` to ensure successful completion.

#### **inherit\_from(+ThreadId)**

Inherit defaults from the given *ThreadId* instead of the calling thread. This option was added to ensure that the `__thread_pool_manager` (see `thread_create_in_pool/4`), which is created lazily, has a predictable state. The following properties are inherited:

- The prompt (see `prompt/2`)
- The *typein* module (see `module/1`)
- The standard streams (`user_input`, etc.)
- The default encoding (see `encoding`)
- The default locale (see `setlocale/1`)
- All prolog flags
- The stack limit (see Prolog flag `stack_limit`).

#### **queue\_max\_size(Size)**

Enforces a maximum to the number of terms in the input queue. See `message_queue_create/2` with the `max_size(o)`ption for details.

#### **stack\_limit(Bytes)**

Set the size limit for the Prolog stacks. See the Prolog flag `stack_limit`. The default is inherited from the calling thread or the thread specified using `inherit_from(ThreadId)`.

#### **c\_stack(K-Bytes)**

Set the limit to which the C stack of this thread may grow. The default, minimum and maximum values are system-dependent.

The *Goal* argument is *copied* to the new Prolog engine. This implies that further instantiation of this term in either thread does not have consequences for the other thread: Prolog threads do not share data from their stacks.

#### **thread\_self(-Id)**

Get the Prolog thread identifier of the running thread. If the thread has an alias, the alias name is returned.

#### **thread\_join(+Id)**

Calls `thread_join/2` and succeeds if thread *Id* terminated with success. Otherwise the exception `error(thread_error(Status), _)` is raised.

#### **thread\_join(+Id, -Status)**

Wait for the termination of the thread with the given *Id*. Then unify the result status of the thread with *Status*. After this call, *Id* becomes invalid and all resources associated with the thread are reclaimed. Note that threads with the attribute `detached(true)` cannot be joined. See also `thread_property/2`.



A thread that has been completed without `thread_join/2` being called on it is partly re-claimed: the Prolog stacks are released and the C thread is destroyed. A small data structure representing the exit status of the thread is retained until `thread_join/2` is called on the thread. Defined values for *Status* are:

**true**

The goal has been proven successfully.

**false**

The goal has failed.

**exception(*Term*)**

The thread is terminated on an exception. See `print_message/2` to turn system exceptions into readable messages.

**exited(*Term*)**

The thread is terminated on `thread_exit/1` using the argument *Term*.

**thread\_detach(+*Id*)**

Switch thread into detached state (see `detached(Bool)` option at `thread_create/3`) at runtime. *Id* is the identifier of the thread placed in detached state. This may be the result of `thread_self/1`.

One of the possible applications is to simplify debugging. Threads that are created as *detached* leave no traces if they crash. For non-detached threads the status can be inspected using `thread_property/2`. Threads nobody is waiting for may be created normally and detach themselves just before completion. This way they leave no traces on normal completion and their reason for failure can be inspected.

**thread\_exit(+*Term*)**

[*deprecated*]

Terminates the thread immediately, leaving `exited(Term)` as result state for `thread_join/2`. If the thread has the attribute `detached(true)` it terminates, but its exit status cannot be retrieved using `thread_join/2`, making the value of *Term* irrelevant. The Prolog stacks and C thread are reclaimed.

The current implementation does not guarantee proper releasing of all mutexes and proper cleanup in `setup_call_cleanup/3`, etc. Please use the exception mechanism (`throw/1`) to abort execution using non-standard control.

**thread\_initialization(:*Goal*)**

Run *Goal* when thread is started. This predicate is similar to `initialization/1`, but is intended for initialization operations of the runtime stacks, such as setting global variables as described in section 4.33. *Goal* is run on four occasions: at the call to this predicate, after loading a saved state, on starting a new thread and on creating a Prolog engine through the C interface. On loading a saved state, *Goal* is executed *after* running the `initialization/1` hooks.

**thread\_at\_exit(:*Goal*)**

Run *Goal* just before releasing the thread resources. This is to be compared to `at_halt/1`, but only for the current thread. These hooks are run regardless of why the execution of the thread has been completed. When these hooks are run, the return code is already available through `thread_property/2` using the result of `thread_self/1` as thread identifier. Note that

there are two scenarios for using exit hooks. Using `thread_at_exit/1` is typically used if the thread creates a side-effect that must be reverted if the thread dies. Another scenario is where the creator of the thread wants to be informed when the thread ends. That cannot be guaranteed by means of `thread_at_exit/1` because it is possible that the thread cannot be created or dies almost instantly due to a signal or resource error. The `at_exit(Goal)` option of `thread_create/3` is designed to deal with this scenario.

The *Goal* is executed with signal processing disabled. This avoids that e.g., `thread_signal(Thread, abort)` kills the exit handler rather than the thread in the case the body of *Thread* has just finished when the signal arrives.

#### **thread\_setconcurrency(-Old, +New)**

Determine the concurrency of the process, which is defined as the maximum number of concurrently active threads. ‘Active’ here means they are using CPU time. This option is provided if the thread implementation provides `pthread_setconcurrency()`. Solaris is a typical example of this family. On other systems this predicate unifies *Old* to 0 (zero) and succeeds silently.

#### **thread\_affinity(+ThreadID, -Current, +New)**

True when *Current* is unified with the current thread affinity and the thread affinity is successfully set to *New*. The *thread affinity* specifies the set of CPUs on which this thread is allowed to run. The affinity is represented as a list of non-negative integers. See also the option `affinity(+Affinity)` of `thread_create/3`.

This predicate is only present if this functionality can be supported and has been ported to the target operating system. Currently, only Linux support is provided.

## 10.2 Monitoring threads

Normal multithreaded applications should not need the predicates from this section because almost any usage of these predicates is unsafe. For example checking the existence of a thread before signalling it is of no use as it may vanish between the two calls. Catching exceptions using `catch/3` is the only safe way to deal with thread-existence errors.

These predicates are provided for diagnosis and monitoring tasks. See also section 10.5, describing more high-level primitives.

#### **is\_thread(@Term)**

True if *Term* is a handle to an existing thread.

#### **thread\_property(?Id, ?Property)**

True if thread *Id* has *Property*. Either or both arguments may be unbound, enumerating all relations on backtracking. Calling `thread_property/2` does not influence any thread. See also `thread_join/2`. For threads that have an alias name, this name is returned in *Id* instead of the opaque thread identifier. Defined properties are:

##### **alias(Alias)**

*Alias* is the alias name of thread *Id*.

##### **detached(Boolean)**

Current detached status of the thread.

**id(Integer)**

Integer identifier for the thread. Can be used as argument to the thread predicates, but applications must be aware that these references are reused.

**status(Status)**

Current status of the thread. *Status* is one of:

**running**

The thread is running. This is the initial status of a thread. Please note that threads waiting for something are considered running too.

**suspended**

Only if the thread is an engine (see section 11). Indicates that the engine is currently not associated with an OS thread.

**false**

The *Goal* of the thread has been completed and failed.

**true**

The *Goal* of the thread has been completed and succeeded.

**exited(Term)**

The *Goal* of the thread has been terminated using `thread_exit/1` with *Term* as argument. If the underlying native thread has exited (using `pthread_exit()`) *Term* is unbound.

**exception(Term)**

The *Goal* of the thread has been terminated due to an uncaught exception (see `throw/1` and `catch/3`).

**engine(Boolean)**

If the thread is an engine (see chapter 11), *Boolean* is `true`. Otherwise the property is not present.

**thread(ThreadId)**

If the thread is an engine that is currently attached to a thread, *ThreadId* is the thread that executes the engine.

**system\_thread\_id(Integer)**

Thread identifier used by the operating system for the calling thread. Not available on all OSes. This is the same as the Prolog flag `system_thread_id` for the calling thread. Access to the system thread identifier can, on some systems, be used to gain additional control over or information about Prolog threads.

See also `thread_statistics/3` to obtain resource usage information and `message_queue_property/2` to get the number of queued messages for a thread.

**thread\_statistics(+Id, +Key, -Value)**

Obtains statistical information on thread *Id* as `statistics/2` does in single-threaded applications. This call supports all keys of `statistics/2`, although only stack sizes, `cputime`, `inferences` and `epoch` yield different values for each thread.<sup>6</sup>

<sup>6</sup>There is no portable interface to obtain thread-specific CPU time and some operating systems provide no access to this information at all. On such systems the total process CPU is returned. Thread CPU time is supported on MS-Windows, Linux and MacOSX.

**mutex\_statistics**

Print usage statistics on internal mutexes and mutexes associated with dynamic predicates. For each mutex two numbers are printed: the number of times the mutex was acquired and the number of *collisions*: the number of times the calling thread has to wait for the mutex. Generally collision count is close to zero on single-CPU hardware.

**10.3 Thread communication****10.3.1 Message queues**

Prolog threads can exchange data using dynamic predicates, database records, and other globally shared data. These provide no suitable means to wait for data or a condition as they can only be checked in an expensive polling loop. *Message queues* provide a means for threads to wait for data or conditions without using the CPU.

Each thread has a message queue attached to it that is identified by the thread. Additional queues are created using `message_queue_create/1`. Explicitly created queues come in two flavours. When given an *alias*, they must be destroyed by the user. *Anonymous* message queues are identified by a *blob* (see section 12.4.8) and subject to garbage collection.

**thread\_send\_message(+QueueOrThreadId, +Term)**

Place *Term* in the given queue or default queue of the indicated thread (which can even be the message queue of itself, see `thread_self/1`). Any term can be placed in a message queue, but note that the term is copied to the receiving thread and variable bindings are thus lost. This call returns immediately.

If more than one thread is waiting for messages on the given queue and at least one of these is waiting with a partially instantiated *Term*, the waiting threads are *all* sent a wake-up signal, starting a rush for the available messages in the queue. This behaviour can seriously harm performance with many threads waiting on the same queue as all-but-the-winner perform a useless scan of the queue. If there is only one waiting thread or all waiting threads wait with an unbound variable, an arbitrary thread is restarted to scan the queue.<sup>7</sup>

**thread\_send\_message(+Queue, +Term, +Options)** [semidet]

As `thread_send_message/2`, but providing additional *Options*. These are to deal with the case that the queue has a finite maximum size and is full: whereas `thread_send_message/2` will block until the queue has drained sufficiently to accept a new message, `thread_send_message/3` can accept a time-out or deadline analogously to `thread_get_message/3`. The options are:

**deadline(+AbsTime)**

The call fails (silently) if no space has become available before *AbsTime*. See `get_time/1` for the representation of absolute time. If *AbsTime* is earlier than the current time, `thread_send_message/3` fails immediately. Both resolution and maximum wait time is platform-dependent.<sup>8</sup>

<sup>7</sup>See the documentation for the POSIX thread functions `pthread_cond_signal()` v.s. `pthread_cond_broadcast()` for background information.

<sup>8</sup>The implementation uses `MsgWaitForMultipleObjects()` on MS-Windows and `pthread_cond_timedwait()` on other systems.

**timeout(+Time)**

*Time* is a float or integer and specifies the maximum time to wait in seconds. This is a relative-time version of the `deadline` option. If both options are provided, the earlier time is effective.

If *Time* is 0 or 0.0, `thread_send_message/3` examines the queue and sends the message if space is available, but does not suspend if no space is available, failing immediately instead.

If *Time* < 0, `thread_send_message/3` fails immediately without sending the message.

**thread\_get\_message(?Term)**

Examines the thread message queue and if necessary blocks execution until a term that unifies to *Term* arrives in the queue. After a term from the queue has been unified to *Term*, the term is deleted from the queue.

Please note that non-unifying messages remain in the queue. After the following has been executed, thread 1 has the term `b(gnu)` in its queue and continues execution using `A = gnat`.

```
<thread 1>
thread_get_message(a(A)),

<thread 2>
thread_send_message(Thread_1, b(gnu)),
thread_send_message(Thread_1, a(gnat)),
```

See also `thread_peek_message/1`.

**thread\_peek\_message(?Term)**

Examines the thread message queue and compares the queued terms with *Term* until one unifies or the end of the queue has been reached. In the first case the call succeeds, possibly instantiating *Term*. If no term from the queue unifies, this call fails. I.e., `thread_peek_message/1` never waits and does not remove any term from the queue. See also `thread_get_message/3`.

**message\_queue\_create(?Queue)**

Equivalent to `message_queue_create(Queue, [])`. For compatibility, calling `message_queue_create(+Atom)` is equivalent to `message_queue_create(Queue, [alias(Atom)])`. New code should use `message_queue_create/2` to create a named queue.

**message\_queue\_create(-Queue, +Options)**

Create a message queue from *Options*. Defined options are:

**alias(+Alias)**

Create a message queue that is identified by the atom *Alias*. Message queues created this way must be explicitly destroyed by the user. If the `alias` option is omitted, an *Anonymous* queue is created that is identified by a *blob* (see section 12.4.8) and subject to garbage collection.<sup>9</sup>

<sup>9</sup>Garbage collecting anonymous message queues is not part of the ISO proposal and most likely not a widely implemented feature.

**max\_size(+Size)**

Maximum number of terms in the queue. If this number is reached, `thread_send_message/2` will suspend until the queue is drained. The option can be used if the source, sending messages to the queue, is faster than the drain, consuming the messages.

**message\_queue\_destroy(+Queue)**

[det]

Destroy a message queue created with `message_queue_create/1`. A permission error is raised if *Queue* refers to (the default queue of) a thread. Other threads that are waiting for *Queue* using `thread_get_message/2` receive an existence error.

**thread\_get\_message(+Queue, ?Term)**

[det]

As `thread_get_message/1`, operating on a given queue. It is allowed (but not advised) to get messages from the queue of other threads. This predicate raises an existence error exception if *Queue* doesn't exist or is destroyed using `message_queue_destroy/1` while this predicate is waiting.

**thread\_get\_message(+Queue, ?Term, +Options)**

[semidet]

As `thread_get_message/2`, but providing additional *Options*:

**deadline(+AbsTime)**

The call fails (silently) if no message has arrived before *AbsTime*. See `get_time/1` for the representation of absolute time. If *AbsTime* is earlier than the current time, `thread_get_message/3` fails immediately. Both resolution and maximum wait time is platform-dependent.<sup>10</sup>

**timeout(+Time)**

*Time* is a float or integer and specifies the maximum time to wait in seconds. This is a relative-time version of the `deadline` option. If both options are provided, the earlier time is effective.

If *Time* is 0 or 0.0, `thread_get_message/3` examines the queue but does not suspend if no matching term is available. Note that unlike `thread_peek_message/2`, a matching term is removed from the queue.

If *Time* < 0, `thread_get_message/3` fails immediately without removing any message from the queue.

**thread\_peek\_message(+Queue, ?Term)**

[semidet]

As `thread_peek_message/1`, operating on a given queue. It is allowed to peek into another thread's message queue, an operation that can be used to check whether a thread has swallowed a message sent to it.

**message\_queue\_property(?Queue, ?Property)**

True if *Property* is a property of *Queue*. Defined properties are:

**alias(Alias)**

Queue has the given alias name.

<sup>10</sup>The implementation uses `MsgWaitForMultipleObjects()` on MS-Windows and `pthread_cond_timedwait()` on other systems.

**max\_size(*Size*)**

Maximum number of terms that can be in the queue. See `message_queue_create/2`. This property is not present if there is no limit (default).

**size(*Size*)**

Queue currently contains *Size* terms. Note that due to concurrent access the returned value may be outdated before it is returned. It can be used for debugging purposes as well as work distribution purposes.

The `size(Size)` property is always present and may be used to enumerate the created message queues. Note that this predicate does *not enumerate* threads, but can be used to query the properties of the default queue of a thread.

Explicit message queues are designed with the *worker-pool* model in mind, where multiple threads wait on a single queue and pick up the first goal to execute. Below is a simple implementation where the workers execute arbitrary Prolog goals. Note that this example provides no means to tell when all work is done. This must be realised using additional synchronisation.

```
%%      create_workers(?Id, +N)
%
%      Create a pool with Id and number of workers.
%      After the pool is created, post_job/1 can be used to
%      send jobs to the pool.

create_workers(Id, N) :-
    message_queue_create(Id),
    forall(between(1, N, _),
           thread_create(do_work(Id), _, [])).

do_work(Id) :-
    repeat,
        thread_get_message(Id, Goal),
        ( catch(Goal, E, print_message(error, E))
        -> true
        ; print_message(error, goal_failed(Goal, worker(Id)))
        ),
    fail.

%%      post_job(+Id, +Goal)
%
%      Post a job to be executed by one of the pool's workers.

post_job(Id, Goal) :-
    thread_send_message(Id, Goal).
```

### 10.3.2 Signalling threads

These predicates provide a mechanism to make another thread execute some goal as an *interrupt*. Signalling threads is safe as these interrupts are only checked at safe points in the virtual machine. Nevertheless, signalling in multithreaded environments should be handled with care as the receiving thread may hold a *mutex* (see `with_mutex/2`). Signalling probably only makes sense to start debugging threads and to cancel no-longer-needed threads with `throw/1`, where the receiving thread should be designed carefully to handle exceptions at any point.

#### **thread\_signal(+ThreadId, :Goal)**

Make thread *ThreadId* execute *Goal* at the first opportunity. In the current implementation, this implies at the first pass through the *Call port*. The predicate `thread_signal/2` itself places *Goal* into the signalled thread's signal queue and returns immediately.

Signals (interrupts) do not cooperate well with the world of multithreading, mainly because the status of mutexes cannot be guaranteed easily. At the call port, the Prolog virtual machine holds no locks and therefore the asynchronous execution is safe.

*Goal* can be any valid Prolog goal, including `throw/1` to make the receiving thread generate an exception, and `trace/0` to start tracing the receiving thread.

In the Windows version, the receiving thread immediately executes the signal if it reaches a Windows `GetMessage()` call, which generally happens if the thread is waiting for (user) input.

### 10.3.3 Threads and dynamic predicates

Besides queues (section 10.3.1) threads can share and exchange data using dynamic predicates. The multithreaded version knows about two types of dynamic predicates. By default, a predicate declared *dynamic* (see `dynamic/1`) is shared by all threads. Each thread may assert, retract and run the dynamic predicate. Synchronisation inside Prolog guarantees the consistency of the predicate. Updates are *logical*: visible clauses are not affected by assert/retract after a query started on the predicate. In many cases primitives from section 10.4 should be used to ensure that application invariants on the predicate are maintained.

Besides shared predicates, dynamic predicates can be declared with the `thread_local/1` directive. Such predicates share their attributes, but the clause list is different in each thread.

#### **thread\_local +Functor/+Arity, ...**

This directive is related to the `dynamic/1` directive. It tells the system that the predicate may be modified using `assert/1`, `retract/1`, etc., during execution of the program. Unlike normal shared dynamic data, however, each thread has its own clause list for the predicate. As a thread starts, this clause list is empty. If there are still clauses when the thread terminates, these are automatically reclaimed by the system (see also `volatile/1`). The `thread_local` property implies the properties *dynamic* and *volatile*.

Thread-local dynamic predicates are intended for maintaining thread-specific state or intermediate results of a computation.

It is not recommended to put clauses for a thread-local predicate into a file, as in the example below, because the clause is only visible from the thread that loaded the source file. All other threads start with an empty clause list.



```
:- thread_local
    foo/1.

foo(gnat).
```

**DISCLAIMER** Whether or not this declaration is appropriate in the sense of the proper mechanism to reach the goal is still debated. If you have strong feelings in favour or against, please share them in the SWI-Prolog mailing list.

## 10.4 Thread synchronisation

All internal Prolog operations are thread-safe. This implies that two Prolog threads can operate on the same dynamic predicate without corrupting the consistency of the predicate. This section deals with user-level *mutexes* (called *monitors* in ADA or *critical sections* by Microsoft). A mutex is a **M**UTual **E**Xclusive device, which implies that at most one thread can *hold* a mutex.

Mutexes are used to realise related updates to the Prolog database. With ‘related’, we refer to the situation where a ‘transaction’ implies two or more changes to the Prolog database. For example, we have a predicate `address/2`, representing the address of a person and we want to change the address by retracting the old and asserting the new address. Between these two operations the database is invalid: this person has either no address or two addresses, depending on the assert/retract order.

The code below provides a solution to this problem based on `with_mutex/2`. It also illustrates the problem of mutexes. The predicate `with_mutex/2` behaves as `once/1` with respect to the guarded goal. This means that our predicate `address/2` is no longer a nice logical non-deterministic relation. This could be solved by explicit locking and unlocking a mutex using `setup_call_cleanup/2`, but at the risk of deadlocking the program if the choice point is left open by accident.

```
change_address(Id, Address) :-
    with_mutex(addressbook,
        ( retractall(address(Id, _)),
          asserta(address_db(Id, Address))
        )).

address(Id, Address) :-
    with_mutex(addressbook,
        address_db(Id, Address)).
```

Message queues (see `message_queue_create/3`) often provide simpler and more robust ways for threads to communicate. Still, mutexes can be a sensible solution and are therefore provided.

### **mutex\_create(?MutexId)**

Create a mutex. If *MutexId* is an atom, a *named* mutex is created. If it is a variable, an anonymous mutex reference is returned. Anonymous mutexes are subject to (atom) garbage collection.

**mutex\_create(-MutexId, +Options)**

Create a mutex using options. Defined options are:

**alias(Alias)**

Set the alias name. Using `mutex_create(X, [alias(name)])` is preferred over the equivalent `mutex_create(name)`.

**mutex\_destroy(+MutexId)**

Destroy a mutex. If the mutex is not locked, it is destroyed and further access yields an `existence_error` exception. As of version 7.1.19, this behaviour is reliable. If the mutex is locked, the mutex is scheduled for *delayed destruction*: it will be destroyed when it becomes unlocked.

**with\_mutex(+MutexId, :Goal)**

Execute *Goal* while holding *MutexId*. If *Goal* leaves choice points, these are destroyed (as in `once/1`). The mutex is unlocked regardless of whether *Goal* succeeds, fails or raises an exception. An exception thrown by *Goal* is re-thrown after the mutex has been successfully unlocked. See also `mutex_create/1` and `setup_call_cleanup/3`.

Although described in the thread section, this predicate is also available in the single-threaded version, where it behaves simply as `once/1`.

**mutex\_lock(+MutexId)**

Lock the mutex. Prolog mutexes are *recursive* mutexes: they can be locked multiple times by the same thread. Only after unlocking it as many times as it is locked does the mutex become available for locking by other threads. If another thread has locked the mutex the calling thread is suspended until the mutex is unlocked.

If *MutexId* is an atom, and there is no current mutex with that name, the mutex is created automatically using `mutex_create/1`. This implies named mutexes need not be declared explicitly.

Please note that locking and unlocking mutexes should be paired carefully. Especially make sure to unlock mutexes even if the protected code fails or raises an exception. For most common cases, use `with_mutex/2`, which provides a safer way for handling Prolog-level mutexes. The predicate `setup_call_cleanup/3` is another way to guarantee that the mutex is unlocked while retaining non-determinism.

**mutex\_trylock(+MutexId)**

As `mutex_lock/1`, but if the mutex is held by another thread, this predicate fails immediately.

**mutex\_unlock(+MutexId)**

Unlock the mutex. This can only be called if the mutex is held by the calling thread. If this is not the case, a `permission_error` exception is raised.

**mutex\_unlock\_all**

*[deprecated]*

Unlock all mutexes held by the current thread. This predicate should not be needed if mutex unlocking is guaranteed with `with_mutex/2` or `setup_call_cleanup/3`.<sup>11</sup>

<sup>11</sup>The also deprecated `thread_exit/1` bypasses the automatic cleanup.

**mutex\_property(?MutexId, ?Property)**

True if *Property* is a property of *MutexId*. Defined properties are:

**alias(*Alias*)**

Mutex has the defined alias name. See `mutex_create/2` using the ‘alias’ option.

**status(*Status*)**

Current status of the mutex. One of `unlocked` if the mutex is currently not locked, or `locked(Owner, Count)` if mutex is locked *Count* times by thread *Owner*. Note that unless *Owner* is the calling thread, the locked status can change at any time. There is no useful application of this property, except for diagnostic purposes.<sup>12</sup>

## 10.5 Thread support library(threadutil)

This library defines a couple of useful predicates for demonstrating and debugging multithreaded applications. This library is certainly not complete.

**threads**

Lists all current threads and their status.

**join\_threads**

Join all terminated threads. For normal applications, dealing with terminated threads must be part of the application logic, either detaching the thread before termination or making sure it will be joined. The predicate `join_threads/0` is intended for interactive sessions to reclaim resources from threads that died unexpectedly during development.

**interactor**

Create a new console and run the Prolog top level in this new console. See also `attach_console/0`. In the Windows version a new interactor can also be created from the Run/New thread menu.

### 10.5.1 Debugging threads

Support for debugging threads is still very limited. Debug and trace mode are flags that are local to each thread. Individual threads can be debugged either using the graphical debugger described in section 3.5 (see `tspy/1` and friends) or by attaching a console to the thread and running the traditional command line debugger (see `attach_console/0`). When using the graphical debugger, the debugger must be *loaded* from the main thread (for example using `guitracer`) before `gtrace/0` can be called from a thread.

**attach\_console**

If the current thread has no console attached yet, attach one and redirect the user streams (input, output, and error) to the new console window. On Unix systems the console is an `xterm` application. On Windows systems this requires the GUI version `swipl-win.exe` rather than the console-based `swipl.exe`.

This predicate has a couple of useful applications. One is to separate (debugging) I/O of different threads. Another is to start debugging a thread that is running in the background. If thread 10 is running, the following sequence starts the tracer on this thread:

<sup>12</sup>BUG: As *Owner* and *Count* are fetched separately from the mutex, the values may be inconsistent.

```
?- thread_signal(10, (attach_console, trace)).
```

**tdebug(+ThreadId)**

Prepare *ThreadId* for debugging using the graphical tracer. This implies installing the tracer hooks in the thread and switching the thread to debug mode using `debug/0`. The call is injected into the thread using `thread_signal/2`. We refer to the documentation of this predicate for asynchronous interaction with threads. New threads created inherit their debug mode from the thread that created them.

**tdebug**

Call `tdebug/1` in all running threads.

**tnodebug(+ThreadId)**

Disable debugging thread *ThreadId*.

**tnodebug**

Disable debugging in all threads.

**tspy(:Spec, +ThreadId)**

Set a spy point as `spy/1` and enable the thread for debugging using `tdebug/1`. Note that a spy point is a global flag on a predicate that is visible from all threads. Spy points are honoured in all threads that are in debug mode and ignored in threads that are in nodebug mode.

**tspy(:Spec)**

Set a spy point as `spy/1` and enable debugging in all threads using `tdebug/0`. Note that removing spy points can be done using `nospy/1`. Disabling spy points in a specific thread is achieved by `tnodebug/1`.

**10.5.2 Profiling threads**

In the current implementation, at most one thread can be profiled at any moment. Any thread can call `profile/1` to profile the execution of some part of its code. The predicate `tprofile/1` allows for profiling the execution of another thread until the user stops collecting profile data.

**tprofile(+ThreadId)**

Start collecting profile data in *ThreadId* and ask the user to hit `<return>` to stop the profiler. See section 4.41 for details on the execution profiler.

**10.6 Multithreaded mixed C and Prolog applications**

All foreign code linked to the multithreading version of SWI-Prolog should be thread-safe (*reentrant*) or guarded in Prolog using `with_mutex/2` from simultaneous access from multiple Prolog threads. If you want to write mixed multithreaded C and Prolog applications you should first familiarise yourself with writing multithreaded applications in C (C++).

If you are using SWI-Prolog as an embedded engine in a multithreaded application you can access the Prolog engine from multiple threads by creating an *engine* in each thread from which you call

Prolog. Without creating an engine, a thread can only use functions that do *not* use the `term_t` type (for example `PL_new_atom()`).

The system supports two models. Section 10.6.1 describes the original one-to-one mapping. In this schema a native thread attaches a Prolog thread if it needs to call Prolog and detaches it when finished, as opposed to the model from section 10.6.2, where threads temporarily use a Prolog engine.

### 10.6.1 A Prolog thread for each native thread (one-to-one)

In the one-to-one model, the thread that called `PL_initialise()` has a Prolog engine attached. If another C thread in the system wishes to call Prolog it must first attach an engine using `PL_thread_attach_engine()` and call `PL_thread_destroy_engine()` after all Prolog work is finished. This model is especially suitable with long running threads that need to do Prolog work regularly. See section 10.6.2 for the alternative many-to-many model.

`int PL_thread_self()`

Returns the integer Prolog identifier of the engine or -1 if the calling thread has no Prolog engine. This function is also provided in the single-threaded version of SWI-Prolog, where it returns -2.

`int PL_unify_thread_id(term_t t, int i)`

Unify *t* with the Prolog thread identifier for thread *i*. Thread identifiers are normally returned from `PL_thread_self()`. Returns -1 if the thread does not exist or the unification fails.

`int PL_thread_attach_engine(const PL_thread_attr_t *attr)`

Creates a new Prolog engine in the calling thread. If the calling thread already has an engine the reference count of the engine is incremented. The *attr* argument can be `NULL` to create a thread with default attributes. Otherwise it is a pointer to a structure with the definition below.<sup>13</sup> For any field with value '0', the default is used. The `cancel` field may be filled with a pointer to a function that is called when `PL_cleanup()` terminates the running Prolog engines. If this function is not present or returns `FALSE` `pthread_cancel()` is used. The `flags` field defines the following flags:

#### **PL\_THREAD\_NO\_DEBUG**

If this flag is present, the thread starts in normal no-debug status. By default, the debug status is inherited from the main thread.

#### **PL\_THREAD\_NOT\_DETACHED**

By default the new thread is created in *detached* mode. With this flag it is created normally, allowing Prolog to *join* the thread.

```
typedef struct
{
    size_t    stack_limit;           /* Total stack limit (bytes) */
    size_t    table_space;          /* Total tabling space limit (bytes) */
    char *    alias;                /* alias name */
    int       (*cancel)(int thread); /* cancel function */
    intptr_t   flags;               /* PL_THREAD_* flags */
    size_t    max_queue_size;       /* Max size of associated queue */
} PL_thread_attr_t;
```

<sup>13</sup>The structure layout changed in version 7.7.14.

The structure may be destroyed after `PL_thread_attach_engine()` has returned. On success it returns the Prolog identifier for the thread (as returned by `PL_thread_self()`). If an error occurs, -1 is returned. If this Prolog is not compiled for multithreading, -2 is returned.

`int PL_thread_destroy_engine()`

Destroy the Prolog engine in the calling thread. Only takes effect if `PL_thread_destroy_engine()` is called as many times as `PL_thread_attach_engine()` in this thread. Returns TRUE on success and FALSE if the calling thread has no engine or this Prolog does not support threads.

Please note that construction and destruction of engines are relatively expensive operations. Only destroy an engine if performance is not critical and memory is a critical resource.

`int PL_thread_at_exit(void (*function)(void *), void *closure, int global)`

Register a handle to be called as the Prolog engine is destroyed. The handler function is called with one `void *` argument holding *closure*. If *global* is TRUE, the handler is installed for *all threads*. Globally installed handlers are executed after the thread-local handlers. If the handler is installed local for the current thread only (*global* == FALSE) it is stored in the same FIFO queue as used by `thread_at_exit/1`.

### 10.6.2 Pooling Prolog engines (many-to-many)

In this model Prolog engines live as entities that are independent from threads. If a thread needs to call Prolog it takes one of the engines from the pool and returns the engine when done. This model is suitable in the following identified cases:

- *Compatibility with the single-threaded version*  
In the single-threaded version, foreign threads must serialise access to the one and only thread engine. Functions from this section allow sharing one engine among multiple threads.
- *Many native threads with infrequent Prolog work*  
Prolog threads are expensive in terms of memory and time to create and destroy them. For systems that use a large number of threads that only infrequently need to call Prolog, it is better to take an engine from a pool and return it there.
- *Prolog status must be handed to another thread*  
This situation has been identified by Uwe Lesta when creating a .NET interface for SWI-Prolog. .NET distributes work for an active internet connection over a pool of threads. If a Prolog engine contains the state for a connection, it must be possible to detach the engine from a thread and re-attach it to another thread handling the same connection.

`PL_engine_t PL_create_engine(PL_thread_attr_t *attributes)`

Create a new Prolog engine. *attributes* is described with `PL_thread_attach_engine()`. Any thread can make this call after `PL_initialise()` returns success. The returned engine is not attached to any thread and lives until `PL_destroy_engine()` is used on the returned handle.

In the single-threaded version this call always returns NULL, indicating failure.

`int PL_destroy_engine(PL_engine_t e)`

Destroy the given engine. Destroying an engine is only allowed if the engine is not attached to any thread or attached to the calling thread. On success this function returns TRUE, on failure the return value is FALSE.

`int PL_set_engine(PL_engine_t engine, PL_engine_t *old)`

Make the calling thread ready to use *engine*. If *old* is non-NULL the current engine associated with the calling thread is stored at the given location. If *engine* equals PL\_ENGINE\_MAIN the initial engine is attached to the calling thread. If *engine* is PL\_ENGINE\_CURRENT the engine is not changed. This can be used to query the current engine. This call returns PL\_ENGINE\_SET if the engine was switched successfully, PL\_ENGINE\_INVALID if *engine* is not a valid engine handle and PL\_ENGINE\_INUSE if the engine is currently in use by another thread.

Engines can be changed at any time. For example, it is allowed to select an engine to initiate a Prolog goal, detach it and at a later moment execute the goal from another thread. Note, however, that the `term_t`, `qid_t` and `fid_t` types are interpreted relative to the engine for which they are created. Behaviour when passing one of these types from one engine to another is undefined.

In the single-threaded version this call only succeeds if *engine* refers to the main engine.

## 10.7 Multithreading and the XPCE graphics system

GUI applications written in XPCE can benefit from Prolog threads if they need to do expensive computations that would otherwise block the UI. The XPCE message passing system is guarded with a single *mutex*, which synchronises both access from Prolog and activation through the GUI. In MS-Windows, GUI events are processed by the thread that created the window in which the event occurred, whereas in Unix/X11 they are processed by the thread that dispatches messages. In practice, the most feasible approach to graphical Prolog implementations is to control XPCE from a single thread and deploy other threads for (long) computations.

Traditionally, XPCE runs in the foreground (*main*) thread. We are working towards a situation where XPCE can run comfortably in a separate thread. A separate XPCE thread can be created using `pce_dispatch/1`. It is also possible to create this thread as the (*pce*) is loaded by setting the `xpce.threaded` to `true`.

Threads other than the thread in which XPCE runs are provided with two predicates to communicate with XPCE.

`in_pce_thread(:Goal)`

[*det*]

Assuming XPCE is running in the foreground thread, this call gives background threads the opportunity to make calls to the XPCE thread. A call to `in_pce_thread/1` succeeds immediately, copying *Goal* to the XPCE thread. *Goal* is added to the XPCE event queue and executed synchronous to normal user events like typing and clicking.

`in_pce_thread_sync(:Goal)`

[*semidet*]

Same as `in_pce_thread/1`, but wait for *Goal* to be completed. Success depends on the success of executing *Goal*. Variable bindings inside *Goal* are visible to the caller, but it should be noted that the values are being *copied*. If *Goal* throws an exception, this exception is re-thrown by `in_pce_thread/1`. If the calling thread is the 'pce thread', `in_pce_thread_sync/1` executes a direct meta-call. See also `pce_thread/1`.

Note that `in_pce_thread_sync/1` is expensive because it requires copying and thread communication. For example, `in_pce_thread_sync true` runs at approximately 50,000 calls per second (AMD Phenom 9600B, Ubuntu 11.04).

**`pce_dispatch(+Options)`**

Create a Prolog thread with the alias name `pce` for XPCE event handling. In the X11 version this call creates a thread that executes the X11 event-dispatch loop. In MS-Windows it creates a thread that executes a windows event-dispatch loop. The XPCE event-handling thread has the alias `pce`. *Options* specifies the thread attributes as `thread_create/3`.



# Coroutining using Prolog engines

---

# 11

Where the term *coroutine* in Prolog typically refer to hooks triggered by *attributed variables* (section 8.1), SWI-Prolog provides two other forms of coroutines. Delimited continuations (see section 4.10) allow creating coroutines that run in the same Prolog engine by capturing and restarting the *continuation*. This section discusses *engines*, also known as *interactors*. The idea was pinned by Paul Tarau [Tarau, 2011]. The API described in this chapter has been established together with Paul Tarau and Paulo Moura.

Engines are closely related to *threads* (section 10). An engine is a Prolog virtual machine that has its own stacks and (virtual) machine state. Unlike normal Prolog threads though, they are not associated with an operating system thread. Instead, you *ask* an engine for a next answer (`engine_next/2`). Asking an engine for the next answer attaches the engine to the calling operating system thread and cause it to run until the engine calls `engine_yield/1` or its associated goal completes with an answer, failure or an exception. After the engine yields or completes, it is detached from the operating system thread and the answer term is made available to the calling thread. Communicating with an engine is similar to communicating with a Prolog system though the terminal. In this sense engines are related to *Pengines* as provided by library `pengines`, but where *Pengines* aim primarily at accessing Prolog engines through the network, engines are in-process entities.

## 11.1 Examples using engines

We introduce engines by describing application areas and providing simple example programs. The predicates are defined in section 11.3. We identify the following application areas for engines.

1. Aggregating solutions from one or more goals. See section 11.1.1.
2. Access the terms produced in *forward execution* through backtracking without collecting all of them first. Section 11.1.1 illustrates this as well.
3. State accumulation and sharing. See section 11.1.2.
4. Scalable many-agent applications. See section 11.1.3.

### 11.1.1 Aggregation using engines

Engines can be used to reason about solutions produced by a goal through backtracking. In this scenario we create an engine with the goal we wish to backtrack over and we enumerate all its solution using `engine_next/1`. This usage scenario competes with the all solution predicates (`findall/3`, `bagof/3`, etc.) and the predicates from library `aggregate`. Below we implement `findall/3` using engines.

```

findall(Templ, Goal, List) :-
    setup_call_cleanup(
        engine_create(Templ, Goal, E),
        get_answers(E, List),
        engine_destroy(E)).

get_answers(E, [H|T]) :-
    engine_next(E, H), !,
    get_answers(E, T).
get_answers(_, []).

```

The above is not a particularly attractive alternative for the built-in `findall/3`. It is mostly slower due to time required to create and destroy the engine as well as the (currently<sup>1</sup>) higher overhead of copying terms between engines than the overhead required by the dedicated representation used by `findall/3`.

It gets more interesting if we wish to combine answers from multiple backtracking predicates. Assume we have two predicates that, on backtracking, return ordered solutions and we wish to merge the two answer streams into a single ordered stream of answers. The solution in classical Prolog is below. It collects both answer sets, merges them using ordered set merging and extract the answers. The code is clean and short, but it doesn't produce any answers before both generators are fully enumerated and it uses memory that is proportional to the combined set of answers.

```

:- meta_predicate merge(?,0, ?,0, -).

merge_answers(T1,G1, T2,G2, A) :-
    findall(T1, G1, L1),
    findall(T2, G2, L2),
    ord_union(L1, L2, Ordered),
    member(A, Ordered).

```

We can achieve the same using engines. We create two engines to generate the solutions to both our generators. Now, we can ask both for an answer, put the smallest in the answer set and ask the engine that created the smallest for its next answer, etc. This way we can create an ordered list of answers as above, but now without creating intermediate lists. We can avoid creating the intermediate list by introducing a third engine that controls the two generators and *yields* the answers rather than putting them in a list. This is a general example of turning a predicate that builds a set of terms into a non-deterministic predicate that produces the results on backtracking. The full code is below. Merging the answers of two generators, each generating a set of 10,000 integers is currently about 20% slower than the code above, but the engine-based solution runs in constant space and generates the first solution immediately after both our generators have produced their first solution.

```

:- meta_predicate merge(?,0, ?,0, -).

```

<sup>1</sup>The current implementation of engines is built on top of primitives that are not optimal for the engine use case. There is considerable opportunity to reduce the overhead.

```

merge(T1,G1, T2,G2, A) :-
    engine_create(A, merge(T1,G1, T2,G2), E),
    repeat,
        ( engine_next(E, A)
        -> true
        ;   !, fail
        ).

merge(T1,G1, T2,G2) :-
    engine_create(T1, G1, E1),
    engine_create(T2, G2, E2),
    ( engine_next(E1, S1)
    -> ( engine_next(E2, S2)
        -> order_solutions(S1, S2, E1, E2)
        ;   yield_remaining(S1, E1)
        )
    ;   engine_next(E2, S2),
        yield_remaining(S2, E2)
    ).

order_solutions(S1, S2, E1, E2) :- !,
    ( S1 @=< S2
    -> engine_yield(S1),
        ( engine_next(E1, S11)
        -> order_solutions(S11, S2, E1, E2)
        ;   yield_remaining(S2, E2)
        )
    ;   engine_yield(S2),
        ( engine_next(E2, S21)
        -> order_solutions(S1, S21, E1, E2)
        ;   yield_remaining(S1, E1)
        )
    ).

yield_remaining(S, E) :-
    engine_yield(S),
    engine_next(E, S1),
    yield_remaining(S1, E).

```

### 11.1.2 State accumulation using engines

Applications that need to manage a state can do so by passing the state around in an additional argument, storing it in a global variable or update it in the dynamic database using `assertz/1` and `retract/1`. Both using an additional argument and a global variable (see `b_setval/2`), make the state subject to backtracking. This may or may not be desirable. If having a state is that subject to

backtracking is required, using an additional argument or backtrackable global variable is the right approach. Otherwise, non-backtrackable global variables (`nb_setval/2`) and dynamic database come into the picture, where global variables are always local to a thread and the dynamic database may or may not be shared between threads (see `thread_local/1`).

Engines bring an alternative that packages a state inside the engine where it is typically represented in a (threaded) Prolog variable. The state may be updated, while controlled backtracking to a previous state belongs to the possibilities. It can be accessed and updated by anyone with access to the engines' handle. Using an engine to represent state has the following advantages:

- The programming style needed inside the engine is much more 'Prolog friendly', using `engine_fetch/1` to read a request and `engine_yield/1` to reply to it.
- The state is packaged and subject to (atom) garbage collection.
- The state may be accessed from multiple threads. Access to the state is synchronized without the need for explicit locks.

The example below implements a shared priority heap based on library `heaps`. The predicate `update_heap/1` shows the typical update loop for maintaining state inside an engine: fetch a command, update the state, yield with the reply and call the updater recursively. The update step is guarded against failure. For robustness one may also guard it against exceptions using `catch/3`. Note that `heap_get/2` passes the *Priority* and *Key* it wishes to delete from the heap such that if the unification fails, the heap remains unchanged.

The resulting heap is a global object with either a named or anonymous handle that evolves independently from the Prolog thread(s) that access it. If the heap is anonymous, it is subject to (atom) garbage collection.

```
:- use_module(library(heaps)).

create_heap(E) :-
    empty_heap(H),
    engine_create(_, update_heap(H), E).

update_heap(H) :-
    engine_fetch(Command),
    (   update_heap(Command, Reply, H, H1)
    -> true
    ;   H1 = H,
        Reply = false
    ),
    engine_yield(Reply),
    update_heap(H1).

update_heap(add(Priority, Key), true, H0, H) :-
    add_to_heap(H0, Priority, Key, H).
update_heap(get(Priority, Key), Priority-Key, H0, H) :-
    get_from_heap(H0, Priority, Key, H).
```

```

heap_add(Priority, Key, E) :-
    engine_post(E, add(Priority, Key), true).

heap_get(Priority, Key, E) :-
    engine_post(E, get(Priority, Key), Priority-Key).

```

### 11.1.3 Scalable many-agent applications

The final application area we touch are agent systems where we wish to capture an agent in a Prolog goal. Such systems can be implemented using threads (see section 10) that use `thread_send_message/2` and `thread_get_message/1` to communicate. The main problem is that each thread is associated by an operating system thread. OS threads are, depending on the OS, relatively expensive. Scalability of this design typically ends, depending on OS and hardware, somewhere between 1,000 and 100,000 agents.

Engines provide an alternative. A detached Prolog engine currently requires approximately 20 Kbytes memory on 64 bit hardware, growing with the size of the Prolog stacks. The Prolog stacks may be minimised by calling `garbage_collect/0` followed by `trim_stacks/0`, providing a *deep sleep* mode. The set of agents, each represented by an engine can be controlled by a static or dynamic pool of threads. Scheduling the execution of agents and their communication is completely open and can be optimised to satisfy the requirements of the application.

This section needs an example. Preferably something that fits on one page and would not scale using threads. Engines might work nice to implement *Antrank: An ant colony algorithm for ranking web pages*.<sup>2</sup>

## 11.2 Engine resource usage

A Prolog engine consists of a virtual machine state that includes the Prolog stacks. An 'empty' engine requires about 20 Kbytes of memory. This grows when the engine requires additional stack space. Anonymous engines are subject to atom garbage collection (see `garbage_collect_atoms/0`). Engines may be reclaimed immediately using `engine_destroy/1`. Calling `engine_destroy/1` destroys the virtual machine state, while the handle itself is left to atom garbage collection. The virtual machine is reclaimed as soon as an engine produced its last result, failed or raised an exception. This implies that it is only advantageous to call `engine_destroy/1` explicitly if you are not interested in further answers.

Engines that are expected to be left in inactive state for a prolonged time can be minimized by calling `garbage_collect/0` and `trim_stacks/0` (in that order) before calling `engine_yield/1` or succeeding.

## 11.3 Engine predicate reference

This section documents the built-in predicates that deal with engines. In addition to these, most predicates dealing with threads and message queue can be used to access engines.

<sup>2</sup><http://www.ijettcs.org/Volume3Issue2/IJETTCS-2014-04-23-113.pdf>

**engine\_create(+Template, :Goal, ?Engine)** [det]

**engine\_create(+Template, :Goal, -Engine, +Options)** [det]

Create a new engine and unify *Engine* with a handle to it. *Template* and *Goal* form a pair similar to `findall/3`: the instantiation of *Template* becomes available through `engine_next/2` after *Goal* succeeds. *Options* is a list of the following options. See `thread_create/3` for details.

**alias(+Name)**

Give the engine a name. *Name* must be an atom. If this option is provided, *Engine* is unified with *Name*. The name space for engines is shared with threads and mutexes.

**stack(+Bytes)**

Set the stack limit for the engine. The default is inherited from the calling thread.

The *Engine* argument of `engine_create/3` may be instantiated to an atom, creating an engine with the given alias.

**engine\_destroy(+Engine)** [det]

Destroy *Engine*.

**engine\_next(+Engine, -Term)** [semidet]

Ask the engine *Engine* to produce a next answer. On this first call on a specific engine, the *Goal* of the engine is started. If a previous call returned an answer through completion, this causes the engine to backtrack and finally, if the engine produces a previous result using `engine_yield/1`, execution proceeds after the `engine_yield/1` call.

**engine\_next\_reified(+Engine, -Term)** [det]

Similar to `engine_next/2`, but instead of success, failure or or raising an exception, *Term* is unified with one of terms below. This predicate is provided primarily for compatibility with Lean Prolog.

**the(Answer)**

Goal succeeded with *Template* bound to *Answer* or Goal yielded with a term *Answer*.

**no**

Goal failed.

**exception(Exception)**

Goal raises the error *Exception*.

**engine\_post(+Engine, +Term)** [det]

Make *Term* available to `engine_fetch/1` inside the *Engine*. This call must be followed by a call to `engine_next/2` and the engine must call `engine_fetch/1`.

**engine\_post(+Engine, +Term, -Reply)** [det]

Combines `engine_post/2` and `engine_next/2`.

**engine\_yield(+Term)** [det]

Called from within the engine, causing `engine_next/2` in the caller to return with *Term*. A subsequent call to `engine_next/2` causes `engine_yield/1` to 'return'. This predicate can only be called if the engine is not involved in a callback from C, i.e., when the engine calls a predicate defined in C that calls back Prolog it is not possible to use this predicate. Trying to do so results in a `permission_error` exception.

- 
- engine\_fetch**(-*Term*) *[det]*  
Called from within the engine to fetch the term made available through `engine_post/2` or `engine_post/3`. If no term is available an `existence_error` exception is raised.
- engine\_self**(-*Engine*) *[det]*  
Called from within the engine to get access to the handle to the engine itself.
- is\_engine**(@*Term*) *[semidet]*  
True if *Term* is a reference to or the alias name of an existing engine.
- current\_engine**(-*Engine*) *[nondet]*  
True when *Engine* is an existing engine.

# Foreign Language Interface

---

# 12

SWI-Prolog offers a powerful interface to C [[Kernighan & Ritchie, 1978](#)]. The main design objectives of the foreign language interface are flexibility and performance. A foreign predicate is a C function that has the same number of arguments as the predicate represented. C functions are provided to analyse the passed terms, convert them to basic C types as well as to instantiate arguments using unification. Non-deterministic foreign predicates are supported, providing the foreign function with a handle to control backtracking.

C can call Prolog predicates, providing both a query interface and an interface to extract multiple solutions from a non-deterministic Prolog predicate. There is no limit to the nesting of Prolog calling C, calling Prolog, etc. It is also possible to write the ‘main’ in C and use Prolog as an embedded logical engine.

## 12.1 Overview of the Interface

A special include file called `SWI-Prolog.h` should be included with each C source file that is to be loaded via the foreign interface. The installation process installs this file in the directory `include` in the SWI-Prolog home directory (`?- current_prolog_flag(home, Home) .`). This C header file defines various data types, macros and functions that can be used to communicate with SWI-Prolog. Functions and macros can be divided into the following categories:

- Analysing Prolog terms
- Constructing new terms
- Unifying terms
- Returning control information to Prolog
- Registering foreign predicates with Prolog
- Calling Prolog from C
- Recorded database interactions
- Global actions on Prolog (halt, break, abort, etc.)

## 12.2 Linking Foreign Modules

Foreign modules may be linked to Prolog in two ways. Using *static linking*, the extensions, a (short) file defining `main()` which attaches the extension calls to Prolog, and the SWI-Prolog kernel distributed as a C library, are linked together to form a new executable. Using *dynamic linking*, the extensions



are linked to a shared library (`.so` file on most Unix systems) or dynamic link library (`.DLL` file on Microsoft platforms) and loaded into the running Prolog process.<sup>1</sup>

### 12.2.1 What linking is provided?

The *static linking* schema can be used on all versions of SWI-Prolog. Whether or not dynamic linking is supported can be deduced from the Prolog flag `open_shared_object` (see `current_prolog_flag/2`). If this Prolog flag yields `true`, `open_shared_object/2` and related predicates are defined. See section 12.2.3 for a suitable high-level interface to these predicates.

### 12.2.2 What kind of loading should I be using?

All described approaches have their advantages and disadvantages. Static linking is portable and allows for debugging on all platforms. It is relatively cumbersome and the libraries you need to pass to the linker may vary from system to system, though the utility program `swipl-ld` described in section 12.5 often hides these problems from the user.

Loading shared objects (DLL files on Windows) provides sharing and protection and is generally the best choice. If a saved state is created using `qsave_program/[1,2]`, an `initialization/1` directive may be used to load the appropriate library at startup.

Note that the definition of the foreign predicates is the same, regardless of the linking type used.

### 12.2.3 library(shlib): Utility library for loading foreign objects (DLLs, shared objects)

This section discusses the functionality of the `(autoload) library(shlib)`, providing an interface to manage shared libraries. We describe the procedure for using a foreign resource (DLL in Windows and shared object in Unix) called `mylib`.

First, one must assemble the resource and make it compatible to SWI-Prolog. The details for this vary between platforms. The `swipl-ld(1)` utility can be used to deal with this in a portable manner. The typical commandline is:

```
swipl-ld -o mylib file.{c,o,cc,C} ...
```

Make sure that one of the files provides a global function `install_mylib()` that initialises the module using calls to `PL_register_foreign()`. Here is a simple example file `mylib.c`, which creates a Windows `MessageBox`:

```
#include <windows.h>
#include <SWI-Prolog.h>

static foreign_t
pl_say_hello(term_t to)
{ char *a;
```

<sup>1</sup>The system also contains code to load `.o` files directly for some operating systems, notably Unix systems using the BSD `a.out` executable format. As the number of Unix platforms supporting this quickly gets smaller and this interface is difficult to port and slow, it is no longer described in this manual. The best alternative would be to use the `dld` package on machines that do not have shared libraries.

```

if ( PL_get_atom_chars(to, &a) )
{ MessageBox(NULL, a, "DLL test", MB_OK|MB_TASKMODAL);

    PL_succeed;
}

PL_fail;
}

install_t
install_mylib()
{ PL_register_foreign("say_hello", 1, pl_say_hello, 0);
}

```

Now write a file `mylib.pl`:

```

:- module(mylib, [ say_hello/1 ]).
:- use_foreign_library(foreign(mylib)).

```

The file `mylib.pl` can be loaded as a normal Prolog file and provides the predicate defined in C.

**load\_foreign\_library**(:*FileSpec*) [det]

**load\_foreign\_library**(:*FileSpec*, +*Entry:atom*) [det]

Load a *shared object* or *DLL*. After loading the *Entry* function is called without arguments. The default entry function is composed from `=install_`, followed by the file base-name. E.g., the load-call below calls the function `install_mylib()`. If the platform prefixes extern functions with `=_`, this prefix is added before calling.

```

...
load_foreign_library(foreign(mylib)),
...

```

#### Arguments

*FileSpec* is a specification for `absolute_file_name/3`. If searching the file fails, the plain name is passed to the OS to try the default method of the OS for locating foreign objects. The default definition of `file_search_path/2` searches `<prolog home>/lib/<arch>` on Unix and `<prolog home>/bin` on Windows.

**See also** `use_foreign_library/1,2` are intended for use in directives.

**use\_foreign\_library(+FileSpec)** [det]

**use\_foreign\_library(+FileSpec, +Entry:atom)** [det]

Load and install a foreign library as `load_foreign_library/1,2` and register the installation using `initialization/2` with the option `now`. This is similar to using:

```
:- initialization(load_foreign_library(foreign(mylib))).
```

but using the `initialization/1` wrapper causes the library to be loaded *after* loading of the file in which it appears is completed, while `use_foreign_library/1` loads the library *immediately*. I.e. the difference is only relevant if the remainder of the file uses functionality of the C-library.

**unload\_foreign\_library(+FileSpec)** [det]

**unload\_foreign\_library(+FileSpec, +Exit:atom)** [det]

Unload a *shared object* or *DLL*. After calling the *Exit* function, the shared object is removed from the process. The default exit function is composed from `=uninstall=`, followed by the file base-name.

**current\_foreign\_library(?File, ?Public)**

Query currently loaded shared libraries.

**reload\_foreign\_libraries**

Reload all foreign libraries loaded (after restore of a state created using `qsave_program/2`).

### 12.2.4 Low-level operations on shared libraries

The interface defined in this section allows the user to load shared libraries (`.so` files on most Unix systems, `.dll` files on Windows). This interface is portable to Windows as well as to Unix machines providing `dlopen(2)` (Solaris, Linux, FreeBSD, Irix and many more) or `shl_open(2)` (HP/UX). It is advised to use the predicates from section [12.2.3](#) in your application.

**open\_shared\_object(+File, -Handle)**

*File* is the name of a shared object file (DLL in MS-Windows). This file is attached to the current process, and *Handle* is unified with a handle to the library. Equivalent to `open_shared_object(File, Handle, [])`. See also `open_shared_object/3` and `load_foreign_library/1`.

On errors, an exception `shared_object(Action, Message)` is raised. *Message* is the return value from `dLError()`.

**open\_shared\_object(+File, -Handle, +Options)**

As `open_shared_object/2`, but allows for additional flags to be passed. *Options* is a list of atoms. `now` implies the symbols are resolved immediately rather than lazy (default). `global` implies symbols of the loaded object are visible while loading other shared objects (by default they are local). Note that these flags may not be supported by your operating system. Check the documentation of `dlopen()` or equivalent on your operating system. Unsupported flags are silently ignored.

**close\_shared\_object(+Handle)**

Detach the shared object identified by *Handle*.

**call\_shared\_object\_function(+Handle, +Function)**

Call the named function in the loaded shared library. The function is called without arguments and the return value is ignored. Normally this function installs foreign language predicates using calls to `PL_register_foreign()`.

**12.2.5 Static Linking**

Below is an outline of the file structure required for statically linking SWI-Prolog with foreign extensions. `.../swipl` refers to the SWI-Prolog home directory (see the Prolog flag `home`). `<arch>` refers to the architecture identifier that may be obtained using the Prolog flag `arch`.

|  |                                |
|--|--------------------------------|
| <code>.../swipl/runtime/&lt;arch&gt;/libswipl.a</code> | SWI-Library                    |
| <code>.../swipl/include/SWI-Prolog.h</code>            | Include file                   |
| <code>.../swipl/include/SWI-Stream.h</code>            | Stream I/O include file        |
| <code>.../swipl/include/SWI-Exports</code>             | Export declarations (AIX only) |
| <code>.../swipl/include/stub.c</code>                  | Extension stub                 |

The definition of the foreign predicates is the same as for dynamic linking. Unlike with dynamic linking, however, there is no initialisation function. Instead, the file `.../swipl/include/stub.c` may be copied to your project and modified to define the foreign extensions. Below is `stub.c`, modified to link the lowercase example described later in this chapter:

```
#include <stdio.h>
#include <SWI-Prolog.h>

extern foreign_t pl_lowercase(term, term);

PL_extension predicates[] =
{
/*{ "name",      arity,  function,      PL_FA_<flags> },*/

  { "lowercase", 2      pl_lowercase,  0 },
  { NULL,        0,      NULL,         0 } /* terminating line */
};

int
main(int argc, char **argv)
{ PL_register_extensions(predicates);

  if ( !PL_initialise(argc, argv) )
    PL_halt(1);

  PL_halt(PL_toplevel() ? 0 : 1);
}
```

Now, a new executable may be created by compiling this file and linking it to `libpl.a` from the runtime directory and the libraries required by both the extensions and the SWI-Prolog kernel. This

may be done by hand, or by using the `swipl-ld` utility described in section 12.5. If the linking is performed by hand, the command line option `-dump-runtime-variables` (see section 2.4) can be used to obtain the required paths, libraries and linking options to link the new executable.

## 12.3 Interface Data Types

### 12.3.1 Type `term_t`: a reference to a Prolog term

The principal data type is `term_t`. Type `term_t` is what Quintus calls `QP_term_ref`. This name indicates better what the type represents: it is a *handle* for a term rather than the term itself. Terms can only be represented and manipulated using this type, as this is the only safe way to ensure the Prolog kernel is aware of all terms referenced by foreign code and thus allows the kernel to perform garbage collection and/or stack-shifts while foreign code is active, for example during a callback from C.

A term reference is a C unsigned long, representing the offset of a variable on the Prolog environment stack. A foreign function is passed term references for the predicate arguments, one for each argument. If references for intermediate results are needed, such references may be created using `PL_new_term_ref()` or `PL_new_term_refs()`. These references normally live till the foreign function returns control back to Prolog. Their scope can be explicitly limited using `PL_open_foreign_frame()` and `PL_close_foreign_frame()/PL_discard_foreign_frame()`.

A `term_t` always refers to a valid Prolog term (variable, atom, integer, float or compound term). A term lives either until backtracking takes us back to a point before the term was created, the garbage collector has collected the term, or the term was created after a `PL_open_foreign_frame()` and `PL_discard_foreign_frame()` has been called.

The foreign interface functions can either *read*, *unify* or *write* to term references. In this document we use the following notation for arguments of type `term_t`:

```
term_t +t   Accessed in read-mode. The '+' indicates the argument is 'input'.
term_t -t   Accessed in write-mode.
term_t ?t   Accessed in unify-mode.
```

**WARNING** Term references that are accessed in 'write' (-) mode will refer to an invalid term if the term is allocated on the global stack and backtracking takes us back to a point before the term was written.<sup>2</sup> Compounds, large integers, floats and strings are all allocated on the global stack. Below is a typical scenario where this may happen. The first solution writes a term extracted from the solution into *a*. After the system backtracks due to `PL_next_solution()`, *a* becomes a reference to a term that no longer exists.

```
term_t a = PL_new_term_ref();
...
query = PL_open_query(...);
while(PL_next_solution(query))
{ PL_get_arg(i, ..., a);
}
PL_close_query(query);
```

<sup>2</sup>This could have been avoided by *trailing* term references when data is written to them. This seriously hurls performance in some scenarios though. If this is desired, use `PL_put_variable()` followed by one of the `PL_unify_*`() functions.

There are two solutions to this problem. One is to scope the term reference using `PL_open_foreign_frame()` and `PL_close_foreign_frame()` and makes sure it goes out of scope before backtracking happens. The other is to clear the term reference using `PL_put_variable()` before backtracking.

Term references are obtained in any of the following ways:

- *Passed as argument*  
The C functions implementing foreign predicates are passed their arguments as term references. These references may be read or unified. Writing to these variables causes undefined behaviour.
- *Created by `PL_new_term_ref()`*  
A term created by `PL_new_term_ref()` is normally used to build temporary terms or to be written by one of the interface functions. For example, `PL_get_arg()` writes a reference to the term argument in its last argument.
- *Created by `PL_new_term_refs(int n)`*  
This function returns a set of term references with the same characteristics as `PL_new_term_ref()`. See `PL_open_query()`.
- *Created by `PL_copy_term_ref(term_t t)`*  
Creates a new term reference to the same term as the argument. The term may be written to. See figure 12.2.

Term references can safely be copied to other C variables of type `term_t`, but all copies will always refer to the same term.

`term_t PL_new_term_ref()`

Return a fresh reference to a term. The reference is allocated on the *local* stack. Allocating a term reference may trigger a stack-shift on machines that cannot use sparse memory management for allocation of the Prolog stacks. The returned reference describes a variable.

`term_t PL_new_term_refs(int n)`

Return  $n$  new term references. The first term reference is returned. The others are  $t + 1$ ,  $t + 2$ , etc. There are two reasons for using this function. `PL_open_query()` expects the arguments as a set of consecutive term references, and *very* time-critical code requiring a number of term references can be written as:

```
pl_mypredicate(term_t a0, term_t a1)
{ term_t t0 = PL_new_term_refs(2);
  term_t t1 = t0+1;

  ...
}
```

`term_t PL_copy_term_ref(term_t from)`

Create a new term reference and make it point initially to the same term as *from*. This function is commonly used to copy a predicate argument to a term reference that may be written.

`void PL_reset_term_refs(term_t after)`

Destroy all term references that have been created after *after*, including *after* itself. Any reference to the invalidated term references after this call results in undefined behaviour.

Note that returning from the foreign context to Prolog will reclaim all references used in the foreign context. This call is only necessary if references are created inside a loop that never exits back to Prolog. See also `PL_open_foreign_frame()`, `PL_close_foreign_frame()` and `PL_discard_foreign_frame()`.

### Interaction with the garbage collector and stack-shifter

Prolog implements two mechanisms for avoiding stack overflow: garbage collection and stack expansion. On machines that allow for it, Prolog will use virtual memory management to detect stack overflow and expand the runtime stacks. On other machines Prolog will reallocate the stacks and update all pointers to them. To do so, Prolog needs to know which data is referenced by C code. As all Prolog data known by C is referenced through term references (`term_t`), Prolog has all the information necessary to perform its memory management without special precautions from the C programmer.

#### 12.3.2 Other foreign interface types

**atom\_t** An atom in Prolog's internal representation. Atoms are pointers to an opaque structure. They are a unique representation for represented text, which implies that atom *A* represents the same text as atom *B* if and only if *A* and *B* are the same pointer.

Atoms are the central representation for textual constants in Prolog. The transformation of a character string *C* to an atom implies a hash-table lookup. If the same atom is needed often, it is advised to store its reference in a global variable to avoid repeated lookup.

**functor\_t** A functor is the internal representation of a name/arity pair. They are used to find the name and arity of a compound term as well as to construct new compound terms. Like atoms they live for the whole Prolog session and are unique.

**predicate\_t** Handle to a Prolog predicate. Predicate handles live forever (although they can lose their definition).

**qid\_t** Query identifier. Used by `PL_open_query()`, `PL_next_solution()` and `PL_close_query()` to handle backtracking from C.

**fid\_t** Frame identifier. Used by `PL_open_foreign_frame()` and `PL_close_foreign_frame()`.

**module\_t** A module is a unique handle to a Prolog module. Modules are used only to call predicates in a specific module.

**foreign\_t** Return type for a C function implementing a Prolog predicate.

**control\_t** Passed as additional argument to non-deterministic foreign functions. See `PL_retry*()` and `PL_foreign_context*()`.

**install\_t** Type for the `install()` and `uninstall()` functions of shared or dynamic link libraries. See section [12.2.3](#).

**int64\_t** Actually part of the C99 standard rather than Prolog. As of version 5.5.6, Prolog integers are 64-bit on all hardware. The C99 type `int64_t` is defined in the `stdint.h` standard header and provides platform-independent 64-bit integers. Portable code accessing Prolog should use this type to exchange integer values. Please note that `PL_get_long()` can return `FALSE` on Prolog integers that cannot be represented as a C long. Robust code should not assume any of the integer fetching functions to succeed, *even* if the Prolog term is known to be an integer.

### PL\_ARITY\_AS\_SIZE

As of SWI-Prolog 7.3.12, the arity of terms has changed from `int` to `size_t`. To deal with this transition, all affecting functions have two versions, where the old name exchanges the arity as `int` and a new function with name `*_sz()` exchanges the arity as `size_t`. If the C macro `PL_ARITY_AS_SIZE` is defined before loading `SWI-Prolog.h`, macros are put in place that map the old names to the new functions. Without precautions, the old code is compatible, but the following warning is printed when compiling:

```
#warning "Term arity has changed from int to size_t."
#warning "Please update your code and use #define PL_ARITY_AS_SIZE 1."
```

To make the code compile silently again, include `SWI-Prolog.h` as below and change the types you use to represent arity from `int` to `size_t`. Please be aware that `size_t` is *unsigned*.

```
#define PL_ARITY_AS_SIZE
#include <SWI-Prolog.h>
```

## 12.4 The Foreign Include File

### 12.4.1 Argument Passing and Control

If Prolog encounters a foreign predicate at run time it will call a function specified in the predicate definition of the foreign predicate. The arguments `1, ..., <arity>` pass the Prolog arguments to the goal as Prolog terms. Foreign functions should be declared of type `foreign_t`. Deterministic foreign functions have two alternatives to return control back to Prolog:

*(return) foreign\_t PL\_succeed()*

Succeed deterministically. `PL_succeed` is defined as `return TRUE`.

*(return) foreign\_t PL\_fail()*

Fail and start Prolog backtracking. `PL_fail` is defined as `return FALSE`.

### Non-deterministic Foreign Predicates

By default foreign predicates are deterministic. Using the `PL_FA_NONDETERMINISTIC` attribute (see `PL_register_foreign()`) it is possible to register a predicate as a non-deterministic predicate. Writing non-deterministic foreign predicates is slightly more complicated as the foreign function needs context information for generating the next solution. Note that the same foreign function should



be prepared to be simultaneously active in more than one goal. Suppose the `natural_number_below_n/2` is a non-deterministic foreign predicate, backtracking over all natural numbers lower than the first argument. Now consider the following predicate:

```
quotient_below_n(Q, N) :-
    natural_number_below_n(N, N1),
    natural_number_below_n(N, N2),
    Q == N1 / N2, !.
```

In this predicate the function `natural_number_below_n/2` simultaneously generates solutions for both its invocations.

Non-deterministic foreign functions should be prepared to handle three different calls from Prolog:

- *Initial call* (`PL_FIRST_CALL`)  
Prolog has just created a frame for the foreign function and asks it to produce the first answer.
- *Redo call* (`PL_REDO`)  
The previous invocation of the foreign function associated with the current goal indicated it was possible to backtrack. The foreign function should produce the next solution.
- *Terminate call* (`PL_PRUNED`)  
The choice point left by the foreign function has been destroyed by a cut. The foreign function is given the opportunity to clean the environment.

Both the context information and the type of call is provided by an argument of type `control_t` appended to the argument list for deterministic foreign functions. The macro `PL_foreign_control()` extracts the type of call from the control argument. The foreign function can pass a context handle using the `PL_retry*` macros and extract the handle from the extra argument using the `PL_foreign_context*` macro.

*(return) foreign\_t* **PL\_retry**(*intptr\_t value*)

The foreign function succeeds while leaving a choice point. On backtracking over this goal the foreign function will be called again, but the control argument now indicates it is a 'Redo' call and the macro `PL_foreign_context()` returns the handle passed via `PL_retry()`. This handle is a signed value two bits smaller than a pointer, i.e., 30 or 62 bits (two bits are used for status indication). Defined as `return _PL_retry(n)`. See also `PL_succeed()`.

*(return) foreign\_t* **PL\_retry\_address**(*void \**)

As `PL_retry()`, but ensures an address as returned by `malloc()` is correctly recovered by `PL_foreign_context_address()`. Defined as `return _PL_retry_address(n)`. See also `PL_succeed()`.

*int* **PL\_foreign\_control**(*control\_t*)

Extracts the type of call from the control argument. The return values are described above. Note that the function should be prepared to handle the `PL_PRUNED` case and should be aware that the other arguments are not valid in this case.

```

typedef struct                                /* define a context structure */
{ ...
} context;

foreign_t
my_function(term_t a0, term_t a1, control_t handle)
{ struct context * ctxt;

  switch( PL_foreign_control(handle) )
  { case PL_FIRST_CALL:
      ctxt = malloc(sizeof(struct context));
      ...
      PL_retry_address(ctxt);
    case PL_REDO:
      ctxt = PL_foreign_context_address(handle);
      ...
      PL_retry_address(ctxt);
    case PL_PRUNED:
      ctxt = PL_foreign_context_address(handle);
      ...
      free(ctxt);
      PL_succeed;
  }
}

```

Figure 12.1: Skeleton for non-deterministic foreign functions

*intptr\_t* **PL\_foreign\_context**(*control\_t*)

Extracts the context from the context argument. If the call type is `PL_FIRST_CALL` the context value is 0L. Otherwise it is the value returned by the last `PL_retry()` associated with this goal (both if the call type is `PL_REDO` or `PL_PRUNED`).

*void \** **PL\_foreign\_context\_address**(*control\_t*)

Extracts an address as passed in by `PL_retry_address()`.

*predicate\_t* **PL\_foreign\_context\_predicate**(*control\_t*)

Fetch the Prolog predicate that is executing this function. Note that if the predicate is imported, the returned predicate refers to the final definition rather than the imported predicate, i.e., the module reported by `PL_predicate_info()` is the module in which the predicate is defined rather than the module where it was called. See also `PL_predicate_info()`.

**Note:** If a non-deterministic foreign function returns using `PL_succeed()` or `PL_fail()`, Prolog assumes the foreign function has cleaned its environment. **No** call with control argument `PL_PRUNED` will follow.

The code of figure 12.1 shows a skeleton for a non-deterministic foreign predicate definition.

### 12.4.2 Atoms and functors

The following functions provide for communication using atoms and functors.

`atom_t PL_new_atom(const char *)`

Return an atom handle for the given C-string. This function always succeeds. The returned handle is valid as long as the atom is referenced (see section 12.4.2). The following atoms are provided as macros, giving access to the empty list symbol and the name of the list constructor. Prior to version 7, `ATOM_nil` is the same as `PL_new_atom("[]")` and `ATOM_dot` is the same as `PL_new_atom(".")`. This is no longer the case in SWI-Prolog version 7.

`atom_t ATOM_nil(A)`

atomic constant that represents the empty list. It is advised to use `PL_get_nil()`, `PL_put_nil()` or `PL_unify_nil()` where applicable.

`atom_t ATOM_dot(A)`

atomic constant that represents the name of the list constructor. The list constructor itself is created using `PL_new_functor(ATOM_dot, 2)`. It is advised to use `PL_get_list()`, `PL_put_list()` or `PL_unify_list()` where applicable.

`atom_t PL_new_atom_mbchars(int rep, size_t len, const char *s)`

This function generalizes `PL_new_atom()` and `PL_new_atom_nchars()` while allowing for multiple encodings. The *rep* argument is one of `REP_ISO_LATIN_1`, `REP_UTF8` or `REP_MB`. If *len* is `(size_t)-1`, it is computed from *s* using `strlen()`.

`const char* PL_atom_chars(atom_t atom)`

Return a C-string for the text represented by the given atom. The returned text will not be changed by Prolog. It is not allowed to modify the contents, not even ‘temporary’ as the string may reside in read-only memory. The returned string becomes invalid if the atom is garbage collected (see section 12.4.2). Foreign functions that require the text from an atom passed in a `term_t` normally use `PL_get_atom_chars()` or `PL_get_atom_nchars()`.

`functor_t PL_new_functor(atom_t name, int arity)`

Returns a *functor identifier*, a handle for the name/arity pair. The returned handle is valid for the entire Prolog session.

`atom_t PL_functor_name(functor_t f)`

Return an atom representing the name of the given functor.

`size_t PL_functor_arity(functor_t f)`

Return the arity of the given functor.

### Atoms and atom garbage collection

With the introduction of atom garbage collection in version 3.3.0, atoms no longer live as long as the process. Instead, their lifetime is guaranteed only as long as they are referenced. In the single-threaded version, atom garbage collections are only invoked at the *call-port*. In the multithreaded version (see chapter 10), they appear asynchronously, except for the invoking thread.

For dealing with atom garbage collection, two additional functions are provided:

`void PL_register_atom(atom_t atom)`

Increment the reference count of the atom by one. `PL_new_atom()` performs this automatically, returning an atom with a reference count of at least one.<sup>3</sup>

`void PL_unregister_atom(atom_t atom)`

Decrement the reference count of the atom. If the reference count drops below zero, an assertion error is raised.

Please note that the following two calls are different with respect to atom garbage collection:

```
PL_unify_atom_chars(t, "text");
PL_unify_atom(t, PL_new_atom("text"));
```

The latter increments the reference count of the atom `text`, which effectively ensures the atom will never be collected. It is advised to use the `*_chars()` or `*_nchars()` functions whenever applicable.

### 12.4.3 Analysing Terms via the Foreign Interface

Each argument of a foreign function (except for the control argument) is of type `term_t`, an opaque handle to a Prolog term. Three groups of functions are available for the analysis of terms. The first just validates the type, like the Prolog predicates `var/1`, `atom/1`, etc., and are called `PL_is_*`. The second group attempts to translate the argument into a C primitive type. These predicates take a `term_t` and a pointer to the appropriate C type and return `TRUE` or `FALSE` depending on successful or unsuccessful translation. If the translation fails, the pointed-to data is never modified.

#### Testing the type of a term

`int PL_term_type(term_t)`

Obtain the type of a term, which should be a term returned by one of the other interface predicates or passed as an argument. The function returns the type of the Prolog term. The type identifiers are listed below. Note that the extraction functions `PL_get_*` also validate the type and thus the two sections below are equivalent.

```
    if ( PL_is_atom(t) )
    { char *s;

      PL_get_atom_chars(t, &s);
      ...;
    }

or

    char *s;
    if ( PL_get_atom_chars(t, &s) )
    { ...;
    }
```

<sup>3</sup>Otherwise asynchronous atom garbage collection might destroy the atom before it is used.

**Version 7** added `PL_NIL`, `PL_BLOB`, `PL_LIST_PAIR` and `PL_DICT`. Older versions classify `PL_NIL` and `PL_BLOB` as `PL_ATOM`, `PL_LIST_PAIR` as `PL_TERM` and do not have dicts.

|                           |                                    |
|---------------------------|------------------------------------|
| <code>PL_VARIABLE</code>  | A variable or attributed variable  |
| <code>PL_ATOM</code>      | A Prolog atom                      |
| <code>PL_NIL</code>       | The constant <code>[]</code>       |
| <code>PL_BLOB</code>      | A blob (see section 12.4.8)        |
| <code>PL_STRING</code>    | A string (see section 5.2)         |
| <code>PL_INTEGER</code>   | A integer                          |
| <code>PL_FLOAT</code>     | A floating point number            |
| <code>PL_TERM</code>      | A compound term                    |
| <code>PL_LIST_PAIR</code> | A list cell ( <code>[H T]</code> ) |
| <code>PL_DICT</code>      | A dict (see section 5.4))          |

The functions `PL_is_⟨type⟩` are an alternative to `PL_term_type()`. The test `PL_is_variable(term)` is equivalent to `PL_term_type(term) == PL_VARIABLE`, but the first is considerably faster. On the other hand, using a switch over `PL_term_type()` is faster and more readable then using an if-then-else using the functions below. All these functions return either `TRUE` or `FALSE`.

`int PL_is_variable(term_t)`

Returns non-zero if *term* is a variable.

`int PL_is_ground(term_t)`

Returns non-zero if *term* is a ground term. See also `ground/1`. This function is cycle-safe.

`int PL_is_atom(term_t)`

Returns non-zero if *term* is an atom.

`int PL_is_string(term_t)`

Returns non-zero if *term* is a string.

`int PL_is_integer(term_t)`

Returns non-zero if *term* is an integer.

`int PL_is_float(term_t)`

Returns non-zero if *term* is a float.

`int PL_is_callable(term_t)`

Returns non-zero if *term* is a callable term. See `callable/1` for details.

`int PL_is_compound(term_t)`

Returns non-zero if *term* is a compound term.

`int PL_is_functor(term_t, functor_t)`

Returns non-zero if *term* is compound and its functor is *functor*. This test is equivalent to `PL_get_functor()`, followed by testing the functor, but easier to write and faster.

`int PL_is_list(term_t)`

Returns non-zero if *term* is a compound term using the list constructor or the list terminator. See also `PL_is_pair()` and `PL_skip_list()`.

int **PL\_is\_pair**(term\_t)

Returns non-zero if *term* is a compound term using the list constructor. See also `PL_is_list()` and `PL_skip_list()`.

int **PL\_is\_atomic**(term\_t)

Returns non-zero if *term* is atomic (not variable or compound).

int **PL\_is\_number**(term\_t)

Returns non-zero if *term* is an integer or float.

int **PL\_is\_acyclic**(term\_t)

Returns non-zero if *term* is acyclic (i.e. a finite tree).

### Reading data from a term

The functions `PL_get_*()` read information from a Prolog term. Most of them take two arguments. The first is the input term and the second is a pointer to the output value or a term reference.

int **PL\_get\_atom**(term\_t +t, atom\_t \*a)

If *t* is an atom, store the unique atom identifier over *a*. See also `PL_atom_chars()` and `PL_new_atom()`. If there is no need to access the data (characters) of an atom, it is advised to manipulate atoms using their handle. As the atom is referenced by *t*, it will live at least as long as *t* does. If longer live-time is required, the atom should be locked using `PL_register_atom()`.

int **PL\_get\_atom\_chars**(term\_t +t, char \*\*s)

If *t* is an atom, store a pointer to a 0-terminated C-string in *s*. It is explicitly **not** allowed to modify the contents of this string. Some built-in atoms may have the string allocated in read-only memory, so ‘temporary manipulation’ can cause an error.

int **PL\_get\_string\_chars**(term\_t +t, char \*\*s, size\_t \*len)

If *t* is a string object, store a pointer to a 0-terminated C-string in *s* and the length of the string in *len*. Note that this pointer is invalidated by backtracking, garbage collection and stack-shifts, so generally the only save operations are to pass it immediately to a C function that doesn’t involve Prolog.

int **PL\_get\_chars**(term\_t +t, char \*\*s, unsigned flags)

Convert the argument term *t* to a 0-terminated C-string. *flags* is a bitwise disjunction from two groups of constants. The first specifies which term types should be converted and the second how the argument is stored. Below is a specification of these constants. `BUF_RING` implies, if the data is not static (as from an atom), that the data is copied to the next buffer from a ring of 16 buffers. This is a convenient way of converting multiple arguments passed to a foreign predicate to C-strings. If `BUF_MALLOC` is used, the data must be freed using `PL_free()` when no longer needed.

With the introduction of wide characters (see section 2.19.1), not all atoms can be converted into a `char*`. This function fails if *t* is of the wrong type, but also if the text cannot be represented. See the `REP_*` flags below for details.

### CVT\_ATOM

Convert if term is an atom.

**CVT\_STRING**

Convert if term is a string.

**CVT\_LIST**

Convert if term is a list of of character codes.

**CVT\_INTEGER**

Convert if term is an integer.

**CVT\_FLOAT**

Convert if term is a float. The characters returned are the same as `write/1` would write for the floating point number.

**CVT\_NUMBER**

Convert if term is an integer or float.

**CVT\_ATOMIC**

Convert if term is atomic.

**CVT\_VARIABLE**

Convert variable to print-name

**CVT\_WRITE**

Convert any term that is not converted by any of the other flags using `write/1`. If no `BUF_*` is provided, `BUF_RING` is implied.

**CVT\_WRITE\_CANONICAL**

As `CVT_WRITE`, but using `write_canonical/2`.

**CVT\_WRITEQ**

As `CVT_WRITE`, but using `writeq/2`.

**CVT\_ALL**

Convert if term is any of the above, except for `CVT_VARIABLE` and `CVT_WRITE*`.

**CVT\_EXCEPTION**

If conversion fails due to a type error, raise a Prolog type error exception in addition to failure

**BUF\_DISCARDABLE**

Data must copied immediately

**BUF\_RING**

Data is stored in a ring of buffers

**BUF\_MALLOC**

Data is copied to a new buffer returned by `PL_malloc(3)`. When no longer needed the user must call `PL_free()` on the data.

**REP\_ISO\_LATIN\_1**

Text is in ISO Latin-1 encoding and the call fails if text cannot be represented. This flag has the value 0 and is thus the default.

**REP\_UTF8**

Convert the text to a UTF-8 string. This works for all text.

**REP\_MB**

Convert to default locale-defined 8-bit string. Success depends on the locale. Conversion is done using the `wcrtomb()` C library function.

**int PL\_get\_list\_chars**(*+term\_t l, char \*\*s, unsigned flags*)

Same as `PL_get_chars(l, s, CVT_LIST—flags)`, provided *flags* contains none of the `CVT_*` flags.

**int PL\_get\_integer**(*+term\_t t, int \*i*)

If *t* is a Prolog integer, assign its value over *i*. On 32-bit machines, this is the same as `PL_get_long()`, but avoids a warning from the compiler. See also `PL_get_long()`.

**int PL\_get\_long**(*term\_t +t, long \*i*)

If *t* is a Prolog integer that can be represented as a long, assign its value over *i*. If *t* is an integer that cannot be represented by a C long, this function returns `FALSE`. If *t* is a floating point number that can be represented as a long, this function succeeds as well. See also `PL_get_int64()`.

**int PL\_get\_int64**(*term\_t +t, int64\_t \*i*)

If *t* is a Prolog integer or float that can be represented as a `int64_t`, assign its value over *i*.

**int PL\_get\_intptr**(*term\_t +t, intptr\_t \*i*)

Get an integer that is at least as wide as a pointer. On most platforms this is the same as `PL_get_long()`, but on Win64 pointers are 8 bytes and longs only 4. Unlike `PL_get_pointer()`, the value is not modified.

**int PL\_get\_bool**(*term\_t +t, int \*val*)

If *t* has the value `true` or `false`, set *val* to the C constant `TRUE` or `FALSE` and return success, otherwise return failure.

**int PL\_get\_pointer**(*term\_t +t, void \*\*ptr*)

In the current system, pointers are represented by Prolog integers, but need some manipulation to make sure they do not get truncated due to the limited Prolog integer range. `PL_put_pointer()` and `PL_get_pointer()` guarantee pointers in the range of `malloc()` are handled without truncating.

**int PL\_get\_float**(*term\_t +t, double \*f*)

If *t* is a float or integer, its value is assigned over *f*.

**int PL\_get\_functor**(*term\_t +t, functor\_t \*f*)

If *t* is compound or an atom, the Prolog representation of the name-arity pair will be assigned over *f*. See also `PL_get_name_arity()` and `PL_is_functor()`.

**int PL\_get\_name\_arity**(*term\_t +t, atom\_t \*name, size\_t \*arity*)

If *t* is compound or an atom, the functor name will be assigned over *name* and the arity over *arity*. See also `PL_get_functor()` and `PL_is_functor()`. See section 12.3.2.

**int PL\_get\_compound\_name\_arity**(*term\_t +t, atom\_t \*name, size\_t \*arity*)

If *t* is compound term, the functor name will be assigned over *name* and the arity over *arity*. This is the same as `PL_get_name_arity()`, but this function fails if *t* is an atom.

**int PL\_get\_module**(*term\_t +t, module\_t \*module*)

If *t* is an atom, the system will look up or create the corresponding module and assign an opaque pointer to it over *module*.



int **PL\_get\_arg**(size\_t index, term\_t t, term\_t a)

If *t* is compound and index is between 1 and arity (inclusive), assign *a* with a term reference to the argument.

int **\_PL\_get\_arg**(size\_t index, term\_t t, term\_t a)

Same as `PL_get_arg()`, but no checking is performed, neither whether *t* is actually a term nor whether *index* is a valid argument index.

### Exchanging text using length and string

All internal text representation in SWI-Prolog is represented using `char *` plus length and allow for 0-bytes in them. The foreign library supports this by implementing a `*_nchars()` function for each applicable `*_chars()` function. Below we briefly present the signatures of these functions. For full documentation consult the `*_chars()` function.

int **PL\_get\_atom\_nchars**(term\_t t, size\_t \*len, char \*\*s)

See `PL_get_atom_chars()`.

int **PL\_get\_list\_nchars**(term\_t t, size\_t \*len, char \*\*s)

See `PL_get_list_chars()`.

int **PL\_get\_nchars**(term\_t t, size\_t \*len, char \*\*s, unsigned int flags)

See `PL_get_chars()`.

int **PL\_put\_atom\_nchars**(term\_t t, size\_t len, const char \*s)

See `PL_put_atom_chars()`.

int **PL\_put\_string\_nchars**(term\_t t, size\_t len, const char \*s)

See `PL_put_string_chars()`.

int **PL\_put\_list\_ncodes**(term\_t t, size\_t len, const char \*s)

See `PL_put_list_codes()`.

int **PL\_put\_list\_nchars**(term\_t t, size\_t len, const char \*s)

See `PL_put_list_chars()`.

int **PL\_unify\_atom\_nchars**(term\_t t, size\_t len, const char \*s)

See `PL_unify_atom_chars()`.

int **PL\_unify\_string\_nchars**(term\_t t, size\_t len, const char \*s)

See `PL_unify_string_chars()`.

int **PL\_unify\_list\_ncodes**(term\_t t, size\_t len, const char \*s)

See `PL_unify_codes()`.

int **PL\_unify\_list\_nchars**(term\_t t, size\_t len, const char \*s)

See `PL_unify_list_chars()`.

In addition, the following functions are available for creating and inspecting atoms:

`atom_t PL_new_atom_nchars(size_t len, const char *s)`

Create a new atom as `PL_new_atom()`, but using the given length and characters. If `len` is `(size_t)-1`, it is computed from `s` using `strlen()`.

`const char * PL_atom_nchars(atom_t a, size_t *len)`

Extract the text and length of an atom.

### Wide-character versions

Support for exchange of wide-character strings is still under consideration. The functions dealing with 8-bit character strings return failure when operating on a wide-character atom or Prolog string object. The functions below can extract and unify both 8-bit and wide atoms and string objects. Wide character strings are represented as C arrays of objects of the type `pl_wchar_t`, which is guaranteed to be the same as `wchar_t` on platforms supporting this type. For example, on MS-Windows, this represents 16-bit UCS2 characters, while using the GNU C library (glibc) this represents 32-bit UCS4 characters.

`atom_t PL_new_atom_wchars(size_t len, const pl_wchar_t *s)`

Create atom from wide-character string as `PL_new_atom_nchars()` does for ISO-Latin-1 strings. If `s` only contains ISO-Latin-1 characters a normal byte-array atom is created. If `len` is `(size_t)-1`, it is computed from `s` using `wcslen()`.

`pl_wchar_t * PL_atom_wchars(atom_t atom, int *len)`

Extract characters from a wide-character atom. Succeeds on any atom marked as 'text'. If the underlying atom is a wide-character atom, the returned pointer is a pointer into the atom structure. If it is an ISO-Latin-1 character, the returned pointer comes from Prolog's 'buffer ring' (see `PL_get_chars()`).

`int PL_get_wchars(term_t t, size_t *len, pl_wchar_t **s, unsigned flags)`

Wide-character version of `PL_get_chars()`. The `flags` argument is the same as for `PL_get_chars()`.

`int PL_unify_wchars(term_t t, int type, size_t len, const pl_wchar_t *s)`

Unify `t` with a textual representation of the C wide-character array `s`. The `type` argument defines the Prolog representation and is one of `PL_ATOM`, `PL_STRING`, `PL_CODE_LIST` or `PL_CHAR_LIST`.

`int PL_unify_wchars_diff(term_t +t, term_t -tail, int type, size_t len, const pl_wchar_t *s)`

Difference list version of `PL_unify_wchars()`, only supporting the types `PL_CODE_LIST` and `PL_CHAR_LIST`. It serves two purposes. It allows for returning very long lists from data read from a stream without the need for a resizing buffer in C. Also, the use of difference lists is often practical for further processing in Prolog. Examples can be found in `packages/clib/readutil.c` from the source distribution.

### Reading a list

The functions from this section are intended to read a Prolog list from C. Suppose we expect a list of atoms; the following code will print the atoms, each on a line:

```

foreign_t
pl_write_atoms(term_t l)
{ term_t head = PL_new_term_ref(); /* the elements */
  term_t list = PL_copy_term_ref(l); /* copy (we modify list) */

  while( PL_get_list(list, head, list) )
  { char *s;

    if ( PL_get_atom_chars(head, &s) )
      Sprintf("%s\n", s);
    else
      PL_fail;
  }

  return PL_get_nil(list); /* test end for [] */
}

```

Note that as of version 7, lists have a new representation unless the option `--traditional` is used. see section 5.1.

**int PL\_get\_list(*term\_t* +*l*, *term\_t* -*h*, *term\_t* -*t*)**

If *l* is a list and not the empty list, assign a term reference to the head to *h* and to the tail to *t*.

**int PL\_get\_head(*term\_t* +*l*, *term\_t* -*h*)**

If *l* is a list and not the empty list, assign a term reference to the head to *h*.

**int PL\_get\_tail(*term\_t* +*l*, *term\_t* -*t*)**

If *l* is a list and not the empty list, assign a term reference to the tail to *t*.

**int PL\_get\_nil(*term\_t* +*l*)**

Succeeds if *l* represents the list termination constant.

**int PL\_skip\_list(*term\_t* +*list*, *term\_t* -*tail*, *size\_t* \**len*)**

This is a multi-purpose function to deal with lists. It allows for finding the length of a list, checking whether something is a list, etc. The reference *tail* is set to point to the end of the list, *len* is filled with the number of list-cells skipped, and the return value indicates the status of the list:

#### **PL\_LIST**

The list is a ‘proper’ list: one that ends in the list terminator constant and *tail* is filled with the terminator constant.

#### **PL\_PARTIAL\_LIST**

The list is a ‘partial’ list: one that ends in a variable and *tail* is a reference to this variable.

#### **PL\_CYCLIC\_TERM**

The list is cyclic (e.g.  $X = [a - X]$ ). *tail* points to an arbitrary cell of the list and *len* is at most twice the cycle length of the list.

**PL\_NOT\_A\_LIST**

The term *list* is not a list at all. *tail* is bound to the non-list term and *len* is set to the number of list-cells skipped.

It is allowed to pass 0 for *tail* and NULL for *len*.

**An example: defining `write/1` in C**

Figure 12.2 shows a simplified definition of `write/1` to illustrate the described functions. This simplified version does not deal with operators. It is called `display/1`, because it mimics closely the behaviour of this Edinburgh predicate.

**12.4.4 Constructing Terms**

Terms can be constructed using functions from the `PL_put_*`() and `PL_cons_*`() families. This approach builds the term ‘inside-out’, starting at the leaves and subsequently creating compound terms. Alternatively, terms may be created ‘top-down’, first creating a compound holding only variables and subsequently unifying the arguments. This section discusses functions for the first approach. This approach is generally used for creating arguments for `PL_call()` and `PL_open_query()`.

`void PL_put_variable(term_t -t)`

Put a fresh variable in the term, resetting the term reference to its initial state.<sup>4</sup>

`void PL_put_atom(term_t -t, atom_t a)`

Put an atom in the term reference from a handle. See also `PL_new_atom()` and `PL_atom_chars()`.

`void PL_put_bool(term_t -t, int val)`

Put one of the atoms `true` or `false` in the term reference. See also `PL_put_atom()`, `PL_unify_bool()` and `PL_get_bool()`.

`int PL_put_chars(term_t -t, int flags, size_t len, const char *chars)`

New function to deal with setting a term from a `char*` with various encodings. The *flags* argument is a bitwise *or* specifying the Prolog target type and the encoding of *chars*. A Prolog type is one of `PL_ATOM`, `PL_STRING`, `PL_CODE_LIST` or `PL_CHAR_LIST`. A representation is one of `REP_ISO_LATIN_1`, `REP_UTF8` or `REP_MB`. See `PL_get_chars()` for a definition of the representation types. If *len* is `-1` *chars* must be zero-terminated and the length is computed from *chars* using `strlen()`.

`int PL_put_atom_chars(term_t -t, const char *chars)`

Put an atom in the term reference constructed from the zero-terminated string. The string itself will never be referenced by Prolog after this function.

`int PL_put_string_chars(term_t -t, const char *chars)`

Put a zero-terminated string in the term reference. The data will be copied. See also `PL_put_string_nchars()`.

<sup>4</sup>Older versions created a variable on the global stack.

```

foreign_t
pl_display(term_t t)
{ functor_t functor;
  int arity, len, n;
  char *s;

  switch( PL_term_type(t) )
  { case PL_VARIABLE:
    case PL_ATOM:
    case PL_INTEGER:
    case PL_FLOAT:
      PL_get_chars(t, &s, CVT_ALL);
      Sprintf("%s", s);
      break;
    case PL_STRING:
      PL_get_string_chars(t, &s, &len);
      Sprintf("\"%s\"", s);
      break;
    case PL_TERM:
      { term_t a = PL_new_term_ref();

        PL_get_name_arity(t, &name, &arity);
        Sprintf("%s(", PL_atom_chars(name));
        for(n=1; n<=arity; n++)
        { PL_get_arg(n, t, a);
          if ( n > 1 )
            Sprintf(", ");
          pl_display(a);
        }
        Sprintf(")");
        break;
      }
    default:
      PL_fail; /* should not happen */
  }
}

PL_succeed;
}

```

Figure 12.2: A Foreign definition of display/1

- int PL\_put\_string\_nchars**(*term\_t* -*t*, *size\_t* *len*, *const char* \**chars*)  
 Put a string, represented by a length/start pointer pair in the term reference. The data will be copied. This interface can deal with 0-bytes in the string. See also section 12.4.21.
- int PL\_put\_list\_chars**(*term\_t* -*t*, *const char* \**chars*)  
 Put a list of ASCII values in the term reference.
- int PL\_put\_integer**(*term\_t* -*t*, *long* *i*)  
 Put a Prolog integer in the term reference.
- int PL\_put\_int64**(*term\_t* -*t*, *int64\_t* *i*)  
 Put a Prolog integer in the term reference.
- int PL\_put\_pointer**(*term\_t* -*t*, *void* \**ptr*)  
 Put a Prolog integer in the term reference. Provided *ptr* is in the ‘malloc()-area’, `PL_get_pointer()` will get the pointer back.
- int PL\_put\_float**(*term\_t* -*t*, *double* *f*)  
 Put a floating-point value in the term reference.
- int PL\_put\_functor**(*term\_t* -*t*, *functor\_t* *functor*)  
 Create a new compound term from *functor* and bind *t* to this term. All arguments of the term will be variables. To create a term with instantiated arguments, either instantiate the arguments using the `PL_unify_*`() functions or use `PL_cons_functor()`.
- int PL\_put\_list**(*term\_t* -*l*)  
 As `PL_put_functor()`, using the list-cell functor. Note that on classical Prolog systems or in SWI-Prolog using the option `--traditional`, this is `./2`, while on SWI-Prolog version 7 this is `[]/2`.
- int PL\_put\_nil**(*term\_t* -*l*)  
 Put the list terminator constant in *l*. Always returns TRUE. Note that in classical Prolog systems or in SWI-Prolog using the option `--traditional`, this is the same as `PL_put_atom_chars("[ ]")`. See section 5.1.
- void PL\_put\_term**(*term\_t* -*t1*, *term\_t* +*t2*)  
 Make *t1* point to the same term as *t2*.
- int PL\_cons\_functor**(*term\_t* -*h*, *functor\_t* *f*, ...)  
 Create a term whose arguments are filled from a variable argument list holding the same number of *term\_t* objects as the arity of the functor. To create the term `animal(gnu, 50)`, use:

```
{ term_t a1 = PL_new_term_ref();
  term_t a2 = PL_new_term_ref();
  term_t t  = PL_new_term_ref();
  functor_t animal2;

  /* animal2 is a constant that may be bound to a global
     variable and re-used
  */
```

```

    animal2 = PL_new_functor(PL_new_atom("animal"), 2);

    PL_put_atom_chars(a1, "gnu");
    PL_put_integer(a2, 50);
    PL_cons_functor(t, animal2, a1, a2);
}

```

After this sequence, the term references *a1* and *a2* may be used for other purposes.

**int PL\_cons\_functor\_v(term\_t -h, functor\_t f, term\_t a0)**

Create a compound term like `PL_cons_functor()`, but *a0* is an array of term references as returned by `PL_new_term_refs()`. The length of this array should match the number of arguments required by the functor.

**int PL\_cons\_list(term\_t -l, term\_t +h, term\_t +t)**

Create a list (cons-) cell in *l* from the head *h* and tail *t*. The code below creates a list of atoms from a char \*\*. The list is built tail-to-head. The `PL_unify_*` functions can be used to build a list head-to-tail.

```

void
put_list(term_t l, int n, char **words)
{ term_t a = PL_new_term_ref();

  PL_put_nil(l);
  while( --n >= 0 )
  { PL_put_atom_chars(a, words[n]);
    PL_cons_list(l, a, l);
  }
}

```

Note that *l* can be redefined within a `PL_cons_list` call as shown here because operationally its old value is consumed before its new value is set.

### 12.4.5 Unifying data

The functions of this section *unify* terms with other terms or translated C data structures. Except for `PL_unify()`, these functions are specific to SWI-Prolog. They have been introduced because they shorten the code for returning data to Prolog and at the same time make this more efficient by avoiding the need to allocate temporary term references and reduce the number of calls to the Prolog API. Consider the case where we want a foreign function to return the host name of the machine Prolog is running on. Using the `PL_get_*` and `PL_put_*` functions, the code becomes:

```

foreign_t
pl_hostname(term_t name)
{ char buf[100];

  if ( gethostname(buf, sizeof(buf)) )

```

```

{ term_t tmp = PL_new_term_ref();

  PL_put_atom_chars(tmp, buf);
  return PL_unify(name, tmp);
}

PL_fail;
}

```

Using `PL_unify_atom_chars()`, this becomes:

```

foreign_t
pl_hostname(term_t name)
{ char buf[100];

  if ( gethostname(buf, sizeof(buf)) )
    return PL_unify_atom_chars(name, buf);

  PL_fail;
}

```

Note that unification functions that perform multiple bindings may leave part of the bindings in case of failure. See `PL_unify()` for details.

int **PL\_unify**(term\_t ?t1, term\_t ?t2)

Unify two Prolog terms and return TRUE on success.

Care is needed if `PL_unify()` returns FAIL and the foreign function does not *immediately* return to Prolog with FAIL. Unification may perform multiple changes to either *t1* or *t2*. A failing unification may have created bindings before failure is detected. *Already created bindings are not undone*. For example, calling `PL_unify()` on `a(X, a)` and `a(c, b)` binds *X* to *c* and fails when trying to unify *a* to *b*. If control remains in C or even if we want to return success to Prolog, we *must* undo such bindings. This is achieved using `PL_open_foreign_frame()` and `PL_rewind_foreign_frame()`, as shown in the snippet below.

```

{ fid_t fid = PL_open_foreign_frame();

  ...
  if ( !PL_unify(t1, t2) )
    PL_rewind_foreign_frame(fid);
  ...

  PL_close_foreign_frame(fid);
}

```

In addition, `PL_unify()` may have failed on an **exception**, typically a resource (stack) overflow. This can be tested using `PL_exception()`, passing 0 (zero) for the query-id argument.



Foreign functions that encounter an exception must return `FAIL` to Prolog as soon as possible or call `PL_clear_exception()` if they wish to ignore the exception.

- `int PL_unify_atom(term_t ?t, atom_t a)`  
Unify *t* with the atom *a* and return non-zero on success.
- `int PL_unify_bool(term_t ?t, int a)`  
Unify *t* with either `true` or `false`.
- `int PL_unify_chars(term_t ?t, int flags, size_t len, const char *chars)`  
New function to deal with unification of `char*` with various encodings to a Prolog representation. The *flags* argument is a bitwise *or* specifying the Prolog target type and the encoding of *chars*. A Prolog type is one of `PL_ATOM`, `PL_STRING`, `PL_CODE_LIST` or `PL_CHAR_LIST`. A representation is one of `REP_ISO_LATIN_1`, `REP_UTF8` or `REP_MB`. See `PL_get_chars()` for a definition of the representation types. If *len* is `-1` *chars* must be zero-terminated and the length is computed from *chars* using `strlen()`.  
If *flags* includes `PL_DIFF_LIST` and type is one of `PL_CODE_LIST` or `PL_CHAR_LIST`, the text is converted to a *difference list*. The tail of the difference list is *t* + 1.
- `int PL_unify_atom_chars(term_t ?t, const char *chars)`  
Unify *t* with an atom created from *chars* and return non-zero on success.
- `int PL_unify_list_chars(term_t ?t, const char *chars)`  
Unify *t* with a list of ASCII characters constructed from *chars*.
- `void PL_unify_string_chars(term_t ?t, const char *chars)`  
Unify *t* with a Prolog string object created from the zero-terminated string *chars*. The data will be copied. See also `PL_unify_string_nchars()`.
- `int PL_unify_integer(term_t ?t, intptr_t n)`  
Unify *t* with a Prolog integer from *n*.
- `int PL_unify_int64(term_t ?t, int64_t n)`  
Unify *t* with a Prolog integer from *n*.
- `int PL_unify_uint64(term_t ?t, uint64_t n)`  
Unify *t* with a Prolog integer from *n*. Note that unbounded integer support is required if *n* does not fit in a *signed* `int64_t`. If unbounded integers are not supported a `representation_error` is raised.
- `int PL_unify_float(term_t ?t, double f)`  
Unify *t* with a Prolog float from *f*.
- `int PL_unify_pointer(term_t ?t, void *ptr)`  
Unify *t* with a Prolog integer describing the pointer. See also `PL_put_pointer()` and `PL_get_pointer()`.
- `int PL_unify_functor(term_t ?t, functor_t f)`  
If *t* is a compound term with the given functor, just succeed. If it is unbound, create a term and bind the variable, else fail. Note that this function does not create a term if the argument is already instantiated. If *f* is a functor with arity 0, *t* is unified with an atom. See also `PL_unify_compound()`.

`int PL_unify_compound(term_t ?t, functor_t f)`

If  $t$  is a compound term with the given functor, just succeed. If it is unbound, create a term and bind the variable, else fail. Note that this function does not create a term if the argument is already instantiated. If  $f$  is a functor with arity 0,  $t$  is unified with compound without arguments. See also `PL_unify_functor()`.

`int PL_unify_list(term_t ?l, term_t -h, term_t -t)`

Unify  $l$  with a list-cell `(./2)`. If successful, write a reference to the head of the list into  $h$  and a reference to the tail of the list into  $t$ . This reference may be used for subsequent calls to this function. Suppose we want to return a list of atoms from a `char **`. We could use the example described by `PL_put_list()`, followed by a call to `PL_unify()`, or we can use the code below. If the predicate argument is unbound, the difference is minimal (the code based on `PL_put_list()` is probably slightly faster). If the argument is bound, the code below may fail before reaching the end of the word list, but even if the unification succeeds, this code avoids a duplicate (garbage) list and a deep unification.

```
foreign_t
pl_get_environ(term_t env)
{ term_t l = PL_copy_term_ref(env);
  term_t a = PL_new_term_ref();
  extern char **environ;
  char **e;

  for(e = environ; *e; e++)
  { if ( !PL_unify_list(l, a, l) ||
        !PL_unify_atom_chars(a, *e) )
      PL_fail;
  }

  return PL_unify_nil(l);
}
```

`int PL_unify_nil(term_t ?l)`

Unify  $l$  with the atom `[]`.

`int PL_unify_arg(int index, term_t ?t, term_t ?a)`

Unifies the  $index$ -th argument (1-based) of  $t$  with  $a$ .

`int PL_unify_term(term_t ?t, ...)`

Unify  $t$  with a (normally) compound term. The remaining arguments are a sequence of a type identifier followed by the required arguments. This predicate is an extension to the Quintus and SICStus foreign interface from which the SWI-Prolog foreign interface has been derived, but has proved to be a powerful and comfortable way to create compound terms from C. Due to the vararg packing/unpacking and the required type-switching this interface is slightly slower than using the primitives. Please note that some bad C compilers have fairly low limits on the number of arguments that may be passed to a function.

Special attention is required when passing numbers. C ‘promotes’ any integral smaller than `int` to `int`. That is, the types `char`, `short` and `int` are all passed as `int`. In addition, on most 32-bit platforms `int` and `long` are the same. Up to version 4.0.5, only `PL_INTEGER` could be specified, which was taken from the stack as `long`. Such code fails when passing small integral types on machines where `int` is smaller than `long`. It is advised to use `PL_SHORT`, `PL_INT` or `PL_LONG` as appropriate. Similarly, C compilers promote `float` to `double` and therefore `PL_FLOAT` and `PL_DOUBLE` are synonyms.

The type identifiers are:

`PL_VARIABLE` *none*

No op. Used in arguments of `PL_FUNCTOR`.

`PL_BOOL` *int*

Unify the argument with `true` or `false`.

`PL_ATOM` *atom\_t*

Unify the argument with an atom, as in `PL_unify_atom()`.

`PL_CHARS` *const char \**

Unify the argument with an atom constructed from the C `char *`, as in `PL_unify_atom_chars()`.

`PL_NCHARS` *size\_t, const char \**

Unify the argument with an atom constructed from `length` and `char*` as in `PL_unify_atom_nchars()`.

`PL_UTF8_CHARS` *const char \**

Create an atom from a UTF-8 string.

`PL_UTF8_STRING` *const char \**

Create a packed string object from a UTF-8 string.

`PL_MBCHARS` *const char \**

Create an atom from a multi-byte string in the current locale.

`PL_MBCODES` *const char \**

Create a list of character codes from a multi-byte string in the current locale.

`PL_MBSTRING` *const char \**

Create a packed string object from a multi-byte string in the current locale.

`PL_NWCHARS` *size\_t, const wchar\_t \**

Create an atom from a length and a wide character pointer.

`PL_NWCODES` *size\_t, const wchar\_t \**

Create a list of character codes from a length and a wide character pointer.

`PL_NWSTRING` *size\_t, const wchar\_t \**

Create a packed string object from a length and a wide character pointer.

`PL_SHORT` *short*

Unify the argument with an integer, as in `PL_unify_integer()`. As `short` is promoted to `int`, `PL_SHORT` is a synonym for `PL_INT`.

`PL_INTEGER` *long*

Unify the argument with an integer, as in `PL_unify_integer()`.

`PL_INT` *int*

Unify the argument with an integer, as in `PL_unify_integer()`.

`PL_LONG` *long*

Unify the argument with an integer, as in `PL_unify_integer()`.

`PL_INT64` *int64\_t*

Unify the argument with a 64-bit integer, as in `PL_unify_int64()`.

`PL_INTPTR` *intptr\_t*

Unify the argument with an integer with the same width as a pointer. On most machines this is the same as `PL_LONG`, but on 64-bit MS-Windows pointers are 64 bits while longs are only 32 bits.

`PL_DOUBLE` *double*

Unify the argument with a float, as in `PL_unify_float()`. Note that, as the argument is passed using the C vararg conventions, a float must be casted to a double explicitly.

`PL_FLOAT` *double*

Unify the argument with a float, as in `PL_unify_float()`.

`PL_POINTER` *void \**

Unify the argument with a pointer, as in `PL_unify_pointer()`.

`PL_STRING` *const char \**

Unify the argument with a string object, as in `PL_unify_string_chars()`.

`PL_TERM` *term\_t*

Unify a subterm. Note this may be the return value of a `PL_new_term_ref()` call to get access to a variable.

`PL_FUNCTOR` *functor\_t, ...*

Unify the argument with a compound term. This specification should be followed by exactly as many specifications as the number of arguments of the compound term.

`PL_FUNCTOR_CHARS` *const char \*name, int arity, ...*

Create a functor from the given name and arity and then behave as `PL_FUNCTOR`.

`PL_LIST` *int length, ...*

Create a list of the indicated length. The remaining arguments contain the elements of the list.

For example, to unify an argument with the term language(dutch), the following skeleton may be used:

```
static functor_t FUNCTOR_language1;

static void
init_constants()
{ FUNCTOR_language1 = PL_new_functor(PL_new_atom("language"), 1);
}

foreign_t
pl_get_lang(term_t r)
{ return PL_unify_term(r,
```

```

                                PL_FUNCTOR, FUNCTOR_language1,
                                PL_CHARS, "dutch");
}

install_t
install()
{ PL_register_foreign("get_lang", 1, pl_get_lang, 0);
  init_constants();
}

```

int **PL\_chars\_to\_term**(const char \*chars, term\_t t)

Parse the string *chars* and put the resulting Prolog term into *t*. *chars* may or may not be closed using a Prolog full-stop (i.e., a dot followed by a blank). Returns FALSE if a syntax error was encountered and TRUE after successful completion. In addition to returning FALSE, the exception-term is returned in *t* on a syntax error. See also `term_to_atom/2`.

The following example builds a goal term from a string and calls it.

```

int
call_chars(const char *goal)
{ fid_t fid = PL_open_foreign_frame();
  term_t g = PL_new_term_ref();
  BOOL rval;

  if ( PL_chars_to_term(goal, g) )
    rval = PL_call(goal, NULL);
  else
    rval = FALSE;

  PL_discard_foreign_frame(fid);
  return rval;
}

...
call_chars("consult(load)");
...

```

int **PL\_wchars\_to\_term**(const pl\_wchar\_t \*chars, term\_t t)

Wide character version of `PL_chars_to_term()`.

char \* **PL\_quote**(int chr; const char \*string)

Return a quoted version of *string*. If *chr* is `'\''`, the result is a quoted atom. If *chr* is `'"'`, the result is a string. The result string is stored in the same ring of buffers as described with the `BUF_RING` argument of `PL_get_chars()`;

In the current implementation, the string is surrounded by *chr* and any occurrence of *chr* is doubled. In the future the behaviour will depend on the `character_escapes` Prolog flag.

### 12.4.6 Convenient functions to generate Prolog exceptions

The typical implementation of a foreign predicate first uses the `PL_get_*`() functions to extract C data types from the Prolog terms. Failure of any of these functions is normally because the Prolog term is of the wrong type. The `*_ex()` family of functions are wrappers around (mostly) the `PL_get_*`() functions, such that we can write code in the style below and get proper exceptions if an argument is uninstantiated or of the wrong type.

```
/** set_size(+Name:atom, +Width:int, +Height:int) is det.

static foreign_t
set_size(term_t name, term_t width, term_t height)
{ char *n;
  int w, h;

  if ( !PL_get_chars(name, &n, CVT_ATOM|CVT_EXCEPTION) ||
        !PL_get_integer_ex(width, &w) ||
        !PL_get_integer_ex(height, &h) )
    return FALSE;

  ...

}
```

int **PL\_get\_atom\_ex**(term\_t t, atom\_t \*a)

As `PL_get_atom()`, but raises a type or instantiation error if *t* is not an atom.

int **PL\_get\_integer\_ex**(term\_t t, int \*i)

As `PL_get_integer()`, but raises a type or instantiation error if *t* is not an integer, or a representation error if the Prolog integer does not fit in a C `int`.

int **PL\_get\_long\_ex**(term\_t t, long \*i)

As `PL_get_long()`, but raises a type or instantiation error if *t* is not an atom, or a representation error if the Prolog integer does not fit in a C `long`.

int **PL\_get\_int64\_ex**(term\_t t, int64\_t \*i)

As `PL_get_int64()`, but raises a type or instantiation error if *t* is not an atom, or a representation error if the Prolog integer does not fit in a C `int64_t`.

int **PL\_get\_intptr\_ex**(term\_t t, intptr\_t \*i)

As `PL_get_intptr()`, but raises a type or instantiation error if *t* is not an atom, or a representation error if the Prolog integer does not fit in a C `intptr_t`.

int **PL\_get\_size\_ex**(term\_t t, size\_t \*i)

As `PL_get_size()`, but raises a type or instantiation error if *t* is not an atom, or a representation error if the Prolog integer does not fit in a C `size_t`.

int **PL\_get\_bool\_ex**(term\_t t, int \*i)

As `PL_get_bool()`, but raises a type or instantiation error if *t* is not a boolean.

**int PL\_get\_float\_ex**(*term\_t t*, *double \*f*)  
 As `PL_get_float()`, but raises a type or instantiation error if *t* is not a float.

**int PL\_get\_char\_ex**(*term\_t t*, *int \*p*, *int eof*)  
 Get a character code from *t*, where *t* is either an integer or an atom with length one. If *eof* is TRUE and *t* is -1, *p* is filled with -1. Raises an appropriate error if the conversion is not possible.

**int PL\_get\_pointer\_ex**(*term\_t t*, *void \*\*addrp*)  
 As `PL_get_pointer()`, but raises a type or instantiation error if *t* is not a pointer.

**int PL\_get\_list\_ex**(*term\_t l*, *term\_t h*, *term\_t t*)  
 As `PL_get_list()`, but raises a type or instantiation error if *t* is not a list.

**int PL\_get\_nil\_ex**(*term\_t l*)  
 As `PL_get_nil()`, but raises a type or instantiation error if *t* is not the empty list.

**int PL\_unify\_list\_ex**(*term\_t l*, *term\_t h*, *term\_t t*)  
 As `PL_unify_list()`, but raises a type error if *t* is not a variable, list-cell or the empty list.

**int PL\_unify\_nil\_ex**(*term\_t l*)  
 As `PL_unify_nil()`, but raises a type error if *t* is not a variable, list-cell or the empty list.

**int PL\_unify\_bool\_ex**(*term\_t t*, *int val*)  
 As `PL_unify_bool()`, but raises a type error if *t* is not a variable or a boolean.

The second family of functions in this section simplifies the generation of ISO compatible error terms. Any foreign function that calls this function must return to Prolog with the return code of the error function or the constant FALSE. If available, these error functions add the name of the calling predicate to the error context. See also `PL_raise_exception()`.

**int PL\_instantiation\_error**(*term\_t culprit*)  
 Raise `instantiation_error`. *Culprit* is ignored, but should be bound to the term that is insufficiently instantiated. See `instantiation_error/1`.

**int PL\_uninstantiation\_error**(*term\_t culprit*)  
 Raise `uninstantiation_error(culprit)`. This should be called if an argument that must be unbound at entry is bound to *culprit*. This error is typically raised for a pure output arguments such as a newly created stream handle (e.g., the third argument of `open/3`).

**int PL\_representation\_error**(*const char \*resource*)  
 Raise `representation_error(resource)`. See `representation_error/1`.

**int PL\_type\_error**(*const char \*expected*, *term\_t culprit*)  
 Raise `type_error(expected, culprit)`. See `type_error/2`.

**int PL\_domain\_error**(*const char \*expected*, *term\_t culprit*)  
 Raise `domain_error(expected, culprit)`. See `domain_error/2`.

**int PL\_existence\_error**(*const char \*type*, *term\_t culprit*)  
 Raise `existence_error(type, culprit)`. See `type_error/2`.

```
int PL_permission_error(const char *operation, const char *type, term_t culprit)
    Raise permission_error(operation, type, culprit). See
    permission_error/3.

int PL_resource_error(const char *resource)
    Raise resource_error(resource). See resource_error/1.

int PL_syntax_error(const char *message, IOSTREAM *in)
    Raise syntax_error(message). If arg is not NULL, add information about the current
    position of the input stream.
```

### 12.4.7 Serializing and deserializing Prolog terms

```
int PL_put_term_from_chars(term_t t, int flags, size_t len, const char *s)
    Parse the text from the C-string s holding len bytes and put the resulting term in t. len can be
    (size_t) -1, assuming a 0-terminated string. The flags argument controls the encoding and
    is currently one of REP_UTF8 (string is UTF8 encoded), REP_MB (string is encoded in the
    current locale) or 0 (string is encoded in ISO latin 1). The string may, but is not required, to be
    closed by a full stop (.).
```

### 12.4.8 BLOBS: Using atoms to store arbitrary binary data

SWI-Prolog atoms as well as strings can represent arbitrary binary data of arbitrary length. This facility is attractive for storing foreign data such as images in an atom. An atom is a unique handle to this data and the atom garbage collector is able to destroy atoms that are no longer referenced by the Prolog engine. This property of atoms makes them attractive as a handle to foreign resources, such as Java atoms, Microsoft's COM objects, etc., providing safe combined garbage collection.

To exploit these features safely and in an organised manner, the SWI-Prolog foreign interface allows for creating 'atoms' with additional type information. The type is represented by a structure holding C function pointers that tell Prolog how to handle releasing the atom, writing it, sorting it, etc. Two atoms created with different types can represent the same sequence of bytes. Atoms are first ordered on the rank number of the type and then on the result of the `compare()` function. Rank numbers are assigned when the type is registered.

#### Defining a BLOB type

The type `PL_blob_t` represents a structure with the layout displayed below. The structure contains additional fields at the ... for internal bookkeeping as well as future extensions.

```
typedef struct PL_blob_t
{
    uintptr_t    magic;           /* PL_BLOB_MAGIC */
    uintptr_t    flags;          /* Bitwise or of PL_BLOB_* */
    char *       name;           /* name of the type */
    int          (*release)(atom_t a);
    int          (*compare)(atom_t a, atom_t b);
    int          (*write)(IOSTREAM *s, atom_t a, int flags);
    void         (*acquire)(atom_t a);
    ...
}
```



```

    ...
} PL_blob_t;

```

For each type, exactly one such structure should be allocated. Its first field must be initialised to `PL_BLOB_MAGIC`. The *flags* is a bitwise *or* of the following constants:

#### **PL\_BLOB\_TEXT**

If specified the blob is assumed to contain text and is considered a normal Prolog atom.

#### **PL\_BLOB\_UNIQUE**

If specified the system ensures that the blob-handle is a unique reference for a blob with the given type, length and content. If this flag is not specified, each lookup creates a new blob.

#### **PL\_BLOB\_NOCOPY**

By default the content of the blob is copied. Using this flag the blob references the external data directly. The user must ensure the provided pointer is valid as long as the atom lives. If `PL_BLOB_UNIQUE` is also specified, uniqueness is determined by comparing the pointer rather than the data pointed at.

The *name* field represents the type name as available to Prolog. See also `current_blob/2`. The other fields are function pointers that must be initialised to proper functions or `NULL` to get the default behaviour of built-in atoms. Below are the defined member functions:

`void acquire(atom_t a)`

Called if a new blob of this type is created through `PL_put_blob()` or `PL_unify_blob()`. This callback may be used together with the release hook to deal with reference-counted external objects.

`int release(atom_t a)`

The blob (atom) *a* is about to be released. This function can retrieve the data of the blob using `PL_blob_data()`. If it returns `FALSE` the atom garbage collector will *not* reclaim the atom.

`int compare(atom_t a, atom_t b)`

Compare the blobs *a* and *b*, both of which are of the type associated to this blob type. Return values are, as `memcmp()`, `< 0` if *a* is less than *b*, `= 0` if both are equal, and `> 0` otherwise.

`int write(IOSTREAM *s, atom_t a, int flags)`

Write the content of the blob *a* to the stream *s* respecting the *flags*. The *flags* are a bitwise *or* of zero or more of the `PL_WRT_*` flags defined in `SWI-Prolog.h`. This prototype is available if the undocumented `SWI-Stream.h` is included *before* `SWI-Prolog.h`.

If this function is not provided, `write/1` emits the content of the blob for blobs of type `PL_BLOB_TEXT` or a string of the format `<#hex data>` for binary blobs.

If a blob type is registered from a loadable object (shared object or DLL) the blob type must be deregistered before the object may be released.

`int PL_unregister_blob_type(PL_blob_t *type)`

Unlink the blob type from the registered type and transform the type of possible living blobs to `unregistered`, avoiding further reference to the type structure, functions referred by it,

as well as the data. This function returns `TRUE` if no blobs of this type existed and `FALSE` otherwise. `PL_unregister_blob_type()` is intended for the `uninstall()` hook of foreign modules, avoiding further references to the module.

### Accessing blobs

The blob access functions are similar to the atom accessing functions. Blobs being atoms, the atom functions operate on blobs and vice versa. For clarity and possible future compatibility issues, however, it is not advised to rely on this.

`int PL_is_blob(term_t t, PL_blob_t **type)`

Succeeds if *t* refers to a blob, in which case *type* is filled with the type of the blob.

`int PL_unify_blob(term_t t, void *blob, size_t len, PL_blob_t *type)`

Unify *t* to a new blob constructed from the given data and associated to the given type. See also `PL_unify_atom_nchars()`.

`int PL_put_blob(term_t t, void *blob, size_t len, PL_blob_t *type)`

Store the described blob in *t*. The return value indicates whether a new blob was allocated (`FALSE`) or the blob is a reference to an existing blob (`TRUE`). Reporting new/existing can be used to deal with external objects having their own reference counts. If the return is `TRUE` this reference count must be incremented, and it must be decremented on blob destruction callback. See also `PL_put_atom_nchars()`.

`int PL_get_blob(term_t t, void **blob, size_t *len, PL_blob_t **type)`

If *t* holds a blob or atom, get the data and type and return `TRUE`. Otherwise return `FALSE`. Each result pointer may be `NULL`, in which case the requested information is ignored.

`void * PL_blob_data(atom_t a, size_t *len, PL_blob_t **type)`

Get the data and type associated to a blob. This function is mainly used from the callback functions described in section 12.4.8.

### 12.4.9 Exchanging GMP numbers

If SWI-Prolog is linked with the GNU Multiple Precision Arithmetic Library (GMP, used by default), the foreign interface provides functions for exchanging numeric values to GMP types. To access these functions the header `<gmp.h>` must be included *before* `<SWI-Prolog.h>`. Foreign code using GMP linked to SWI-Prolog asks for some considerations.

- SWI-Prolog normally rebinds the GMP allocation functions using `mp_set_memory_functions()`. This means SWI-Prolog must be initialised before the foreign code touches any GMP function. You can call `PL_action(PL_GMP_SET_ALLOC_FUNCTIONS, TRUE)` to force Prolog's GMP initialization without doing the rest of the Prolog initialization. If you do not want Prolog rebinding the GMP allocation, call `PL_action(PL_GMP_SET_ALLOC_FUNCTIONS, FALSE)` *before* initializing Prolog.
- On Windows, each DLL has its own memory pool. To make exchange of GMP numbers between Prolog and foreign code possible you must either let Prolog rebind the allocation functions (default) or you must recompile SWI-Prolog to link to a DLL version of the GMP library.

Here is an example exploiting the function `mpz_nextprime()`:

```
#include <gmp.h>
#include <SWI-Prolog.h>

static foreign_t
next_prime(term_t n, term_t prime)
{ mpz_t mpz;
  int rc;

  mpz_init(mpz);
  if ( PL_get_mpz(n, mpz) )
  { mpz_nextprime(mpz, mpz);

    rc = PL_unify_mpz(prime, mpz);
  } else
    rc = FALSE;

  mpz_clear(mpz);
  return rc;
}

install_t
install()
{ PL_register_foreign("next_prime", 2, next_prime, 0);
}
```

**int PL\_get\_mpz**(*term\_t t*, *mpz\_t mpz*)

If *t* represents an integer, *mpz* is filled with the value and the function returns TRUE. Otherwise *mpz* is untouched and the function returns FALSE. Note that *mpz* must have been initialised before calling this function and must be cleared using `mpz_clear()` to reclaim any storage associated with it.

**int PL\_get\_mpq**(*term\_t t*, *mpq\_t mpq*)

If *t* is an integer or rational number (term `rdiv/2`), *mpq* is filled with the *normalised* rational number and the function returns TRUE. Otherwise *mpq* is untouched and the function returns FALSE. Note that *mpq* must have been initialised before calling this function and must be cleared using `mpq_clear()` to reclaim any storage associated with it.

**int PL\_unify\_mpz**(*term\_t t*, *mpz\_t mpz*)

Unify *t* with the integer value represented by *mpz* and return TRUE on success. The *mpz* argument is not changed.

**int PL\_unify\_mpq**(*term\_t t*, *mpq\_t mpq*)

Unify *t* with a rational number represented by *mpq* and return TRUE on success. Note that *t* is unified with an integer if the denominator is 1. The *mpq* argument is not changed.

### 12.4.10 Calling Prolog from C

The Prolog engine can be called from C. There are two interfaces for this. For the first, a term is created that could be used as an argument to `call/1`, and then `PL_call()` is used to call Prolog. This system is simple, but does not allow to inspect the different answers to a non-deterministic goal and is relatively slow as the runtime system needs to find the predicate. The other interface is based on `PL_open_query()`, `PL_next_solution()` and `PL_cut_query()` or `PL_close_query()`. This mechanism is more powerful, but also more complicated to use.

#### Predicate references

This section discusses the functions used to communicate about predicates. Though a Prolog predicate may be defined or not, redefined, etc., a Prolog predicate has a handle that is neither destroyed nor moved. This handle is known by the type `predicate_t`.

`predicate_t PL_pred(funcion_t f, module_t m)`

Return a handle to a predicate for the specified name/arity in the given module. This function always succeeds, creating a handle for an undefined predicate if no handle was available. If the module argument *m* is `NULL`, the current context module is used.

`predicate_t PL_predicate(const char *name, int arity, const char* module)`

Same as `PL_pred()`, but provides a more convenient interface to the C programmer.

`void PL_predicate_info(predicate_t p, atom_t *n, size_t *a, module_t *m)`

Return information on the predicate *p*. The name is stored over *n*, the arity over *a*, while *m* receives the definition module. Note that the latter need not be the same as specified with `PL_predicate()`. If the predicate is imported into the module given to `PL_predicate()`, this function will return the module where the predicate is defined. Any of the arguments *n*, *a* and *m* can be `NULL`.

#### Initiating a query from C

This section discusses the functions for creating and manipulating queries from C. Note that a foreign context can have at most one active query. This implies that it is allowed to make strictly nested calls between C and Prolog (Prolog calls C, calls Prolog, calls C, etc.), but it is **not** allowed to open multiple queries and start generating solutions for each of them by calling `PL_next_solution()`. Be sure to call `PL_cut_query()` or `PL_close_query()` on any query you opened before opening the next or returning control back to Prolog.

`qid_t PL_open_query(module_t ctx, int flags, predicate_t p, term_t *t0)`

Opens a query and returns an identifier for it. *ctx* is the *context module* of the goal. When `NULL`, the context module of the calling context will be used, or `user` if there is no calling context (as may happen in embedded systems). Note that the context module only matters for *meta-predicates*. See `meta_predicate/1`, `context_module/1` and `module_transparent/1`. The *p* argument specifies the predicate, and should be the result of a call to `PL_pred()` or `PL_predicate()`. Note that it is allowed to store this handle as global data and reuse it for future queries. The term reference *t0* is the first of a vector of term references as returned by `PL_new_term_refs(n)`.

The *flags* arguments provides some additional options concerning debugging and exception handling. It is a bitwise *or* of the following values:

#### PL\_Q\_NORMAL

Normal operation. The debugger inherits its settings from the environment. If an exception occurs that is not handled in Prolog, a message is printed and the tracer is started to debug the error.<sup>5</sup>

#### PL\_Q\_NODEBUG

Switch off the debugger while executing the goal. This option is used by many calls to hook-predicates to avoid tracing the hooks. An example is `print/1` calling `portray/1` from foreign code.

#### PL\_Q\_CATCH\_EXCEPTION

If an exception is raised while executing the goal, do not report it, but make it available for `PL_exception()`.

#### PL\_Q\_PASS\_EXCEPTION

As `PL_Q_CATCH_EXCEPTION`, but do not invalidate the exception-term while calling `PL_close_query()`. This option is experimental.

#### PL\_Q\_ALLOW\_YIELD

Support the `I_YIELD` instruction for engine-based coroutines. See `$engine_yield/2` in `boot/init.pl` for details.

#### PL\_Q\_EXT\_STATUS

Make `PL_next_solution()` return extended status. Instead of only `TRUE` or `FALSE` extended status as illustrated in the following table:

| Extended                    | Normal             |   |
|-----------------------------|--------------------|---|
| <code>PL_S_EXCEPTION</code> | <code>FALSE</code> | Exception available through <code>PL_exception()</code> |
| <code>PL_S_FALSE</code>     | <code>FALSE</code> | Query failed  |
| <code>PL_S_TRUE</code>      | <code>TRUE</code>  | Query succeeded with choicepoint                        |
| <code>PL_S_LAST</code>      | <code>TRUE</code>  | Query succeeded without choicepoint                     |

`PL_open_query()` can return the query identifier '0' if there is not enough space on the environment stack. This function succeeds, even if the referenced predicate is not defined. In this case, running the query using `PL_next_solution()` will return an `existence_error`. See `PL_exception()`.

The example below opens a query to the predicate `is_a/2` to find the ancestor of 'me'. The reference to the predicate is valid for the duration of the process and may be cached by the client.

```
char *
ancestor(const char *me)
{ term_t a0 = PL_new_term_refs(2);
  static predicate_t p;
```

<sup>5</sup>Do not pass the integer 0 for normal operation, as this is interpreted as `PL_Q_NODEBUG` for backward compatibility reasons.

```

if ( !p )
    p = PL_predicate("is_a", 2, "database");

PL_put_atom_chars(a0, me);
PL_open_query(NULL, PL_Q_NORMAL, p, a0);
...
}

```

**int PL\_next\_solution(*qid\_t qid*)**

Generate the first (next) solution for the given query. The return value is `TRUE` if a solution was found, or `FALSE` to indicate the query could not be proven. This function may be called repeatedly until it fails to generate all solutions to the query.

**int PL\_cut\_query(*qid\_t qid*)**

Discards the query, but does not delete any of the data created by the query. It just invalidates *qid*, allowing for a new call to `PL_open_query()` in this context. `PL_cut_query()` may invoke cleanup handlers (see `setup_call_cleanup/3`) and therefore may experience exceptions. If an exception occurs the return value is `FALSE` and the exception is accessible through `PL_exception(0)`.

**int PL\_close\_query(*qid\_t qid*)**

As `PL_cut_query()`, but all data and bindings created by the query are destroyed.

**qid\_t PL\_current\_query(*void*)**

Returns the query id of the current query or 0 if the current thread is not executing any queries.

**int PL\_call\_predicate(*module\_t m, int flags, predicate\_t pred, term\_t +t0*)**

Shorthand for `PL_open_query()`, `PL_next_solution()`, `PL_cut_query()`, generating a single solution. The arguments are the same as for `PL_open_query()`, the return value is the same as `PL_next_solution()`.

**int PL\_call(*term\_t t, module\_t m*)**

Call term *t* just like the Prolog predicate `once/1`. *t* is called in the module *m*, or in the context module if *m* == `NULL`. Returns `TRUE` if the call succeeds, `FALSE` otherwise. Figure 12.3 shows an example to obtain the number of defined atoms. All checks are omitted to improve readability.

### 12.4.11 Discarding Data

The Prolog data created and term references needed to set up the call and/or analyse the result can in most cases be discarded right after the call. `PL_close_query()` allows for destroying the data, while leaving the term references. The calls below may be used to destroy term references and data. See figure 12.3 for an example.

**fid\_t PL\_open\_foreign\_frame()**

Create a foreign frame, holding a mark that allows the system to undo bindings and destroy data created after it, as well as providing the environment for creating term references. This function is called by the kernel before calling a foreign predicate.

```

int
count_atoms()
{ fid_t fid = PL_open_foreign_frame();
  term_t goal = PL_new_term_ref();
  term_t a1   = PL_new_term_ref();
  term_t a2   = PL_new_term_ref();
  functor_t s2 = PL_new_functor(PL_new_atom("statistics"), 2);
  int atoms;

  PL_put_atom_chars(a1, "atoms");
  PL_cons_functor(goal, s2, a1, a2);
  PL_call(goal, NULL);          /* call it in current module */

  PL_get_integer(a2, &atoms);
  PL_discard_foreign_frame(fid);

  return atoms;
}

```

Figure 12.3: Calling Prolog

**void PL.close\_foreign\_frame(fid\_t id)**

Discard all term references created after the frame was opened. All other Prolog data is retained. This function is called by the kernel whenever a foreign function returns control back to Prolog.

**void PL.discard\_foreign\_frame(fid\_t id)**

Same as `PL.close_foreign_frame()`, but also undo all bindings made since the open and destroy all Prolog data.

**void PL.rewind\_foreign\_frame(fid\_t id)**

Undo all bindings and discard all term references created since the frame was created, but do not pop the frame. That is, the same frame can be rewound multiple times, and must eventually be closed or discarded.

It is obligatory to call either of the two closing functions to discard a foreign frame. Foreign frames may be nested.

### 12.4.12 Foreign Code and Modules

Modules are identified via a unique handle. The following functions are available to query and manipulate modules.

**module\_t PL.context()**

Return the module identifier of the context module of the currently active foreign predicate.

int **PL\_strip\_module**(term\_t +raw, module\_t \*m, term\_t -plain)

Utility function. If *raw* is a term, possibly holding the module construct  $\langle module \rangle : \langle rest \rangle$ , this function will make *plain* a reference to  $\langle rest \rangle$  and fill *module* \* with  $\langle module \rangle$ . For further nested module constructs the innermost module is returned via *module* \*. If *raw* is not a module construct, *raw* will simply be put in *plain*. The value pointed to by *m* must be initialized before calling `PL_strip_module()`, either to the default module or to NULL. A NULL value is replaced by the current context module if *raw* carries no module. The following example shows how to obtain the plain term and module if the default module is the user module:

```
{ module m = PL_new_module(PL_new_atom("user"));
  term_t plain = PL_new_term_ref();

  PL_strip_module(term, &m, plain);
  ...
}
```

atom\_t **PL\_module\_name**(module\_t module)

Return the name of *module* as an atom.

module\_t **PL\_new\_module**(atom\_t name)

Find an existing module or create a new module with the name *name*.

### 12.4.13 Prolog exceptions in foreign code

This section discusses `PL_exception()`, `PL_throw()` and `PL_raise_exception()`, the interface functions to detect and generate Prolog exceptions from C code. `PL_throw()` and `PL_raise_exception()` from the C interface raise an exception from foreign code. `PL_throw()` exploits the C function `longjmp()` to return immediately to the innermost `PL_next_solution()`. `PL_raise_exception()` registers the exception term and returns FALSE. If a foreign predicate returns FALSE, while an exception term is registered, a Prolog exception will be raised by the virtual machine.

Calling these functions outside the context of a function implementing a foreign predicate results in undefined behaviour.

`PL_exception()` may be used after a call to `PL_next_solution()` fails, and returns a term reference to an exception term if an exception was raised, and 0 otherwise.

If a C function implementing a predicate calls Prolog and detects an exception using `PL_exception()`, it can handle this exception or return with the exception. Some caution is required though. It is **not** allowed to call `PL_close_query()` or `PL_discard_foreign_frame()` afterwards, as this will invalidate the exception term. Below is the code that calls a Prolog-defined arithmetic function (see `arithmetic_function/1`).

If `PL_next_solution()` succeeds, the result is analysed and translated to a number, after which the query is closed and all Prolog data created after `PL_open_foreign_frame()` is destroyed. On the other hand, if `PL_next_solution()` fails and if an exception was raised, just pass it. Otherwise generate an exception (`PL_error()` is an internal call for building the standard error terms and calling `PL_raise_exception()`). After this, the Prolog environment should be discarded using `PL_cut_query()` and `PL_close_foreign_frame()` to avoid invalidating the exception term.



```

static int
prologFunction(ArithFunction f, term_t av, Number r)
{ int arity = f->proc->definition->functor->arity;
  fid_t fid = PL_open_foreign_frame();
  qid_t qid;
  int rval;

  qid = PL_open_query(NULL, PL_Q_NORMAL, f->proc, av);

  if ( PL_next_solution(qid) )
  { rval = valueExpression(av+arity-1, r);
    PL_close_query(qid);
    PL_discard_foreign_frame(fid);
  } else
  { term_t except;

    if ( (except = PL_exception(qid)) )
    { rval = PL_throw(except);          /* pass exception */
    } else
    { char *name = stringAtom(f->proc->definition->functor->name);

      /* generate exception */
      rval = PL_error(name, arity-1, NULL, ERR_FAILED, f->proc);
    }

    PL_cut_query(qid);                  /* donot destroy data */
    PL_close_foreign_frame(fid);        /* same */
  }

  return rval;
}

```

int **PL\_raise\_exception**(term\_t exception)

Generate an exception (as throw/1) and return FALSE. Below is an example returning an exception from a foreign predicate:

```

foreign_t
pl_hello(term_t to)
{ char *s;

  if ( PL_get_atom_chars(to, &s) )
  { Sprintf("Hello \"%s\"\n", s);

    PL_succeed;
  } else

```

```

{ term_t except = PL_new_term_ref();

  PL_unify_term(except,
                PL_FUNCTOR_CHARS, "type_error", 2,
                PL_CHARS, "atom",
                PL_TERM, to);

  return PL_raise_exception(except);
}
}

```

**int PL\_throw**(*term\_t exception*)

Similar to `PL_raise_exception()`, but returns using the C `longjmp()` function to the innermost `PL_next_solution()`.

**term\_t PL\_exception**(*qid\_t qid*)

If `PL_next_solution()` fails, this can be due to normal failure of the Prolog call, or because an exception was raised using `throw/1`. This function returns a handle to the exception term if an exception was raised, or 0 if the Prolog goal simply failed. If there is an exception, `PL_exception()` allocates a term-handle using `PL_new_term_ref()` that is used to return the exception term.

Additionally, `PL_exception(0)` returns the pending exception in the current query or 0 if no exception is pending. This can be used to check the error status after a failing call to, e.g., one of the unification functions.

**void PL\_clear\_exception**(*void*)

Tells Prolog that the encountered exception must be ignored. This function must be called if control remains in C after a previous API call fails with an exception.<sup>6</sup>

#### 12.4.14 Catching Signals (Software Interrupts)

SWI-Prolog offers both a C and Prolog interface to deal with software interrupts (signals). The Prolog mapping is defined in section 4.12. This subsection deals with handling signals from C.

If a signal is not used by Prolog and the handler does not call Prolog in any way, the native signal interface routines may be used.

Any handler that wishes to call one of the Prolog interface functions should call `PL_sigaction()` to install the handler. `PL_signal()` provides a deprecated interface that is notably not capable of properly restoring the old signal status if the signal was previously handled by Prolog.

**int PL\_sigaction**(*int sig, pl\_sigaction\_t \*act, pl\_sigaction\_t \*oldact*)

Install or query the status for signal *sig*. The signal is an integer between 1 and 64, where the where the signals up to 32 are mapped to OS signals and signals above that are handled by Prolog's synchronous signal handling. The `pl_sigaction_t` is a struct with the following definition:

<sup>6</sup>This feature is non-portable. Other Prolog systems (e.g., YAP) have no facilities to ignore raised exceptions, and the design of YAP's exception handling does not support such a facility.

```
typedef struct pl_sigaction
{ void      (*sa_cfunction) (int);      /* traditional C function */
  predicate_t sa_predicate;              /* call a predicate */
  int        sa_flags;                  /* additional flags */
} pl_sigaction_t;
```

The `sa_flags` is a bitwise or of `PLSIG_THROW`, `PLSIG_SYNC` and `PLSIG_NOFRAME`. Signal handling is enabled if `PLSIG_THROW` is provided, `sa_cfunction` or `sa_predicate` is provided. `sa_predicate` is a predicate handle for a predicate with arity 1. If no action is provided the signal handling for this signal is restored to the default before `PLinitialise()` was called.

Finally, 0 (zero) may be passed for *sig*. In that case the system allocates a free signal in the *Prolog range* (32...64). Such signal handler are activated using `PLthread_raise()`.

`void (*) () PL_signal(sig, func)`

This function is equivalent to the BSD-Unix `signal()` function, regardless of the platform used. The signal handler is blocked while the signal routine is active, and automatically reactivated after the handler returns.

After a signal handler is registered using this function, the native signal interface redirects the signal to a generic signal handler inside SWI-Prolog. This generic handler validates the environment, creates a suitable environment for calling the interface functions described in this chapter and finally calls the registered user-handler.

By default, signals are handled asynchronously (i.e., at the time they arrive). It is inherently dangerous to call extensive code fragments, and especially exception related code from asynchronous handlers. The interface allows for *synchronous* handling of signals. In this case the native OS handler just schedules the signal using `PL_raise()`, which is checked by `PL_handle_signals()` at the call- and redo-port. This behaviour is realised by *or-ing* *sig* with the constant `PL_SIGSYNC`.<sup>7</sup>

Signal handling routines may raise exceptions using `PL_raise_exception()`. The use of `PL_throw()` is not safe. If a synchronous handler raises an exception, the exception is delayed to the next call to `PL_handle_signals()`;

`int PL_raise(int sig)`

Register *sig* for *synchronous* handling by Prolog. Synchronous signals are handled at the call-port or if foreign code calls `PL_handle_signals()`. See also `thread_signal/2`.

`int PL_handle_signals(void)`

Handle any signals pending from `PL_raise()`. `PL_handle_signals()` is called at each pass through the call- and redo-port at a safe point. Exceptions raised by the handler using `PL_raise_exception()` are properly passed to the environment.

The user may call this function inside long-running foreign functions to handle scheduled interrupts. This routine returns the number of signals handled. If a handler raises an exception, the return value is -1 and the calling routine should return with `FALSE` as soon as possible.

<sup>7</sup>A better default would be to use synchronous handling, but this interface preserves backward compatibility.

int **PL\_get\_signum\_ex**(*term\_t t*, int \**sig*)

Extract a signal specification from a Prolog term and store as an integer signal number in *sig*. The specification is an integer, a lowercase signal name without SIG or the full signal name. These refer to the same: 9, kill and SIGKILL. Leaves a typed, domain or instantiation error if the conversion fails.

### 12.4.15 Miscellaneous

#### Term Comparison

int **PL\_compare**(*term\_t t1*, *term\_t t2*)

Compares two terms using the standard order of terms and returns -1, 0 or 1. See also `compare/3`.

int **PL\_same\_compound**(*term\_t t1*, *term\_t t2*)

Yields TRUE if *t1* and *t2* refer to physically the same compound term and FALSE otherwise.

#### Recorded database

In some applications it is useful to store and retrieve Prolog terms from C code. For example, the XPCE graphical environment does this for storing arbitrary Prolog data as slot-data of XPCE objects.

Please note that the returned handles have no meaning at the Prolog level and the recorded terms are not visible from Prolog. The functions `PL_recorded()` and `PL_erase()` are the only functions that can operate on the stored term.

Two groups of functions are provided. The first group (`PL_record()` and friends) store Prolog terms on the Prolog heap for retrieval during the same session. These functions are also used by `recorda/3` and friends. The recorded database may be used to communicate Prolog terms between threads.

record\_t **PL\_record**(*term\_t t*)

Record the term *t* into the Prolog database as `recorda/3` and return an opaque handle to the term. The returned handle remains valid until `PL_erase()` is called on it. `PL_recorded()` is used to copy recorded terms back to the Prolog stack.

record\_t **PL\_duplicate\_record**(*record\_t record*)

Return a duplicate of *record*. As records are read-only objects this function merely increments the records reference count.

int **PL\_recorded**(*record\_t record*, *term\_t t*)

Copy a recorded term back to the Prolog stack. The same record may be used to copy multiple instances at any time to the Prolog stack. Returns TRUE on success, and FALSE if there is not enough space on the stack to accommodate the term. See also `PL_record()` and `PL_erase()`.

void **PL\_erase**(*record\_t record*)

Remove the recorded term from the Prolog database, reclaiming all associated memory resources.

The second group (headed by `PL_record_external()`) provides the same functionality, but the returned data has properties that enable storing the data on an external device. It has been designed

to make it possible to store Prolog terms fast and compact in an external database. Here are the main features:

- *Independent of session*  
Records can be communicated to another Prolog session and made visible using `PL_recorded_external()`.
- *Binary*  
The representation is binary for maximum performance. The returned data may contain zero bytes.
- *Byte-order independent*  
The representation can be transferred between machines with different byte order.
- *No alignment restrictions*  
There are no memory alignment restrictions and copies of the record can thus be moved freely. For example, it is possible to use this representation to exchange terms using shared memory between different Prolog processes.
- *Compact*  
It is assumed that a smaller memory footprint will eventually outperform slightly faster representations.
- *Stable*  
The format is designed for future enhancements without breaking compatibility with older records.

`char * PL_record_external(term_t +t, size_t *len)`

Record the term *t* into the Prolog database as `recorda/3` and return an opaque handle to the term. The returned handle remains valid until `PL_erase_external()` is called on it.

It is allowed to copy the data and use `PL_recorded_external()` on the copy. The user is responsible for the memory management of the copy. After copying, the original may be discarded using `PL_erase_external()`.

`PL_recorded_external()` is used to copy such recorded terms back to the Prolog stack.

`int PL_recorded_external(const char *record, term_t -t)`

Copy a recorded term back to the Prolog stack. The same record may be used to copy multiple instances at any time to the Prolog stack. See also `PL_record_external()` and `PL_erase_external()`.

`int PL_erase_external(char *record)`

Remove the recorded term from the Prolog database, reclaiming all associated memory resources.

### Getting file names

The function `PL_get_file_name()` provides access to Prolog filenames and its file-search mechanism described with `absolute_file_name/3`. Its existence is motivated to realise a uniform interface to deal with file properties, search, naming conventions, etc., from foreign code.

`int PL_get_file_name(term_t spec, char **name, int flags)`

Translate a Prolog term into a file name. The name is stored in the static buffer ring described with the `PL_get_chars()` option `BUF_RING`. Conversion from the internal UNICODE encoding is done using standard C library functions. *flags* is a bit-mask controlling the conversion process. Options are:

`PL_FILE_ABSOLUTE`

Return an absolute path to the requested file.

`PL_FILE_OSPATH`

Return the name using the hosting OS conventions. On MS-Windows, `\` is used to separate directories rather than the canonical `/`.

`PL_FILE_SEARCH`

Invoke `absolute_file_name/3`. This implies rules from `file_search_path/2` are used.

`PL_FILE_EXIST`

Demand the path to refer to an existing entity.

`PL_FILE_READ`

Demand read-access on the result.

`PL_FILE_WRITE`

Demand write-access on the result.

`PL_FILE_EXECUTE`

Demand execute-access on the result.

`PL_FILE_NOERRORS`

Do not raise any exceptions.

`int PL_get_file_nameW(term_t spec, wchar_t **name, int flags)`

Same as `PL_get_file_name()`, but returns the filename as a wide-character string. This is intended for Windows to access the Unicode version of the Win32 API. Note that the flag `PL_FILE_OSPATH` must be provided to fetch a filename in OS native (e.g., `C:\x\y`) notation.

### Dealing with Prolog flags from C

Foreign code can set or create Prolog flags using `PL_set_prolog_flag()`. See `set_prolog_flag/2` and `create_prolog_flag/3`. To retrieve the value of a flag you can use `PL_current_prolog_flag()`.

`int PL_set_prolog_flag(const char *name, int type, ...)`

Set/create a Prolog flag from C. *name* is the name of the affected flag. *type* is one of the values below, which also dictates the type of the final argument. The function returns `TRUE` on success and `FALSE` on failure. This function can be called *before* `PL_initialise()`, making the flag available to the Prolog startup code.

`PL_BOOL`

Create a boolean (`true` or `false`) flag. The argument must be an `int`.

`PL_ATOM`

Create a flag with an atom as value. The argument must be of type `const char *`.

**PL\_INTEGER**

Create a flag with an integer as value. The argument must be of type `intptr_t *`.

`int PL_current_prolog_flag(atom_t name, int type, void *value)`

Retrieve the value of a Prolog flag from C. *name* is the name of the flag as an `atom_t` (see `current_prolog_flag/2`). *type* specifies the kind of value to be retrieved, it is one of the values below. *value* is a pointer to a location where to store the value. The user is responsible for making sure this memory location is of the appropriate size/type (see the returned types below to determine the size/type). The function returns `TRUE` on success and `FALSE` on failure.

**PL\_ATOM**

Retrieve a flag whose value is an `atom`. The returned value is an `atom` handle of type `atom_t`.

**PL\_INTEGER**

Retrieve a flag whose value is an `integer`. The returned value is an integer of type `int64_t`.

**PL\_FLOAT**

Retrieve a flag whose value is a `float`. The returned value is a floating point number of type `double`.

**PL\_TERM**

Retrieve a flag whose value is a `term`. The returned value is a `term` handle of type `term_t`.

**12.4.16 Errors and warnings**

`PL_warning()` prints a standard Prolog warning message to the standard error (`user_error`) stream. Please note that new code should consider using `PL_raise_exception()` to raise a Prolog exception. See also section 4.11.

`int PL_warning(format, a1, ...)`

Print an error message starting with `'[WARNING: '`, followed by the output from *format*, followed by a `']'` and a newline. Then start the tracer. *format* and the arguments are the same as for `printf(2)`. Always returns `FALSE`.

**12.4.17 Environment Control from Foreign Code**

`int PL_action(int, ...)`

Perform some action on the Prolog system. *int* describes the action. Remaining arguments depend on the requested action. The actions are listed below:

**PL\_ACTION\_TRACE**

Start Prolog tracer (`trace/0`). Requires no arguments.

**PL\_ACTION\_DEBUG**

Switch on Prolog debug mode (`debug/0`). Requires no arguments.

**PL\_ACTION\_BACKTRACE**

Print backtrace on current output stream. The argument (an `int`) is the number of frames printed.

**PL\_ACTION\_HALT**

Halt Prolog execution. This action should be called rather than Unix `exit()` to give Prolog the opportunity to clean up. This call does not return. The argument (an `int`) is the exit code. See `halt/1`.

**PL\_ACTION\_ABORT**

Generate a Prolog abort (`abort/0`). This call does not return. Requires no arguments.

**PL\_ACTION\_BREAK**

Create a standard Prolog break environment (`break/0`). Returns after the user types the end-of-file character. Requires no arguments.

**PL\_ACTION\_GUIAPP**

Windows: Used to indicate to the kernel that the application is a GUI application if the argument is not 0, and a console application if the argument is 0. If a fatal error occurs, the system uses a windows messagebox to report this on a GUI application, and otherwise simply prints the error and exits.

**PL\_ACTION\_TRADITIONAL**

Same effect as using `--traditional`. Must be called *before* `PL_initialise()`.

**PL\_ACTION\_WRITE**

Write the argument, a `char *` to the current output stream.

**PL\_ACTION\_FLUSH**

Flush the current output stream. Requires no arguments.

**PL\_ACTION\_ATTACH\_CONSOLE**

Attach a console to a thread if it does not have one. See `attach_console/0`.

**PL\_GMP\_SET\_ALLOC\_FUNCTIONS**

Takes an integer argument. If `TRUE`, the GMP allocations are immediately bound to the Prolog functions. If `FALSE`, SWI-Prolog will never rebind the GMP allocation functions. See `mp_set_memory_functions()` in the GMP documentation. The action returns `FALSE` if there is no GMP support or GMP is already initialised.

**12.4.18 Querying Prolog**

`long PL_query(int)`

Obtain status information on the Prolog system. The actual argument type depends on the information required. `int` describes what information is wanted.<sup>8</sup> The options are given in table 12.1.

**12.4.19 Registering Foreign Predicates**

`int PL_register_foreign_in_module(char *mod, char *name, int arity, foreign_t (*f)(), int flags, ...)`

Register the C function `f` to implement a Prolog predicate. After this call returns successfully a predicate with name `name` (a `char *`) and arity `arity` (a C `int`) is created in module `mod`. If

<sup>8</sup>Returning pointers and integers as a long is bad style. The signature of this function should be changed.



|                     |  |
|---------------------|--|
| PL_QUERY_ARGC       | Return an integer holding the number of arguments given to Prolog from Unix.   |
| PL_QUERY_ARGV       | Return a <code>char **</code> holding the argument vector given to Prolog from Unix.   |
| PL_QUERY_SYMBOLFILE | Return a <code>char *</code> holding the current symbol file of the running process.   |
| PL_MAX_INTEGER      | Return a long, representing the maximal integer value represented by a Prolog integer.   |
| PL_MIN_INTEGER      | Return a long, representing the minimal integer value.   |
| PL_QUERY_VERSION    | Return a long, representing the version as $10,000 \times M + 100 \times m + p$ , where $M$ is the major, $m$ the minor version number and $p$ the patch level. For example, 20717 means 2.7.17. |
| PL_QUERY_ENCODING   | Return the default stream encoding of Prolog (of type <code>IOENC</code> ).  |
| PL_QUERY_USER_CPU   | Get amount of user CPU time of the process in milliseconds.  |

Table 12.1: `PL_query()` options

*mod* is `NULL`, the predicate is created in the module of the calling context, or if no context is present in the module *user*.

When called in Prolog, Prolog will call *function*. *flags* form a bitwise *or*'ed list of options for the installation. These are:

|                        |  |
|------------------------|--|
| PL_FA_META             | Provide meta-predicate info (see below)                            |
| PL_FA_TRANSPARENT      | Predicate is module transparent (deprecated)                       |
| PL_FA_NONDETERMINISTIC | Predicate is non-deterministic. See also <code>PL_retry()</code> . |
| PL_FA_NOTRACE          | Predicate cannot be seen in the tracer                             |
| PL_FA_VARARGS          | Use alternative calling convention.                                |

If `PL_FA_META` is provided, `PL_register_foreign_in_module()` takes one extra argument. This argument is of type `const char*`. This string must be exactly as long as the number of arguments of the predicate and filled with characters from the set `0-9:~+?`. See `meta_predicate/1` for details. `PL_FA_TRANSPARENT` is implied if at least one meta-argument is provided (`0-9:~`). Note that meta-arguments are *not always* passed as `<module>:<term>`. Always use `PL_strip_module()` to extract the module and plain term from a meta-argument.<sup>9</sup>

Predicates may be registered either before or after `PL_initialise()`. When registered before initialisation the registration is recorded and executed after installing the system predicates and before loading the saved state.

Default calling (i.e. without `PL_FA_VARARGS`) *function* is passed the same number of `term_t`

<sup>9</sup>It is encouraged to pass an additional `NULL` pointer for non-meta-predicates.

arguments as the arity of the predicate and, if the predicate is non-deterministic, an extra argument of type `control_t` (see section 12.4.1). If `PL_FA_VARARGS` is provided, *function* is called with three arguments. The first argument is a `term_t` handle to the first argument. Further arguments can be reached by adding the offset (see also `PL_new_term_refs()`). The second argument is the arity, which defines the number of valid term references in the argument vector. The last argument is used for non-deterministic calls. It is currently undocumented and should be defined of type `void*`. Here is an example:

```
static foreign_t
atom_checksum(term_t a0, int arity, void* context)
{ char *s;

  if ( PL_get_atom_chars(a0, &s) )
  { int sum;

    for(sum=0; *s; s++)
      sum += *s&0xff;

    return PL_unify_integer(a0+1, sum&0xff);
  }

  return FALSE;
}

install_t
install()
{ PL_register_foreign("atom_checksum", 2,
                     atom_checksum, PL_FA_VARARGS);
}
```

`int PL_register_foreign(const char *name, int arity, foreign_t (*function)(), int flags, ...)`

Same as `PL_register_foreign_in_module()`, passing `NULL` for the *module*.

`void PL_register_extensions_in_module(const char *module, PL_extension *e)`

Register a series of predicates from an array of definitions of the type `PL_extension` in the given *module*. If *module* is `NULL`, the predicate is created in the module of the calling context, or if no context is present in the module user. The `PL_extension` type is defined as

```
typedef struct PL_extension
{ char          *predicate_name; /* Name of the predicate */
  short         arity;           /* Arity of the predicate */
  pl_function_t function;        /* Implementing functions */
  short         flags;           /* Or of PL_FA_... */
} PL_extension;
```

For details, see `PL_register_foreign_in_module()`. Here is an example of its usage:

```

static PL_extension predicates[] = {
{ "foo",          1,          pl_foo, 0 },
{ "bar",          2,          pl_bar, PL_FA_NONDETERMINISTIC },
{ NULL,           0,          NULL,  0 }
};

main(int argc, char **argv)
{ PL_register_extensions_in_module("user", predicates);

  if ( !PL_initialise(argc, argv) )
    PL_halt(1);

  ...
}

```

void **PL\_register\_extensions**( *PL\_extension \*e*)

Same as `PL_register_extensions_in_module()` using `NULL` for the *module* argument.

### 12.4.20 Foreign Code Hooks

For various specific applications some hooks are provided.

`PL_dispatch_hook_t` **PL\_dispatch.hook**(*PL\_dispatch\_hook\_t*)

If this hook is not `NULL`, this function is called when reading from the terminal. It is supposed to dispatch events when SWI-Prolog is connected to a window environment. It can return two values: `PL_DISPATCH_INPUT` indicates Prolog input is available on file descriptor 0 or `PL_DISPATCH_TIMEOUT` to indicate a timeout. The old hook is returned. The type `PL_dispatch_hook_t` is defined as:

```
typedef int  (*PL_dispatch_hook_t) (void);
```

void **PL\_abort.hook**(*PL\_abort\_hook\_t*)

Install a hook when `abort/0` is executed. SWI-Prolog `abort/0` is implemented using `setjmp()/longjmp()` construct. The hooks are executed in the reverse order of their registration after the `longjmp()` took place and before the Prolog top level is reinvoked. The type `PL_abort_hook_t` is defined as:

```
typedef void (*PL_abort_hook_t) (void);
```

int **PL\_abort.unhook**(*PL\_abort\_hook\_t*)

Remove a hook installed with `PL_abort.hook()`. Returns `FALSE` if no such hook is found, `TRUE` otherwise.

`void PL_on_halt(int (*f)(int, void *), void *closure)`

Register the function *f* to be called if SWI-Prolog is halted. The function is called with two arguments: the exit code of the process (0 if this cannot be determined) and the *closure* argument passed to the `PL_on_halt()` call. Handlers *must* return 0. Other return values are reserved for future use. See also `at_halt/1`.<sup>10</sup> These handlers are called *before* system cleanup and can therefore access all normal Prolog resources. See also `PL_exit_hook()`.

`void PL_exit_hook(int (*f)(int, void *), void *closure)`

Similar to `PL_on_halt()`, but the hooks are executed by `PL_halt()` instead of `PL_cleanup()` just before calling `exit()`.

`PL_agc_hook_t PL_agc_hook(PL_agc_hook_t new)`

Register a hook with the atom-garbage collector (see `garbage_collect_atoms/0`) that is called on any atom that is reclaimed. The old hook is returned. If no hook is currently defined, `NULL` is returned. The argument of the called hook is the atom that is to be garbage collected. The return value is an `int`. If the return value is zero, the atom is **not** reclaimed. The hook may invoke any Prolog predicate.

The example below defines a foreign library for printing the garbage collected atoms for debugging purposes.

```
#include <SWI-Stream.h>
#include <SWI-Prolog.h>

static int
atom_hook(atom_t a)
{ Sdprintf("AGC: deleting %s\n", PL_atom_chars(a));

  return TRUE;
}

static PL_agc_hook_t old;

install_t
install()
{ old = PL_agc_hook(atom_hook);
}

install_t
uninstall()
{ PL_agc_hook(old);
}
```

<sup>10</sup>**BUG:** Although both `PL_on_halt()` and `at_halt/1` are called in FIFO order, *all* `at_halt/1` handlers are called before *all* `PL_on_halt()` handlers.

### 12.4.21 Storing foreign data

When combining foreign code with Prolog, it can be necessary to make data represented in the foreign language available to Prolog. For example, to pass it to another foreign function. At the end of this section, there is a partial implementation of using foreign functions to manage bit-vectors. Another example is the SGML/XML library that manages a ‘parser’ object, an object that represents the current state of the parser and that can be directed to perform actions such as parsing a document or make queries about the document content.

This section provides some hints for handling foreign data in Prolog. There are four options for storing such data:

- *Natural Prolog data*  
Uses the representation one would choose if no foreign interface was required. For example, a bitvector representing a list of small integers can be represented as a Prolog list of integers.
- *Opaque packed data on the stacks*  
It is possible to represent the raw binary representation of the foreign object as a Prolog string (see section 5.2). Strings may be created from foreign data using `PL_put_string_nchars()` and retrieved using `PL_get_string_chars()`. It is good practice to wrap the string in a compound term with arity 1, so Prolog can identify the type. The hook `portray/1` rules may be used to streamline printing such terms during development.
- *Opaque packed data in a blob*  
Similar to the above solution, binary data can be stored in an atom. The blob interface (section 12.4.8) provides additional facilities to assign a type and hook-functions that act on creation and destruction of the underlying atom.
- *Natural foreign data, passed as a pointer*  
An alternative is to pass a pointer to the foreign data. Again, the pointer is often wrapped in a compound term.

The choice may be guided using the following distinctions

- *Is the data opaque to Prolog*  
With ‘opaque’ data, we refer to data handled in foreign functions, passed around in Prolog, but where Prolog never examines the contents of the data itself. If the data is opaque to Prolog, the selection will be driven solely by simplicity of the interface and performance.
- *What is the lifetime of the data*  
With ‘lifetime’ we refer to how it is decided that the object is (or can be) destroyed. We can distinguish three cases:
  1. The object must be destroyed on backtracking and normal Prolog garbage collection (i.e., it acts as a normal Prolog term). In this case, representing the object as a Prolog string (second option above) is the only feasible solution.
  2. The data must survive Prolog backtracking. This leaves two options. One is to represent the object using a pointer and use explicit creation and destruction, making the programmer responsible. The alternative is to use the blob-interface, leaving destruction to the (atom) garbage collector.

3. The data lives as during the lifetime of a foreign function that implements a predicate. If the predicate is deterministic, foreign automatic variables are suitable. If the predicate is non-deterministic, the data may be allocated using `malloc()` and a pointer may be passed. See section [12.4.1](#).

### Examples for storing foreign data

In this section, we outline some examples, covering typical cases. In the first example, we will deal with extending Prolog's data representation with integer sets, represented as bit-vectors. Then, we discuss the outline of the DDE interface.

**Integer sets** with not-too-far-apart upper- and lower-bounds can be represented using bit-vectors. Common set operations, such as union, intersection, etc., are reduced to simple *and*'ing and *or*'ing the bit-vectors. This can be done using Prolog's unbounded integers.

For really demanding applications, foreign representation will perform better, especially time-wise. Bit-vectors are naturally expressed using string objects. If the string is wrapped in `bitvector/1`, the lower-bound of the vector is 0 and the upper-bound is not defined; an implementation for getting and putting the sets as well as the union predicate for it is below.

```
#include <SWI-Prolog.h>

#define max(a, b) ((a) > (b) ? (a) : (b))
#define min(a, b) ((a) < (b) ? (a) : (b))

static functor_t FUNCTOR_bitvector1;

static int
get_bitvector(term_t in, int *len, unsigned char **data)
{ if ( PL_is_functor(in, FUNCTOR_bitvector1) )
  { term_t a = PL_new_term_ref();

    PL_get_arg(1, in, a);
    return PL_get_string(a, (char **)data, len);
  }

  PL_fail;
}

static int
unify_bitvector(term_t out, int len, const unsigned char *data)
{ if ( PL_unify_functor(out, FUNCTOR_bitvector1) )
  { term_t a = PL_new_term_ref();

    PL_get_arg(1, out, a);

    return PL_unify_string_nchars(a, len, (const char *)data);
  }
}
```

```

    PL_fail;
}

static foreign_t
pl_bitvector_union(term_t t1, term_t t2, term_t u)
{ unsigned char *s1, *s2;
  int l1, l2;

  if ( get_bitvector(t1, &l1, &s1) &&
      get_bitvector(t2, &l2, &s2) )
  { int l = max(l1, l2);
    unsigned char *s3 = alloca(l);

    if ( s3 )
    { int n;
      int ml = min(l1, l2);

      for(n=0; n<ml; n++)
        s3[n] = s1[n] | s2[n];
      for( ; n < l1; n++)
        s3[n] = s1[n];
      for( ; n < l2; n++)
        s3[n] = s2[n];

      return unify_bitvector(u, l, s3);
    }

    return PL_warning("Not enough memory");
  }

  PL_fail;
}

install_t
install()
{ PL_register_foreign("bitvector_union", 3, pl_bitvector_union, 0);

  FUNCTOR_bitvector1 = PL_new_functor(PL_new_atom("bitvector"), 1);
}

```

**The DDE interface** (see section 4.43) represents another common usage of the foreign interface: providing communication to new operating system features. The DDE interface requires knowledge about active DDE server and client channels. These channels contains various foreign data types. Such

an interface is normally achieved using an open/close protocol that creates and destroys a *handle*. The handle is a reference to a foreign data structure containing the relevant information.

There are a couple of possibilities for representing the handle. The choice depends on responsibilities and debugging facilities. The simplest approach is to use `PL_unify_pointer()` and `PL_get_pointer()`. This approach is fast and easy, but has the drawbacks of (untyped) pointers: there is no reliable way to detect the validity of the pointer, nor to verify that it is pointing to a structure of the desired type. The pointer may be wrapped into a compound term with arity 1 (i.e., `dde_channel(<Pointer>)`), making the type-problem less serious.

Alternatively (used in the DDE interface), the interface code can maintain a (preferably variable length) array of pointers and return the index in this array. This provides better protection. Especially for debugging purposes, wrapping the handle in a compound is a good suggestion.

### 12.4.22 Embedding SWI-Prolog in other applications

With embedded Prolog we refer to the situation where the ‘main’ program is not the Prolog application. Prolog is sometimes embedded in C, C++, Java or other languages to provide logic based services in a larger application. Embedding loads the Prolog engine as a library to the external language. Prolog itself only provides for embedding in the C language (compatible with C++). Embedding in Java is achieved using JPL using a C-glue between the Java and Prolog C interfaces.

The most simple embedded program is below. The interface function `PL_initialise()` **must** be called before any of the other SWI-Prolog foreign language functions described in this chapter, except for `PL_initialise_hook()`, `PL_new_atom()`, `PL_new_functor()` and `PL_register_foreign()`. `PL_initialise()` interprets all the command line arguments, except for the `-t toplevel` flag that is interpreted by `PL_toplevel()`.

```
int
main(int argc, char **argv)
{ if ( !PL_initialise(argc, argv) )
    PL_halt(1);

    PL_halt(PL_toplevel() ? 0 : 1);
}
```

**int PL\_initialise(int argc, char \*\*argv)**

Initialises the SWI-Prolog heap and stacks, restores the Prolog state, loads the system and personal initialisation files, runs the `initialization/1` hooks and finally runs the `-g goal` hook.

Special consideration is required for `argv[0]`. On **Unix**, this argument passes the part of the command line that is used to locate the executable. Prolog uses this to find the file holding the running executable. The **Windows** version uses this to find a *module* of the running executable. If the specified module cannot be found, it tries the module `libpl.dll`, containing the Prolog runtime kernel. In all these cases, the resulting file is used for two purposes:

- See whether a Prolog saved state is appended to the file. If this is the case, this state will be loaded instead of the default `boot.prc` file from the SWI-Prolog home directory. See also `qsave_program/[1,2]` and section 12.5.



- Find the Prolog home directory. This process is described in detail in section 12.6.

`PL_initialise()` returns 1 if all initialisation succeeded and 0 otherwise.<sup>11</sup>

In most cases, *argc* and *argv* will be passed from the main program. It is allowed to create your own argument vector, provided *argv[0]* is constructed according to the rules above. For example:

```
int
main(int argc, char **argv)
{ char *av[10];
  int ac = 0;

  av[ac++] = argv[0];
  av[ac++] = "-x";
  av[ac++] = "mystate";
  av[ac] = NULL;

  if ( !PL_initialise(ac, av) )
    PL_halt(1);
  ...
}
```

Please note that the passed argument vector may be referred from Prolog at any time and should therefore be valid as long as the Prolog engine is used.

A good setup in Windows is to add SWI-Prolog's bin directory to your PATH and either pass a module holding a saved state, or "libpl.dll" as *argv[0]*. If the Prolog state is attached to a DLL (see the `-dll` option of `swipl-ld`), pass the name of this DLL.

`int PL_is_initialised(int *argc, char ***argv)`

Test whether the Prolog engine is already initialised. Returns FALSE if Prolog is not initialised and TRUE otherwise. If the engine is initialised and *argc* is not NULL, the argument count used with `PL_initialise()` is stored in *argc*. Same for the argument vector *argv*.

`int PL_set_resource_db_mem(const unsigned char *data, size_t size)`

This function must be called at most once and *before* calling `PL_initialise()`. The memory area designated by *data* and *size* must contain the resource data and be in the format as produced by `qsave_program/2`. The memory area is accessed by `PL_initialise()` as well as calls to `open_resource/3`.<sup>12</sup>

For example, we can include the bootstrap data into an embedded executable using the steps below. The advantage of this approach is that it is fully supported by any OS and you obtain a single file executable.

1. Create a saved state using `qsave_program/2` or

<sup>11</sup>BUG: Various fatal errors may cause `PL_initialise()` to call `PL_halt(1)`, preventing it from returning at all.

<sup>12</sup>This implies that the data must remain accessible during the lifetime of the process if `open_resource/3` is used. Future versions may provide a function to detach the resource database and cause `open_resource/3` to raise an exception.

```
% swipl -o state -c file.pl ...
```

2. Create a C source file from the state using e.g., the Unix utility `xxd(1)`:

```
% xxd -i state > state.h
```

3. Embed Prolog as in the example below. Instead of calling the `toplevel` you probably want to call your application code.

```
#include <SWI-Prolog.h>
#include "state.h"

int
main(int argc, char **argv)
{ if ( !PL_set_resource_db_mem(state, state_len) ||
      !PL_initialise(argc, argv) )
    PL_halt(1);

    return PL_toplevel();
}
```

Alternative to `xxd`, it is possible to use inline assembler, e.g. the `gcc incbin` instruction. Code for `gcc` was provided by Roberto Bagnara on the SWI-Prolog mailinglist. Given the state in a file `state`, create the following assembler program:

```
.globl _state
.globl _state_end
_state:
    .incbin "state"
_state_end:
```

Now include this as follows:

```
#include <SWI-Prolog.h>

#if __linux
#define STATE _state
#define STATE_END _state_end
#else
#define STATE state
#define STATE_END state_end
#endif

extern unsigned char STATE[];
extern unsigned char STATE_END[];
```

```

int
main(int argc, char **argv)
{ if ( !PL_set_resource_db_mem(STATE, STATE_END - STATE) ||
      !PL_initialise(argc, argv) )
    PL_halt(1);
  return PL_toplevel();
}

```

As Jose Morales pointed at <https://github.com/graphitemaster/incbin>, which contains a portability layer on top of the above idea.

**int PL\_toplevel()**

Runs the goal of the `-t toplevel` switch (default `prolog/0`) and returns 1 if successful, 0 otherwise.

**int PL\_cleanup(int status)**

This function performs the reverse of `PL_initialise()`. It runs the `PL_on_halt()` and `at_halt/1` handlers, closes all streams (except for the ‘standard I/O’ streams which are flushed only), deallocates all memory if *status* equals ‘0’ and restores all signal handlers. The *status* argument is passed to the various termination hooks and indicates the *exit-status*.

The function returns TRUE if successful and FALSE otherwise. Currently, FALSE is returned when an attempt is made to call `PL_cleanup()` recursively or if one of the exit handlers cancels the termination using `cancel_halt/1`. Exit handlers may only cancel termination if *status* is 0.

In theory, this function allows deleting and restarting the Prolog system in the same process. In practice, SWI-Prolog’s cleanup process is far from complete, and trying to revive the system using `PL_initialise()` will leak memory in the best case. It can also crash the application.

In this state, there is little practical use for this function. If you want to use Prolog temporarily, consider running it in a separate process. If you want to be able to reset Prolog, your options are (again) a separate process, modules or threads.

**void PL\_cleanup\_fork()**

Stop intervaltimer that may be running on behalf of `profile/1`. The call is intended to be used in combination with `fork()`:

```

if ( (pid=fork()) == 0 )
{ PL_cleanup_fork();
  <some exec variation>
}

```

The call behaves the same on Windows, though there is probably no meaningful application.

**int PL\_halt(int status)**

Clean up the Prolog environment using `PL_cleanup()` and if successful call `exit()` with the *status* argument. Returns FALSE if exit was cancelled by `PL_cleanup()`.

### Threading, Signals and embedded Prolog

This section applies to Unix-based environments that have signals or multithreading. The Windows version is compiled for multithreading, and Windows lacks proper signals.

We can distinguish two classes of embedded executables. There are small C/C++ programs that act as an interfacing layer around Prolog. Most of these programs can be replaced using the normal Prolog executable extended with a dynamically loaded foreign extension and in most cases this is the preferred route. In other cases, Prolog is embedded in a complex application that—like Prolog—wants to control the process environment. A good example is Java. Embedding Prolog is generally the only way to get these environments together in one process image. Java VMs, however, are by nature multithreaded and appear to do signal handling (software interrupts).

On Unix systems, SWI-Prolog installs handlers for the following signals:

**SIGUSR2** has an empty signal handler. This signal is sent to a thread after sending a thread-signal (see `thread_signal/2`). It causes blocking system calls to return with `EINTR`, which gives them the opportunity to react to thread-signals.

In some cases the embedded system and SWI-Prolog may both use `SIGUSR2` without conflict. If the embedded system redefines `SIGUSR2` with a handler that runs quickly and no harm is done in the embedded system due to spurious wakeup when initiated from Prolog, there is no problem. If SWI-Prolog is initialised *after* the embedded system it will call the handler set by the embedded system and the same conditions as above apply. SWI-Prolog's handler is a simple function only chaining a possibly previously registered handler. SWI-Prolog can handle spurious `SIGUSR2` signals.

**SIGINT** is used by the top level to activate the tracer (typically bound to `control-C`). The first `control-C` posts a request for starting the tracer in a safe, synchronous fashion. If `control-C` is hit again before the safe route is executed, it prompts the user whether or not a forced interrupt is desired.

**SIGTERM**, **SIGABRT** and **SIGQUIT** are caught to cleanup before killing the process again using the same signal.

**SIGSEGV**, **SIGILL**, **SIGBUS**, **SIGFPE** and **SIGSYS** are caught by to print a backtrace before killing the process again using the same signal.

**SIGHUP** is caught and causes the process to exit with status 2 after cleanup.

The `--nosignals` option can be used to inhibit all signal processing except for `SIGUSR2`. The handling of `SIGUSR2` is vital for dealing with blocking system call in threads. The used signal may be changed using the `--sigalert=NUM` option or disabled using `--sigalert=0`.

## 12.5 Linking embedded applications using `swipl-ld`

The utility program `swipl-ld` (Win32: `swipl-ld.exe`) may be used to link a combination of C files and Prolog files into a stand-alone executable. `swipl-ld` automates most of what is described in the previous sections.

In normal usage, a copy is made of the default embedding template `.../swipl/include/stub.c`. The `main()` routine is modified to suit your application. `PLinitialise()` **must** be

passed the program name (*argv[0]*) (Win32: the executing program can be obtained using `GetModuleFileName()`). The other elements of the command line may be modified. Next, `swipl-ld` is typically invoked as:

```
swipl-ld -o output stubfile.c [other-c-or-o-files] [plfiles]
```

`swipl-ld` will first split the options into various groups for both the C compiler and the Prolog compiler. Next, it will add various default options to the C compiler and call it to create an executable holding the user's C code and the Prolog kernel. Then, it will call the SWI-Prolog compiler to create a saved state from the provided Prolog files and finally, it will attach this saved state to the created emulator to create the requested executable.

Below, it is described how the options are split and which additional options are passed.

**-help**

Print brief synopsis.

**-pl *prolog***

Select the Prolog to use. This Prolog is used for two purposes: get the home directory as well as the compiler/linker options and create a saved state of the Prolog code.

**-ld *linker***

Linker used to link the raw executable. Default is to use the C compiler (Win32: `link.exe`).

**-cc *C compiler***

Compiler for `.c` files found on the command line. Default is the compiler used to build SWI-Prolog accessible through the Prolog flag `c_cc` (Win32: `cl.exe`).

**-c++ *C++-compiler***

Compiler for C++ source file (extensions `.cpp`, `.cxx`, `.cc` or `.C`) found on the command line. Default is `c++` or `g++` if the C compiler is `gcc` (Win32: `cl.exe`).

**-nostate**

Just relink the kernel, do not add any Prolog code to the new kernel. This is used to create a new kernel holding additional foreign predicates on machines that do not support the shared-library (DLL) interface, or if building the state cannot be handled by the default procedure used by `swipl-ld`. In the latter case the state is created separately and appended to the kernel using `cat <kernel> <state> > <out>` (Win32: `copy /b <kernel>+<state> <out>`).

**-shared**

Link C, C++ or object files into a shared object (DLL) that can be loaded by the `load_foreign_library/1` predicate. If used with `-c` it sets the proper options to compile a C or C++ file ready for linking into a shared object.

**-dll**

*Windows only.* Embed SWI-Prolog into a DLL rather than an executable.

**-c**

Compile C or C++ source files into object files. This turns `swipl-ld` into a replacement for the C or C++ compiler, where proper options such as the location of the include directory are passed automatically to the compiler.

**-E**

Invoke the C preprocessor. Used to make `swipl-ld` a replacement for the C or C++ compiler.

**-pl-options** ...

Additional options passed to Prolog when creating the saved state. The first character immediately following `pl-options` is used as separator and translated to spaces when the argument is built. Example: `-pl-options, -F, xpce` passes `-F xpce` as additional flags to Prolog.

**-ld-options** ...

Passes options to the linker, similar to `-pl-options`.

**-cc-options** ...

Passes options to the C/C++ compiler, similar to `-pl-options`.

**-v**

Select verbose operation, showing the various programs and their options.

**-o** *outfile*

Reserved to specify the final output file.

**-l***library*

Specifies a library for the C compiler. By default, `-lswipl` (Win32: `libpl.lib`) and the libraries needed by the Prolog kernel are given.

**-L***library-directory*

Specifies a library directory for the C compiler. By default the directory containing the Prolog C library for the current architecture is passed.

**-g** | **-I***include-directory* | **-D***definition*

These options are passed to the C compiler. By default, the include directory containing `SWI-Prolog.h` is passed. `swipl-ld` adds two additional `* -Ddef` flags:

**-D\_\_SWI\_PROLOG\_\_**

Indicates the code is to be connected to SWI-Prolog.

**-D\_\_SWI\_EMBEDDED\_\_**

Indicates the creation of an embedded program.

**\*.o** | **\*.c** | **\*.C** | **\*.cxx** | **\*.cpp**

Passed as input files to the C compiler.

**\*.pl** | **\*.qlf**

Passed as input files to the Prolog compiler to create the saved state.

**\***

All other options. These are passed as linker options to the C compiler.

### 12.5.1 A simple example

The following is a very simple example going through all the steps outlined above. It provides an arithmetic expression evaluator. We will call the application `calc` and define it in the files `calc.c` and `calc.pl`. The Prolog file is simple:

```
calc(Atom) :-  
    term_to_atom(Expr, Atom),  
    A is Expr,  
    write(A),  
    nl.
```

The C part of the application parses the command line options, initialises the Prolog engine, locates the `calc/1` predicate and calls it. The coder is in figure 12.4.

The application is now created using the following command line:

```
% swipl-ld -o calc calc.c calc.pl
```

The following indicates the usage of the application:

```
% calc pi/2  
1.5708
```

## 12.6 The Prolog ‘home’ directory

Executables embedding SWI-Prolog should be able to find the ‘home’ directory of the development environment unless a self-contained saved state has been added to the executable (see `qsave_program/[1,2]` and section 12.5).

If Prolog starts up, it will try to locate the development environment. To do so, it will try the following steps until one succeeds:

1. If the `--home=DIR` is provided, use this.
2. If the environment variable `SWI_HOME_DIR` is defined and points to an existing directory, use this.
3. If the environment variable `SWIPL` is defined and points to an existing directory, use this.
4. Locate the primary executable or (Windows only) a component (*module*) thereof and check whether the parent directory of the directory holding this file contains the file `swipl`. If so, this file contains the (relative) path to the home directory. If this directory exists, use this. This is the normal mechanism used by the binary distribution.
5. If the precompiled path exists, use it. This is only useful for a source installation.

If all fails and there is no state attached to the executable or provided Windows module (see `PL_initialise()`), SWI-Prolog gives up. If a state is attached, the current working directory is used.

The `file_search_path/2` alias `swi` is set to point to the home directory located.

```
#include <stdio.h>
#include <SWI-Prolog.h>

#define MAXLINE 1024

int
main(int argc, char **argv)
{ char expression[MAXLINE];
  char *e = expression;
  char *program = argv[0];
  char *plav[2];
  int n;

  /* combine all the arguments in a single string */

  for(n=1; n<argc; n++)
  { if ( n != 1 )
    *e++ = ' ';
    strcpy(e, argv[n]);
    e += strlen(e);
  }

  /* make the argument vector for Prolog */

  plav[0] = program;
  plav[1] = NULL;

  /* initialise Prolog */

  if ( !PL_initialise(1, plav) )
    PL_halt(1);

  /* Lookup calc/1 and make the arguments and call */

  { predicate_t pred = PL_predicate("calc", 1, "user");
    term_t h0 = PL_new_term_refs(1);
    int rval;

    PL_put_atom_chars(h0, expression);
    rval = PL_call_predicate(NULL, PL_Q_NORMAL, pred, h0);

    PL_halt(rval ? 0 : 1);
  }

  return 0;
}
```



## 12.7 Example of Using the Foreign Interface

Below is an example showing all stages of the declaration of a foreign predicate that transforms atoms possibly holding uppercase letters into an atom only holding lowercase letters. Figure 12.5 shows the C source file, figure 12.6 illustrates compiling and loading of foreign code.

```
/* Include file depends on local installation */
#include <SWI-Prolog.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>

foreign_t
pl_lowercase(term_t u, term_t l)
{ char *copy;
  char *s, *q;
  int rval;

  if ( !PL_get_atom_chars(u, &s) )
    return PL_warning("lowercase/2: instantiation fault");
  copy = malloc(strlen(s)+1);

  for( q=copy; *s; q++, s++)
    *q = (isupper(*s) ? tolower(*s) : *s);
  *q = '\0';

  rval = PL_unify_atom_chars(l, copy);
  free(copy);

  return rval;
}

install_t
install()
{ PL_register_foreign("lowercase", 2, pl_lowercase, 0);
}
```

Figure 12.5: Lowercase source file

```
% gcc -I/usr/local/lib/swipl-\plversion/include -fpic -c lowercase.c
% gcc -shared -o lowercase.so lowercase.o
% swipl
Welcome to SWI-Prolog (...)
...

1 ?- load_foreign_library(lowercase).
true.

2 ?- lowercase('Hello World!', L).
L = 'hello world!'.
```

Figure 12.6: Compiling the C source and loading the object file

## 12.8 Notes on Using Foreign Code

### 12.8.1 Foreign debugging functions

The functions in this section are primarily intended for debugging foreign extensions or embedded Prolog. Violating the constraints of the foreign interface often leads to crashes in a subsequent garbage collection. If this happens, the system needs to be recompiled with the cflags `-DO_DEBUG`. This is normally achieved by editing `src/Makefile` and changing the definition of `COFLAGS` to the value below. The `-gdwarf-2 -g3` provides detailed debugging information for `gcc`. If you use another C compiler you may need other flags.

```
COFLAGS=-DO_DEBUG -gdwarf-2 -g3
```

After recompiling the Prolog kernel all functions listed above are available to use from the debugger (e.g. `gdb`) or can be placed at critical location in your code or the system code.

`void PL_backtrace(int depth, int flags)`

Dump a Prolog backtrace to the `user_error` stream. *Depth* is the number of frames to dump. *Flags* is a bitwise or of the following constants:

#### **PL\_BT\_SAFE**

(0x1) Do not try to print *goals*. Instead, just print the predicate name and arity. This reduces the likelihood to crash if `PL_backtrace()` is called in a damaged environment.

#### **PL\_BT\_USER**

(0x2) Only show ‘user’ frames. Default is to also show frames of hidden built-in predicates.

`char * PL_backtrace_string(int depth, int flags)`

As `PL_backtrace()`, but returns the stack as a string. The string uses UTF-8 encoding. The returned string must be freed using `PL_free()`. This function was added to get stack traces from running servers where I/O is redirected or discarded. For example, using `gdb`, a stack trace is printed in the `gdb` console regardless of Prolog I/O redirection using the following command:

```
(gdb) printf "%s", PL_backtrace_string(25,0)
```

The source distribution provides the script `scripts/swipl-bt` that exploits `gdb` and `PL_backtrace_string()` to print stack traces in various formats for a SWI-Prolog process, given its process id.

`int PL_check_data(term_t data)`

Check the consistency of the term *data*. Returns `TRUE` this is actually implemented in the current version and `FALSE` otherwise. The actual implementation only exists if the system is compiled with the cflag `-DO_DEBUG` or `-DO_MAINTENANCE`. This is *not* the default.

`int PL_check_stacks()`

Check the consistency of the runtime stacks of the calling thread. Returns `TRUE` this is actually implemented in the current version and `FALSE` otherwise. The actual implementation only

exists if the system is compiled with the cflag `-DO_DEBUG` or `-DO_MAINTENANCE`. This is *not* the default.

The Prolog kernel sources use the macro `DEBUG (Topic, Code)`. These macros are disabled in the production version and must be enabled by recompiling the system as described above. Specific topics can be enabled and disabled using the predicates `prolog_debug/1` and `prolog_nodebug/1`. In addition, they can be activated from the commandline using commandline option `-d topics`, where *topics* is a comma-separated list of debug topics to enable. For example, the code below adds many consistency checks and prints messages if the Prolog signal handler dispatches signals.

```
$ swipl -d chk_secure,msg_signal
```

**prolog\_debug(+Topic)**

**prolog\_nodebug(+Topic)**

Enable/disable a debug topic. *Topic* is an atom that identifies the desired topic. The available topics are defined in `src/pl-debug.h`. Please search the sources to find out what is actually printed and when. We highlight one topic here:

**chk\_secure(A)**

dd many expensive consistency checks to the system. This should typically be used when the system crashes, notably in the garbage collector. Garbage collection crashes are in most cases caused by invalid data on the Prolog stacks. This debug topic may help locating how the invalid data was created.

### 12.8.2 Memory Allocation

SWI-Prolog's heap memory allocation is based on the `malloc(3)` library routines. SWI-Prolog provides the functions below as a wrapper around `malloc()`. Allocation errors in these functions trap SWI-Prolog's fatal-error handler, in which case `PL_malloc()` or `PL_realloc()` do not return.

Portable applications must use `PL_free()` to release strings returned by `PL_get_chars()` using the `BUF_MALLOC` argument. Portable applications may use both `PL_malloc()` and friends or `malloc()` and friends but should not mix these two sets of functions on the same memory.

`void * PL_malloc(size_t bytes)`

Allocate *bytes* of memory. On failure SWI-Prolog's fatal-error handler is called and `PL_malloc()` does not return. Memory allocated using these functions must use `PL_realloc()` and `PL_free()` rather than `realloc()` and `free()`.

`void * PL_realloc(void *mem, size_t size)`

Change the size of the allocated chunk, possibly moving it. The *mem* argument must be obtained from a previous `PL_malloc()` or `PL_realloc()` call.

`void PL_free(void *mem)`

Release memory. The *mem* argument must be obtained from a previous `PL_malloc()` or `PL_realloc()` call.

### Boehm-GC support

This section is obsolete. Although the Boehm-GC interfaces still exist, it turns out that the scalability is not good enough for SWI-Prolog. It is unlikely that SWI-Prolog will ever switch to Boehm-GC.

To accommodate future use of the Boehm garbage collector<sup>13</sup> for heap memory allocation, the interface provides the functions described below. Foreign extensions that wish to use the Boehm-GC facilities can use these wrappers. Please note that if SWI-Prolog is not compiled to use Boehm-GC (default), the user is responsible for calling `PL_free()` to reclaim memory.

```
void* PL_malloc_atomic(size_t bytes)
void* PL_malloc_uncollectable(size_t bytes)
void* PL_malloc_atomic_uncollectable(size_t bytes)
```

If Boehm-GC is not used, these are all the same as `PL_malloc()`. With Boehm-GC, these map to the corresponding Boehm-GC functions. *Atomic* means that the content should not be scanned for pointers, and *uncollectable* means that the object should never be garbage collected.

```
void* PL_malloc_stubborn(size_t bytes)
void PL_end_stubborn_change(void *memory)
```

These functions allow creating objects, promising GC that the content will not change after `PL_end_stubborn_change()`.

### 12.8.3 Compatibility between Prolog versions

Great care is taken to ensure binary compatibility of foreign extensions between different Prolog versions. Only the much less frequently used stream interface has been responsible for binary incompatibilities.

Source code that relies on new features of the foreign interface can use the macro `PLVERSION` to find the version of `SWI-Prolog.h` and `PL_query()` using the option `PL_QUERY_VERSION` to find the version of the attached Prolog system. Both follow the same numbering schema explained with `PL_query()`.

### 12.8.4 Debugging and profiling foreign code (valgrind)

This section is only relevant for Unix users on platforms supported by [valgrind](#). Valgrind is an excellent binary instrumentation platform. Unlike many other instrumentation platforms, valgrind can deal with code loaded through `dlopen()`.

The `callgrind` tool can be used to profile foreign code loaded under SWI-Prolog. Compile the foreign library adding `-g` option to `gcc` or `swipl-ld`. By setting the environment variable `VALGRIND` to `yes`, SWI-Prolog will *not* release loaded shared objects using `dlclose()`. This trick is required to get source information on the loaded library. Without, valgrind claims that the shared object has no debugging information.<sup>14</sup> Here is the complete sequence using `bash` as login shell:

<sup>13</sup>[http://www.hpl.hp.com/personal/Hans\\_Boehm/gc/](http://www.hpl.hp.com/personal/Hans_Boehm/gc/)

<sup>14</sup>Tested using valgrind version 3.2.3 on x64.

```
% VALGRIND=yes valgrind --tool=callgrind pl <args>
<prolog interaction>
% kcachegrind callgrind.out.<pid>
```

### 12.8.5 Name Conflicts in C modules

In the current version of the system all public C functions of SWI-Prolog are in the symbol table. This can lead to name clashes with foreign code. Someday I should write a program to strip all these symbols from the symbol table (why does Unix not have that?). For now I can only suggest you give your function another name. You can do this using the C preprocessor. If—for example—your foreign package uses a function `warning()`, which happens to exist in SWI-Prolog as well, the following macro should fix the problem:

```
#define warning warning_
```

Note that shared libraries do not have this problem as the shared library loader will only look for symbols in the main executable for symbols that are not defined in the library itself.

### 12.8.6 Compatibility of the Foreign Interface

The term reference mechanism was first used by Quintus Prolog version 3. SICStus Prolog version 3 is strongly based on the Quintus interface. The described SWI-Prolog interface is similar to using the Quintus or SICStus interfaces, defining all foreign-predicate arguments of type `+term`. SWI-Prolog explicitly uses type `functor_t`, while Quintus and SICStus use *<name>* and *<arity>*. As the names of the functions differ from Prolog to Prolog, a simple macro layer dealing with the names can also deal with this detail. For example:

```
#define QP_put_functor(t, n, a) \
    PL_put_functor(t, PL_new_functor(n, a))
```

The `PL_unify_*` functions are lacking from the Quintus and SICStus interface. They can easily be emulated, or the put/unify approach should be used to write compatible code.

The `PL_open_foreign_frame()/PL_close_foreign_frame()` combination is lacking from both other Prologs. SICStus has `PL_new_term_refs(0)`, followed by `PL_reset_term_refs()`, that allows for discarding term references.

The Prolog interface for the graphical user interface package XPCE shares about 90% of the code using a simple macro layer to deal with different naming and calling conventions of the interfaces.

# Deploying applications

---

This chapter describes the features of SWI-Prolog for delivering applications using *saved states*.

## 13.1 Deployment options

There are several ways to make a Prolog application available to your users. By far the easiest way is to require the user to install SWI-Prolog and deliver the application as a directory holding source files, other resources the application may need and a *Prolog Script* file that provides the executable. See section 2.10.2. The two-step installation may be slightly less convenient for the end user, but enables the end-user to conveniently run your program on a different operating system or architecture. This mechanism is obviously not suitable if you want to keep the source of your program secret.

Another solution is to use *saved states*, the main topic of this chapter, together with the installed development system and disable *autoloading* requirements into the state using `--no-autoload` or the `autoload(false)` option of `qsave_program/2`. This allows creating the application as a single file, while avoiding the need to ensure that the state is self-contained. For large programs this technique typically reduces startup time by an order of magnitude. This mechanism is particularly suitable for in-house and cloud deployment. It provides some protection against inspecting the source. See section 13.6 for details.

The final solution is to make sure all required resources are present in the saved state. In this case the state may be added to the *emulator* and the application consists of the emulator with state and the shared objects/DLLs required to make the emulator work. If the emulator can be statically linked for the target platform this creates a single file executable that does not require SWI-Prolog installed on the target computer.

## 13.2 Understanding saved states

A SWI-Prolog *saved state* is a *resource archive* that contains the compiled program in a machine-independent format,<sup>1</sup> startup options, optionally shared objects/DLLs and optionally additional *resource* files. As of version 7.7.13, the resource archive format is ZIP. A resource file is normally **created** using the commandline option `-c`:

```
swipl -o mystate option ... -c file.pl ...
```

The above causes SWI-Prolog to load the given Prolog files and call `qsave_program/2` using options created from the *option ...* in the command above.

---

<sup>1</sup>Although the compiled code is independent from the CPU and operating system, 32-bit compiled code does not run on the 64-bit emulator, nor the other way around. Conditionally compiled code (see `if/1`) may also reduce platform independence.

A saved state may be **executed** in several ways. The basic mechanism is to use the `-x`:

```
swipl -x mystate app-arg ...
```

Saved states may have an arbitrary payload at the *start*. This allows combining a (shell) script or the emulator with the state to turn the state into a single file executable. By default a state starts with a shell script (Unix) or the emulator (Windows).<sup>2</sup> The options `emulator(File)` and `stand_alone(Bool)` control what is added at the start of the state. Finally, C/C++ programs that embed Prolog may use a static C string that embeds the state into the executable. See `PL.set_resource_db_mem()`.

### 13.2.1 Creating a saved state

The predicates in this section support creating a saved state. Note that states are commonly created from the commandline using the `-c`, for example:

```
swipl -o mystate --foreign=save -c load.pl
```

Long (`--`) options are translated into options for `qsave_program/2`. This transformation uses the same conventions as used by `argv_options/3`, except that the transformation is guided by the option type. This implies that integer and callable options need to have valid syntax and boolean options may be abbreviated to simply `--autoload` or `--no-autoload` as shorthands for `--autoload=true` and `--autoload=false`.

#### **qsave\_program(+File, +Options)**

Saves the current state of the program to the file *File*. The result is a resource archive *File* containing expresses all Prolog data from the running program, all user-defined resources (see `resource/2` and `open_resource/2`) and optionally all shared objects/DLLs required by the program for the current architecture. Depending on the `stand_alone` option, the resource is headed by the emulator, a Unix shell script or nothing. *Options* is a list of additional options:

#### **stack\_limit(+Bytes)**

Sets default stack limit for the new process. See the command line option `--stack_limit` and the Prolog flag `stack_limit`.

#### **goal(:Callable)**

Initialization goal for the new executable (see `-g`). Two values have special meaning: `prolog` starts the Prolog toplevel and `default` runs `halt/0` if there are initialization goals and the `prolog/0` toplevel otherwise.

#### **toplevel(:Callable)**

Top-level goal for the new executable (see `-t`). Similar to `initialization/2` using `main`, the default toplevel is to enter the Prolog interactive shell unless a goal has been specified using `goal(Callable)`.

#### **init\_file(+Atom)**

Default initialization file for the new executable. See `-f`.

<sup>2</sup>As the default emulator is a short program while the true emulator is in a DLL this keeps the state short.



**class(+Class)**

If `runtime` (default), read resources from the state and disconnect the code loaded into the state from the original source. If `development`, save the predicates in their current state and keep reading resources from their source (if present). See also `open_resource/3`.

**autoload(+Boolean)**

If `true` (default), run `autoload/0` first.

**map(+File)**

Dump a human-readable trace of what has been saved in *File*.

**op(+Action)**

One of `save` (default) to save the current operator table or `standard` to use the initial table of the emulator.

**stand\_alone(+Boolean)**

If `true`, the emulator is the first part of the state. If the emulator is started it tests whether a saved state is attached to itself and load this state. Provided the application has all libraries loaded, the resulting executable is completely independent from the runtime environment or location where it was built. See also section [2.10.2](#).

**emulator(+File)**

File to use for the emulator. Default is the running Prolog image.

**foreign(+Action)**

If `save`, include shared objects (DLLs) into the saved state. See `current_foreign_library/2`. If the program `strip` is available, this is first used to reduce the size of the shared object. If a state is started, `use_foreign_library/1` first tries to locate the foreign resource in the resource database. When found it copies the content of the resource to a temporary file and loads it. If possible (Unix), the temporary object is deleted immediately after opening.<sup>34</sup>

**undefined(+Value)**

Defines what happens if an undefined predicate is found during the code analysis. Values are `ignore` (default) or `error`. In the latter case creating the state is aborted with a message that indicates the undefines predicates and from where they are called.

**obfuscate(+Boolean)**

If `true` (default `false`), replace predicate names with generated symbols to make the code harder to assess for reverse engineering. See section [13.6.1](#).

**verbose(+Boolean)**

If `true` (default `false`), report progress and status, notably regarding auto loading.

**qsave\_program(+File)**

Equivalent to `qsave_program(File, [])`.

**autoload**

Check the current Prolog program for predicates that are referred to, are undefined and have a definition in the Prolog library. Load the appropriate libraries.

<sup>3</sup>This option is experimental and currently disabled by default. It will become the default if it proves robust.

<sup>4</sup>Creating a temporary file is the most portable way to load a shared object from a zip file but requires write access to the file system. Future versions may provide shortcuts for specific platforms that bypass the file system.

This predicate is used by `qsave_program/[1,2]` to ensure the saved state does not depend on availability of the libraries. The predicate `autoload/0` examines all clauses of the loaded program (obtained with `clause/2`) and analyzes the body for referenced goals. Such an analysis cannot be complete in Prolog, which allows for the creation of arbitrary terms at runtime and the use of them as a goal. The current analysis is limited to the following:

- Direct goals appearing in the body
- Arguments of declared meta-predicates that are marked with an integer (0..9). See `meta_predicate/1`.

The analysis of meta-predicate arguments is limited to cases where the argument appears literally in the clause or is assigned using `=/2` before the meta-call. That is, the following fragment is processed correctly:

```
...,
Goal = prove(Theory),
forall(current_theory(Theory),
       Goal)),
```

But, the calls to `prove_simple/1` and `prove_complex/1` in the example below are *not* discovered by the analysis and therefore the modules that define these predicates must be loaded explicitly using `use_module/1,2`.

```
...,
member(Goal, [ prove_simple(Theory),
               prove_complex(Theory)
             ]),
forall(current_theory(Theory),
       Goal)),
```

It is good practice to use `gxref/0` to make sure that the program has sufficient declarations such that the analysis tools can verify that all required predicates can be resolved and that all code is called. See `meta_predicate/1`, `dynamic/1`, `public/1` and `prolog:called_by/2`.

#### **volatile +Name/Arity, ...**

Declare that the clauses of specified predicates should **not** be saved to the program. The volatile declaration is normally used to prevent the clauses of dynamic predicates that represent data for the current session from being saved in the state file.

### **13.2.2 Limitations of `qsave_program`**

There are three areas that require special attention when using `qsave_program/[1,2]`.

- If the program is an embedded Prolog application or uses the foreign language interface, care has to be taken to restore the appropriate foreign context. See section 13.2.3 for details.

- If the program uses directives (`:- goal. lines`) that perform other actions than setting predicate attributes (`dynamic/1`, `volatile/1`, etc.) or loading files (`use_module/1`, etc.). Goals that need to be executed when the state is started must use `initialization/1` (ISO standard) or `initialization/2` (SWI extension that provides more control over when the goal is executed). For example, `initialization/2` can be used to start the application:

```
:- initialization(go, main).
```

- *Blobs* used as references to the database (see `clause/3`, `recorded/3`), streams, threads, etc. can not be saved. This implies that (dynamic) clauses may not contain such references at the moment the `qsave_program/2` is called. Note that the required foreign context (stream, etc.) cannot be present in the state anyway, making it pointless to save such references. An attempt to save such objects results in a warning.

The `volatile/1` directive may be used to prevent saving the clauses of predicates that hold such references. The saved program must reinitialise such references using the normal program initialization techniques: use `initialization/1,2` directives, explicitly create them by the entry point or make the various components recreate the context lazily when required.

### 13.2.3 Runtimes and Foreign Code

Many applications use packages that include foreign language components compiled to shared objects or DLLs. This code is normally loaded using `use_foreign_library/1` and the `foreign` file search path. Below is an example from the `socket` library.

```
:- use_foreign_library(foreign(socket)).
```

There are two options to handle shared objects in runtime applications. The first is to use the `foreign(save)` option of `qsave_program/2` or the `--foreign=save` commandline option. This causes the dependent shared objects to be included into the resource archive. The `use_foreign_library/1` directive first attempts to find the foreign file in the resource archive. Alternatively, the shared objects may be placed in a directory that is distributed with the application. In this cases the file search path `foreign` must be setup to point at this directory. For example, we can place the shared objects in the same directory as the executable using the definition below. This may be refined further by adding subdirectories depending on the architecture as available from the Prolog flag `arch`.

```
:- multifile user:file_search_path/2.

user:file_search_path(foreign, Dir) :-
    current_prolog_flag(executable, Exe),
    file_directory_name(Exe, Dir).
```

### 13.3 State initialization

The `initialization/1` and `initialization/2` directive may be used to register goals to be executed at various points in the life cycle of an executable. Alternatively, one may consider *lazy initialization* which typically follows the pattern below. Single threaded code can avoid using `with_mutex/2`.

```
:- dynamic x_done/0.
:- volatile x_done/0.

x(X) :-
    x_done,
    !,
    use_x(X).
x(X) :-
    with_mutex(x, create_x),
    use_x(X).

create_x :-
    x_done,
    !.
create_x :-
    <create x>
    asserta(x_done).
```

### 13.4 Using program resources

A *resource* is similar to a file. Resources, however, can be represented in two different formats: on files, as well as part of the resource *archive* of a saved state (see `qsave_program/2`) that acts as a *virtual file system* for the SWI-Prolog I/O predicates (see `open/4`, `register_iri_scheme/3`).

A resource has a *name*. The *source* data of a resource is a file. Resources are declared by adding clauses to the predicate `resource/2` or `resource/3`. Resources can be accessed from Prolog as files that start with `res://` or they can be opened using `open_resource/3`.

#### 13.4.1 Resources as files

As of SWI-Prolog 7.7.13, resources that are compiled into the program can be accessed using the normal file handling predicates. Currently the following predicates transparently handle resources as read-only files:

- `open/3`, `open/4`
- `access_file/2`
- `exists_file/1`
- `exists_directory/1`
- `time_file/2`

- `size_file/2`

In addition, `open_shared_object/3`, underlying `use_foreign_library/1` handles *shared objects* or DLLs by copying them to a temporary file and opening this file. If the OS allows for it, the copied file is deleted immediately, otherwise it is deleted on program termination.

With the ability to open resources as if they were files we can use them for many tasks without changing the source code as required when using `open_resource/2`. Below we describe a typical scenario.

- Related resources are placed in one or more directories. Consider a web application where we have several directories holding icons. Add clauses to `file_search_path/2` that makes all icons accessible using the term `icon(file)`.
- Add a clause as below before creating the state. This causes all icons to be become available as `res://app/icon/file`.

```
resource(app/icon, icon(.)).
```

- Add a clause to `file_search_path/2` that make the icons available from the resource data. For example using the code below.

```
:- asserta(user:file_search_path(icon, 'res://app/icon').
```

### 13.4.2 Access resources using `open_resource`

Before the system had the ability to open resources as files, resources were opened using the predicates `open_resource/2` or `open_resource/3`. These predicates provide somewhat better dynamic control over resources depending on whether the code is running from files or from a saved state. The main disadvantage is that having a separate open call requires rewriting code to make it work with resources rather than files.

**`open_resource(+Name, -Stream)`**

**`open_resource(+Name, -Stream, +Options)`**

Opens the resource specified by *Name*. If successful, *Stream* is unified with an input stream that provides access to the resource. The stream can be tuned using the *Options*, which is a subset of the options provided by `open/4`.

**`type(Type)`**

**`encoding(Encoding)`**

**`bom(Bool)`**

Options that determine the binary/text type, encoding for text streams and whether or not the content should be checked for a BOM marker. The options have the same meaning as the corresponding options for `open/4`.

The predicate `open_resource/3` first checks `resource/2`. When successful it will open the returned resource source file. Otherwise it will look in the program's resource database.

When creating a saved state, the system normally saves the resource contents into the resource archive, but does not save the resource clauses.

This way, the development environment uses the files (and modifications) to the `resource/3` declarations and/or files containing resource info, thus immediately affecting the running environment, while the runtime system quickly accesses the system resources.

### 13.4.3 Declaring resources

**resource**(:*Name*, +*FileSpec*)

**resource**(:*Name*, +*FileSpec*, +*Options*)

These predicates are defined as dynamic predicates in the module `user`. Clauses for them may be defined in any module, including the user module. *Name* is the name of the resource (an atom). A resource name may contain any character, except for \$ and :, which are reserved for internal usage by the resource library. *FileSpec* is a file specification that may exploit `file_search_path/2` (see `absolute_file_name/2`).

Often, resources are defined as unit clauses (facts), but the definition of this predicate also allows for rules. For proper generation of the saved state, it must be possible to enumerate the available resources by calling this predicate with all its arguments unbound.

If *FileSpec* points at a directory, the content of the directory is recursively added below *Name*. If *FileSpec* a term of the form `Alias(Name)`, all directories that match this specification are enumerated and their content is added to the resource database. If an file appears in multiple results of this search path only the first file is added. Note that this is consistent with the normal behaviour where `absolute_file_name/3` returns the first match. The *Options* can be used to control what is saved from a directory.

**include**(+*Patterns*)

Only include a file from a directory if it matches at least one of the members of *Patterns*.

**exclude**(+*Patterns*)

Excludes a file from a directory if it matches at least one of the members of *Patterns*.

### 13.4.4 Managing resource files

As of version 7.7.13, SWI-Prolog resource files are zip(1) files. Prolog creates and accesses its resource files using the [minizip](#) project. The resource files may be examined and modified using any tool that can process zip files.

## 13.5 Debugging and updating deployed systems

SWI-Prolog provides several facilities to debug and update running (server) applications. The core to these facilities are:

- Hot-swap recompilation (section [4.3.2](#) and the library `hotswap`) allow, with some limitation, making modifications to running services. This includes adding debugging and logging statements.

- To make this useful some form of interaction is required. This can be implemented using signal handlers (Unix), specific HTTP services, generic HTTP services (e.g., [SWISH](#)) or networked interaction using the library `prolog_server` that allow interaction using `netcat` (`nc`) or `telnet`.

## 13.6 Protecting your code

Prolog in general, but SWI-Prolog in particular is an transparent environment. Prolog's "code is data" point of view makes this natural as it simplifies development and debugging. Some users though want or need to protect their code against copying or reverse engineering.

There are three ways to distribute code: as source, as `.qlf` file and in a saved state. Both QLF files and saved states contain the code as *virtual machine code*. QLF files capture the predicates and directives, while saved state capture the current state of the program. From the viewpoint of protecting code there is no significant difference.

There are two aspects to protection. One is to make sure the attacker has no access to the code in any format and the other is to provide access to a non-human-readable version of the code. The second approach is known as code obfuscation. Code obfuscation typically remove layout and comments and rename all internal identifiers. If an attacker gets access to the SWI-Prolog virtual machine code this can be *decompiled*. The decompiled code does not include layout information variable names and comments. Other identifiers, notably predicate and module names are maintained. This provides some protection against understanding the source as Prolog code without meaningful variable names and comments is generally hard to follow.

For further protecting the code, there are several scenarios.

- If the user has unrestricted access to the file system on which the application is installed the user can always access the state or QLF file. This data can be loaded into a compatible emulator and be *decompiled*.
- If the user can run arbitrary Prolog code or shell commands the state can be protected by embedding it as a string in the executable deny read access to the executable. This requires a small C program that includes the string and uses `PL_set_resource_db_mem()` to register the string as the resource database. See `PL_set_resource_db_mem()` for details. This protection should be combined with the `protect_static_code` described below.
- Some extra protection can be provided using the Prolog flag `protect_static_code`, which disables decompilation of *static* predicates. Note that most Prolog implementations cannot decompile static code. Various SWI-Prolog tools depend on this ability though. Examples are `list_undefined/0`, `autoload/0`, `show_coverage/1`, etc.

### 13.6.1 Obfuscating code in saved states


If the option `obfuscate(true)` is used with `qsave_program/2`, certain atoms in the saved state are renamed. The renaming is performed by library `obfuscate`. The current implementation is rather conservative, renaming atoms that are used only to define the functor that names a predicate. This is a safe operation, provided the application does not create new references to renamed predicates by reading additional source code or constructing the atom that names the predicate dynamically in some other way such as using `atom_concat/3`. Predicates that are called this way must be declared using `public/1`.

Note that more aggressive renaming is possible, but this requires more detailed analysis of the various roles played by some atom. Helpful and descriptive predicate names tend to be unique and are thus subject to this transformation. More general names tend to collide with other roles of the same atom and thus prevent renaming.

## 13.7 Finding Application files

If your application uses files that are not part of the saved program such as database files, configuration files, etc., the runtime version has to be able to locate these files. The `file_search_path/2` mechanism in combination with the `-p alias` command line argument provides a flexible mechanism for locating runtime files.





# The SWI-Prolog library

---

This chapter documents the SWI-Prolog library. As SWI-Prolog provides auto-loading, there is little difference between library predicates and built-in predicates. Part of the library is therefore documented in the rest of the manual. Library predicates differ from built-in predicates in the following ways:

- User definition of a built-in leads to a permission error, while using the name of a library predicate is allowed.
- If autoloading is disabled explicitly or because trapping unknown predicates is disabled (see `unknown/2` and `current_prolog_flag/2`), library predicates must be loaded explicitly.
- Using libraries reduces the footprint of applications that don't need them.

*The documentation of the library has just started. Material from the standard packages should be moved here, some material from other parts of the manual should be moved too and various libraries are not documented at all.*

## A.1 `library(aggregate)`: Aggregation operators on backtrackable predicates

**Compatibility** Quintus, SICStus 4. The `forall/2` is a SWI-Prolog built-in and `term_variables/3` is a SWI-Prolog built-in with **different semantics**.

### To be done

- Analysing the aggregation template and compiling a predicate for the list aggregation can be done at compile time.
- `aggregate_all/3` can be rewritten to run in constant space using non-backtrackable assignment on a term.

This library provides aggregating operators over the solutions of a predicate. The operations are a generalisation of the `bagof/3`, `setof/3` and `findall/3` built-in predicates. The defined aggregation operations are counting, computing the sum, minimum, maximum, a bag of solutions and a set of solutions. We first give a simple example, computing the country with the smallest area:

```
smallest_country(Name, Area) :-  
    aggregate(min(A, N), country(N, A), min(Area, Name)).
```

There are four aggregation predicates (`aggregate/3`, `aggregate/4`, `aggregate_all/3` and `aggregate/4`), distinguished on two properties.

**aggregate vs. aggregate\_all** The `aggregate` predicates use `setof/3` (`aggregate/4`) or `bagof/3` (`aggregate/3`), dealing with existential qualified variables ( $\text{Var}^{\wedge}\text{Goal}$ ) and providing multiple solutions for the remaining free variables in `Goal`. The `aggregate_all/3` predicate uses `findall/3`, implicitly qualifying all free variables and providing exactly one solution, while `aggregate_all/4` uses `sort/2` over solutions that `Discriminator` (see below) generated using `findall/3`.

**The Discriminator argument** The versions with 4 arguments deduplicate redundant solutions of `Goal`. Solutions for which both the template variables and `Discriminator` are identical will be treated as one solution. For example, if we wish to compute the total population of all countries, and for some reason `country(belgium, 11000000)` may succeed twice, we can use the following to avoid counting the population of Belgium twice:

```
aggregate(sum(P), Name, country(Name, P), Total)
```

All aggregation predicates support the following operators below in `Template`. In addition, they allow for an arbitrary named compound term, where each of the arguments is a term from the list below. For example, the term `r(min(X), max(X))` computes both the minimum and maximum binding for `X`.

#### **count**

Count number of solutions. Same as `sum(1)`.

#### **sum(*Expr*)**

Sum of *Expr* for all solutions.

#### **min(*Expr*)**

Minimum of *Expr* for all solutions.

#### **min(*Expr*, *Witness*)**

A term `min(Min, Witness)`, where `Min` is the minimal version of *Expr* over all solutions, and *Witness* is any other template applied to solutions that produced `Min`. If multiple solutions provide the same minimum, *Witness* corresponds to the first solution.

#### **max(*Expr*)**

Maximum of *Expr* for all solutions.

#### **max(*Expr*, *Witness*)**

As `min(Expr, Witness)`, but producing the maximum result.

#### **set(*X*)**

An ordered set with all solutions for *X*.

#### **bag(*X*)**

A list of all solutions for *X*.

### **Acknowledgements**

The development of this library was sponsored by Securitease, <http://www.securitease.com>

**aggregate(+Template, :Goal, -Result)** [nondet]  
Aggregate bindings in *Goal* according to *Template*. The `aggregate/3` version performs `bagof/3` on *Goal*.

**aggregate(+Template, +Discriminator, :Goal, -Result)** [nondet]  
Aggregate bindings in *Goal* according to *Template*. The `aggregate/4` version performs `setof/3` on *Goal*.

**aggregate\_all(+Template, :Goal, -Result)** [semidet]  
Aggregate bindings in *Goal* according to *Template*. The `aggregate_all/3` version performs `findall/3` on *Goal*. Note that this predicate fails if *Template* contains one or more of `min(X)`, `max(X)`, `min(X, Witness)` or `max(X, Witness)` and *Goal* has no solutions, i.e., the minimum and maximum of an empty set is undefined.

**aggregate\_all(+Template, +Discriminator, :Goal, -Result)** [semidet]  
Aggregate bindings in *Goal* according to *Template*. The `aggregate_all/4` version performs `findall/3` followed by `sort/2` on *Goal*. See `aggregate_all/3` to understand why this predicate can fail.

**foreach(:Generator, :Goal)**  
True if conjunction of results is true. Unlike `forall/2`, which runs a failure-driven loop that proves *Goal* for each solution of *Generator*, `foreach/2` creates a conjunction. Each member of the conjunction is a copy of *Goal*, where the variables it shares with *Generator* are filled with the values from the corresponding solution.

The implementation executes `forall/2` if *Goal* does not contain any variables that are not shared with *Generator*.

Here is an example:

```
?- foreach(between(1,4,X), dif(X,Y)), Y = 5.
Y = 5.
?- foreach(between(1,4,X), dif(X,Y)), Y = 3.
false.
```

**bug** *Goal* is copied repeatedly, which may cause problems if attributed variables are involved.

**free\_variables(:Generator, +Template, +VarList0, -VarList)** [det]  
Find free variables in `bagof/setof` template. In order to handle variables properly, we have to find all the universally quantified variables in the *Generator*. All variables as yet unbound are universally quantified, unless

1. they occur in the template
2. they are bound by  $X^P$ , `setof/3`, or `bagof/3`

`free_variables(Generator, Template, OldList, NewList)` finds this set using `OldList` as an accumulator.

#### author

- Richard O'Keefe
- Jan Wielemaker (made some SWI-Prolog enhancements)

**license** Public domain (from DEC10 library).

**To be done**

- Distinguish between control-structures and data terms.
- Exploit our built-in `term_variables/2` at some places?

**sandbox:safe\_meta(+Goal, -Called)** *[semidet,multifile]*

Declare the aggregate meta-calls safe. This cannot be proven due to the manipulations of the argument *Goal*.

## A.2 library(ansi\_term): Print decorated text to ANSI consoles

See also [http://en.wikipedia.org/wiki/ANSI\\_escape\\_code](http://en.wikipedia.org/wiki/ANSI_escape_code)

This library allows for exploiting the color and attribute facilities of most modern terminals using ANSI escape sequences. This library provides the following:

- `ansi_format/3` allows writing messages to the terminal with ansi attributes.
- It defines the hook `prolog:message_line_element/2`, which provides ansi attributes for `print_message/2`.

**ansi\_format(+Attributes, +Format, +Args)** *[det]*

*Format* text with ANSI attributes. This predicate behaves as `format/2` using *Format* and *Args*, but if the `current_output` is a terminal, it adds ANSI escape sequences according to *Attributes*. For example, to print a text in bold cyan, do

```
?- ansi_format([bold,fg(cyan)], 'Hello ~w', [world]).
```

*Attributes* is either a single attribute or a list thereof. The attribute names are derived from the ANSI specification. See the source for `sgr_code/2` for details. Some commonly used attributes are:

- `bold`
- `underline`
- `fg(Color)`, `bg(Color)`, `hfg(Color)`, `hbg(Color)`

Defined color constants are below. `default` can be used to access the default color of the terminal.

- `black`, `red`, `green`, `yellow`, `blue`, `magenta`, `cyan`, `white`

ANSI sequences are sent if and only if

- The `current_output` has the property `tty(true)` (see `stream_property/2`).
- The Prolog flag `color_term` is `true`.

**prolog:message\_line\_element(+Stream, +Term)** *[semidet,multifile]*

Hook implementation that deals with `ansi(+Attr, +Fmt, +Args)` in message specifications.

### A.3 library(apply): Apply predicates on a list

**See also**

- `apply_macros.pl` provides compile-time expansion for part of this library.
- <http://www.cs.otago.ac.nz/staffpriv/ok/pllib.htm>

**To be done** Add `include/4`, `include/5`, `exclude/4`, `exclude/5`

This module defines meta-predicates that apply a predicate on all members of a list.

**include**(:*Goal*, +*List1*, ?*List2*) [det]  
 Filter elements for which *Goal* succeeds. True if *List2* contains those elements *Xi* of *List1* for which `call(Goal, Xi)` succeeds.

**See also** Older versions of SWI-Prolog had `sublist/3` with the same arguments and semantics.

**exclude**(:*Goal*, +*List1*, ?*List2*) [det]  
 Filter elements for which *Goal* fails. True if *List2* contains those elements *Xi* of *List1* for which `call(Goal, Xi)` fails.

**partition**(:*Pred*, +*List*, ?*Included*, ?*Excluded*) [det]  
 Filter elements of *List* according to *Pred*. True if *Included* contains all elements for which `call(Pred, X)` succeeds and *Excluded* contains the remaining elements.

**partition**(:*Pred*, +*List*, ?*Less*, ?*Equal*, ?*Greater*) [semidet]  
 Filter *List* according to *Pred* in three sets. For each element *Xi* of *List*, its destination is determined by `call(Pred, Xi, Place)`, where *Place* must be unified to one of `<`, `=` or `>`. *Pred* must be deterministic.

**maplist**(:*Goal*, ?*List*)  
 True if *Goal* can successfully be applied on all elements of *List*. Arguments are reordered to gain performance as well as to make the predicate deterministic under normal circumstances.

**maplist**(:*Goal*, ?*List1*, ?*List2*)  
 As `maplist/2`, operating on pairs of elements from two lists.

**maplist**(:*Goal*, ?*List1*, ?*List2*, ?*List3*)  
 As `maplist/2`, operating on triples of elements from three lists.

**maplist**(:*Goal*, ?*List1*, ?*List2*, ?*List3*, ?*List4*)  
 As `maplist/2`, operating on quadruples of elements from four lists.

**convlist**(:*Goal*, +*ListIn*, -*ListOut*) [det]  
 Similar to `maplist/3`, but elements for which `call(Goal, ElemIn, _)` fails are omitted from *ListOut*. For example (using `library(yall)`):

```
?- convlist([X,Y]>>(integer(X), Y is X^2),
           [3, 5, 4.4, 2], L).
L = [9, 25, 4].
```

**Compatibility** Also appears in YAP `library(maplist)` and SICStus `library(lists)`.

**foldl**(:Goal, +List, +V0, -V)

**foldl**(:Goal, +List1, +List2, +V0, -V)

**foldl**(:Goal, +List1, +List2, +List3, +V0, -V)

**foldl**(:Goal, +List1, +List2, +List3, +List4, +V0, -V)

Fold a list, using arguments of the list as left argument. The foldl family of predicates is defined by:

```
foldl(P, [X11,...,X1n], ..., [Xm1,...,Xmn], V0, Vn) :-
    P(X11, ..., Xm1, V0, V1),
    ...
    P(X1n, ..., Xmn, V', Vn).
```

**scanl**(:Goal, +List, +V0, -Values)

**scanl**(:Goal, +List1, +List2, +V0, -Values)

**scanl**(:Goal, +List1, +List2, +List3, +V0, -Values)

**scanl**(:Goal, +List1, +List2, +List3, +List4, +V0, -Values)

Left scan of list. The scanl family of higher order list operations is defined by:

```
scanl(P, [X11,...,X1n], ..., [Xm1,...,Xmn], V0,
      [V0,V1,...,Vn]) :-
    P(X11, ..., Xm1, V0, V1),
    ...
    P(X1n, ..., Xmn, V', Vn).
```

## A.4 library(assoc): Association lists

Authors: Richard A. O'Keefe, L.Damas, V.S.Costa and [Markus Triska](#)

### A.4.1 Introduction

An *association list* as implemented by this library is a collection of unique *keys* that are associated to *values*. Keys must be ground, values need not be.

An association list can be used to *fetch* elements via their keys and to *enumerate* its elements in ascending order of their keys.

This library uses **AVL trees** to implement association lists. This means that

- inserting a key
- changing an association
- fetching a single element

are all  $O(\log(N))$  *worst-case* (and expected) time operations, where  $N$  denotes the number of elements in the association list.

The logarithmic overhead is often acceptable in practice. Notable advantages of association lists over several other methods are:

- `library(assoc)` is written entirely in Prolog, making it portable to other systems
- the interface predicates fit the declarative nature of Prolog, avoiding destructive updates to terms
- AVL trees scale very predictably and can be used to represent sparse arrays efficiently.

### A.4.2 Creating association lists

An association list is *created* with one of the following predicates:

**empty\_assoc**(?Assoc) [semidet]  
Is true if *Assoc* is the empty association list.

**list\_to\_assoc**(+Pairs, -Assoc) [det]  
Create an association from a list *Pairs* of Key-Value pairs. List must not contain duplicate keys.

**Errors** `domain_error(unique_key_pairs, List)` if List contains duplicate keys

**ord\_list\_to\_assoc**(+Pairs, -Assoc) [det]  
*Assoc* is created from an ordered list *Pairs* of Key-Value pairs. The pairs must occur in strictly ascending order of their keys.

**Errors** `domain_error(key_ordered_pairs, List)` if pairs are not ordered.

### A.4.3 Querying association lists

An association list can be *queried* with:

**get\_assoc**(+Key, +Assoc, -Value) [semidet]  
True if *Key-Value* is an association in *Assoc*.

**Errors** `type_error(assoc, Assoc)` if *Assoc* is not an association list.

**get\_assoc**(+Key, +Assoc0, ?Val0, ?Assoc, ?Val) [semidet]  
True if *Key-Val0* is in *Assoc0* and *Key-Val* is in *Assoc*.

**max\_assoc**(+Assoc, -Key, -Value) [semidet]  
True if *Key-Value* is in *Assoc* and *Key* is the largest key.

**min\_assoc**(+Assoc, -Key, -Value) [semidet]  
True if *Key-Value* is in *assoc* and *Key* is the smallest key.

**gen\_assoc**(?Key, +Assoc, ?Value) [nondet]  
True if *Key-Value* is an association in *Assoc*. Enumerates keys in ascending order on backtracking.

**See also** `get_assoc/3`.

#### A.4.4 Modifying association lists

Elements of an association list can be changed and inserted with:

**put\_assoc(+Key, +Assoc0, +Value, -Assoc)** [det]  
*Assoc* is *Assoc0*, except that *Key* is associated with *Value*. This can be used to insert and change associations.

**del\_assoc(+Key, +Assoc0, ?Value, -Assoc)** [semidet]  
 True if *Key-Value* is in *Assoc0*. *Assoc* is *Assoc0* with *Key-Value* removed.

**del\_min\_assoc(+Assoc0, ?Key, ?Val, -Assoc)** [semidet]  
 True if *Key-Value* is in *Assoc0* and *Key* is the smallest key. *Assoc* is *Assoc0* with *Key-Value* removed. Warning: This will succeed with *no* bindings for *Key* or *Val* if *Assoc0* is empty.

**del\_max\_assoc(+Assoc0, ?Key, ?Val, -Assoc)** [semidet]  
 True if *Key-Value* is in *Assoc0* and *Key* is the greatest key. *Assoc* is *Assoc0* with *Key-Value* removed. Warning: This will succeed with *no* bindings for *Key* or *Val* if *Assoc0* is empty.

#### A.4.5 Conversion predicates

Conversion of (parts of) an association list to *lists* is possible with:

**assoc\_to\_list(+Assoc, -Pairs)** [det]  
 Translate *Assoc* to a list *Pairs* of Key-Value pairs. The keys in *Pairs* are sorted in ascending order.

**assoc\_to\_keys(+Assoc, -Keys)** [det]  
 True if *Keys* is the list of keys in *Assoc*. The keys are sorted in ascending order.

**assoc\_to\_values(+Assoc, -Values)** [det]  
 True if *Values* is the list of values in *Assoc*. *Values* are ordered in ascending order of the key to which they were associated. *Values* may contain duplicates.

#### A.4.6 Reasoning about association lists and their elements

Further inspection predicates of an association list and its elements are:

**is\_assoc(+Assoc)** [semidet]  
 True if *Assoc* is an association list. This predicate checks that the structure is valid, elements are in order, and tree is balanced to the extent guaranteed by AVL trees. I.e., branches of each subtree differ in depth by at most 1.

**map\_assoc(:Pred, +Assoc)** [semidet]  
 True if *Pred(Value)* is true for all values in *Assoc*.

**map\_assoc(:Pred, +Assoc0, ?Assoc)** [semidet]  
 Map corresponding values. True if *Assoc* is *Assoc0* with *Pred* applied to all corresponding pairs of values.



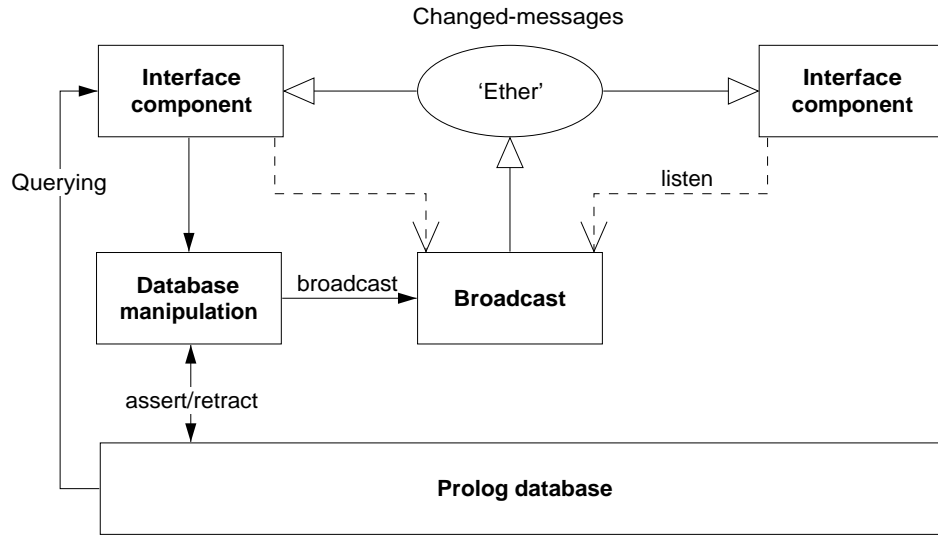


Figure A.1: Information-flow using broadcasting service

## A.5 library(broadcast): Broadcast and receive event notifications

The `broadcast` library was invented to realise GUI applications consisting of stand-alone components that use the Prolog database for storing the application data. Figure A.1 illustrates the flow of information using this design

The broadcasting service provides two services. Using the ‘shout’ service, an unknown number of agents may listen to the message and act. The broadcaster is not (directly) aware of the implications. Using the ‘request’ service, listening agents are asked for an answer one-by-one and the broadcaster is allowed to reject answers using normal Prolog failure.

Shouting is often used to inform about changes made to a common database. Other messages can be “save yourself” or “show this”.

Requesting is used to get information while the broadcaster is not aware who might be able to answer the question. For example “who is showing *X*?”.

### **broadcast(+Term)**

Broadcast *Term*. There are no limitations to *Term*, though being a global service, it is good practice to use a descriptive and unique principal functor. All associated goals are started and regardless of their success or failure, `broadcast/1` always succeeds. Exceptions are passed.

### **broadcast\_request(+Term)**

Unlike `broadcast/1`, this predicate stops if an associated goal succeeds. Backtracking causes it to try other listeners. A broadcast request is used to fetch information without knowing the identity of the agent providing it. C.f. “Is there someone who knows the age of John?” could be asked using

```

... ,
broadcast_request(age_of('John', Age)),

```

If there is an agent (*listener*) that registered an ‘age-of’ service and knows about the age of ‘John’ this question will be answered.

**listen(+Template, :Goal)**

Register a *listen* channel. Whenever a term unifying *Template* is broadcasted, call *Goal*. The following example traps all broadcasted messages as a variable unifies to any message. It is commonly used to debug usage of the library.

```
?- listen(Term, (writeln(Term), fail)).
?- broadcast(hello(world)).
hello(world)
true.
```

**listen(+Listener, +Template, :Goal)**

Declare *Listener* as the owner of the channel. Unlike a channel opened using `listen/2`, channels that have an owner can terminate the channel. This is commonly used if an object is listening to broadcast messages. In the example below we define a ‘name-item’ displaying the name of an identifier represented by the predicate `name_of/2`.

```
:- pce_begin_class(name_item, text_item).

variable(id, any, get, "Id visualised").

initialise(NI, Id:any) :->
    name_of(Id, Name),
    send_super(NI, initialise, name, Name,
               message(NI, set_name, @arg1)),
    send(NI, slot, id, Id),
    listen(NI, name_of(Id, Name),
           send(NI, selection, Name)).

unlink(NI) :->
    unlisten(NI),
    send_super(NI, unlink).

set_name(NI, Name:name) :->
    get(NI, id, Id),
    retractall(name_of(Id, _)),
    assert(name_of(Id, Name)),
    broadcast(name_of(Id, Name)).

:- pce_end_class.
```

**unlisten(+Listener)**

Deregister all entries created with `listen/3` whose *Listener* unify.

**unlisten(+Listener, +Template)**

Deregister all entries created with `listen/3` whose *Listener* and *Template* unify.

**unlisten**(+Listener, +Template, :Goal)

Deregister all entries created with `listen/3` whose *Listener*, *Template* and *Goal* unify.

**listening**(?Listener, ?Template, ?Goal)

Examine the current listeners. This predicate is useful for debugging purposes.

## A.6 library(charsio): I/O on Lists of Character Codes

**Compatibility** The naming of this library is not in line with the ISO standard. We believe that the SWI-Prolog native predicates form a more elegant alternative for this library.

This module emulates the Quintus/SICStus library `charsio.pl` for reading and writing from/to lists of character codes. Most of these predicates are straight calls into similar SWI-Prolog primitives. Some can even be replaced by ISO standard predicates.

**format\_to\_chars**(+Format, +Args, -Codes)

[det]

Use `format/2` to write to a list of character codes.

**format\_to\_chars**(+Format, +Args, -Codes, ?Tail)

[det]

Use `format/2` to write to a difference list of character codes.

**write\_to\_chars**(+Term, -Codes)

Write a term to a code list. True when *Codes* is a list of character codes written by `write/1` on *Term*.

**write\_to\_chars**(+Term, -Codes, ?Tail)

Write a term to a code list. *Codes\Tail* is a difference list of character codes produced by `write/1` on *Term*.

**atom\_to\_chars**(+Atom, -Codes)

[det]

Convert *Atom* into a list of character codes.

**deprecated** Use ISO `atom_codes/2`.

**atom\_to\_chars**(+Atom, -Codes, ?Tail)

[det]

Convert *Atom* into a difference list of character codes.

**number\_to\_chars**(+Number, -Codes)

[det]

Convert *Atom* into a list of character codes.

**deprecated** Use ISO `number_codes/2`.

**number\_to\_chars**(+Number, -Codes, ?Tail)

[det]

Convert *Number* into a difference list of character codes.

**read\_from\_chars**(+Codes, -Term)

[det]

Read *Codes* into *Term*.

**Compatibility** The SWI-Prolog version does not require *Codes* to end in a full-stop.

**read\_term\_from\_chars**(+Codes, -Term, +Options) [det]

Read *Codes* into *Term*. *Options* are processed by `read_term/3`.

**Compatibility** sicstus

**open\_chars\_stream**(+Codes, -Stream) [det]

Open *Codes* as an input stream.

**See also** `open_string/2`.

**with\_output\_to\_chars**(:Goal, -Codes) [det]

Run *Goal* as with `once/1`. Output written to `current_output` is collected in *Codes*.

**with\_output\_to\_chars**(:Goal, -Codes, ?Tail) [det]

Run *Goal* as with `once/1`. Output written to `current_output` is collected in *Codes*\Tail.

**with\_output\_to\_chars**(:Goal, -Stream, -Codes, ?Tail) [det]

Same as `with_output_to_chars/3` using an explicit stream. The difference list *Codes*\Tail contains the character codes that *Goal* has written to *Stream*.

## A.7 library(check): Consistency checking

**See also**

- `gxref/0` provides a graphical cross referencer
- PceEmacs performs real time consistency checks while you edit
- `library(prolog_xref)` implements 'offline' cross-referencing
- `library(prolog_codewalk)` implements 'online' analysis

This library provides some consistency checks for the loaded Prolog program. The predicate `make/0` runs `list_undefined/0` to find undefined predicates in 'user' modules.

**check** [det]

Run all consistency checks defined by `checker/2`. Checks enabled by default are:

- `list_undefined/0` reports undefined predicates
- `list_trivial_fails/0` reports calls for which there is no matching clause.
- `list_redefined/0` reports predicates that have a local definition and a global definition. Note that these are **not** errors.
- `list_autoload/0` lists predicates that will be defined at runtime using the autoloader.

**list\_undefined** [det]

**list\_undefined**(+Options) [det]

Report undefined predicates. This predicate finds undefined predicates by decompiling and analyzing the body of all clauses. *Options*:

**module\_class**(+Classes)

Process modules of the given *Classes*. The default for classes is `[user]`. For example, to include the libraries into the examination, use `[user, library]`.

**See also**

- `gxref/0` provides a graphical cross-referencer.
- `make/0` calls `list_undefined/0`

**list\_autoload***[det]*

Report predicates that may be auto-loaded. These are predicates that are not defined, but will be loaded on demand if referenced.

**See also** `autoload/0`

**To be done** This predicate uses an older mechanism for finding undefined predicates. Should be synchronized with `list_undefined`.

**list\_redefined**

Lists predicates that are defined in the global module `user` as well as in a normal module; that is, predicates for which the local definition overrules the global default definition.

**list\_void\_declarations***[det]*

List predicates that have declared attributes, but no clauses.

**list\_trivial\_fails***[det]***list\_trivial\_fails(+Options)***[det]*

List goals that trivially fail because there is no matching clause. *Options*:

**module\_class(+Classes)**

Process modules of the given *Classes*. The default for classes is `[user]`. For example, to include the libraries into the examination, use `[user, library]`.

**trivial\_fail\_goal(:Goal)***[multifile]*

Multifile hook that tells `list_trivial_fails/0` to accept *Goal* as valid.

**list\_strings***[det]***list\_strings(+Options)***[det]*

List strings that appear in clauses. This predicate is used to find portability issues for changing the Prolog flag `double_quotes` from `codes` to `string`, creating packed string objects. Warnings may be suppressed using the following multifile hooks:

- `string_predicate/1` to stop checking certain predicates
- `valid_string_goal/1` to tell the checker that a goal is safe.

**See also** Prolog flag `double_quotes`.

**string\_predicate(:PredicateIndicator)***[multifile]*

Multifile hook to disable `list_strings/0` on the given predicate. This is typically used for facts that store strings.

**valid\_string\_goal(+Goal)***[semidet,multifile]*

Multifile hook that qualifies *Goal* as valid for `list_strings/0`. For example, `format("Hello world~n")` is considered proper use of string constants.

**checker**(:*Goal*, +*Message*:*text*)

[*multifile*]

Register code validation routines. Each clause defines a *Goal* which performs a consistency check executed by `check/0`. *Message* is a short description of the check. For example, assuming the `my_checks` module defines a predicate `list_format_mistakes/0`:

```
:- multifile check:checker/2.
check:checker(my_checks:list_format_mistakes,
              "errors with format/2 arguments").
```

The predicate is dynamic, so you can disable checks with `retract/1`. For example, to stop reporting redefined predicates:

```
retract(check:checker(list_redefined,_)).
```

## A.8 library(clpb): CLP(B): Constraint Logic Programming over Boolean Variables

author [Markus Triska](#)

### A.8.1 Introduction

This library provides CLP(B), Constraint Logic Programming over Boolean variables. It can be used to model and solve combinatorial problems such as verification, allocation and covering tasks.

CLP(B) is an instance of the general CLP(X) scheme (section 8), extending logic programming with reasoning over specialised domains.

The implementation is based on reduced and ordered Binary Decision Diagrams (BDDs).

Benchmarks and usage examples of this library are available from:  
<https://www.metalevel.at/clpb/>

We recommend the following references for citing this library in scientific publications:

```
@inproceedings{Triska2016,
  author    = "Markus Triska",
  title     = "The {Boolean} Constraint Solver of {SWI-Prolog}:
              System Description",
  booktitle = "FLOPS",
  series    = "LNCS",
  volume    = 9613,
  year      = 2016,
  pages     = "45--61"
}

@article{Triska2018,
  title = "Boolean constraints in {SWI-Prolog}:
          A comprehensive system description",
  journal = "Science of Computer Programming",
  volume = "164",
```

```

pages = "98 - 115",
year = "2018",
note = "Special issue of selected papers from FLOPS 2016",
issn = "0167-6423",
doi = "https://doi.org/10.1016/j.scico.2018.02.001",
url = "http://www.sciencedirect.com/science/article/pii/S0167642318300273",
author = "Markus Triska",
keywords = "CLP(B), Boolean unification, Decision diagrams, BDD"
}

```

These papers are available from <https://www.metalevel.at/swiclpb.pdf> and <https://www.metalevel.at/boolean.pdf> respectively.

### A.8.2 Boolean expressions

A *Boolean expression* is one of:

|                            |   |
|----------------------------|---|
| 0                          | false                                       |
| 1                          | true  |
| <i>variable</i>            | unknown truth value                         |
| <i>atom</i>                | universally quantified variable             |
| $\sim Expr$                | logical NOT                                 |
| $Expr + Expr$              | logical OR                                  |
| $Expr * Expr$              | logical AND                                 |
| $Expr \# Expr$             | exclusive OR                                |
| $Var \wedge Expr$          | existential quantification                  |
| $Expr =: Expr$             | equality                                    |
| $Expr = \backslash = Expr$ | disequality (same as #)                     |
| $Expr \leq Expr$           | less or equal (implication)                 |
| $Expr \geq Expr$           | greater or equal                            |
| $Expr < Expr$              | less than                                   |
| $Expr > Expr$              | greater than                                |
| $card(Is, Exprs)$          | cardinality constraint ( <i>see below</i> ) |
| $+(Exprs)$                 | n-fold disjunction ( <i>see below</i> )     |
| $*(Exprs)$                 | n-fold conjunction ( <i>see below</i> )     |

where *Expr* again denotes a Boolean expression.

The Boolean expression  $card(Is, Exprs)$  is true iff the number of true expressions in the list *Exprs* is a member of the list *Is* of integers and integer ranges of the form From-To. For example, to state that precisely two of the three variables *X*, *Y* and *Z* are true, you can use  $sat(card([2], [X, Y, Z]))$ .

$+(Exprs)$  and  $*(Exprs)$  denote, respectively, the disjunction and conjunction of all elements in the list *Exprs* of Boolean expressions.

Atoms denote parametric values that are universally quantified. All universal quantifiers appear implicitly in front of the entire expression. In residual goals, universally quantified variables always appear on the right-hand side of equations. Therefore, they can be used to express functional dependencies on input variables.

### A.8.3 Interface predicates

The most frequently used CLP(B) predicates are:

**sat(+Expr)**

True iff the Boolean expression *Expr* is satisfiable.

**taut(+Expr, -T)**

If *Expr* is a tautology with respect to the posted constraints, succeeds with  $T = \mathbf{1}$ . If *Expr* cannot be satisfied, succeeds with  $T = \mathbf{0}$ . Otherwise, it fails.

**labeling(+Vs)**

Assigns truth values to the variables *Vs* such that all constraints are satisfied.

The unification of a CLP(B) variable *X* with a term *T* is equivalent to posting the constraint `sat (X:=T)`.

### A.8.4 Examples

Here is an example session with a few queries and their answers:

```
?- use_module(library(clpb)).
true.

?- sat(X*Y).
X = Y, Y = 1.

?- sat(X * ~X).
false.

?- taut(X * ~X, T).
T = 0,
sat(X:=X).

?- sat(X^Y^(X+Y)).
sat(X:=X),
sat(Y:=Y).

?- sat(X*Y + X*Z), labeling([X,Y,Z]).
X = Z, Z = 1, Y = 0 ;
X = Y, Y = 1, Z = 0 ;
X = Y, Y = Z, Z = 1.

?- sat(X =< Y), sat(Y =< Z), taut(X =< Z, T).
T = 1,
sat(X:=X*Y),
sat(Y:=Y*Z).
```



```
?- sat(1#X#a#b) .
sat(X:=a#b) .
```

The pending residual goals constrain remaining variables to Boolean expressions and are declaratively equivalent to the original query. The last example illustrates that when applicable, remaining variables are expressed as functions of universally quantified variables.

### A.8.5 Obtaining BDDs

By default, CLP(B) residual goals appear in (approximately) algebraic normal form (ANF). This projection is often computationally expensive. We can set the Prolog flag `clpb_residuals` to the value `bdd` to see the BDD representation of all constraints. This results in faster projection to residual goals, and is also useful for learning more about BDDs. For example:

```
?- set_prolog_flag(clpb_residuals, bdd) .
true.

?- sat(X#Y) .
node(3)- (v(X, 0)->node(2);node(1)) ,
node(1)- (v(Y, 1)->true;false) ,
node(2)- (v(Y, 1)->false;true) .
```

Note that this representation cannot be pasted back on the toplevel, and its details are subject to change. Use `copy_term/3` to obtain such answers as Prolog terms.

The variable order of the BDD is determined by the order in which the variables first appear in constraints. To obtain different orders, we can for example use:

```
?- sat(+[1,Y,X]), sat(X#Y) .
node(3)- (v(Y, 0)->node(2);node(1)) ,
node(1)- (v(X, 1)->true;false) ,
node(2)- (v(X, 1)->false;true) .
```

### A.8.6 Enabling monotonic CLP(B)

In the default execution mode, CLP(B) constraints are *not* monotonic. This means that *adding* constraints can yield new solutions. For example:

```
?-          sat(X:=1), X = 1+0 .
false.

?- X = 1+0, sat(X:=1), X = 1+0 .
X = 1+0 .
```

This behaviour is highly problematic from a logical point of view, and it may render **declarative debugging** techniques inapplicable.

Set the flag `clpb_monotonic` to `true` to make CLP(B) **monotonic**. If this mode is enabled, then you must wrap CLP(B) variables with the functor `v/1`. For example:

```
?- set_prolog_flag(clpb_monotonic, true).
true.

?- sat(v(X)=:1#1).
X = 0.
```

### A.8.7 Example: Pigeons

In this example, we are attempting to place  $I$  pigeons into  $J$  holes in such a way that each hole contains at most one pigeon. One interesting property of this task is that it can be formulated using only *cardinality constraints* (`card/2`). Another interesting aspect is that this task has no short resolution refutations in general.

In the following, we use **Prolog DCG notation** to describe a list  $Cs$  of CLP(B) constraints that must all be satisfied.

```
:- use_module(library(clpb)).
:- use_module(library(clpfd)).

pigeon(I, J, Rows, Cs) :-
    length(Rows, I), length(Row, J),
    maplist(same_length(Row), Rows),
    transpose(Rows, TRows),
    phrase((all_cards(Rows, [1]), all_cards(TRows, [0,1])), Cs).

all_cards([], _) --> [].
all_cards([Ls|Lss], Cs) --> [card(Cs, Ls)], all_cards(Lss, Cs).
```

Example queries:

```
?- pigeon(9, 8, Rows, Cs), sat(*(Cs)).
false.

?- pigeon(2, 3, Rows, Cs), sat(*(Cs)),
   append(Rows, Vs), labeling(Vs),
   maplist(portray_clause, Rows).
[0, 0, 1].
[0, 1, 0].
etc.
```

### A.8.8 Example: Boolean circuit

Consider a Boolean circuit that express the Boolean function XOR with 4 NAND gates. We can model such a circuit with CLP(B) constraints as follows:

```
:- use_module(library(clpb)).
```

```
nand_gate(X, Y, Z) :- sat(Z == ~(X*Y)).

xor(X, Y, Z) :-
    nand_gate(X, Y, T1),
    nand_gate(X, T1, T2),
    nand_gate(Y, T1, T3),
    nand_gate(T2, T3, Z).
```

Using universally quantified variables, we can show that the circuit does compute XOR as intended:

```
?- xor(x, y, Z).
sat(Z == x#y).
```

### A.8.9 Acknowledgments

The interface predicates of this library follow the example of [SICStus Prolog](#).

Use SICStus Prolog for higher performance in many cases.

### A.8.10 CLP(B) predicate index

In the following, each CLP(B) predicate is described in more detail.

We recommend the following link to refer to this manual:

<http://eu.swi-prolog.org/man/clpb.html>

**sat(+Expr)** [semidet]

True iff *Expr* is a satisfiable Boolean expression.

**taut(+Expr, -T)** [semidet]

Tautology check. Succeeds with  $T = 0$  if the Boolean expression *Expr* cannot be satisfied, and with  $T = 1$  if *Expr* is always true with respect to the current constraints. Fails otherwise.

**labeling(+Vs)** [multi]

Enumerate concrete solutions. Assigns truth values to the Boolean variables *Vs* such that all stated constraints are satisfied.

**sat\_count(+Expr, -Count)** [det]

*Count* the number of admissible assignments. *Count* is the number of different assignments of truth values to the variables in the Boolean expression *Expr*, such that *Expr* is true and all posted constraints are satisfiable.

A common form of invocation is `sat_count([1|Vs], Count)`: This counts the number of admissible assignments to *Vs* without imposing any further constraints.

Examples:

```
?- sat(A <= B), Vs = [A,B], sat_count([1|Vs], Count).
Vs = [A, B],
Count = 3,
sat(A == A*B).
```

```
?- length(Vs, 120),
    sat_count(+Vs, CountOr),
    sat_count(*(Vs), CountAnd).
Vs = [...],
CountOr = 1329227995784915872903807060280344575,
CountAnd = 1.
```

**weighted\_maximum(+Weights, +Vs, -Maximum)***[multi]*

Enumerate weighted optima over admissible assignments. Maximize a linear objective function over Boolean variables *Vs* with integer coefficients *Weights*. This predicate assigns 0 and 1 to the variables in *Vs* such that all stated constraints are satisfied, and *Maximum* is the maximum of  $\text{sum}(\text{Weight}_i * V_i)$  over all admissible assignments. On backtracking, all admissible assignments that attain the optimum are generated.

This predicate can also be used to *minimize* a linear Boolean program, since negative integers can appear in *Weights*.

Example:

```
?- sat(A#B), weighted_maximum([1,2,1], [A,B,C], Maximum).
A = 0, B = 1, C = 1, Maximum = 3.
```

**random\_labeling(+Seed, +Vs)***[det]*

Select a single random solution. An admissible assignment of truth values to the Boolean variables in *Vs* is chosen in such a way that each admissible assignment is equally likely. *Seed* is an integer, used as the initial seed for the random number generator.

## A.9 library(clpfd): CLP(FD): Constraint Logic Programming over Finite Domains

author [Markus Triska](#)

**Development of this library has moved to SICStus Prolog.**

Please see [CLP\(Z\)](#) for more information.

### A.9.1 Introduction

This library provides CLP(FD): Constraint Logic Programming over Finite Domains. This is an instance of the general CLP(X) scheme (section 8), extending logic programming with reasoning over specialised domains. CLP(FD) lets us reason about **integers** in a way that honors the relational nature of Prolog.

Read [The Power of Prolog](#) to understand how this library is meant to be used in practice.

There are two major use cases of CLP(FD) constraints:

1. **declarative integer arithmetic** (section [A.9.3](#))
2. solving **combinatorial problems** such as planning, scheduling and allocation tasks.

The predicates of this library can be classified as:

- *arithmetic* constraints like `#=/2`, `#>/2` and `#\=/2` (section A.9.17)
- the *membership* constraints `in/2` and `ins/2` (section A.9.17)
- the *enumeration* predicates `indomain/1`, `label/1` and `labeling/2` (section A.9.17)
- *combinatorial* constraints like `all_distinct/1` and `global_cardinality/2` (section A.9.17)
- *reification* predicates such as `#<==>/2` (section A.9.17)
- *reflection* predicates such as `fd_dom/2` (section A.9.17)

In most cases, *arithmetic constraints* (section A.9.2) are the only predicates you will ever need from this library. When reasoning over integers, simply replace low-level arithmetic predicates like `(is)/2` and `(>)/2` by the corresponding CLP(FD) constraints like `#=/2` and `#>/2` to honor and preserve declarative properties of your programs. For satisfactory performance, arithmetic constraints are implicitly rewritten at compilation time so that low-level fallback predicates are automatically used whenever possible.

Almost all Prolog programs also reason about integers. Therefore, it is highly advisable that you make CLP(FD) constraints available in all your programs. One way to do this is to put the following directive in your `~/.swiplrc` initialisation file:

```
:- use_module(library(clpfd)).
```

All example programs that appear in the CLP(FD) documentation assume that you have done this.

Important concepts and principles of this library are illustrated by means of usage examples that are available in a public git repository: [github.com/triska/clpfd](https://github.com/triska/clpfd)

If you are used to the complicated operational considerations that low-level arithmetic primitives necessitate, then moving to CLP(FD) constraints may, due to their power and convenience, at first feel to you excessive and almost like cheating. It *isn't*. Constraints are an integral part of all popular Prolog systems, and they are designed to help you eliminate and avoid the use of low-level and less general primitives by providing declarative alternatives that are meant to be used instead.

When teaching Prolog, CLP(FD) constraints should be introduced *before* explaining low-level arithmetic predicates and their procedural idiosyncrasies. This is because constraints are easy to explain, understand and use due to their purely relational nature. In contrast, the modedness and directionality of low-level arithmetic primitives are impure limitations that are better deferred to more advanced lectures.

We recommend the following reference (PDF: [metalevel.at/swiclpfd.pdf](https://metalevel.at/swiclpfd.pdf)) for citing this library in scientific publications:

```
@inproceedings{Triska12,
  author    = {Markus Triska},
  title     = {The Finite Domain Constraint Solver of {SWI-Prolog}},
  booktitle = {FLOPS},
  series    = {LNCS},
  volume    = {7294},
```

```

year      = {2012},
pages     = {307-316}
}

```

More information about CLP(FD) constraints and their implementation is contained in: [metalevel.at/drt.pdf](http://metalevel.at/drt.pdf)

The best way to discuss applying, improving and extending CLP(FD) constraints is to use the dedicated `clpfd` tag on [stackoverflow.com](http://stackoverflow.com). Several of the world's foremost CLP(FD) experts regularly participate in these discussions and will help you for free on this platform.

### A.9.2 Arithmetic constraints

In modern Prolog systems, **arithmetic constraints** subsume and supersede low-level predicates over integers. The main advantage of arithmetic constraints is that they are true *relations* and can be used in all directions. For most programs, arithmetic constraints are the only predicates you will ever need from this library.

The most important arithmetic constraint is `#=/2`, which subsumes both `(is)/2` and `(=:)/2` over integers. Use `#=/2` to make your programs more general. See declarative integer arithmetic (section [A.9.3](#)).

In total, the arithmetic constraints are:

|                                 |   |
|---------------------------------|---|
| <code>Expr1 #= Expr2</code>     | Expr1 equals Expr2                      |
| <code>Expr1 #\= Expr2</code>    | Expr1 is not equal to Expr2             |
| <code>Expr1 #&gt;= Expr2</code> | Expr1 is greater than or equal to Expr2 |
| <code>Expr1 #&lt;= Expr2</code> | Expr1 is less than or equal to Expr2    |
| <code>Expr1 #&gt; Expr2</code>  | Expr1 is greater than Expr2             |
| <code>Expr1 #&lt; Expr2</code>  | Expr1 is less than Expr2                |

*Expr1* and *Expr2* denote **arithmetic expressions**, which are:

|                              |                                      |
|------------------------------|--------------------------------------|
| <i>integer</i>               | Given value                          |
| <i>variable</i>              | Unknown integer                      |
| <i>?(variable)</i>           | Unknown integer                      |
| <code>-Expr</code>           | Unary minus                          |
| <code>Expr + Expr</code>     | Addition                             |
| <code>Expr * Expr</code>     | Multiplication                       |
| <code>Expr - Expr</code>     | Subtraction                          |
| <code>Expr ^ Expr</code>     | Exponentiation                       |
| <code>min(Expr, Expr)</code> | Minimum of two expressions           |
| <code>max(Expr, Expr)</code> | Maximum of two expressions           |
| <code>Expr mod Expr</code>   | Modulo induced by floored division   |
| <code>Expr rem Expr</code>   | Modulo induced by truncated division |
| <code>abs(Expr)</code>       | Absolute value                       |
| <code>Expr // Expr</code>    | Truncated integer division           |
| <code>Expr div Expr</code>   | Floored integer division             |

where *Expr* again denotes an arithmetic expression.

The bitwise operations `(\)/1`, `(/\)/2`, `(\)/2`, `(>>)/2`, `(<<)/2`, `lsb/1`, `msb/1`, `popcount/1` and `(xor)/2` are also supported.

### A.9.3 Declarative integer arithmetic

The *arithmetic constraints* (section A.9.2) `#=/2`, `#>/2` etc. are meant to be used *instead* of the primitives `(is)/2`, `(=:=)/2`, `(>)/2` etc. over integers. Almost all Prolog programs also reason about integers. Therefore, it is recommended that you put the following directive in your `~/.swiplrc` initialisation file to make CLP(FD) constraints available in all your programs:

```
:- use_module(library(clpfd)).
```

Throughout the following, it is assumed that you have done this.

The most basic use of CLP(FD) constraints is *evaluation* of arithmetic expressions involving integers. For example:

```
?- X #= 1+2.  
X = 3.
```

This could in principle also be achieved with the lower-level predicate `(is)/2`. However, an important advantage of arithmetic constraints is their purely relational nature: Constraints can be used in *all directions*, also if one or more of their arguments are only partially instantiated. For example:

```
?- 3 #= Y+2.  
Y = 1.
```

This relational nature makes CLP(FD) constraints easy to explain and use, and well suited for beginners and experienced Prolog programmers alike. In contrast, when using low-level integer arithmetic, we get:

```
?- 3 is Y+2.  
ERROR: is/2: Arguments are not sufficiently instantiated  
  
?- 3 =:= Y+2.  
ERROR: =:=/2: Arguments are not sufficiently instantiated
```

Due to the necessary operational considerations, the use of these low-level arithmetic predicates is considerably harder to understand and should therefore be deferred to more advanced lectures.

For supported expressions, CLP(FD) constraints are drop-in replacements of these low-level arithmetic predicates, often yielding more general programs. See `n_factorial/2` (section A.9.4) for an example.

This library uses `goal_expansion/2` to automatically rewrite constraints at compilation time so that low-level arithmetic predicates are *automatically* used whenever possible. For example, the predicate:

```
positive_integer(N) :- N #>= 1.
```

is executed as if it were written as:

```
positive_integer(N) :-
    (   integer(N)
    ->  N >= 1
    ;   N #>= 1
    ).
```

This illustrates why the performance of CLP(FD) constraints is almost always completely satisfactory when they are used in modes that can be handled by low-level arithmetic. To disable the automatic rewriting, set the Prolog flag `clpfd_goal_expansion` to `false`.

If you are used to the complicated operational considerations that low-level arithmetic primitives necessitate, then moving to CLP(FD) constraints may, due to their power and convenience, at first feel to you excessive and almost like cheating. It *isn't*. Constraints are an integral part of all popular Prolog systems, and they are designed to help you eliminate and avoid the use of low-level and less general primitives by providing declarative alternatives that are meant to be used instead.

#### A.9.4 Example: Factorial relation

We illustrate the benefit of using `#=/2` for more generality with a simple example.

Consider first a rather conventional definition of `n_factorial/2`, relating each natural number *N* to its factorial *F*:

```
n_factorial(0, 1).
n_factorial(N, F) :-
    N #> 0,
    N1 #= N - 1,
    n_factorial(N1, F1),
    F #= N * F1.
```

This program uses CLP(FD) constraints *instead* of low-level arithmetic throughout, and everything that *would have worked* with low-level arithmetic *also* works with CLP(FD) constraints, retaining roughly the same performance. For example:

```
?- n_factorial(47, F).
F = 258623241511168180642964355153611979969197632389120000000000 ;
false.
```

Now the point: Due to the increased flexibility and generality of CLP(FD) constraints, we are free to *reorder* the goals as follows:

```
n_factorial(0, 1).
n_factorial(N, F) :-
    N #> 0,
    N1 #= N - 1,
    F #= N * F1,
    n_factorial(N1, F1).
```



In this concrete case, *termination* properties of the predicate are improved. For example, the following queries now both terminate:

```
?- n_factorial(N, 1).  
N = 0 ;  
N = 1 ;  
false.  
  
?- n_factorial(N, 3).  
false.
```

To make the predicate terminate if *any* argument is instantiated, add the (implied) constraint `F #\= 0` before the recursive call. Otherwise, the query `n_factorial(N, 0)` is the only non-terminating case of this kind.

The value of CLP(FD) constraints does *not* lie in completely freeing us from *all* procedural phenomena. For example, the two programs do not even have the same *termination properties* in all cases. Instead, the primary benefit of CLP(FD) constraints is that they allow you to try different execution orders and apply **declarative debugging** techniques *at all*! Reordering goals (and clauses) can significantly impact the performance of Prolog programs, and you are free to try different variants if you use declarative approaches. Moreover, since all CLP(FD) constraints *always terminate*, placing them earlier can at most *improve*, never worsen, the termination properties of your programs. An additional benefit of CLP(FD) constraints is that they eliminate the complexity of introducing `(is)/2` and `(=:)/2` to beginners, since *both* predicates are subsumed by `#=/2` when reasoning over integers.

In the case above, the clauses are mutually exclusive *if* the first argument is sufficiently instantiated. To make the predicate deterministic in such cases while retaining its generality, you can use `zcompare/3` to *reify* a comparison, making the different cases distinguishable by pattern matching. For example, in this concrete case and others like it, you can use `zcompare(Comp, 0, N)` to obtain as *Comp* the symbolic outcome (`<`, `=`, `>`) of 0 compared to *N*.

### A.9.5 Combinatorial constraints

In addition to subsuming and replacing low-level arithmetic predicates, CLP(FD) constraints are often used to solve combinatorial problems such as planning, scheduling and allocation tasks. Among the most frequently used **combinatorial constraints** are `all_distinct/1`, `global_cardinality/2` and `cumulative/2`. This library also provides several other constraints like `disjoint2/1` and `automaton/8`, which are useful in more specialized applications.

### A.9.6 Domains

Each CLP(FD) variable has an associated set of admissible integers, which we call the variable's **domain**. Initially, the domain of each CLP(FD) variable is the set of *all* integers. CLP(FD) constraints like `#=/2`, `#>/2` and `#\=/2` can at most reduce, and never extend, the domains of their arguments. The constraints `in/2` and `ins/2` let us explicitly state domains of CLP(FD) variables. The process of determining and adjusting domains of variables is called constraint **propagation**, and it is performed automatically by this library. When the domain of a variable contains only one element, then the variable is automatically unified to that element.

Domains are taken into account when further constraints are stated, and by enumeration predicates like `labeling/2`.

### A.9.7 Example: Sudoku

As another example, consider *Sudoku*: It is a popular puzzle over integers that can be easily solved with CLP(FD) constraints.

```
sudoku(Rows) :-
    length(Rows, 9), maplist(same_length(Rows), Rows),
    append(Rows, Vs), Vs ins 1..9,
    maplist(all_distinct, Rows),
    transpose(Rows, Columns),
    maplist(all_distinct, Columns),
    Rows = [As,Bs,Cs,Ds,Es,Fs,Gs,Hs,Is],
    blocks(As, Bs, Cs),
    blocks(Ds, Es, Fs),
    blocks(Gs, Hs, Is).

blocks([], [], []).
blocks([N1,N2,N3|Ns1], [N4,N5,N6|Ns2], [N7,N8,N9|Ns3]) :-
    all_distinct([N1,N2,N3,N4,N5,N6,N7,N8,N9]),
    blocks(Ns1, Ns2, Ns3).

problem(1, [[_,_,_,_,_,_,_,_,_],
            [_,_,_,_,_,3,_,8,5],
            [_,_,1,_,2,_,_,_,_],
            [_,_,_,5,_,7,_,_,_],
            [_,_,4,_,_,_,1,_,_],
            [_,9,_,_,_,_,_,_,_],
            [5,_,_,_,_,_,_,7,3],
            [_,_,2,_,1,_,_,_,_],
            [_,_,_,_,4,_,_,_,9]]).
```

Sample query:

```
?- problem(1, Rows), sudoku(Rows), maplist(portray_clause, Rows).
[9, 8, 7, 6, 5, 4, 3, 2, 1].
[2, 4, 6, 1, 7, 3, 9, 8, 5].
[3, 5, 1, 9, 2, 8, 7, 4, 6].
[1, 2, 8, 5, 3, 7, 6, 9, 4].
[6, 3, 4, 8, 9, 2, 1, 5, 7].
[7, 9, 5, 4, 6, 1, 8, 3, 2].
[5, 1, 9, 2, 8, 6, 4, 7, 3].
[4, 7, 2, 3, 1, 9, 5, 6, 8].
[8, 6, 3, 7, 4, 5, 2, 1, 9].
Rows = [[9, 8, 7, 6, 5, 4, 3, 2|...], ... , [...|...]].
```

In this concrete case, the constraint solver is strong enough to find the unique solution without any search. For the general case, see search (section [A.9.9](#)).

### A.9.8 Residual goals

Here is an example session with a few queries and their answers:

```
?- X #> 3.
X in 4..sup.

?- X #\= 20.
X in inf..19\21..sup.

?- 2*X #= 10.
X = 5.

?- X*X #= 144.
X in -12\12.

?- 4*X + 2*Y #= 24, X + Y #= 9, [X,Y] ins 0..sup.
X = 3,
Y = 6.

?- X #= Y #<==> B, X in 0..3, Y in 4..5.
B = 0,
X in 0..3,
Y in 4..5.
```

The answers emitted by the toplevel are called *residual programs*, and the goals that comprise each answer are called **residual goals**. In each case above, and as for all pure programs, the residual program is declaratively equivalent to the original query. From the residual goals, it is clear that the constraint solver has deduced additional domain restrictions in many cases.

To inspect residual goals, it is best to let the toplevel display them for us. Wrap the call of your predicate into `call_residue_vars/2` to make sure that all constrained variables are displayed. To make the constraints a variable is involved in available as a Prolog term for further reasoning within your program, use `copy_term/3`. For example:

```
?- X #= Y + Z, X in 0..5, copy_term([X,Y,Z], [X,Y,Z], Gs).
Gs = [clpfd: (X in 0..5), clpfd: (Y+Z#=X)],
X in 0..5,
Y+Z#=X.
```

This library also provides *reflection* predicates (like `fd_dom/2`, `fd_size/2` etc.) with which we can inspect a variable's current domain. These predicates can be useful if you want to implement your own labeling strategies.

### A.9.9 Core relations and search

Using CLP(FD) constraints to solve combinatorial tasks typically consists of two phases:

1. **Modeling.** In this phase, all relevant constraints are stated.
2. **Search.** In this phase, *enumeration predicates* are used to search for concrete solutions.

It is good practice to keep the modeling part, via a dedicated predicate called the **core relation**, separate from the actual search for solutions. This lets us observe termination and determinism properties of the core relation in isolation from the search, and more easily try different search strategies.

As an example of a constraint satisfaction problem, consider the cryptarithmic puzzle SEND + MORE = MONEY, where different letters denote distinct integers between 0 and 9. It can be modeled in CLP(FD) as follows:

```
puzzle([S,E,N,D] + [M,O,R,E] = [M,O,N,E,Y]) :-
    Vars = [S,E,N,D,M,O,R,Y],
    Vars ins 0..9,
    all_different(Vars),
    S*1000 + E*100 + N*10 + D +
    M*1000 + O*100 + R*10 + E #=
    M*10000 + O*1000 + N*100 + E*10 + Y,
    M #\= 0, S #\= 0.
```

Notice that we are *not* using `labeling/2` in this predicate, so that we can first execute and observe the modeling part in isolation. Sample query and its result (actual variables replaced for readability):

```
?- puzzle(As+Bs=Cs).
As = [9, A2, A3, A4],
Bs = [1, 0, B3, A2],
Cs = [1, 0, A3, A2, C5],
A2 in 4..7,
all_different([9, A2, A3, A4, 1, 0, B3, C5]),
91*A2+A4+10*B3#=90*A3+C5,
A3 in 5..8,
A4 in 2..8,
B3 in 2..8,
C5 in 2..8.
```

From this answer, we see that this core relation *terminates* and is in fact *deterministic*. Moreover, we see from the residual goals that the constraint solver has deduced more stringent bounds for all variables. Such observations are only possible if modeling and search parts are cleanly separated.

Labeling can then be used to search for solutions in a separate predicate or goal:

```
?- puzzle(As+Bs=Cs), label(As).
As = [9, 5, 6, 7],
Bs = [1, 0, 8, 5],
Cs = [1, 0, 6, 5, 2] ;
false.
```

In this case, it suffices to label a subset of variables to find the puzzle's unique solution, since the constraint solver is strong enough to reduce the domains of remaining variables to singleton sets. In general though, it is necessary to label all variables to obtain ground solutions.

### A.9.10 Example: Eight queens puzzle

We illustrate the concepts of the preceding sections by means of the so-called *eight queens puzzle*. The task is to place 8 queens on an 8x8 chessboard such that none of the queens is under attack. This means that no two queens share the same row, column or diagonal.

To express this puzzle via CLP(FD) constraints, we must first pick a suitable representation. Since CLP(FD) constraints reason over *integers*, we must find a way to map the positions of queens to integers. Several such mappings are conceivable, and it is not immediately obvious which we should use. On top of that, different constraints can be used to express the desired relations. For such reasons, *modeling* combinatorial problems via CLP(FD) constraints often necessitates some creativity and has been described as more of an art than a science.

In our concrete case, we observe that there must be exactly one queen per column. The following representation therefore suggests itself: We are looking for 8 integers, one for each column, where each integer denotes the *row* of the queen that is placed in the respective column, and which are subject to certain constraints.

In fact, let us now generalize the task to the so-called *N queens puzzle*, which is obtained by replacing 8 by *N* everywhere it occurs in the above description. We implement the above considerations in the **core relation** `n_queens/2`, where the first argument is the number of queens (which is identical to the number of rows and columns of the generalized chessboard), and the second argument is a list of *N* integers that represents a solution in the form described above.

```
n_queens(N, Qs) :-
    length(Qs, N),
    Qs ins 1..N,
    safe_queens(Qs).

safe_queens([]).
safe_queens([Q|Qs]) :- safe_queens(Qs, Q, 1), safe_queens(Qs).

safe_queens([], _, _).
safe_queens([Q|Qs], Q0, D0) :-
    Q0 #\= Q,
    abs(Q0 - Q) #\= D0,
    D1 #= D0 + 1,
    safe_queens(Qs, Q0, D1).
```

Note that all these predicates can be used in *all directions*: We can use them to *find* solutions, *test* solutions and *complete* partially instantiated solutions.

The original task can be readily solved with the following query:

```
?- n_queens(8, Qs), label(Qs).
Qs = [1, 5, 8, 6, 3, 7, 2, 4] .
```

Using suitable labeling strategies, we can easily find solutions with 80 queens and more:

```
?- n_queens(80, Qs), labeling([ff], Qs).
Qs = [1, 3, 5, 44, 42, 4, 50, 7, 68|...] .

?- time((n_queens(90, Qs), labeling([ff], Qs))).
% 5,904,401 inferences, 0.722 CPU in 0.737 seconds (98% CPU)
Qs = [1, 3, 5, 50, 42, 4, 49, 7, 59|...] .
```

Experimenting with different search strategies is easy because we have separated the core relation from the actual search.

### A.9.11 Optimisation

We can use `labeling/2` to minimize or maximize the value of a CLP(FD) expression, and generate solutions in increasing or decreasing order of the value. See the labeling options `min(Expr)` and `max(Expr)`, respectively.

Again, to easily try different labeling options in connection with optimisation, we recommend to introduce a dedicated predicate for posting constraints, and to use `labeling/2` in a separate goal. This way, we can observe properties of the core relation in isolation, and try different labeling options without recompiling our code.

If necessary, we can use `once/1` to commit to the first optimal solution. However, it is often very valuable to see alternative solutions that are *also* optimal, so that we can choose among optimal solutions by other criteria. For the sake of **purity** and completeness, we recommend to avoid `once/1` and other constructs that lead to impurities in CLP(FD) programs.

Related to optimisation with CLP(FD) constraints are `library(simplex)` and CLP(Q) which reason about *linear* constraints over rational numbers.

### A.9.12 Reification

The constraints `in/2`, `#=/2`, `#\=/2`, `#</2`, `#>/2`, `#<=/2`, and `#>=/2` can be *reified*, which means reflecting their truth values into Boolean values represented by the integers 0 and 1. Let P and Q denote reifiable constraints or Boolean variables, then:

|                               |                                      |
|-------------------------------|--------------------------------------|
| <code>#\ Q</code>             | True iff Q is false                  |
| <code>P #\ / Q</code>         | True iff either P or Q               |
| <code>P # / \ Q</code>        | True iff both P and Q                |
| <code>P # \ Q</code>          | True iff either P or Q, but not both |
| <code>P # &lt;==&gt; Q</code> | True iff P and Q are equivalent      |
| <code>P # ==&gt; Q</code>     | True iff P implies Q                 |
| <code>P # &lt;== Q</code>     | True iff Q implies P                 |

The constraints of this table are reifiable as well.

When reasoning over Boolean variables, also consider using CLP(B) constraints as provided by `library(clpb)`.

### A.9.13 Enabling monotonic CLP(FD)

In the default execution mode, CLP(FD) constraints still exhibit some non-relational properties. For example, *adding* constraints can yield new solutions:

```
?-          X #= 2, X = 1+1.
false.

?- X = 1+1, X #= 2, X = 1+1.
X = 1+1.
```

This behaviour is highly problematic from a logical point of view, and it may render declarative debugging techniques inapplicable.

Set the Prolog flag `clpfd_monotonic` to `true` to make CLP(FD) **monotonic**: This means that *adding* new constraints *cannot* yield new solutions. When this flag is `true`, we must wrap variables that occur in arithmetic expressions with the functor `(?) / 1` or `(#) / 1`. For example:

```
?- set_prolog_flag(clpfd_monotonic, true).
true.

?- #(X) #= #(Y) + #(Z).
#(Y) + #(Z) #= #(X).

?-          X #= 2, X = 1+1.
ERROR: Arguments are not sufficiently instantiated
```

The wrapper can be omitted for variables that are already constrained to integers.

### A.9.14 Custom constraints

We can define custom constraints. The mechanism to do this is not yet finalised, and we welcome suggestions and descriptions of use cases that are important to you.

As an example of how it can be done currently, let us define a new custom constraint `oneground(X, Y, Z)`, where `Z` shall be 1 if at least one of `X` and `Y` is instantiated:

```
:- multifile clpfd:run_propagator/2.

oneground(X, Y, Z) :-
    clpfd:make_propagator(oneground(X, Y, Z), Prop),
    clpfd:init_propagator(X, Prop),
    clpfd:init_propagator(Y, Prop),
    clpfd:trigger_once(Prop).

clpfd:run_propagator(oneground(X, Y, Z), MState) :-
    (   integer(X) -> clpfd:kill(MState), Z = 1
    ;   integer(Y) -> clpfd:kill(MState), Z = 1
    ;   true
    ).
```

First, `clpfd:make_propagator/2` is used to transform a user-defined representation of the new constraint to an internal form. With `clpfd:init_propagator/2`, this internal form is then attached to `X` and `Y`. From now on, the propagator will be invoked whenever the domains of `X` or `Y` are changed. Then, `clpfd:trigger_once/1` is used to give the propagator its first chance for propagation even though the variables' domains have not yet changed. Finally, `clpfd:run_propagator/2` is extended to define the actual propagator. As explained, this predicate is automatically called by the constraint solver. The first argument is the user-defined representation of the constraint as used in `clpfd:make_propagator/2`, and the second argument is a mutable state that can be used to prevent further invocations of the propagator when the constraint has become entailed, by using `clpfd:kill/1`. An example of using the new constraint:

```
?- oneground(X, Y, Z), Y = 5,
   Y = 5,
   Z = 1,
   X in inf..sup.
```

### A.9.15 Applications

CLP(FD) applications that we find particularly impressive and worth studying include:

- Michael Hendricks uses CLP(FD) constraints for flexible reasoning about *dates* and *times* in the [julian](#) package.
- Julien Cumin uses CLP(FD) constraints for integer arithmetic in [Brachylog](#).

### A.9.16 Acknowledgments

This library gives you a glimpse of what [SICStus Prolog](#) can do. The API is intentionally mostly compatible with that of SICStus Prolog, so that you can easily switch to a much more feature-rich and much faster CLP(FD) system when you need it. I thank [Mats Carlsson](#), the designer and main implementor of SICStus Prolog, for his elegant example. I first encountered his system as part of the excellent [GUPU](#) teaching environment by [Ulrich Neumerkel](#). Ulrich was also the first and most determined tester of the present system, filing hundreds of comments and suggestions for improvement. [Tom Schrijvers](#) has contributed several constraint libraries to SWI-Prolog, and I learned a lot from his coding style and implementation examples. [Bart Demoen](#) was a driving force behind the implementation of attributed variables in SWI-Prolog, and this library could not even have started without his prior work and contributions. Thank you all!

### A.9.17 CLP(FD) predicate index

In the following, each CLP(FD) predicate is described in more detail.

We recommend the following link to refer to this manual:

<http://eu.swi-prolog.org/man/clpfd.html>

### Arithmetic constraints

*Arithmetic* constraints are the most basic use of CLP(FD). Every time you use `(is)/2` or one of the low-level arithmetic comparisons `((<)/2`, `(>)/2` etc.) over integers, consider using CLP(FD)



constraints *instead*. This can at most *increase* the generality of your programs. See declarative integer arithmetic (section A.9.3).

`?X #= ?Y`

The arithmetic expression  $X$  equals  $Y$ . This is the most important arithmetic constraint (section A.9.2), subsuming and replacing both `(is)/2` and `(=:)/2` over integers. See declarative integer arithmetic (section A.9.3).

`?X #\= ?Y`

The arithmetic expressions  $X$  and  $Y$  evaluate to distinct integers. When reasoning over integers, replace `(=\)/2` by `#\=/2` to obtain more general relations. See declarative integer arithmetic (section A.9.3).

`?X #>= ?Y`

Same as `Y #<= X`. When reasoning over integers, replace `(>=)/2` by `#>=/2` to obtain more general relations. See declarative integer arithmetic (section A.9.3).

`?X #<= ?Y`

The arithmetic expression  $X$  is less than or equal to  $Y$ . When reasoning over integers, replace `(=<)/2` by `#<=/2` to obtain more general relations. See declarative integer arithmetic (section A.9.3).

`?X #> ?Y`

Same as `Y #< X`. When reasoning over integers, replace `(>)/2` by `#>/2` to obtain more general relations. See declarative integer arithmetic (section A.9.3).

`?X #< ?Y`

The arithmetic expression  $X$  is less than  $Y$ . When reasoning over integers, replace `(<)/2` by `#</2` to obtain more general relations. See declarative integer arithmetic (section A.9.3).

In addition to its regular use in tasks that require it, this constraint can also be useful to eliminate uninteresting symmetries from a problem. For example, all possible matches between pairs built from four players in total:

```
?- Vs = [A,B,C,D], Vs ins 1..4,
    all_different(Vs),
    A #< B, C #< D, A #< C,
    findall(pair(A,B)-pair(C,D), label(Vs), Ms).
Ms = [ pair(1, 2)-pair(3, 4),
      pair(1, 3)-pair(2, 4),
      pair(1, 4)-pair(2, 3) ].
```

## Membership constraints

If you are using CLP(FD) to model and solve combinatorial tasks, then you typically need to specify the admissible domains of variables. The *membership constraints* `in/2` and `ins/2` are useful in such cases.

`?Var in +Domain`

$Var$  is an element of  $Domain$ .  $Domain$  is one of:

*Integer*

Singleton set consisting only of *Integer*.

*Lower .. Upper*

All integers *I* such that  $Lower \leq I \leq Upper$ . *Lower* must be an integer or the atom **inf**, which denotes negative infinity. *Upper* must be an integer or the atom **sup**, which denotes positive infinity.

*Domain1 \ / Domain2*

The union of *Domain1* and *Domain2*.

**+Vars ins +Domain**

The variables in the list *Vars* are elements of *Domain*. See `in/2` for the syntax of *Domain*.

**Enumeration predicates**

When modeling combinatorial tasks, the actual search for solutions is typically performed by *enumeration predicates* like `labeling/2`. See the section about *core relations* and search for more information.

**indomain(?Var)**

Bind *Var* to all feasible values of its domain on backtracking. The domain of *Var* must be finite.

**label(+Vars)**

Equivalent to `labeling([], Vars)`. See `labeling/2`.

**labeling(+Options, +Vars)**

Assign a value to each variable in *Vars*. Labeling means systematically trying out values for the finite domain variables *Vars* until all of them are ground. The domain of each variable in *Vars* must be finite. *Options* is a list of options that let you exhibit some control over the search process. Several categories of options exist:

The variable selection strategy lets you specify which variable of *Vars* is labeled next and is one of:

**leftmost**

Label the variables in the order they occur in *Vars*. This is the default.

**ff**

*First fail*. Label the leftmost variable with smallest domain next, in order to detect infeasibility early. This is often a good strategy.

**ffc**

Of the variables with smallest domains, the leftmost one participating in most constraints is labeled next.

**min**

Label the leftmost variable whose lower bound is the lowest next.

**max**

Label the leftmost variable whose upper bound is the highest next.

The value order is one of:

**up**

Try the elements of the chosen variable's domain in ascending order. This is the default.

**down**

Try the domain elements in descending order.

The branching strategy is one of:

**step**

For each variable  $X$ , a choice is made between  $X = V$  and  $X \neq V$ , where  $V$  is determined by the value ordering options. This is the default.

**enum**

For each variable  $X$ , a choice is made between  $X = V_1$ ,  $X = V_2$  etc., for all values  $V_i$  of the domain of  $X$ . The order is determined by the value ordering options.

**bisect**

For each variable  $X$ , a choice is made between  $X \leq M$  and  $X > M$ , where  $M$  is the midpoint of the domain of  $X$ .

At most one option of each category can be specified, and an option must not occur repeatedly.

The order of solutions can be influenced with:

- `min(Expr)`
- `max(Expr)`

This generates solutions in ascending/descending order with respect to the evaluation of the arithmetic expression `Expr`. Labeling `Vars` must make `Expr` ground. If several such options are specified, they are interpreted from left to right, e.g.:

```
?- [X,Y] ins 10..20, labeling([max(X),min(Y)], [X,Y]).
```

This generates solutions in descending order of  $X$ , and for each binding of  $X$ , solutions are generated in ascending order of  $Y$ . To obtain the incomplete behaviour that other systems exhibit with `"maximize(Expr)"` and `"minimize(Expr)"`, use `once/1`, e.g.:

```
once(labeling([max(Expr)], Vars))
```

Labeling is always complete, always terminates, and yields no redundant solutions. See core relations and search (section A.9.9) for usage advice.

**Global constraints**

A *global constraint* expresses a relation that involves many variables at once. The most frequently used global constraints of this library are the combinatorial constraints `all_distinct/1`, `global_cardinality/2` and `cumulative/2`.

**all\_distinct(+Vars)**

True iff `Vars` are pairwise distinct. For example, `all_distinct/1` can detect that not all variables can assume distinct values given the following domains:

```
?- maplist(in, Vs,
          [1\3..4, 1..2\4, 1..2\4, 1..3, 1..3, 1..6]),
   all_distinct(Vs).
false.
```

**all\_different(+Vars)**

Like `all_distinct/1`, but with weaker propagation. Consider using `all_distinct/1` instead, since `all_distinct/1` is typically acceptably efficient and propagates much more strongly.

**sum(+Vars, +Rel, ?Expr)**

The sum of elements of the list *Vars* is in relation *Rel* to *Expr*. *Rel* is one of `#=`, `#\=`, `#<`, `#>`, `#=<` or `#>=`. For example:

```
?- [A,B,C] ins 0..sup, sum([A,B,C], #=, 100).
A in 0..100,
A+B+C#=100,
B in 0..100,
C in 0..100.
```

**scalar\_product(+Cs, +Vs, +Rel, ?Expr)**

True iff the scalar product of *Cs* and *Vs* is in relation *Rel* to *Expr*. *Cs* is a list of integers, *Vs* is a list of variables and integers. *Rel* is `#=`, `#\=`, `#<`, `#>`, `#=<` or `#>=`.

**lex\_chain(+Lists)**

*Lists* are lexicographically non-decreasing.

**tuples\_in(+Tuples, +Relation)**

True iff all *Tuples* are elements of *Relation*. Each element of the list *Tuples* is a list of integers or finite domain variables. *Relation* is a list of lists of integers. Arbitrary finite relations, such as compatibility tables, can be modeled in this way. For example, if 1 is compatible with 2 and 5, and 4 is compatible with 0 and 3:

```
?- tuples_in([X,Y], [[1,2],[1,5],[4,0],[4,3]]), X = 4.
X = 4,
Y in 0\3.
```

As another example, consider a train schedule represented as a list of quadruples, denoting departure and arrival places and times for each train. In the following program, *Ps* is a feasible journey of length 3 from A to D via trains that are part of the given schedule.

```
trains([[1,2,0,1],
        [2,3,4,5],
        [2,3,0,1],
        [3,4,5,6],
        [3,4,2,3],
```

```

        [3,4,8,9]]).

threepath(A, D, Ps) :-
    Ps = [[A,B,_T0,T1],[B,C,T2,T3],[C,D,T4,_T5]],
    T2 #> T1,
    T4 #> T3,
    trains(Ts),
    tuples_in(Ps, Ts).

```

In this example, the unique solution is found without labeling:

```

?- threepath(1, 4, Ps).
Ps = [[1, 2, 0, 1], [2, 3, 4, 5], [3, 4, 8, 9]].

```

#### **serialized(+Starts, +Durations)**

Describes a set of non-overlapping tasks. *Starts* = [S<sub>1</sub>,...,S<sub>n</sub>], is a list of variables or integers, *Durations* = [D<sub>1</sub>,...,D<sub>n</sub>] is a list of non-negative integers. Constrains *Starts* and *Durations* to denote a set of non-overlapping tasks, i.e.: S<sub>i</sub> + D<sub>i</sub> =< S<sub>j</sub> or S<sub>j</sub> + D<sub>j</sub> =< S<sub>i</sub> for all 1 =< i < j =< n. Example:

```

?- length(Vs, 3),
   Vs ins 0..3,
   serialized(Vs, [1,2,3]),
   label(Vs).
Vs = [0, 1, 3] ;
Vs = [2, 0, 3] ;
false.

```

**See also** Dorndorf et al. 2000, "Constraint Propagation Techniques for the Disjunctive Scheduling Problem"

#### **element(?N, +Vs, ?V)**

The *N*-th element of the list of finite domain variables *Vs* is *V*. Analogous to nth1/3.

#### **global\_cardinality(+Vs, +Pairs)**

Global Cardinality constraint. Equivalent to global\_cardinality(Vs, Pairs, []). See global\_cardinality/3.

Example:

```

?- Vs = [_,_,_], global_cardinality(Vs, [1-2,3-_]), label(Vs).
Vs = [1, 1, 3] ;
Vs = [1, 3, 1] ;
Vs = [3, 1, 1].

```

#### **global\_cardinality(+Vs, +Pairs, +Options)**

Global Cardinality constraint. *Vs* is a list of finite domain variables, *Pairs* is a list of Key-Num

pairs, where *Key* is an integer and *Num* is a finite domain variable. The constraint holds iff each *V* in *Vs* is equal to some key, and for each Key-Num pair in *Pairs*, the number of occurrences of *Key* in *Vs* is *Num*. *Options* is a list of options. Supported options are:

**consistency**(*value*)

A weaker form of consistency is used.

**cost**(*Cost*, *Matrix*)

*Matrix* is a list of rows, one for each variable, in the order they occur in *Vs*. Each of these rows is a list of integers, one for each key, in the order these keys occur in *Pairs*. When variable *v<sub>i</sub>* is assigned the value of key *k<sub>j</sub>*, then the associated cost is *Matrix*-{*ij*}. *Cost* is the sum of all costs.

**circuit**(+*Vs*)

True iff the list *Vs* of finite domain variables induces a Hamiltonian circuit. The *k*-th element of *Vs* denotes the successor of node *k*. Node indexing starts with 1. Examples:

```
?- length(Vs, _), circuit(Vs), label(Vs).
Vs = [] ;
Vs = [1] ;
Vs = [2, 1] ;
Vs = [2, 3, 1] ;
Vs = [3, 1, 2] ;
Vs = [2, 3, 4, 1] .
```

**cumulative**(+*Tasks*)

Equivalent to `cumulative(Tasks, [limit(1)])`. See `cumulative/2`.

**cumulative**(+*Tasks*, +*Options*)

Schedule with a limited resource. *Tasks* is a list of tasks, each of the form `task(Si, Di, Ei, Ci, Ti)`. *S<sub>i</sub>* denotes the start time, *D<sub>i</sub>* the positive duration, *E<sub>i</sub>* the end time, *C<sub>i</sub>* the non-negative resource consumption, and *T<sub>i</sub>* the task identifier. Each of these arguments must be a finite domain variable with bounded domain, or an integer. The constraint holds iff at each time slot during the start and end of each task, the total resource consumption of all tasks running at that time does not exceed the global resource limit. *Options* is a list of options. Currently, the only supported option is:

**limit**(*L*)

The integer *L* is the global resource limit. Default is 1.

For example, given the following predicate that relates three tasks of durations 2 and 3 to a list containing their starting times:

```
tasks_starts(Tasks, [S1,S2,S3]) :-
    Tasks = [task(S1,3,_,1,_),
             task(S2,2,_,1,_),
             task(S3,2,_,1,_)] .
```

We can use `cumulative/2` as follows, and obtain a schedule:

```
?- tasks_starts(Tasks, Starts), Starts ins 0..10,
    cumulative(Tasks, [limit(2)]), label(Starts).
Tasks = [task(0, 3, 3, 1, _G36), task(0, 2, 2, 1, _G45), ...],
Starts = [0, 0, 2] .
```

### **disjoint2(+Rectangles)**

True iff *Rectangles* are not overlapping. *Rectangles* is a list of terms of the form  $F(X_i, W_i, Y_i, H_i)$ , where  $F$  is any functor, and the arguments are finite domain variables or integers that denote, respectively, the  $X$  coordinate, width,  $Y$  coordinate and height of each rectangle.

### **automaton(+Vs, +Nodes, +Arcs)**

Describes a list of finite domain variables with a finite automaton. Equivalent to `automaton(Vs, _, Vs, Nodes, Arcs, [], [], _)`, a common use case of `automaton/8`. In the following example, a list of binary finite domain variables is constrained to contain at least two consecutive ones:

```
two_consecutive_ones(Vs) :-
    automaton(Vs, [source(a), sink(c)],
               [arc(a, 0, a), arc(a, 1, b),
                arc(b, 0, a), arc(b, 1, c),
                arc(c, 0, c), arc(c, 1, c)]).
```

Example query:

```
?- length(Vs, 3), two_consecutive_ones(Vs), label(Vs).
Vs = [0, 1, 1] ;
Vs = [1, 1, 0] ;
Vs = [1, 1, 1].
```

### **automaton(+Sequence, ?Template, +Signature, +Nodes, +Arcs, +Counters, +Initials, ?Finals)**

Describes a list of finite domain variables with a finite automaton. True iff the finite automaton induced by *Nodes* and *Arcs* (extended with *Counters*) accepts *Signature*. *Sequence* is a list of terms, all of the same shape. Additional constraints must link *Sequence* to *Signature*, if necessary. *Nodes* is a list of `source(Node)` and `sink(Node)` terms. *Arcs* is a list of `arc(Node, Integer, Node)` and `arc(Node, Integer, Node, Exprs)` terms that denote the automaton's transitions. Each node is represented by an arbitrary term. Transitions that are not mentioned go to an implicit failure node. *Exprs* is a list of arithmetic expressions, of the same length as *Counters*. In each expression, variables occurring in *Counters* symbolically refer to previous counter values, and variables occurring in *Template* refer to the current element of *Sequence*. When a transition containing arithmetic expressions is taken, each counter is updated according to the result of the corresponding expression. When a transition without arithmetic expressions is taken, all counters remain unchanged. *Counters* is a list of variables. *Initials* is a list of finite domain variables or integers denoting, in the same order, the initial value of each counter. These values are related to *Finals* according to the arithmetic expressions of the taken transitions.

The following example is taken from Beldiceanu, Carlsson, Debruyne and Petit: "Reformulation of Global Constraints Based on Constraints Checkers", Constraints 10(4), pp 339-362 (2005). It relates a sequence of integers and finite domain variables to its number of inflexions, which are switches between strictly ascending and strictly descending subsequences:

```
sequence_inflexions(Vs, N) :-
    variables_signature(Vs, Sigs),
    automaton(Sigs, _, Sigs,
        [source(s), sink(i), sink(j), sink(s)],
        [arc(s,0,s), arc(s,1,j), arc(s,2,i),
         arc(i,0,i), arc(i,1,j,[C+1]), arc(i,2,i),
         arc(j,0,j), arc(j,1,j),
         arc(j,2,i,[C+1])],
        [C], [0], [N])).

variables_signature([], []).
variables_signature([V|Vs], Sigs) :-
    variables_signature_(Vs, V, Sigs).

variables_signature_([], _, []).
variables_signature_([V|Vs], Prev, [S|Sigs]) :-
    V #= Prev #<==> S #= 0,
    Prev #< V #<==> S #= 1,
    Prev #> V #<==> S #= 2,
    variables_signature_(Vs, V, Sigs).
```

Example queries:

```
?- sequence_inflexions([1,2,3,3,2,1,3,0], N).
N = 3.

?- length(Ls, 5), Ls ins 0..1,
   sequence_inflexions(Ls, 3), label(Ls).
Ls = [0, 1, 0, 1, 0] ;
Ls = [1, 0, 1, 0, 1].
```

### **chain(+Zs, +Relation)**

*Zs* form a chain with respect to *Relation*. *Zs* is a list of finite domain variables that are a chain with respect to the partial order *Relation*, in the order they appear in the list. *Relation* must be *#=*, *#=<*, *#>=*, *#<* or *#>*. For example:

```
?- chain([X,Y,Z], #>=).
X#>=Y,
Y#>=Z.
```



### Reification predicates

Many CLP(FD) constraints can be *reified*. This means that their truth value is itself turned into a CLP(FD) variable, so that we can explicitly reason about whether a constraint holds or not. See reification (section A.9.12).

#### $\#\backslash + Q$

$Q$  does *not* hold. See reification (section A.9.12).

For example, to obtain the complement of a domain:

```
?- #\ X in -3..0\10..80.
X in inf.. -4\1..9\81..sup.
```

#### $?P \#<==> ?Q$

$P$  and  $Q$  are equivalent. See reification (section A.9.12).

For example:

```
?- X #= 4 #<==> B, X #\= 4.
B = 0,
X in inf..3\5..sup.
```

The following example uses reified constraints to relate a list of finite domain variables to the number of occurrences of a given value:

```
vs_n_num(Vs, N, Num) :-
    maplist(eq_b(N), Vs, Bs),
    sum(Bs, #=, Num).

eq_b(X, Y, B) :- X #= Y #<==> B.
```

Sample queries and their results:

```
?- Vs = [X,Y,Z], Vs ins 0..1, vs_n_num(Vs, 4, Num).
Vs = [X, Y, Z],
Num = 0,
X in 0..1,
Y in 0..1,
Z in 0..1.

?- vs_n_num([X,Y,Z], 2, 3).
X = 2,
Y = 2,
Z = 2.
```

#### $?P \#==> ?Q$

$P$  implies  $Q$ . See reification (section A.9.12).

`?P #<== ?Q`

$Q$  implies  $P$ . See reification (section A.9.12).

`?P #/\ ?Q`

$P$  and  $Q$  hold. See reification (section A.9.12).

`?P #\/?Q`

$P$  or  $Q$  holds. See reification (section A.9.12).

For example, the sum of natural numbers below 1000 that are multiples of 3 or 5:

```
?- findall(N, (N mod 3 #= 0 #\ N mod 5 #= 0, N in 0..999,
             indomain(N)),
          Ns),
    sum(Ns, #=, Sum).
Ns = [0, 3, 5, 6, 9, 10, 12, 15, 18|...],
Sum = 233168.
```

`?P #\ ?Q`

Either  $P$  holds or  $Q$  holds, but not both. See reification (section A.9.12).

**zcompare(?Order, ?A, ?B)**

Analogous to `compare/3`, with finite domain variables  $A$  and  $B$ .

Think of `zcompare/3` as *reifying* an arithmetic comparison of two integers. This means that we can explicitly reason about the different cases *within* our programs. As in `compare/3`, the atoms `<`, `>` and `=` denote the different cases of the trichotomy. In contrast to `compare/3` though, `zcompare/3` works correctly for *all modes*, also if only a subset of the arguments is instantiated. This allows you to make several predicates over integers deterministic while preserving their generality and completeness. For example:

```
n_factorial(N, F) :-
    zcompare(C, N, 0),
    n_factorial_(C, N, F).

n_factorial_(=, _, 1).
n_factorial_(>, N, F) :-
    F #= F0*N,
    N1 #= N - 1,
    n_factorial(N1, F0).
```

This version of `n_factorial/2` is deterministic if the first argument is instantiated, because argument indexing can distinguish the different clauses that reflect the possible and admissible outcomes of a comparison of  $N$  against 0. Example:

```
?- n_factorial(30, F).
F = 265252859812191058636308480000000.
```

Since there is no clause for  $<$ , the predicate automatically *fails* if  $N$  is less than 0. The predicate can still be used in all directions, including the most general query:

```
?- n_factorial(N, F) .
N = 0,
F = 1 ;
N = F, F = 1 ;
N = F, F = 2 .
```

In this case, all clauses are tried on backtracking, and `zcompare/3` ensures that the respective ordering between  $N$  and 0 holds in each case.

The truth value of a comparison can also be reified with `(#<=>)/2` in combination with one of the *arithmetic constraints* (section A.9.2). See reification (section A.9.12). However, `zcompare/3` lets you more conveniently distinguish the cases.

### Reflection predicates

Reflection predicates let us obtain, in a well-defined way, information that is normally internal to this library. In addition to the predicates explained below, also take a look at `call_residue_vars/2` and `copy_term/3` to reason about CLP(FD) constraints that arise in programs. This can be useful in program analyzers and declarative debuggers.

#### **fd\_var(+Var)**

True iff *Var* is a CLP(FD) variable.

#### **fd\_inf(+Var, -Inf)**

*Inf* is the infimum of the current domain of *Var*.

#### **fd\_sup(+Var, -Sup)**

*Sup* is the supremum of the current domain of *Var*.

#### **fd\_size(+Var, -Size)**

Reflect the current size of a domain. *Size* is the number of elements of the current domain of *Var*, or the atom **sup** if the domain is unbounded.

#### **fd\_dom(+Var, -Dom)**

*Dom* is the current domain (see `in/2`) of *Var*. This predicate is useful if you want to reason about domains. It is *not* needed if you only want to display remaining domains; instead, separate your model from the search part and let the toplevel display this information via residual goals.

For example, to implement a custom labeling strategy, you may need to inspect the current domain of a finite domain variable. With the following code, you can convert a *finite* domain to a list of integers:

```
dom_integers(D, Is) :- phrase(dom_integers_(D), Is) .

dom_integers_(I)      --> { integer(I) }, [I] .
```

```
dom_integers_(L..U)    --> { numlist(L, U, Is) }, Is.
dom_integers_(D1\ / D2) --> dom_integers_(D1), dom_integers_(D2).
```

Example:

```
?- X in 1..5, X #\= 4, fd_dom(X, D), dom_integers(D, Is).
D = 1..3\ / 5,
Is = [1, 2, 3, 5],
X in 1..3\ / 5.
```

### A.9.18 Closing and opening words about CLP(FD)

CLP(FD) constraints are one of the main reasons why logic programming approaches are picked over other paradigms for solving many tasks of high practical relevance. The usefulness of CLP(FD) constraints for scheduling, allocation and combinatorial optimization tasks is well-known both in academia and industry.

With this library, we take the applicability of CLP(FD) constraints one step further, following the road that visionary systems like SICStus Prolog have already clearly outlined: This library is designed to completely subsume and *replace* low-level predicates over integers, which were in the past repeatedly found to be a major stumbling block when introducing logic programming to beginners.

Embrace the change and new opportunities that this paradigm allows! Use CLP(FD) constraints in your programs. The use of CLP(FD) constraints instead of low-level arithmetic is also a good indicator to judge the quality of any introductory Prolog text.

## A.10 library(clpqr): Constraint Logic Programming over Rationals and Reals

Author: *Christian Holzbaur*, ported to SWI-Prolog by *Leslie De Koninck*, K.U. Leuven

This CLP(Q,R) system is a port of the CLP(Q,R) system of Sicstus Prolog by Christian Holzbaur: Holzbaur C.: OFAI clp(q,r) Manual, Edition 1.3.3, Austrian Research Institute for Artificial Intelligence, Vienna, TR-95-09, 1995.<sup>1</sup> This manual is roughly based on the manual of the above mentioned CLP(Q,R) implementation.

The CLP(Q,R) system consists of two components: the CLP(Q) library for handling constraints over the rational numbers and the CLP(R) library for handling constraints over the real numbers (using floating point numbers as representation). Both libraries offer the same predicates (with exception of `bb_inf/4` in CLP(Q) and `bb_inf/5` in CLP(R)). It is allowed to use both libraries in one program, but using both CLP(Q) and CLP(R) constraints on the same variable will result in an exception.

Please note that the `clpqr` library is *not* an *autoload* library and therefore this library must be loaded explicitly before using it:

```
:- use_module(library(clpq)).
```

or

<sup>1</sup><http://www.ai.univie.ac.at/cgi-bin/tr-online?number+95-09>

```
:- use_module(library(clpr)).
```

### A.10.1 Solver predicates

The following predicates are provided to work with constraints:

**{ }(+Constraints)**

Adds the constraints given by *Constraints* to the constraint store.

**entailed(+Constraint)**

Succeeds if *Constraint* is necessarily true within the current constraint store. This means that adding the negation of the constraint to the store results in failure.

**inf(+Expression, -Inf)**

Computes the infimum of *Expression* within the current state of the constraint store and returns that infimum in *Inf*. This predicate does not change the constraint store.

**sup(+Expression, -Sup)**

Computes the supremum of *Expression* within the current state of the constraint store and returns that supremum in *Sup*. This predicate does not change the constraint store.

**minimize(+Expression)**

Minimizes *Expression* within the current constraint store. This is the same as computing the infimum and equating the expression to that infimum.

**maximize(+Expression)**

Maximizes *Expression* within the current constraint store. This is the same as computing the supremum and equating the expression to that supremum.

**bb\_inf(+Ints, +Expression, -Inf, -Vertex, +Eps)**

This predicate is offered in CLP(R) only. It computes the infimum of *Expression* within the current constraint store, with the additional constraint that in that infimum, all variables in *Ints* have integral values. *Vertex* will contain the values of *Ints* in the infimum. *Eps* denotes how much a value may differ from an integer to be considered an integer. E.g. when *Eps* = 0.001, then *X* = 4.999 will be considered as an integer (5 in this case). *Eps* should be between 0 and 0.5.

**bb\_inf(+Ints, +Expression, -Inf, -Vertex)**

This predicate is offered in CLP(Q) only. It behaves the same as `bb_inf/5` but does not use an error margin.

**bb\_inf(+Ints, +Expression, -Inf)**

The same as `bb_inf/5` or `bb_inf/4` but without returning the values of the integers. In CLP(R), an error margin of 0.001 is used.

**dump(+Target, +Newvars, -CodedAnswer)**

Returns the constraints on *Target* in the list *CodedAnswer* where all variables of *Target* have been replaced by *NewVars*. This operation does not change the constraint store. E.g. in

|                                      |       |  |                   |
|--------------------------------------|-------|--|-------------------|
| $\langle \text{Constraints} \rangle$ | $::=$ | $\langle \text{Constraint} \rangle$  | single constraint |
|                                      |       | $\langle \text{Constraint} \rangle , \langle \text{Constraints} \rangle$             | conjunction       |
|                                      |       | $\langle \text{Constraint} \rangle ; \langle \text{Constraints} \rangle$             | disjunction       |
| $\langle \text{Constraint} \rangle$  | $::=$ | $\langle \text{Expression} \rangle < \langle \text{Expression} \rangle$              | less than         |
|                                      |       | $\langle \text{Expression} \rangle > \langle \text{Expression} \rangle$              | greater than      |
|                                      |       | $\langle \text{Expression} \rangle = < \langle \text{Expression} \rangle$            | less or equal     |
|                                      |       | $< = ( \langle \text{Expression} \rangle , \langle \text{Expression} \rangle )$      | less or equal     |
|                                      |       | $\langle \text{Expression} \rangle > = \langle \text{Expression} \rangle$            | greater or equal  |
|                                      |       | $\langle \text{Expression} \rangle = \backslash = \langle \text{Expression} \rangle$ | not equal         |
|                                      |       | $\langle \text{Expression} \rangle ::= \langle \text{Expression} \rangle$            | equal             |
|                                      |       | $\langle \text{Expression} \rangle = \langle \text{Expression} \rangle$              | equal             |
| $\langle \text{Expression} \rangle$  | $::=$ | $\langle \text{Variable} \rangle$  | Prolog variable   |
|                                      |       | $\langle \text{Number} \rangle$  | Prolog number     |
|                                      |       | $+ \langle \text{Expression} \rangle$  | unary plus        |
|                                      |       | $- \langle \text{Expression} \rangle$  | unary minus       |
|                                      |       | $\langle \text{Expression} \rangle + \langle \text{Expression} \rangle$              | addition          |
|                                      |       | $\langle \text{Expression} \rangle - \langle \text{Expression} \rangle$              | subtraction       |
|                                      |       | $\langle \text{Expression} \rangle * \langle \text{Expression} \rangle$              | multiplication    |
|                                      |       | $\langle \text{Expression} \rangle / \langle \text{Expression} \rangle$              | division          |
|                                      |       | $\text{abs}(\langle \text{Expression} \rangle)$                                      | absolute value    |
|                                      |       | $\text{sin}(\langle \text{Expression} \rangle)$                                      | sine              |
|                                      |       | $\text{cos}(\langle \text{Expression} \rangle)$                                      | cosine            |
|                                      |       | $\text{tan}(\langle \text{Expression} \rangle)$                                      | tangent           |
|                                      |       | $\text{exp}(\langle \text{Expression} \rangle)$                                      | exponent          |
|                                      |       | $\text{pow}(\langle \text{Expression} \rangle)$                                      | exponent          |
|                                      |       | $\langle \text{Expression} \rangle ^ \langle \text{Expression} \rangle$              | exponent          |
|                                      |       | $\text{min}(\langle \text{Expression} \rangle , \langle \text{Expression} \rangle)$  | minimum           |
|                                      |       | $\text{max}(\langle \text{Expression} \rangle , \langle \text{Expression} \rangle)$  | maximum           |

Table A.1: CLP(Q,R) constraint BNF

```
dump ( [X, Y, Z] , [x, y, z] , Cons )
```

Cons will contain the constraints on X, Y and Z, where these variables have been replaced by atoms x, y and z.

### A.10.2 Syntax of the predicate arguments

The arguments of the predicates defined in the subsection above are defined in table A.1. Failing to meet the syntax rules will result in an exception.

### A.10.3 Use of unification

Instead of using the `{ }/1` predicate, you can also use the standard unification mechanism to store constraints. The following code samples are equivalent:

|   |  |  |
|---|--|--|
| $A = B * C$   | B or C is ground<br>A and (B or C) are ground                  | $A = 5 * C$ or $A = B * 4$<br>$20 = 5 * C$ or $20 = B * 4$   |
| $A = B / C$   | C is ground<br>A and B are ground                              | $A = B / 3$<br>$4 = 12 / C$                                  |
| $X = \min(Y, Z)$<br>$X = \max(Y, Z)$<br>$X = \text{abs}(Y)$     | Y and Z are ground<br>Y and Z are ground<br>Y is ground        | $X = \min(4, 3)$<br>$X = \max(4, 3)$<br>$X = \text{abs}(-7)$ |
| $X = \text{pow}(Y, Z)$<br>$X = \text{exp}(Y, Z)$<br>$X = Y ^ Z$ | X and Y are ground<br>X and Z are ground<br>Y and Z are ground | $8 = 2 ^ Z$<br>$8 = Y ^ 3$<br>$X = 2 ^ 3$                    |
| $X = \sin(Y)$<br>$X = \cos(Y)$<br>$X = \tan(Y)$                 | X is ground<br>Y is ground                                     | $1 = \sin(Y)$<br>$X = \sin(1.5707)$                          |

Table A.2: CLP(Q,R) isolating axioms

- *Unification with a variable*

```
{X = Y}
X = Y
```

- *Unification with a number*

```
{X = 5.0}
X = 5.0
```

#### A.10.4 Non-linear constraints

The CLP(Q,R) system deals only passively with non-linear constraints. They remain in a passive state until certain conditions are satisfied. These conditions, which are called the isolation axioms, are given in table A.2.

#### A.10.5 Status and known problems

The clpq and clpr libraries are ‘orphaned’, i.e., they currently have no maintainer.

- *Top-level output*

The top-level output may contain variables not present in the original query:

```
?- {X+Y>=1} .
{Y=1-X+_G2160, _G2160>=0} .

?-
```

Nonetheless, for linear constraints this kind of answer means unconditional satisfiability.

- *Dumping constraints*

The first argument of `dump/3` has to be a list of free variables at call-time:

```
?- {X=1}, dump([X], [Y], L) .
ERROR: Unhandled exception: Unknown message:
        instantiation_error(dump([1], [_G11], _G6), 1)
?-
```

## A.11 `library(csv)`: Process CSV (Comma-Separated Values) data

See also RFC 4180

**To be done**

- Implement immediate assert of the data to avoid possible stack overflows.
- Writing creates an intermediate code-list, possibly overflowing resources. This waits for pure output!

This library parses and generates CSV data. CSV data is represented in Prolog as a list of rows. Each row is a compound term, where all rows have the same name and arity.

**csv\_read\_file(+File, -Rows)** [det]

**csv\_read\_file(+File, -Rows, +Options)** [det]

Read a CSV file into a list of rows. Each row is a Prolog term with the same arity. *Options* is handed to `csv//2`. Remaining options are processed by `phrase_from_file/3`. The default separator depends on the file name extension and is `\t` for `.tsv` files and `,` otherwise.

Suppose we want to create a predicate `table/6` from a CSV file that we know contains 6 fields per record. This can be done using the code below. Without the option `arity(6)`, this would generate a predicate `table/N`, where N is the number of fields per record in the data.

```
?- csv_read_file(File, Rows, [functor(table), arity(6)]),
    maplist(assert, Rows).
```

**csv\_read\_stream(+Stream, -Rows, +Options)** [det]

Read CSV data from *Stream*. See also `csv_read_row/3`.

**csv(?Rows) //** [det]

**csv(?Rows, +Options) //** [det]

Prolog DCG to ‘read/write’ CSV data. *Options*:

**separator(+Code)**

The comma-separator. Must be a character code. Default is (of course) the comma. Character codes can be specified using the `0'` notion. E.g., using `separator(0';)` parses a semicolon separated file.

**ignore\_quotes(+Boolean)**

If `true` (default `false`), threat double quotes as a normal character.



**strip(+Boolean)**

If `true` (default `false`), strip leading and trailing blank space. RFC4180 says that blank space is part of the data.

**skip\_header(+CommentLead)**

Skip leading lines that start with *CommentLead*. There is no standard for comments in CSV files, but some CSV files have a header where each line starts with `#`. After skipping comment lines this option causes `csv//2` to skip empty lines. Note that an empty line may not contain white space characters (space or tab) as these may provide valid data.

**convert(+Boolean)**

If `true` (default), use `name/2` on the field data. This translates the field into a number if possible.

**case(+Action)**

If `down`, downcase atomic values. If `up`, upcase them and if `preserve` (default), do not change the case.

**functor(+Atom)**

Functor to use for creating row terms. Default is `row`.

**arity(?Arity)**

Number of fields in each row. This predicate raises a `domain_error(row_arity(Expected), Found)` if a row is found with different arity.

**match\_arity(+Boolean)**

If `false` (default `true`), do not reject CSV files where lines provide a varying number of fields (columns). This can be a work-around to use some incorrect CSV files.

**csv\_read\_file\_row(+File, -Row, +Options)**

[nondet]

True when *Row* is a row in *File*. First unifies *Row* with the first row in *File*. Backtracking yields the second, ... row. This interface is an alternative to `csv_read_file/3` that avoids loading all rows in memory. Note that this interface does not guarantee that all rows in *File* have the same arity.

In addition to the options of `csv_read_file/3`, this predicate processes the option:

**line(-Line)**

*Line* is unified with the 1-based line-number from which *Row* is read. Note that *Line* is not the physical line, but rather the *logical* record number.

**To be done** Input is read line by line. If a record separator is embedded in a quoted field, parsing the record fails and another line is added to the input. This does not nicely deal with other reasons why parsing the row may fail.

**csv\_read\_row(+Stream, -Row, +CompiledOptions)**

[det]

Read the next CSV record from *Stream* and unify the result with *Row*. *CompiledOptions* is created from options defined for `csv//2` using `csv_options/2`. *Row* is unified with `end_of_file` upon reaching the end of the input.

**csv\_options(-Compiled, +Options)**

[det]

*Compiled* is the compiled representation of the CSV processing options as they may be passed

into `csv//2`, etc. This predicate is used in combination with `csv_read_row/3` to avoid repeated processing of the options.

**csv\_write\_file(+File, +Data)** [det]

**csv\_write\_file(+File, +Data, +Options)** [det]

Write a list of Prolog terms to a CSV file. *Options* are given to `csv//2`. Remaining options are given to `open/4`. The default separator depends on the file name extension and is `\t` for `.tsv` files and `,` otherwise.

**csv\_write\_stream(+Stream, +Data, +Options)** [det]

Write the rows in *Data* to *Stream*. This is similar to `csv_write_file/3`, but can deal with data that is produced incrementally. The example below saves all answers from the predicate `data/3` to *File*.

```
save_data(File) :-
    setup_call_cleanup(
        open(File, write, Out),
        forall(data(C1,C2,C3),
            csv_write_stream(Out, [row(C1,C2,C3)], [])),
        close(Out)),
```

## A.12 library(dcg/basics): Various general DCG utilities

**To be done** This is just a starting point. We need a comprehensive set of generally useful DCG primitives.

This library provides various commonly used DCG primitives acting on list of character **codes**. Character classification is based on `code_type/2`.

This module started its life as `library(http/dcg_basics)` to support the HTTP protocol. Since then, it was increasingly used in code that has no relation to HTTP and therefore this library was moved to the core library.

**string\_without(+EndCodes, -Codes) //** [det]

Take as many codes from the input until the next character code appears in the list *EndCodes*. The terminating code itself is left on the input. Typical use is to read upto a defined delimiter such as a newline or other reserved character. For example:

```
...,
string_without("\n", RestOfLine)
```

Arguments

---

*EndCodes* is a list of character codes.

**See also** `string//1`.

**string(-Codes) //** [nondet]

Take as few as possible tokens from the input, taking one more each time on backtracking. This code is normally followed by a test for a delimiter. For example:

```
upto_colon(Atom) -->
    string(Codes), ":", !,
    { atom_codes(Atom, Codes) }.
```

**See also** `string_without//2`.

**blanks //** [det]  
Skip zero or more white-space characters.

**blank //** [semidet]  
Take next space character from input. Space characters include newline.

**See also** `white//0`

**nonblanks(-Codes) //** [det]  
Take all graph characters

**nonblank(-Code) //** [semidet]  
*Code* is the next non-blank (graph) character.

**blanks\_to\_nl //** [semidet]  
Take a sequence of `blank//0` codes if blanks are followed by a newline or end of the input.

**whites //** [det]  
Skip white space *inside* a line.

**See also** `blanks//0` also skips newlines.

**white //** [semidet]  
Take next white character from input. White characters do *not* include newline.

**alpha\_to\_lower(?C) //** [semidet]  
Read a letter (class `alpha`) and return it as a lowercase letter. If *C* is instantiated and the DCG list is already bound, *C* must be `lower` and matches both a lower and uppercase letter. If the output list is unbound, its first element is bound to *C*. For example:

```
?- alpha_to_lower(0'a, 'AB', R).
R = [66].
?- alpha_to_lower(C, 'AB', R).
C = 97, R = [66].
?- alpha_to_lower(0'a, L, R).
L = [97|R].
```

**digits(?Chars) //** [det]

**digit(?Char) //** [det]

**integer(?Integer) //** [det]

Number processing. The predicate `digits//1` matches a possibly empty set of digits, `digit//1` processes a single digit and `integer` processes an optional sign followed by a non-empty sequence of digits into an integer.

**float(?Float) //** [det]  
 Process a floating point number. The actual conversion is controlled by `number_codes/2`.

**number(+Number) //** [det]  
**number(-Number) //** [semidet]  
 Generate extract a number. Handles both integers and floating point numbers.

**xinteger(+Integer) //** [det]  
**xinteger(-Integer) //** [semidet]  
 Generate or extract an integer from a sequence of hexadecimal digits. Hexadecimal characters include both uppercase (A-F) and lowercase (a-f) letters.

**xdigit(-Weight) //** [semidet]  
 True if the next code is a hexadecimal digit with *Weight*. *Weight* is between 0 and 15. Hexadecimal characters include both uppercase (A-F) and lowercase (a-f) letters.

**xdigits(-WeightList) //** [det]  
 List of weights of a sequence of hexadecimal codes. *WeightList* may be empty. Hexadecimal characters include both uppercase (A-F) and lowercase (a-f) letters.

**eos**  
 Matches end-of-input. The implementation behaves as the following portable implementation:

```
eos --> call(eos_).
eos_([], []).
```

**To be done** This is a difficult concept and violates the *context free* property of DCGs. Explain the exact problems.

**remainder(-List) //**  
 Unify *List* with the remainder of the input.

**prolog\_var\_name(-Name:atom) //** [semidet]  
 Matches a Prolog variable name. Primarily intended to deal with quasi quotations that embed Prolog variables.

**atom(++Atom) //** [det]  
 Generate codes of *Atom*. Current implementation uses `write/1`, dealing with any Prolog term. *Atom* must be ground though.

## A.13 library(dcg/high\_order): High order grammar operations

This library provides facilities comparable `maplist/3`, `ignore/1` and `foreach/2` for DCGs.

**STATUS:** This library is experimental. The interface and implementation may change based on feedback. Please send feedback to the mailinglist or the issue page of the `swipl-devel.git` repository.

**sequence**(:Element, ?List) //

[nondet]

Match or generate a sequence of *Element*. This predicate is deterministic if *List* is fully instantiated and *Element* is deterministic. When parsing, this predicate is *greedy* and does not prune choice points. For example:

```
?- phrase(sequence(digit, Digits), `123a`, L).
Digits = "123",
L = [97] ;
Digits = [49, 50],
L = [51, 97] ;
...
```

**sequence**(:Element, :Sep, ?List) //

[nondet]

Match or generate a sequence of *Element* where each pair of elements is separated by *Sep*. When *parsing*, a matched *Sep* *commits*. The final element is *not* committed. See also `sequence/5`.

**sequence**(:Start, :Element, :Sep, :End, ?List) //

[semidet]

Match or generate a sequence of *Element* enclosed by *Start* and *End*, where each pair of elements is separated by *Sep*. More formally, it matches the following sequence:

```
Start (Element, Sep)*, End
```

The example below matches a Prolog list of integers:

```
?- phrase(sequence(["", blanks),
                  number, ("", blanks),
                  (blanks, ""]), L),
   `[1, 2, 3 ] a`, Tail).
L = [1, 2, 3],
Tail = [32, 97].
```

**optional**(:Match, :Default) //

[det]

Perform an optional match, executing *Default* if *Match* is not matched. This is comparable to `ignore/1`. Both *Match* and *Default* are DCG body terms. *Default* is typically used to instantiate the output variables of *Match*, but may also be used to match a default representation. Using `[]` for *Default* succeeds without any additional actions if *Match* fails. For example:

```
?- phrase(optional(number(X), {X=0}), `23`, Tail).
X = 23,
Tail = [].
?- phrase(optional(number(X), {X=0}), `aap`, Tail).
X = 0,
Tail = `aap`.
```

**foreach**(:Generator, :Element) // [det]  
**foreach**(:Generator, :Element, :Sep) // [det]  
 Generate a list from the solutions of *Generator*. This predicate collects all solutions of *Generator*, applies *Element* for each solution and *Sep* between each pair of solutions. For example:

```
?- phrase(foreach(between(1,5,X), number(X), ", "), L).
L = "1, 2, 3, 4, 5, 6, 7, 8, 9, 10".
```

## A.14 library(debug): Print debug messages and test assertions

**author** Jan Wielemaker

This library is a replacement for `format/3` for printing debug messages. Messages are assigned a *topic*. By dynamically enabling or disabling topics the user can select desired messages. Debug statements are removed when the code is compiled for optimization.

See manual for details. With XPCE, you can use the call below to start a graphical monitoring tool.

```
?- prolog_ide(debug_monitor).
```

Using the predicate `assertion/1` you can make assumptions about your program explicit, trapping the debugger if the condition does not hold.

**debugging**(+Topic) [semidet]  
**debugging**(-Topic) [nondet]  
**debugging**(?Topic, ?Bool) [nondet]  
 Examine debug topics. The form `debugging(+Topic)` may be used to perform more complex debugging tasks. A typical usage skeleton is:

```
( debugging(mytopic)
-> <perform debugging actions>
; true
),
...

```

The other two calls are intended to examine existing and enabled debugging tokens and are typically not used in user programs.

**debug**(+Topic) [det]  
**nodebug**(+Topic) [det]  
 Add/remove a topic from being printed. `nodebug(_)` removes all topics. Gives a warning if the topic is not defined unless it is used from a directive. The latter allows placing debug topics at the start of a (load-)file without warnings.

For `debug/1`, *Topic* can be a term `Topic > Out`, where *Out* is either a stream or stream-alias or a filename (atom). This redirects debug information on this topic to the given output.

**list\_debug\_topics** [det]

List currently known debug topics and their setting.

**debug\_message\_context(+What)** [det]

Specify additional context for debug messages.

**deprecated** New code should use the Prolog flag `message_context`. This predicates adds or deletes topics from this list.

**debug(+Topic, +Format, :Args)** [det]

*Format* a message if debug topic is enabled. Similar to `format/3` to `user_error`, but only prints if *Topic* is activated through `debug/1`. *Args* is a meta-argument to deal with goal for the `@-command`. Output is first handed to the hook `prolog:debug_print_hook/3`. If this fails, *Format+Args* is translated to text using the message-translation (see `print_message/2`) for the term `debug(Format, Args)` and then printed to every matching destination (controlled by `debug/1`) using `print_message_lines/3`.

The message is preceded by `'% '` and terminated with a newline.

See also `format/3`.

**prolog:debug\_print\_hook(+Topic, +Format, +Args)** [semidet,multifile]

Hook called by `debug/3`. This hook is used by the graphical frontend that can be activated using `prolog_ide/1`:

```
?- prolog_ide(debug_monitor).
```

**assertion(:Goal)** [det]

Acts similar to `C assert()` macro. It has no effect if *Goal* succeeds. If *Goal* fails or throws an exception, the following steps are taken:

- call `prolog:assertion_failed/2`. If `prolog:assertion_failed/2` fails, then:
  - If this is an interactive toplevel thread, print a message, the stack-trace, and finally trap the debugger.
  - Otherwise, throw `error(assertion_error(Reason, G), _)` where *Reason* is one of `fail` or the exception raised.

**prolog:assertion\_failed(+Reason, +Goal)** [semidet,multifile]

This hook is called if the *Goal* of `assertion/1` fails. *Reason* is unified with either `fail` if *Goal* simply failed or an exception call otherwise. If this hook fails, the default behaviour is activated. If the hooks throws an exception it will be propagated into the caller of `assertion/1`.

## A.15 library(dict): Dict utilities

This library defines utilities that operate on lists of dicts, notably to make lists of dicts consistent by adding missing keys, converting between lists of compounds and lists of dicts, joining and slicing lists of dicts.

**dicts\_same\_tag(+List, -Tag)** [semidet]

True when *List* is a list of dicts that all have the tag *Tag*.

**dict\_keys(+Dict, -Keys)** [det]

True when *Keys* is an ordered set of the keys appearing in *Dict*.

**dicts\_same\_keys(+List, -Keys)** [semidet]

True if *List* is a list of dicts that all have the same keys and *Keys* is an ordered set of these keys.

**dicts\_to\_same\_keys(+DictsIn, :OnEmpty, -DictsOut)**

*DictsOut* is a copy of *DictsIn*, where each dict contains all keys appearing in all dicts of *DictsIn*. Values for keys that are added to a dict are produced by calling *OnEmpty* as below. The predicate `dict_fill/4` provides an implementation that fills all new cells with a predefined value.

```
call(:OnEmpty, +Key, +Dict, -Value)
```

**dict\_fill(+ValueIn, +Key, +Dict, -Value)** [det]

Implementation for the `dicts_to_same_keys/3` *OnEmpty* closure that fills new cells with a copy of *ValueIn*. Note that `copy_term/2` does not really copy ground terms. Below are two examples. Note that when filling empty cells with a variable, each empty cell is bound to a new variable.

```
?- dicts_to_same_keys([r{x:1}, r{y:2}], dict_fill(null), L).
L = [r{x:1, y:null}, r{x:null, y:2}].
?- dicts_to_same_keys([r{x:1}, r{y:2}], dict_fill(_), L).
L = [r{x:1, y:_G2005}, r{x:_G2036, y:2}].
```

Use `dict_no_fill/3` to raise an error if a dict is missing a key.

**dicts\_join(+Key, +DictsIn, -Dicts)** [semidet]

Join dicts in *Dicts* that have the same value for *Key*, provided they do not have conflicting values on other keys. For example:

```
?- dicts_join(x, [r{x:1, y:2}, r{x:1, z:3}, r{x:2, y:4}], L).
L = [r{x:1, y:2, z:3}, r{x:2, y:4}].
```

**Errors** `existence_error(key, Key, Dict)` if a dict in *Dicts1* or *Dicts2* does not contain *Key*.

**dicts\_join(+Key, +Dicts1, +Dicts2, -Dicts)** [semidet]

Join two lists of dicts (*Dicts1* and *Dicts2*) on *Key*. Each pair *D1-D2* from *Dicts1* and *Dicts2* that have the same (`==`) value for *Key* creates a new dict *D* with the union of the keys from *D1* and *D2*, provided *D1* and *D2* do not have conflicting values for some key. For example:

```
?- DL1 = [r{x:1, y:1}, r{x:2, y:4}],
   DL2 = [r{x:1, z:2}, r{x:3, z:4}],
   dicts_join(x, DL1, DL2, DL).
DL = [r{x:1, y:1, z:2}, r{x:2, y:4}, r{x:3, z:4}].
```



**Errors** `existence_error(key, Key, Dict)` if a dict in *Dicts1* or *Dicts2* does not contain *Key*.

**dicts\_slice(+Keys, +DictsIn, -DictsOut)** [det]  
*DictsOut* is a list of Dicts only containing values for *Keys*.

**dicts\_to\_compounds(?Dicts, +Keys, :OnEmpty, ?Compounds)** [semidet]  
 True when *Dicts* and *Compounds* are lists of the same length and each element of *Compounds* is a compound term whose arguments represent the values associated with the corresponding keys in *Keys*. When converting from dict to row, *OnEmpty* is used to compute missing values. The functor for the compound is the same as the tag of the pair. When converting from dict to row and the dict has no tag, the functor `row` is used. For example:

```
?- Dicts = [_{x:1}, _{x:2, y:3}],
    dicts_to_compounds(Dicts, [x], dict_fill(null), Compounds).
Compounds = [row(1), row(2)].
?- Dicts = [_{x:1}, _{x:2, y:3}],
    dicts_to_compounds(Dicts, [x,y], dict_fill(null), Compounds).
Compounds = [row(1, null), row(2, 3)].
?- Compounds = [point(1,1), point(2,4)],
    dicts_to_compounds(Dicts, [x,y], dict_fill(null), Compounds).
Dicts = [point{x:1, y:1}, point{x:2, y:4}].
```

When converting from *Dicts* to *Compounds* *Keys* may be computed by `dicts_same_keys/2`.

## A.16 library(error): Error generating support

### author

- Jan Wielemaker
- Richard O'Keefe
- Ulrich Neumerkel

### See also

- `library(debug)` and `library(prolog_stack)`.
- `print_message/2` is used to print (uncaught) error terms.

This module provides predicates to simplify error generation and checking. It's implementation is based on a discussion on the SWI-Prolog mailinglist on best practices in error handling. The utility predicate `must_be/2` provides simple run-time type validation. The `*_error` predicates are simple wrappers around `throw/1` to simplify throwing the most common ISO error terms.

### type\_error(+Type, +Term)

Tell the user that *Term* is not of the expected *Type*. This error is closely related to `domain_error/2` because the notion of types is not really set in stone in Prolog. We introduce the difference using a simple example.

Suppose an argument must be a non-negative integer. If the actual argument is not an integer, this is a *type\_error*. If it is a negative integer, it is a *domain\_error*.

Typical borderline cases are predicates accepting a compound term, e.g., `point(X, Y)`. One could argue that the basic type is a compound-term and any other compound term is a domain error. Most Prolog programmers consider each compound as a type and would consider a compound that is not `point(_, _)` a *type\_error*.

**domain\_error(+Type, +Term)**

The argument is of the proper type, but has a value that is outside the supported values. See `type_error/2` for a more elaborate discussion of the distinction between type- and domain-errors.

**existence\_error(+Type, +Term)**

*Term* is of the correct type and correct domain, but there is no existing (external) resource that is represented by it.

**existence\_error(+Type, +Term, +Set)**

*Term* is of the correct type and correct domain, but there is no existing (external) resource that is represented by it in the provided set.

**Compatibility** This error is not in ISO.

**permission\_error(+Action, +Type, +Term)**

It is not allowed to perform *Action* on the object *Term* that is of the given *Type*.

**instantiation\_error(+Term)**

An argument is under-instantiated. I.e. it is not acceptable as it is, but if some variables are bound to appropriate values it would be acceptable.

|             | Arguments  |
|-------------|--|
| <i>Term</i> | is the term that needs (further) instantiation. Unfortunately, the ISO error does not allow for passing this term along with the error, but we pass it to this predicate for documentation purposes and to allow for future enhancement. |

**uninstantiation\_error(+Term)**

An argument is over-instantiated. This error is used for output arguments whose value cannot be known upfront. For example, the goal `open(File, read, input)` cannot succeed because the system will allocate a new unique stream handle that will never unify with `input`.

**representation\_error(+Reason)**

A representation error indicates a limitation of the implementation. SWI-Prolog has no such limits that are not covered by other errors, but an example of a representation error in another Prolog implementation could be an attempt to create a term with an arity higher than supported by the system.

**syntax\_error(+Culprit)**

A text has invalid syntax. The error is described by *Culprit*.

**To be done** Deal with proper description of the location of the error. For short texts, we allow for `Type(Text)`, meaning *Text* is not a valid *Type*. E.g. `syntax_error(number('1a'))` means that `1a` is not a valid number.

**resource\_error(+Culprit)**

A goal cannot be completed due to lack of resources.

**must\_be(+Type, @Term)**

[det]

True if *Term* satisfies the type constraints for *Type*. Defined types are atom, atomic, between, boolean, callable, chars, codes, text, compound, constant, float, integer, nonneg, positive\_integer, negative\_integer, nonvar, number, oneof, list, list\_or\_partial\_list, symbol, var, rational, encoding, dict and string.

Most of these types are defined by an arity-1 built-in predicate of the same name. Below is a brief definition of the other types.

|                                     |   |
|-------------------------------------|---|
| acyclic                             | Acyclic term (tree); see <code>acyclic_term/1</code>                                      |
| any                                 |   |
| <code>between(FloatL,FloatU)</code> | Number [FloatL..FloatU]   |
| <code>between(IntL,IntU)</code>     | Integer [IntL..IntU]  |
| boolean                             | One of <code>true</code> or <code>false</code>  |
| char                                | Atom of length 1  |
| chars                               | Proper list of 1-character atoms  |
| code                                | Representation Unicode code point   |
| codes                               | Proper list of Unicode character codes  |
| constant                            | Same as <code>atomic</code>   |
| cyclic                              | Cyclic term (rational tree); see <code>cyclic_term/1</code>                               |
| dict                                | A dictionary term; see <code>is_dict/1</code>   |
| encoding                            | Valid name for a character encoding; see <code>current_encoding/1</code>                  |
| list                                | A (non-open) list; see <code>is_list/1</code>   |
| negative_integer                    | Integer < 0   |
| nonneg                              | Integer >= 0  |
| <code>oneof(L)</code>               | Ground term that is member of L   |
| positive_integer                    | Integer > 0   |
| proper_list                         | Same as <code>list</code>   |
| <code>list(Type)</code>             | Proper list with elements of <i>Type</i>  |
| list_or_partial_list                | A list or an open list (ending in a variable); see <code>is_list_or_partial_list/1</code> |
| stream                              | A stream name or valid stream handle; see <code>is_stream/1</code>                        |
| symbol                              | Same as <code>atom</code>   |
| text                                | One of <code>atom</code> , <code>string</code> , <code>chars</code> or <code>codes</code> |
| type                                | <i>Term</i> is a valid type specification   |

Note: The Windows version can only represent Unicode code points up to  $2^{16}-1$ . Higher values cause a representation error on most text handling predicates.

**throws** `instantiation_error` if *Term* is insufficiently instantiated and `type_error(Type, Term)` if *Term* is not of *Type*.

**is\_of\_type(+Type, @Term)**

[semidet]

True if *Term* satisfies *Type*.

**has\_type(+Type, @Term)**

[semidet,multifile]

True if *Term* satisfies *Type*.

**current\_type**(?Type, @Var, -Body)

[nondet]

True when *Type* is a currently defined type and *Var* satisfies *Type* of the body term *Body* succeeds.

## A.17 library(gensym): Generate unique identifiers

Gensym (**Generate Symbols**) is an old library for generating unique symbols (atoms). Such symbols are generated from a base atom which gets a sequence number appended. Of course there is no guarantee that ‘catch22’ is not an already defined atom and therefore one must be aware these atoms are only unique in an isolated context.

The SWI-Prolog gensym library is thread-safe. The sequence numbers are global over all threads and therefore generated atoms are unique over all threads.

**gensym**(+Base, -Unique)

Generate a unique atom from base *Base* and unify it with *Unique*. *Base* should be an atom. The first call will return  $\langle base \rangle 1$ , the next  $\langle base \rangle 2$ , etc. Note that this is no guarantee that the atom is unique in the system.

**reset\_gensym**(+Base)

Restart generation of identifiers from *Base* at  $\langle Base \rangle 1$ . Used to make sure a program produces the same results on subsequent runs. Use with care.

**reset\_gensym**

Reset gensym for all registered keys. This predicate is available for compatibility only. New code is strongly advised to avoid the use of `reset_gensym` or at least to reset only the keys used by your program to avoid unexpected side effects on other components.

## A.18 library(iostream): Utilities to deal with streams

**See also** `library(archive)`, `library(process)`, `library(zlib)`,  
`library(http/http_stream)`

This library contains utilities that deal with streams, notably originating from non-built-in sources such as URLs, archives, windows, processes, etc.

The predicate `open_any/5` acts as a *broker* between applications that can process data from a stream and libraries that can create streams from diverse sources. Without this predicate, processing data inevitably follows the pattern below. As *call\_some\_open\_variation* can be anything, this blocks us from writing predicates such as `load_xml(From, DOM)` that can operate on arbitrary input sources.

```
setup_call_cleanup(
    call_some_open_variation(Spec, In),
    process(In),
    close(In)).
```

Libraries that can open streams can install the hook `iostream:open_hook/6` to make their functionality available through `open_any/5`.

**open\_any(+Specification, +Mode, -Stream, -Close, +Options)**

Establish a stream from *Specification* that should be closed using *Close*, which can either be called or passed to `close_any/1`. *Options* processed:

**encoding(Enc)**

Set stream to encoding *Enc*.

Without loaded plugins, the `open_any/5` processes the following values for *Specification*. If no rule matches, `open_any/5` processes *Specification* as `file(Specification)`.

*Stream*

A plain stream handle. Possible post-processing options such as encoding are applied. *Close* does *not* close the stream, but resets other side-effects such as the encoding.

**stream(Stream)**

Same as a plain *Stream*.

*FileURL*

If *Specification* is of the form `=file://...=`, the pointed to file is opened using `open/4`. Requires `library(uri)` to be installed.

**file(Path)**

Explicitly open the file *Path*. *Path* can be an *Path(File)* term as accepted by `absolute_file_name/3`.

**string(String)**

Open a Prolog string, atom, list of characters or codes as an *input* stream.

The typical usage scenario is given in the code below, where `<process>` processes the input.

```
setup_call_cleanup(
    open_any(Spec, read, In, Close, Options),
    <process>(In),
    Close).
```

Currently, the following libraries extend this predicate:

**library(http/http\_open)**

Adds support for URLs using the `http` and `https` schemes.

**close\_any(+Goal)**

Execute the *Close* closure returned by `open_any/5`. The closure can also be called directly. Using `close_any/1` can be considered better style and enhances tractability of the source code.

**open\_hook(+Spec, +Mode, -Stream, -Close, +Options0, -Options)**

[semidet,multifile]

Open *Spec* in *Mode*, producing *Stream*.

|                 | Arguments  |
|-----------------|--|
| <i>Close</i>    | is unified to a goal that must be called to undo the side-effects of the action, e.g., typically the term <code>close(Stream)</code> |
| <i>Options0</i> | are the options passed to <code>open_any/5</code>  |
| <i>Options</i>  | are passed to the post processing filters that may be installed by <code>open_any/5</code> .   |

## A.19 library(lists): List Manipulation

**Compatibility** Virtually every Prolog system has `library(lists)`, but the set of provided predicates is diverse. There is a fair agreement on the semantics of most of these predicates, although error handling may vary.

This library provides commonly accepted basic predicates for list manipulation in the Prolog community. Some additional list manipulations are built-in. See e.g., `memberchk/2`, `length/2`.

The implementation of this library is copied from many places. These include: "The Craft of Prolog", the DEC-10 Prolog library (LISTRO.PL) and the YAP lists library. Some predicates are reimplemented based on their specification by Quintus and SICStus.

### member(?Elem, ?List)

True if *Elem* is a member of *List*. The SWI-Prolog definition differs from the classical one. Our definition avoids unpacking each list element twice and provides determinism on the last element. E.g. this is deterministic:

```
member(X, [One]).
```

**author** Gertjan van Noord

### append(?List1, ?List2, ?List1AndList2)

*List1AndList2* is the concatenation of *List1* and *List2*

### append(+ListOfLists, ?List)

Concatenate a list of lists. Is true if *ListOfLists* is a list of lists, and *List* is the concatenation of these lists.

|                    | Arguments                                       |
|--------------------|---|
| <i>ListOfLists</i> | must be a list of <i>possibly</i> partial lists |

### prefix(?Part, ?Whole)

True iff *Part* is a leading substring of *Whole*. This is the same as `append(Part, _, Whole)`.

### select(?Elem, ?List1, ?List2)

Is true when *List1*, with *Elem* removed, results in *List2*. This implementation is deterministic if the last element of *List1* has been selected.

### selectchk(+Elem, +List, -Rest)

[semidet]

Semi-deterministic removal of first element in *List* that unifies with *Elem*.

**select**(?X, ?XList, ?Y, ?YList)*[nondet]*

Select from two lists at the same position. True if *XList* is unifiable with *YList* apart a single element at the same position that is unified with *X* in *XList* and with *Y* in *YList*. A typical use for this predicate is to *replace* an element, as shown in the example below. All possible substitutions are performed on backtracking.

```
?- select(b, [a,b,c,b], 2, X) .
X = [a, 2, c, b] ;
X = [a, b, c, 2] ;
false.
```

**See also** `selectchk/4` provides a semidet version.

**selectchk**(?X, ?XList, ?Y, ?YList)*[semidet]*

Semi-deterministic version of `select/4`.

**nextto**(?X, ?Y, ?List)

True if *Y* directly follows *X* in *List*.

**delete**(+List1, @Elem, -List2)*[det]*

Delete matching elements from a list. True when *List2* is a list with all elements from *List1* except for those that unify with *Elem*. Matching *Elem* with elements of *List1* is uses `\+ Elem \= H`, which implies that *Elem* is not changed.

**See also** `select/3`, `subtract/3`.

**deprecated** There are too many ways in which one might want to delete elements from a list to justify the name. Think of matching (`=` vs. `==`), delete first/all, be deterministic or not.

**nth0**(?Index, ?List, ?Elem)

True when *Elem* is the *Index*'th element of *List*. Counting starts at 0.

**Errors** `type_error(integer, Index)` if *Index* is not an integer or unbound.

**See also** `nth1/3`.

**nth1**(?Index, ?List, ?Elem)

Is true when *Elem* is the *Index*'th element of *List*. Counting starts at 1.

**See also** `nth0/3`.

**nth0**(?N, ?List, ?Elem, ?Rest)*[det]*

Select/insert element at index. True when *Elem* is the *N*'th (0-based) element of *List* and *Rest* is the remainder (as in `select/3`) of *List*. For example:

```
?- nth0(I, [a,b,c], E, R) .
I = 0, E = a, R = [b, c] ;
I = 1, E = b, R = [a, c] ;
I = 2, E = c, R = [a, b] ;
false.
```

```
?- nth0(1, L, a1, [a,b]).
L = [a, a1, b].
```

**nth1(?N, ?List, ?Elem, ?Rest)**

[det]

As `nth0/4`, but counting starts at 1.

**last(?List, ?Last)**

Succeeds when *Last* is the last element of *List*. This predicate is `semidet` if *List* is a list and `multi` if *List* is a partial list.

**Compatibility** There is no de-facto standard for the argument order of `last/2`. Be careful when porting code or use `append(_, [Last], List)` as a portable alternative.

**proper\_length(@List, -Length)**

[semidet]

True when *Length* is the number of elements in the proper list *List*. This is equivalent to

```
proper_length(List, Length) :-
    is_list(List),
    length(List, Length).
```

**same\_length(?List1, ?List2)**

Is true when *List1* and *List2* are lists with the same number of elements. The predicate is deterministic if at least one of the arguments is a proper list. It is non-deterministic if both arguments are partial lists.

**See also** `length/2`

**reverse(?List1, ?List2)**

Is true when the elements of *List2* are in reverse order compared to *List1*.

**permutation(?Xs, ?Ys)**

[nondet]

True when *Xs* is a permutation of *Ys*. This can solve for *Ys* given *Xs* or *Xs* given *Ys*, or even enumerate *Xs* and *Ys* together. The predicate `permutation/2` is primarily intended to generate permutations. Note that a list of length *N* has *N!* permutations, and unbounded permutation generation becomes prohibitively expensive, even for rather short lists ( $10! = 3,628,800$ ).

If both *Xs* and *Ys* are provided and both lists have equal length the order is  $|Xs|^2$ . Simply testing whether *Xs* is a permutation of *Ys* can be achieved in order  $\log(|Xs|)$  using `msort/2` as illustrated below with the `semidet` predicate `is_permutation/2`:

```
is_permutation(Xs, Ys) :-
    msort(Xs, Sorted),
    msort(Ys, Sorted).
```

The example below illustrates that *Xs* and *Ys* being proper lists is not a sufficient condition to use the above replacement.



```
?- permutation([1,2], [X,Y]).
X = 1, Y = 2 ;
X = 2, Y = 1 ;
false.
```

**Errors** `type_error(list, Arg)` if either argument is not a proper or partial list.

**flatten**(+*NestedList*, -*FlatList*)

[det]

Is true if *FlatList* is a non-nested version of *NestedList*. Note that empty lists are removed. In standard Prolog, this implies that the atom '[]' is removed too. In SWI7, [] is distinct from '[]'.

Ending up needing `flatten/2` often indicates, like `append/3` for appending two lists, a bad design. Efficient code that generates lists from generated small lists must use difference lists, often possible through grammar rules for optimal readability.

**See also** `append/2`

**max\_member**(-*Max*, +*List*)

[semidet]

True when *Max* is the largest member in the standard order of terms. Fails if *List* is empty.

**See also**

- `compare/3`
- `max_list/2` for the maximum of a list of numbers.

**min\_member**(-*Min*, +*List*)

[semidet]

True when *Min* is the smallest member in the standard order of terms. Fails if *List* is empty.

**See also**

- `compare/3`
- `min_list/2` for the minimum of a list of numbers.

**sum\_list**(+*List*, -*Sum*)

[det]

*Sum* is the result of adding all numbers in *List*.

**max\_list**(+*List*:*list(number)*, -*Max*:*number*)

[semidet]

True if *Max* is the largest number in *List*. Fails if *List* is empty.

**See also** `max_member/2`.

**min\_list**(+*List*:*list(number)*, -*Min*:*number*)

[semidet]

True if *Min* is the smallest number in *List*. Fails if *List* is empty.

**See also** `min_member/2`.

**numlist**(+*Low*, +*High*, -*List*)

[semidet]

*List* is a list [*Low*, *Low*+1, ... *High*]. Fails if *High* < *Low*.

**Errors**

- `type_error(integer, Low)`
- `type_error(integer, High)`

**is\_set(@Set)***[semidet]*

True if *Set* is a proper list without duplicates. Equivalence is based on `==/2`. The implementation uses `sort/2`, which implies that the complexity is  $N \cdot \log(N)$  and the predicate may cause a resource-error. There are no other error conditions.

**list\_to\_set(+List, ?Set)***[det]*

True when *Set* has the same elements as *List* in the same order. The left-most copy of duplicate elements is retained. *List* may contain variables. Elements *E1* and *E2* are considered duplicates iff *E1* `==` *E2* holds. The complexity of the implementation is  $N \cdot \log(N)$ .

**Errors** *List* is type-checked.

**See also** `sort/2` can be used to create an ordered set. Many set operations on ordered sets are order  $N$  rather than order  $N^2$ . The `list_to_set/2` predicate is more expensive than `sort/2` because it involves, two sorts and a linear scan.

**Compatibility** Up to version 6.3.11, `list_to_set/2` had complexity  $N^2$  and equality was tested using `==/2`.

**intersection(+Set1, +Set2, -Set3)***[det]*

True if *Set3* unifies with the intersection of *Set1* and *Set2*. The complexity of this predicate is  $|Set1| \cdot |Set2|$ . A *set* is defined to be an unordered list without duplicates. Elements are considered duplicates if they can be unified.

**See also** `ord_intersection/3`.

**union(+Set1, +Set2, -Set3)***[det]*

True if *Set3* unifies with the union of the lists *Set1* and *Set2*. The complexity of this predicate is  $|Set1| \cdot |Set2|$ . A *set* is defined to be an unordered list without duplicates. Elements are considered duplicates if they can be unified.

**See also** `ord_union/3`

**subset(+SubSet, +Set)***[semidet]*

True if all elements of *SubSet* belong to *Set* as well. Membership test is based on `memberchk/2`. The complexity is  $|SubSet| \cdot |Set|$ . A *set* is defined to be an unordered list without duplicates. Elements are considered duplicates if they can be unified.

**See also** `ord_subset/2`.

**subtract(+Set, +Delete, -Result)***[det]*

*Delete* all elements in *Delete* from *Set*. Deletion is based on unification using `memberchk/2`. The complexity is  $|Delete| \cdot |Set|$ . A *set* is defined to be an unordered list without duplicates. Elements are considered duplicates if they can be unified.

**See also** `ord_subtract/3`.

## A.20 library(main): Provide entry point for scripts

**See also**

- `library(optparse)` for comprehensive option parsing.
- `library(prolog_stack)` to force backtraces in case of an uncaught exception.
- XPCE users should have a look at `library(pce_main)`, which starts the GUI and processes events until all windows have gone.

This library is intended for supporting PrologScript on Unix using the `#!` magic sequence for scripts using commandline options. The entry point `main/0` calls the user-supplied predicate `main/1` passing a list of commandline options. Below is a simple `echo` implementation in Prolog.

```
#!/usr/bin/env swipl

:- initialization(main, main).

main(Argv) :-
    echo(Argv).

echo([]) :- nl.
echo([Last]) :- !,
    write(Last), nl.
echo([H|T]) :-
    write(H), write(' '),
    echo(T).
```

### **main**

Call `main/1` using the passed command-line arguments. Before calling `main/1` this predicate installs a signal handler for `SIGINT` (Control-C) that terminates the process with status 1.

### **argv\_options(+Argv, -RestArgv, -Options)**

[det]

Generic transformation of long commandline arguments to options. Each `-Name=Value` is mapped to `Name(Value)`. Each plain name is mapped to `Name(true)`, unless `Name` starts with `no-`, in which case the option is mapped to `Name(false)`. Numeric option values are mapped to Prolog numbers.

**See also** `library(optparse)` provides a more involved option library, providing both short and long options, help and error handling. This predicate is more for quick-and-dirty scripts.

## **A.21 library(nb\_set): Non-backtrackable set**

The library `nb_set` defines *non-backtrackable sets*, implemented as binary trees. The sets are represented as compound terms and manipulated using `nb_setarg/3`. Non-backtrackable manipulation of datastructures is not supported by a large number of Prolog implementations, but it has several advantages over using the database. It produces less garbage, is thread-safe, reentrant and deals with exceptions without leaking data.

Similar to the `assoc` library, keys can be any Prolog term, but it is not allowed to instantiate or modify a term.

One of the ways to use this library is to generate unique values on backtracking *without* generating *all* solutions first, for example to act as a filter between a generator producing many duplicates and an expensive test routine, as outlined below:

```
generate_and_test(Solution) :-
    empty_nb_set(Set),
    generate(Solution),
    add_nb_set(Solution, Set, true),
    test(Solution).
```

**empty\_nb\_set(?Set)**

True if *Set* is a non-backtrackable empty set.

**add\_nb\_set(+Key, !Set)**

Add *Key* to *Set*. If *Key* is already a member of *Set*, `add_nb_set/3` succeeds without modifying *Set*.

**add\_nb\_set(+Key, !Set, ?New)**

If *Key* is not in *Set* and *New* is unified to `true`, *Key* is added to *Set*. If *Key* is in *Set*, *New* is unified to `false`. It can be used for many purposes:

|                                      |                             |
|--------------------------------------|-----------------------------|
| <code>add_nb_set(+, +, false)</code> | Test membership             |
| <code>add_nb_set(+, +, true)</code>  | Succeed only if new member  |
| <code>add_nb_set(+, +, Var)</code>   | Succeed, binding <i>Var</i> |

**gen\_nb\_set(+Set, -Key)**

Generate all members of *Set* on backtracking in the standard order of terms. To test membership, use `add_nb_set/3`.

**size\_nb\_set(+Set, -Size)**

Unify *Size* with the number of elements in *Set*.

**nb\_set\_to\_list(+Set, -List)**

Unify *List* with a list of all elements in *Set* in the standard order of terms (i.e., an *ordered list*).

## A.22 library(www\_browser): Activating your Web-browser

This library deals with the very system-dependent task of opening a web page in a browser. See also `url` and the HTTP package.

**www\_open\_url(+URL)**

Open *URL* in an external web browser. The reason to place this in the library is to centralise the maintenance on this highly platform- and browser-specific task. It distinguishes between the following cases:

- *MS-Windows*

If it detects MS-Windows it uses `win_shell/2` to open the *URL*. The behaviour and browser started depends on the version of Windows and Windows-shell configuration, but in general it should be the behaviour expected by the user.

- *Other platforms*

On other platforms it tests the environment variable (see `getenv/2`) named `BROWSER` or uses `netscape` if this variable is not set. If the browser is either `mozilla` or `netscape`, `www.open_url/1` first tries to open a new window on a running browser using the `-remote` option of Netscape. If this fails or the browser is not `mozilla` or `netscape` the system simply passes the URL as first argument to the program.

## A.23 library(occurs): Finding and counting sub-terms

**See also** `library(terms)` provides similar predicates and is probably more wide-spread than this library.

This is a SWI-Prolog implementation of the corresponding Quintus library, based on the generalised `arg/3` predicate of SWI-Prolog.

**contains\_term(+Sub, +Term)** [semidet]  
Succeeds if *Sub* is contained in *Term* (=, deterministically)

**contains\_var(+Sub, +Term)** [det]  
Succeeds if *Sub* is contained in *Term* (==, deterministically)

**free\_of\_term(+Sub, +Term)**  
Succeeds if *Sub* does not unify to any subterm of *Term*

**free\_of\_var(+Sub, +Term)**  
Succeeds if *Sub* is not equal (==) to any subterm of *Term*

**occurrences\_of\_term(+SubTerm, +Term, ?Count)**  
*Count* the number of SubTerms in *Term*

**occurrences\_of\_var(+SubTerm, +Term, ?Count)**  
*Count* the number of SubTerms in *Term*

**sub\_term(-Sub, +Term)**  
Generates (on backtracking) all subterms of *Term*.

**sub\_var(-Sub, +Term)**  
Generates (on backtracking) all subterms (==) of *Term*.

## A.24 library(option): Option list processing

**See also**

- `library(record)`
- Option processing capabilities may be declared using the directive `predicate_options/3`.

**To be done** We should consider putting many options in an `assoc` or `record` with appropriate preprocessing to achieve better performance.

The `library(option)` provides some utilities for processing option lists. Option lists are commonly used as an alternative for many arguments. Examples of built-in predicates are `open/4` and `write_term/3`. Naming the arguments results in more readable code, and the list nature makes it easy to extend the list of options accepted by a predicate. Option lists come in two styles, both of which are handled by this library.

**Name(Value)** This is the preferred style.

**Name = Value** This is often used, but deprecated.

Processing options inside time-critical code (loops) can cause serious overhead. One possibility is to define a record using `library(record)` and initialise this using `make_<record>/2`. In addition to providing good performance, this also provides type-checking and central declaration of defaults.

```
:- record_atts(width:integer=100, shape:oneof([box,circle])=box).

process(Data, Options) :-
    make_atts(Options, Attributes),
    action(Data, Attributes).

action(Data, Attributes) :-
   atts_shape(Attributes, Shape),
    ...
```

Options typically have exactly one argument. The library does support options with 0 or more than one argument with the following restrictions:

- The predicate `option/3` and `select_option/4`, involving default are meaningless. They perform an `arg(1, Option, Default)`, causing failure without arguments and filling only the first option-argument otherwise.
- `meta_options/3` can only qualify options with exactly one argument.

**option(?Option, +OptionList, +Default)** [semidet]  
Get an *Option* from *OptionList*. *OptionList* can use the Name=Value as well as the Name(Value) convention.

|               |                                |           |
|---------------|--------------------------------|-----------|
|               |                                | Arguments |
| <i>Option</i> | Term of the form Name(?Value). |           |

**option(?Option, +OptionList)** [semidet]  
Get an *Option* from *OptionList*. *OptionList* can use the Name=Value as well as the Name(Value) convention. Fails silently if the option does not appear in *OptionList*.

|               |                                |           |
|---------------|--------------------------------|-----------|
|               |                                | Arguments |
| <i>Option</i> | Term of the form Name(?Value). |           |

**select\_option**(?Option, +Options, -RestOptions) [semidet]  
 Get and remove *Option* from an option list. As `option/2`, removing the matching option from *Options* and unifying the remaining options with *RestOptions*.

**select\_option**(?Option, +Options, -RestOptions, +Default) [det]  
 Get and remove *Option* with default value. As `select_option/3`, but if *Option* is not in *Options*, its value is unified with *Default* and *RestOptions* with *Options*.

**merge\_options**(+New, +Old, -Merged) [det]  
 Merge two option lists. *Merged* is a sorted list of options using the canonical format `Name(Value)` holding all options from *New* and *Old*, after removing conflicting options from *Old*.

Multi-values options (e.g., `proxy (Host, Port)`) are allowed, where both option-name and arity define the identity of the option.

**meta\_options**(+IsMeta, :Options0, -Options) [det]  
 Perform meta-expansion on options that are module-sensitive. Whether an option name is module-sensitive is determined by calling `call(IsMeta, Name)`. Here is an example:

```
meta_options(is_meta, OptionsIn, Options),
...
is_meta(callback).
```

Meta-options must have exactly one argument. This argument will be qualified.

**To be done** Should be integrated with declarations from `predicate_options/3`.

**dict\_options**(?Dict, ?Options) [det]  
 Convert between an option list and a dictionary. One of the arguments must be instantiated. If the option list is created, it is created in canonical form, i.e., using `Option(Value)` with the *Options* sorted in the standard order of terms. Note that the conversion is not always possible due to different constraints and conversion may thus lead to (type) errors.

- *Dict* keys can be integers. This is not allowed in canonical option lists.
- *Options* can hold multiple options with the same key. This is not allowed in dicts.
- *Options* can have more than one value (`name(V1, V2)`). This is not allowed in dicts.

Also note that most system predicates and predicates using this library for processing the option argument can both work with classical Prolog options and dicts objects.

## A.25 library(optparse): command line parsing

**author** Marcus Uneson

**version** 0.20 (2011-04-27)

**To be done** : validation? e.g. numbers; file path existence; one-out-of-a-set-of-atoms

This module helps in building a command-line interface to an application. In particular, it provides functions that take an option specification and a list of atoms, probably given to the program on the command line, and return a parsed representation (a list of the customary `Key(Val)` by default; or optionally, a list of `Func(Key, Val)` terms in the style of `current_prolog_flag/2`). It can also synthesize a simple help text from the options specification.

The terminology in the following is partly borrowed from python, see <http://docs.python.org/library/optparse.html#terminology>. Very briefly, *arguments* is what you provide on the command line and for many prologs show up as a list of atoms `Args` in `current_prolog_flag(argv, Args)`. For a typical prolog incantation, they can be divided into

- *runtime arguments*, which controls the prolog runtime; conventionally, they are ended by `'-'`;
- *options*, which are key-value pairs (with a boolean value possibly implicit) intended to control your program in one way or another; and
- *positional arguments*, which is what remains after all runtime arguments and options have been removed (with implicit arguments – true/false for booleans – filled in).

Positional arguments are in particular used for mandatory arguments without which your program won't work and for which there are no sensible defaults (e.g., input file names). Options, by contrast, offer flexibility by letting you change a default setting. Options are optional not only by etymology: this library has no notion of mandatory or required options (see the python docs for other rationales than laziness).

The command-line arguments enter your program as a list of atoms, but the programs perhaps expects booleans, integers, floats or even prolog terms. You tell the parser so by providing an *options specification*. This is just a list of individual option specifications. One of those, in turn, is a list of ground prolog terms in the customary `Name(Value)` format. The following terms are recognized (any others raise error).

#### **opt(Key)**

*Key* is what the option later will be accessed by, just like for `current_prolog_flag(Key, Value)`. This term is mandatory (an error is thrown if missing).

#### **shortflags(ListOfFlags)**

*ListOfFlags* denotes any single-dashed, single letter args specifying the current option (`-s`, `-K`, etc). Uppercase letters must be quoted. Usually *ListOfFlags* will be a singleton list, but sometimes aliased flags may be convenient.

#### **longflags(ListOfFlags)**

*ListOfFlags* denotes any double-dashed arguments specifying the current option (`--verbose`, `--no-debug`, etc). They are basically a more readable alternative to short flags, except

1. long flags can be specified as `--flag value` or `--flag=value` (but not as `--flagvalue`); short flags as `-f val` or `-fval` (but not `-f=val`)



2. boolean long flags can be specified as `--bool-flag` or `--bool-flag=true` or `--bool-flag true`; and they can be negated as `--no-bool-flag` or `--bool-flag=false` or `--bool-flag false`.

Except that shortflags must be single characters, the distinction between long and short is in calling convention, not in namespaces. Thus, if you have `shortflags([v])`, you can use it as `-v2` or `-v 2` or `--v=2` or `--v 2` (but not `-v=2` or `--v2`).

Shortflags and longflags both default to `[]`. It can be useful to have flagless options – see example below.

#### **meta**(*Meta*)

*Meta* is optional and only relevant for the synthesized usage message and is the name (an atom) of the metasyntactic variable (possibly) appearing in it together with type and default value (e.g. `x:integer=3`, `interest:float=0.11`). It may be useful to have named variables (`x`, `interest`) in case you wish to mention them again in the help text. If not given the `Meta`: part is suppressed – see example below.

#### **type**(*Type*)

*Type* is one of `boolean`, `atom`, `integer`, `float`, `term`. The corresponding argument will be parsed appropriately. This term is optional; if not given, defaults to `term`.

#### **default**(*Default*)

*Default* value. This term is optional; if not given, or if given the special value `'_'`, an uninstantiated variable is created (and any type declaration is ignored).

#### **help**(*Help*)

*Help* is (usually) an atom of text describing the option in the help text. This term is optional (but obviously strongly recommended for all options which have flags).

Long lines are subject to basic word wrapping – split on white space, reindent, rejoin. However, you can get more control by supplying the line breaking yourself: rather than a single line of text, you can provide a list of lines (as atoms). If you do, they will be joined with the appropriate indent but otherwise left untouched (see the option `mode` in the example below).

Absence of mandatory option specs or the presence of more than one for a particular option throws an error, as do unknown or incompatible types.

As a concrete example from a fictive application, suppose we want the following options to be read from the command line (`long flag(s)`, `short flag(s)`, `meta:type=default`, `help`)

|                                     |                    |                           |  |
|-------------------------------------|--------------------|---------------------------|--|
| <code>--mode</code>                 | <code>-m</code>    | <code>atom=SCAN</code>    | data gathering mode,<br>one of<br>SCAN: do this<br>READ: do that<br>MAKE: make numbers<br>WAIT: do nothing |
| <code>--rebuild-cache</code>        | <code>-r</code>    | <code>boolean=true</code> | rebuild cache in<br>each iteration   |
| <code>--heisenberg-threshold</code> | <code>-t,-h</code> | <code>float=0.1</code>    | heisenberg threshold   |
| <code>--depths, --iters</code>      | <code>-i,-d</code> | <code>K:integer=3</code>  | stop after K   |

|               |    |                |                      |
|---------------|----|----------------|----------------------|
|               |    |                | iterations           |
| --distances   |    | term=[1,2,3,5] | initial prolog term  |
| --output-file | -o | FILE:atom=_    | write output to FILE |
| --label       | -l | atom=REPORT    | report label         |
| --verbosity   | -v | V:integer=2    | verbosity level,     |
|               |    |                | 1 <= V <= 3          |

We may also have some configuration parameters which we currently think not needs to be controlled from the command line, say `path('/some/file/path')`.

This interface is described by the following options specification (order between the specifications of a particular option is irrelevant).

```
ExampleOptsSpec =
  [ [opt(mode      ), type(atom), default('SCAN'),
    shortflags([m]),  longflags(['mode']),
    help([ 'data gathering mode, one of'
      , '  SCAN: do this'
      , '  READ: do that'
      , '  MAKE: fabricate some numbers'
      , '  WAIT: don''t do anything'])]

  , [opt(cache), type(boolean), default(true),
    shortflags([r]),  longflags(['rebuild-cache']),
    help('rebuild cache in each iteration')]

  , [opt(threshold), type(float), default(0.1),
    shortflags([t,h]),  longflags(['heisenberg-threshold']),
    help('heisenberg threshold')]

  , [opt(depth), meta('K'), type(integer), default(3),
    shortflags([i,d]), longflags([depths, iters]),
    help('stop after K iterations')]

  , [opt(distances), default([1,2,3,5]),
    longflags([distances]),
    help('initial prolog term')]

  , [opt(outfile), meta('FILE'), type(atom),
    shortflags([o]),  longflags(['output-file']),
    help('write output to FILE')]

  , [opt(label), type(atom), default('REPORT'),
    shortflags([l]),  longflags([label]),
    help('report label')]

  , [opt(verbose),  meta('V'), type(integer), default(2),
    shortflags([v]),  longflags([verbosity]),
```

```

    help('verbosity level, 1 <= V <= 3')]

, [opt(path), default('/some/file/path/')]
].

```

The help text above was accessed by `opt_help(ExamplesOptsSpec, HelpText)`. The options appear in the same order as in the `OptsSpec`.

Given `ExampleOptsSpec`, a command line (somewhat syntactically inconsistent, in order to demonstrate different calling conventions) may look as follows

```

ExampleArgs = [ '-d5'
                , '--heisenberg-threshold', '0.14'
                , '--distances=[1,1,2,3,5,8]'
                , '--iters', '7'
                , '-ooutput.txt'
                , '--rebuild-cache', 'true'
                , 'input.txt'
                , '--verbosity=2'
                ].

```

`opt_parse(ExampleOptsSpec, ExampleArgs, Opts, PositionalArgs)` would then succeed with

```

Opts = [ mode('SCAN')
        , label('REPORT')
        , path('/some/file/path')
        , threshold(0.14)
        , distances([1,1,2,3,5,8])
        , depth(7)
        , outfile('output.txt')
        , cache(true)
        , verbose(2)
        ],
PositionalArgs = ['input.txt'].

```

Note that `path('/some/file/path')` showing up in `Opts` has a default value (of the implicit type 'term'), but no corresponding flags in `OptsSpec`. Thus it can't be set from the command line. The rest of your program doesn't need to know that, of course. This provides an alternative to the common practice of asserting such hard-coded parameters under a single predicate (for instance `setting(path, '/some/file/path')`), with the advantage that you may seamlessly upgrade them to command-line options, should you one day find this a good idea. Just add an appropriate flag or two and a line of help text. Similarly, suppressing an option in a cluttered interface amounts to commenting out the flags.

`opt_parse/5` allows more control through an additional argument list as shown in the example below.

```

?- opt_parse(ExampleOptsSpec, ExampleArgs, Opts, PositionalArgs,
            [ output_functor(appl_config)
              ]).

Opts =      [ appl_config(verbose, 2),
              , appl_config(label, 'REPORT')
              ...
            ]

```

This representation may be preferable with the empty-flag configuration parameter style above (perhaps with asserting `appl_config/2`).

### A.25.1 Notes and tips

- In the example we were mostly explicit about the types. Since the default is `term`, which subsumes `integer`, `float`, `atom`, it may be possible to get away cheaper (e.g., by only giving booleans). However, it is recommended practice to always specify types: parsing becomes more reliable and error messages will be easier to interpret.
- Note that `-sbar` is taken to mean `-s bar`, not `-s -b -a -r`, that is, there is no clustering of flags.
- `-s=foo` is disallowed. The rationale is that although some command-line parsers will silently interpret this as `-s =foo`, this is very seldom what you want. To have an option argument start with '=' (very un-recommended), say so explicitly.
- The example specifies the option `depth` twice: once as `-d5` and once as `--iters 7`. The default when encountering duplicated flags is to `keeplast` (this behaviour can be controlled, by `ParseOption duplicated_flags`).
- The order of the options returned by the parsing functions is the same as given on the command line, with non-overridden defaults prepended and duplicates removed as in previous item. You should not rely on this, however.
- Unknown flags (not appearing in `OptsSpec`) will throw errors. This is usually a Good Thing. Sometimes, however, you may wish to pass along flags to an external program (say, one called by `shell/2`), and it means duplicated effort and a maintenance headache to have to specify all possible flags for the external program explicitly (if it even can be done). On the other hand, simply taking all unknown flags as valid makes error checking much less efficient and identification of positional arguments uncertain. A better solution is to collect all arguments intended for passing along to an indirectly called program as a single argument, probably as an `atom` (if you don't need to inspect them first) or as a `prolog term` (if you do).

**opt\_arguments(+OptsSpec, -Opts, -PositionalArgs)**

[det]

Extract commandline options according to a specification. Convenience predicate, assuming

that command-line arguments can be accessed by `current_prolog_flag/2` (as in `swi-prolog`). For other access mechanisms and/or more control, get the args and pass them as a list of atoms to `opt_parse/4` or `opt_parse/5` instead.

*Opts* is a list of parsed options in the form `Key(Value)`. Dashed args not in *OptsSpec* are not permitted and will raise error (see tip on how to pass unknown flags in the module description). *PositionalArgs* are the remaining non-dashed args after each flag has taken its argument (filling in `true` or `false` for booleans). There are no restrictions on non-dashed arguments and they may go anywhere (although it is good practice to put them last). Any leading arguments for the runtime (up to and including `'-'`) are discarded.

**opt\_parse(+OptsSpec, +ApplArgs, -Opts, -PositionalArgs)** [det]  
 Equivalent to `opt_parse(OptsSpec, ApplArgs, Opts, PositionalArgs, [])`.

**opt\_parse(+OptsSpec, +ApplArgs, -Opts, -PositionalArgs, +ParseOptions)** [det]  
 Parse the arguments *Args* (as list of atoms) according to *OptsSpec*. Any runtime arguments (typically terminated by `'-'`) are assumed to be removed already.

*Opts* is a list of parsed options in the form `Key(Value)`, or (with the option functor(*Func*) given) in the form `Func(Key, Value)`. Dashed args not in *OptsSpec* are not permitted and will raise error (see tip on how to pass unknown flags in the module description). *PositionalArgs* are the remaining non-dashed args after each flag has taken its argument (filling in `true` or `false` for booleans). There are no restrictions on non-dashed arguments and they may go anywhere (although it is good practice to put them last). *ParseOptions* are

#### **output\_functor(Func)**

Set the functor *Func* of the returned options *Func(Key,Value)*. Default is the special value `'OPTION'` (upper-case), which makes the returned options have form `Key(Value)`.

#### **duplicate\_flags(Keep)**

Controls how to handle options given more than once on the command line. *Keep* is one of `keepfirst`, `keeplast`, `keepall` with the obvious meaning. Default is `keeplast`.

#### **allow\_empty\_flag\_spec(Bool)**

If true (default), a flag specification is not required (it is allowed that both shortflags and longflags be either `[]` or absent). Flagless options cannot be manipulated from the command line and will not show up in the generated help. This is useful when you have (also) general configuration parameters in your *OptsSpec*, especially if you think they one day might need to be controlled externally. See example in the module overview. `allow_empty_flag_spec(false)` gives the more customary behaviour of raising error on empty flags.

**opt\_help(+OptsSpec, -Help:atom)** [det]  
 True when *Help* is a help string synthesized from *OptsSpec*.

**parse\_type(+Type, +Codes:list(code), -Result)** [semidet,multifile]  
 Hook to parse option text *Codes* to an object of type *Type*.

## A.26 `library(ordsets)`: Ordered set manipulation

Ordered sets are lists with unique elements sorted to the standard order of terms (see `sort/2`). Exploiting ordering, many of the set operations can be expressed in order  $N$  rather than  $N^2$  when dealing with unordered sets that may contain duplicates. The `library(ordsets)` is available in a number of Prolog implementations. Our predicates are designed to be compatible with common practice in the Prolog community. The implementation is incomplete and relies partly on `library(oset)`, an older ordered set library distributed with SWI-Prolog. New applications are advised to use `library(ordsets)`.

Some of these predicates match directly to corresponding list operations. It is advised to use the versions from this library to make clear you are operating on ordered sets. An exception is `member/2`. See `ord_memberchk/2`.

The `ordsets` library is based on the standard order of terms. This implies it can handle all Prolog terms, including variables. Note however, that the ordering is not stable if a term inside the set is further instantiated. Also note that variable ordering changes if variables in the set are unified with each other or a variable in the set is unified with a variable that is ‘older’ than the newest variable in the set. In practice, this implies that it is allowed to use `member(X, OrdSet)` on an ordered set that holds variables only if `X` is a fresh variable. In other cases one should cease using it as an `ordset` because the order it relies on may have been changed.

**`is_ordset(@Term)`** [semidet]

True if *Term* is an ordered set. All predicates in this library expect ordered sets as input arguments. Failing to fulfill this assumption results in undefined behaviour. Typically, ordered sets are created by predicates from this library, `sort/2` or `setof/3`.

**`ord_empty(?List)`** [semidet]

True when *List* is the empty ordered set. Simply unifies list with the empty list. Not part of Quintus.

**`ord_seteq(+Set1, +Set2)`** [semidet]

True if *Set1* and *Set2* have the same elements. As both are canonical sorted lists, this is the same as `==/2`.

**Compatibility** sicstus

**`list_to_ord_set(+List, -OrdSet)`** [det]

Transform a list into an ordered set. This is the same as sorting the list.

**`ord_intersect(+Set1, +Set2)`** [semidet]

True if both ordered sets have a non-empty intersection.

**`ord_disjoint(+Set1, +Set2)`** [semidet]

True if *Set1* and *Set2* have no common elements. This is the negation of `ord_intersect/2`.

**`ord_intersect(+Set1, +Set2, -Intersection)`**

*Intersection* holds the common elements of *Set1* and *Set2*.

**deprecated** Use `ord_intersection/3`

**ord\_intersection(+PowerSet, -Intersection)**

*Intersection* of a powerset. True when *Intersection* is an ordered set holding all elements common to all sets in *PowerSet*.

**Compatibility** sicstus

**ord\_intersection(+Set1, +Set2, -Intersection)**

[det]

*Intersection* holds the common elements of *Set1* and *Set2*. Uses `ord_disjoint/2` if *Intersection* is bound to [] on entry.

**ord\_intersection(+Set1, +Set2, ?Intersection, ?Difference)**

[det]

*Intersection* and difference between two ordered sets. *Intersection* is the intersection between *Set1* and *Set2*, while *Difference* is defined by `ord_subtract(Set2, Set1, Difference)`.

**See also** `ord_intersection/3` and `ord_subtract/3`.

**ord\_add\_element(+Set1, +Element, ?Set2)**

[det]

Insert an element into the set. This is the same as `ord_union(Set1, [Element], Set2)`.

**ord\_del\_element(+Set, +Element, -NewSet)**

[det]

Delete an element from an ordered set. This is the same as `ord_subtract(Set, [Element], NewSet)`.

**ord\_selectchk(+Item, ?Set1, ?Set2)**

[semidet]

`Selectchk/3`, specialised for ordered sets. Is true when `select(Item, Set1, Set2)` and *Set1*, *Set2* are both sorted lists without duplicates. This implementation is only expected to work for *Item* ground and either *Set1* or *Set2* ground. The "chk" suffix is meant to remind you of `memberchk/2`, which also expects its first argument to be ground. `ord_selectchk(X, S, T) => ord_memberchk(X, S) & \+ ord_memberchk(X, T)`.

**author** Richard O'Keefe

**ord\_memberchk(+Element, +OrdSet)**

[semidet]

True if *Element* is a member of *OrdSet*, compared using `==`. Note that *enumerating* elements of an ordered set can be done using `member/2`.

Some Prolog implementations also provide `ord_member/2`, with the same semantics as `ord_memberchk/2`. We believe that having a semidet `ord_member/2` is unacceptably inconsistent with the `*_chk` convention. Portable code should use `ord_memberchk/2` or `member/2`.

**author** Richard O'Keefe

**ord\_subset(+Sub, +Super)**

[semidet]

Is true if all elements of *Sub* are in *Super*

**ord\_subtract(+InOSet, +NotInOSet, -Diff)**

[det]

*Diff* is the set holding all elements of *InOSet* that are not in *NotInOSet*.

**ord\_union(+SetOfSets, -Union)**

[det]

True if *Union* is the union of all elements in the superset *SetOfSets*. Each member of *SetOfSets* must be an ordered set, the sets need not be ordered in any way.

**author** Copied from YAP, probably originally by Richard O’Keefe.

**ord\_union(+Set1, +Set2, ?Union)**

[det]

*Union* is the union of *Set1* and *Set2*

**ord\_union(+Set1, +Set2, -Union, -New)**

[det]

True iff `ord_union(Set1, Set2, Union)` and `ord_subtract(Set2, Set1, New)`.

**ord\_symdiff(+Set1, +Set2, ?Difference)**

[det]

Is true when *Difference* is the symmetric difference of *Set1* and *Set2*. I.e., *Difference* contains all elements that are not in the intersection of *Set1* and *Set2*. The semantics is the same as the sequence below (but the actual implementation requires only a single scan).

```
ord_union(Set1, Set2, Union),
ord_intersection(Set1, Set2, Intersection),
ord_subtract(Union, Intersection, Difference).
```

For example:

```
?- ord_symdiff([1,2], [2,3], X).
X = [1,3].
```

## A.27 library(pairs): Operations on key-value lists

**author** Jan Wielemaker

**See also** `keysort/2`, `library(assoc)`

This module implements common operations on Key-Value lists, also known as *Pairs*. Pairs have great practical value, especially due to `keysort/2` and the `library(assoc.pl)`.

This library is based on discussion in the SWI-Prolog mailinglist, including specifications from Quintus and a library proposal by Richard O’Keefe.

**pairs\_keys\_values(?Pairs, ?Keys, ?Values)**

[det]

True if *Keys* holds the keys of *Pairs* and *Values* the values.

Deterministic if any argument is instantiated to a finite list and the others are either free or finite lists. All three lists are in the same order.

**See also** `pairs_values/2` and `pairs_keys/2`.

**pairs\_values(+Pairs, -Values)**

[det]

Remove the keys from a list of Key-Value pairs. Same as `pairs_keys_values(Pairs, _, Values)`



**pairs\_keys(+Pairs, -Keys)***[det]*

Remove the values from a list of Key-Value pairs. Same as `pairs_keys_values(Pairs, Keys, _)`

**group\_pairs\_by\_key(+Pairs, -Joined:list(Key-Values))***[det]*

Group values with equivalent ( $=$ / $2$ ) consecutive keys. For example:

```
?- group_pairs_by_key([a-2, a-1, b-4, a-3], X).
X = [a-[2,1], b-[4], a-[3]]
```

Sorting the list of pairs before grouping can be used to group *all* values associated with a key. For example, finding all values associated with the largest key:

```
?- sort(1, @>=, [a-1, b-2, c-3, a-4, a-5, c-6], Ps),
   group_pairs_by_key(Ps, [K-Vs|_]).
K = c,
Vs = [3, 6].
```

In this example, sorting by key only (first argument of `sort/4` is 1) ensures that the order of the values in the original list of pairs is maintained.

Arguments

|               |  |
|---------------|--|
| <i>Pairs</i>  | Key-Value list   |
| <i>Joined</i> | List of Key-Group, where Group is the list of <i>Values</i> associated with equivalent consecutive Keys in the same order as they appear in <i>Pairs</i> . |

**transpose\_pairs(+Pairs, -Transposed)***[det]*

Swap Key-Value to Value-Key. The resulting list is sorted using `keysort/2` on the new key.

**map\_list\_to\_pairs(:Function, +List, -Keyed)**

Create a Key-Value list by mapping each element of *List*. For example, if we have a list of lists we can create a list of Length-*List* using

```
map_list_to_pairs(length, ListOfLists, Pairs),
```

**A.28 library(persistency): Provide persistent dynamic predicates****To be done**

- Provide type safety while loading
- Thread safety must now be provided at the user-level. Can we provide generic thread safety? Basically, this means that we must wrap all exported predicates. That might better be done outside this library.
- Transaction management?
- Should `assert_<name>` only assert if the database does not contain a variant?

This module provides simple persistent storage for one or more dynamic predicates. A database is always associated with a module. A module that wishes to maintain a database must declare the terms that can be placed in the database using the directive `persistent/1`.

The `persistent/1` expands each declaration into four predicates:

- `name(Arg, ...)`
- `assert_name(Arg, ...)`
- `retract_name(Arg, ...)`
- `retractall_name(Arg, ...)`

As mentioned, a database can only be accessed from within a single module. This limitation is on purpose, forcing the user to provide a proper API for accessing the shared persistent data.

Below is a simple example:

```
:- module(user_db,
    [ attach_user_db/1,          % +File
      current_user_role/2,       % ?User, ?Role
      add_user/2,               % +User, +Role
      set_user_role/2           % +User, +Role
    ]).
:- use_module(library(persistency)).

:- persistent
    user_role(name:atom, role:oneof([user,administrator])).

attach_user_db(File) :-
    db_attach(File, []).

%%      current_user_role(+Name, -Role) is semidet.

current_user_role(Name, Role) :-
    with_mutex(user_db, user_role(Name, Role)).

add_user(Name, Role) :-
    assert_user_role(Name, Role).

set_user_role(Name, Role) :-
    user_role(Name, Role), !.
set_user_role(Name, Role) :-
    with_mutex(user_db,
        ( retractall_user_role(Name, _),
          assert_user_role(Name, Role) ) ).
```

**persistent +Spec**

Declare dynamic database terms. Declarations appear in a directive and have the following format:

```
:- persistent
    <callable>,
    <callable>,
    ...
```

Each specification is a callable term, following the conventions of `library(record)`, where each argument is of the form

```
name:type
```

Types are defined by `library(error)`.

**current\_persistent\_predicate(:PI)**

[nondet]

True if *PI* is a predicate that provides access to the persistent database DB.

**db\_attach(:File, +Options)**

Use *File* as persistent database for the calling module. The calling module must defined `persistent/1` to declare the database terms. Defined options:

**sync(+Sync)**

One of `close` (close journal after write), `flush` (default, flush journal after write) or `none` (handle as fully buffered stream).

If *File* is already attached this operation may change the `sync` behaviour.

**db\_attached(:File)**

[semidet]

True if the context module attached to the persistent database *File*.

**db\_detach**

[det]

Detach persistency from the calling module and delete all persistent clauses from the Prolog database. Note that the file is not affected. After this operation another file may be attached, providing it satisfies the same persistency declaration.

**db\_sync(:What)**

Synchronise database with the associated file. *What* is one of:

**reload**

Database is reloaded from file if the file was modified since loaded.

**update**

As `reload`, but use incremental loading if possible. This allows for two processes to examine the same database file, where one writes the database and the other periodically calls `db_sync(update)` to follow the modified data.

**gc**

Database was re-written, deleting all retractall statements. This is the same as `gc(50)`.

**gc(Percentage)**

GC DB if the number of deleted terms is greater than the given percentage of the total number of terms.

**gc(always)**

GC DB without checking the percentage.

**close**

Database stream was closed

**detach**

Remove all registered persistency for the calling module

**nop**

No-operation performed

With unbound *What*, `db_sync/1` reloads the database if it was modified on disk, gc it if it is dirty and close it if it is opened.

**db\_sync.all(+What)**

Sync all registered databases.

## A.29 library(pio): Pure I/O

This library provides pure list-based I/O processing for Prolog, where the communication to the actual I/O device is performed transparently through coroutining. This module itself is just an interface to the actual implementation modules.

### A.29.1 library(pure\_input): Pure Input from files and streams

**To be done** Provide support for alternative input readers, e.g. reading terms, tokens, etc.

This module is part of `pio.pl`, dealing with *pure input*: processing input streams from the outside world using pure predicates, notably grammar rules (DCG). Using pure predicates makes non-deterministic processing of input much simpler.

Pure input uses attributed variables to read input from the external source into a list *on demand*. The overhead of lazy reading is more than compensated for by using block reads based on `read_pending_codes/3`.

Ulrich Neumerkel came up with the idea to use coroutining for creating a *lazy list*. His implementation repositioned the file to deal with re-reading that can be necessary on backtracking. The current implementation uses destructive assignment together with more low-level attribute handling to realise pure input on any (buffered) stream.

**phrase\_from\_file(:Grammar, +File)**

[nondet]

Process the content of *File* using the DCG rule *Grammar*. The space usage of this mechanism depends on the length of the not committed part of *Grammar*. Committed parts of the temporary list are reclaimed by the garbage collector, while the list is extended on demand due to unification of the attributed tail variable. Below is an example that counts the number of times a string appears in a file. The library `dcg/basics` provides `string//1` matching

an arbitrary string and remainder//1 which matches the remainder of the input without parsing.

```
:- use_module(library(dcg/basics)).

file_contains(File, Pattern) :-
    phrase_from_file(match(Pattern), File).

match(Pattern) -->
    string(_),
    string(Pattern),
    remainder(_).

match_count(File, Pattern, Count) :-
    aggregate_all(count, file_contains(File, Pattern), Count).
```

This can be called as (note that the pattern must be a string (code list)):

```
?- match_count('pure_input.pl', 'file', Count).
```

**phrase\_from\_file**(:Grammar, +File, +Options) [nondet]

As phrase\_from\_file/2, providing additional *Options*. *Options* are passed to open/4.

**phrase\_from\_stream**(:Grammar, +Stream)

Run Grammar against the character codes on *Stream*. *Stream* must be buffered.

**syntax\_error**(+Error) //

Throw the syntax error *Error* at the current location of the input. This predicate is designed to be called from the handler of phrase\_from\_file/3.

```
throws error(syntax_error(Error), Location)
```

**lazy\_list\_location**(-Location) // [det]

Determine current (error) location in a lazy list. True when *Location* is an (error) location term that represents the current location in the DCG list.

|                 | Arguments  |
|-----------------|--|
| <i>Location</i> | is a term file(Name, Line, LinePos, CharNo) or stream(Stream, Line, LinePos, CharNo) if no file is associated to the stream RestLazyList. Finally, if the Lazy list is fully materialized (ends in []), <i>Location</i> is unified with end_of_file-CharCount. |

**See also** lazy\_list\_character\_count//1 only provides the character count.

**lazy\_list\_character\_count**(-CharCount) //

True when *CharCount* is the current character count in the Lazy list. The character count is computed by finding the distance to the next frozen tail of the lazy list. *CharCount* is one of:

- An integer
- A term `end_of_file-Count`

**See also** `lazy_list_location//1` provides full details of the location for error reporting.

### **stream\_to\_lazy\_list(+Stream, -List)**

*[det]*

Create a lazy list representing the character codes in *Stream*. *List* is a partial list ending in an attributed variable. Unifying this variable reads the next block of data. The block is stored with the attribute value such that there is no need to re-read it.

**Compatibility** Unlike the previous version of this predicate this version does not require a repositionable stream. It does require a buffer size of at least the maximum number of bytes of a multi-byte sequence (6).

## **A.30 library(predicate\_options): Declare option-processing of predicates**

*Discussions with Jeff Schultz helped shaping this library*

### **A.30.1 The strength and weakness of predicate options**

Many ISO predicates accept options, e.g., `open/4`, `write_term/3`. Options offer an attractive alternative to proliferation into many predicates and using high-arity predicates. Properly defined and used, they also form a mechanism for extending the API of both system and application predicates without breaking portability. I.e., previously fixed behaviour can be replaced by dynamic behaviour controlled by an option where the default is the previously defined fixed behaviour. The alternative to using options is to add an additional argument and maintain the previous definition. While a series of predicates with increasing arity is adequate for a small number of additional parameters, the untyped positional argument handling of Prolog quickly makes this unmanageable.

The ISO standard uses the extensibility offered by options by allowing implementations to extend the set of accepted options. While options form a perfect solution to maintain backward portability in a linear development model, it is not well equipped to deal with concurrent branches because

1. There is no API to find which options are supported in a particular implementation.
2. While the portability problem caused by a missing predicate in Prolog A can easily be solved by implementing this predicate, it is much harder to add processing of an additional option to an already existing predicate.

Different Prolog implementations can be seen as concurrent development branches of the Prolog language. Different sets of supported options pose a serious portability issue. Using an option *O* that establishes the desired behaviour on system *A* leads (on most systems) to an error on system *B*. Porting may require several actions:

- Drop *O* (if the option is not vital, such as the layout options to `write_term/3`)
- Replace *O* by *O2* (i.e., a differently named option doing the same)
- Something else (cannot be ported; requires a totally different approach, etc.)

Predicates that process options are particularly a problem when writing a compatibility layer to run programs developed for System *A* on System *B* because complete emulation is often hard, may cause a serious slowdown and is often not needed because the application-to-be-ported only uses options that are shared by all target Prolog implementations. Unfortunately, the consequences of a partial emulation cannot be assessed by tools.

### A.30.2 Options as arguments or environment?

We distinguish two views on options. One is to see them as additional parameters that require strict existence, type and domain-checking and the other is to consider them ‘locally scoped environment variables’. Most systems adopt the first option. SWI-Prolog adopts the second: it silently ignores options that are not supported but does type and domain checking of option-values. The ‘environment’ view is commonly used in applications to create predicates supporting more options using the skeleton below. This way of programming requires that *pred1* and *pred2* do not interpret the same option differently. In cases where this is not true, the options must be distributed by *some\_pred*. We have been using this programming style for many years and in practice it turns out that the need for active distribution of options is rare. I.e., options either have distinct names or multiple predicates implement the same option but this has the desired effect. An example of the latter is the `encoding` option, which typically needs to be applied consistently.

```
some_pred(..., Options) :-  
    pred1(..., Options),  
    pred2(..., Options).
```

As stated before, options provide a readable alternative to high-arity predicates and offer a robust mechanism to evolve the API, but at the cost of some runtime overhead and weaker consistency checking, both at compiletime and runtime. From our experience, the ‘environment’ approach is productive, but the consequence is that mistyped options are silently ignored. The option infrastructure described in this section tries to remedy these problems.

### A.30.3 Improving on the current situation

Whether we see options as arguments or locally scoped environment variables, the most obvious way to improve on the current situation is to provide reflective support for options: discover that an argument is an option-list and find what options are supported. Reflective access to options can be used by the compiler and development environment as well as by the runtime system to warn or throw errors.

#### Options as types

An obvious approach to deal with options is to define the different possible option values as a type and type the argument that processes the option as `list(<option_type>)`, as illustrated below. Considering options as types fully covers the case where we consider options as additional parameters.

```
:- type open_option ---> type(stream_type) |  
                                alias(atom) | ... .  
:- pred open(source_sink, open_mode, stream, list(open_option)).
```

There are three reasons for considering a different approach:

- There is no consensus about types in the Prolog world, neither about what types should look like, nor whether or not they are desirable. It is not likely that this debate will be resolved shortly.
- Considering options as types does not support the ‘environment’ view, which we consider the most productive.
- Even when using types, we need reflective access to what options are provided in order to be able to write compile or runtime conditional code.

### Reflective access to options

From the above, we conclude that we require reflective access to find out whether an option is supported and valid for a particular predicate. Possible option values must be described by types. Due to lack of a type system, we use `library(error)` to describe allowed option values. Predicate options are declared using `predicate_options/3`:

#### **predicate\_options(:PI, +Arg, +Options)**

[det]

Declare that the predicate *PI* processes options on *Arg*. *Options* is a list of options processed. Each element is one of:

- `Option(ModeAndType) PI` processes `Option`. The option-value must comply to `ModeAndType`. `Mode` is one of `+` or `-` and `Type` is a type as accepted by `must_be/2`.
- `pass_to(:PI,Arg)` The option-list is passed to the indicated predicate.

Below is an example that processes the option `header(boolean)` and passes all options to `open/4`:

```
:- predicate_options(write_xml_file/3, 3,
                    [ header(boolean),
                      pass_to(open/4, 4)
                    ]).

write_xml_file(File, XMLTerm, Options) :-
    open(File, write, Out, Options),
    ( option(header(true), Options, true)
    -> write_xml_header(Out)
    ;   true
    ),
    ...
```

This predicate may only be used as a *directive* and is processed by `expand_term/2`. Option processing can be specified at runtime using `assert_predicate_options/3`, which is intended to support program analysis.



**assert\_predicate\_options**(:*PI*, +*Arg*, +*Options*, ?*New*) [semidet]

As predicate\_options(:*PI*, +*Arg*, +*Options*). *New* is a boolean indicating whether the declarations have changed. If *New* is provided and `false`, the predicate becomes semidet and fails without modifications if modifications are required.

The predicates below realise the support for compile and runtime checking for supported options.

**current\_predicate\_option**(:*PI*, ?*Arg*, ?*Option*) [nondet]

True when *Arg* of *PI* processes *Option*. For example, the following is true:

```
?- current_predicate_option(open/4, 4, type(text)).
true.
```

This predicate is intended to support conditional compilation using `if/1 ... endif/0`. The predicate `current_predicate_options/3` can be used to access the full capabilities of a predicate.

**check\_predicate\_option**(:*PI*, +*Arg*, +*Option*) [det]

Verify predicate options at runtime. Similar to `current_predicate_option/3`, but intended to support runtime checking.

#### Errors

- `existence_error(option, OptionName)` if the option is not supported by *PI*.
- `type_error(Type, Value)` if the option is supported but the value does not match the option type. See `must_be/2`.

The predicates below can be used in a development environment to inform the user about supported options. PceEmacs uses this for colouring option names and values.

**current\_option\_arg**(:*PI*, ?*Arg*) [nondet]

True when *Arg* of *PI* processes predicate options. Which options are processed can be accessed using `current_predicate_option/3`.

**current\_predicate\_options**(:*PI*, ?*Arg*, ?*Options*) [nondet]

True when *Options* is the current active option declaration for *PI* on *Arg*. See `predicate_options/3` for the argument descriptions. If *PI* is ground and refers to an undefined predicate, the autoloader is used to obtain a definition of the predicate.

The library can execute a complete check of your program using `check_predicate_options/0`:

**check\_predicate\_options** [det]

Analyse loaded program for erroneous options. This predicate decompiles the current program and searches for calls to predicates that process options. For each option list, it validates whether the provided options are supported and validates the argument type. This predicate performs partial dataflow analysis to track option-lists inside a clause.

**See also** `derive_predicate_options/0` can be used to derive declarations for predicates that pass options. This predicate should normally be called before `check_predicate_options/0`.

The library offers predicates that may be used to create declarations for your application. These predicates are designed to cooperate with the module system.

### **derive\_predicate\_options**

[det]

Derive new predicate option declarations. This predicate analyses the loaded program to find clauses that process options using one of the predicates from `library(option)` or passes options to other predicates that are known to process options. The process is repeated until no new declarations are retrieved.

**See also** `autoload/0` may be used to complete the loaded program.

### **retractall\_predicate\_options**

[det]

Remove all dynamically (derived) predicate options.

### **derived\_predicate\_options(:PI, ?Arg, ?Options)**

[nondet]

Derive option arguments using static analysis. True when *Options* is the current *derived* active option declaration for *PI* on *Arg*.

### **derived\_predicate\_options(+Module)**

[det]

Derive predicate option declarations for a module. The derived options are printed to the `current_output` stream.

## **A.31 library(prolog\_pack): A package manager for Prolog**

**See also** Installed packages can be inspected using `?- doc_browser.`

#### **To be done**

- Version logic
- Find and resolve conflicts
- Upgrade git packages
- Validate git packages
- Test packages: run tests from directory 'test'.

The `library(prolog_pack)` provides the SWI-Prolog package manager. This library lets you inspect installed packages, install packages, remove packages, etc. It is complemented by the built-in `attach_packs/0` that makes installed packages available as libraries.

### **pack\_list\_installed**

[det]

List currently installed packages. Unlike `pack_list/1`, only locally installed packages are displayed and no connection is made to the internet.

**See also** Use `pack_list/1` to find packages.

### **pack\_info(+Pack)**

Print more detailed information about *Pack*.

### **pack\_search(+Query)**

[det]

### **pack\_list(+Query)**

[det]

*Query* package server and installed packages and display results. *Query* matches case-insensitively against the name and title of known and installed packages. For each matching package, a single line is displayed that provides:

- Installation status
  - **p**: package, not installed
  - **i**: installed package; up-to-date with public version
  - **U**: installed package; can be upgraded
  - **A**: installed package; newer than publically available
  - **I**: installed package; not on server
- Name@Version
- Name@Version(ServerVersion)
- Title

Hint: `?- pack_list('') .` lists all packages.

The predicates `pack_list/1` and `pack_search/1` are synonyms. Both contact the package server at <http://www.swi-prolog.org> to find available packages.

**See also** `pack_list_installed/0` to list installed packages without contacting the server.

### **pack\_install(+Spec:atom)**

[det]

Install a package. *Spec* is one of

- Archive file name
- HTTP URL of an archive file name. This URL may contain a star (\*) for the version. In this case `pack_install` asks for the directory content and selects the latest version.
- GIT URL (not well supported yet)
- A local directory name given as `file:// URL`.
- A package name. This queries the package repository at <http://www.swi-prolog.org>

After resolving the type of package, `pack_install/2` is used to do the actual installation.

### **pack\_install(+Name, +Options)**

[det]

Install package *Name*. Processes the options below. Default options as would be used by `pack_install/1` are used to complete the provided *Options*.

#### **url(+URL)**

Source for downloading the package

#### **package\_directory(+Dir)**

Directory into which to install the package

#### **interactive(+Boolean)**

Use default answer without asking the user if there is a default action.

#### **silent(+Boolean)**

If `true` (default `false`), suppress informational progress messages.

#### **upgrade(+Boolean)**

If `true` (default `false`), upgrade package if it is already installed.

**git(+Boolean)**

If `true` (default `false` unless *URL* ends with `=.git=`), assume the URL is a GIT repository.

Non-interactive installation can be established using the option `interactive(false)`. It is advised to install from a particular *trusted* URL instead of the plain pack name for unattended operation.

**pack\_url\_file(+URL, -File)***[det]*

True if *File* is a unique id for the referenced pack and version. Normally, that is simply the base name, but GitHub archives destroy this picture. Needed by the pack manager.

**pack\_rebuild(+Pack)***[det]*

Rebuilt possible foreign components of *Pack*.

**pack\_rebuild***[det]*

Rebuild foreign components of all packages.

**environment(-Name, -Value)***[nondet,multifile]*

Hook to define the environment for building packs. This Multifile hook extends the process environment for building foreign extensions. A value provided by this hook overrides defaults provided by `def_environment/2`. In addition to changing the environment, this may be used to pass additional values to the environment, as in:

```
prolog_pack:environment('USER', User) :-
    getenv('USER', User).
```

Arguments

*Name* is an atom denoting a valid variable name

*Value* is either an atom or number representing the value of the variable.

**pack\_upgrade(+Pack)***[semidet]*

Try to upgrade the package *Pack*.

**To be done** Update dependencies when updating a pack from git?

**pack\_remove(+Name)***[det]*

Remove the indicated package.

**pack\_property(?Pack, ?Property)***[nondet]*

True when *Property* is a property of an installed *Pack*. This interface is intended for programs that wish to interact with the package manager. Defined properties are:

**directory(Directory)**

*Directory* into which the package is installed

**version(Version)**

Installed version

**title(Title)**

Full title of the package

**author**(*Author*)

Registered author

**download**(*URL*)

Official download *URL*

**readme**(*File*)

Package README file (if present)

**todo**(*File*)

Package TODO file (if present)

## **A.32 library(prolog\_xref): Cross-reference data collection library**

This library collects information on defined and used objects in Prolog source files. Typically these are predicates, but we expect the library to deal with other types of objects in the future. The library is a building block for tools doing dependency tracking in applications. Dependency tracking is useful to reveal the structure of an unknown program or detect missing components at compile time, but also for program transformation or minimising a program saved state by only saving the reachable objects.

This section gives a partial description of the library API, providing some insight in how you can use it for analysing your program. The library should be further modularized, moving its knowledge about, for example, XPCE into a different file and allowing for adding knowledge about other libraries such as Logtalk. **Please do not consider this interface rock-solid.**

The library is exploited by two graphical tools in the SWI-Prolog environment: the XPCE front-end started by `gxref/0` and described in section 3.7, and PceEmacs (section 3.4), which exploits this library for its syntax colouring.

For all predicates described below, *Source* is the source that is processed. This is normally a filename in any notation acceptable to the file loading predicates (see `load_files/2`). Using the hooks defined in section A.32.1 it can be anything else that can be translated into a Prolog stream holding Prolog source text. *Callable* is a callable term (see `callable/1`). Callables do not carry a module qualifier unless the referred predicate is not in the module defined *Source*.

**xref\_source**(+*Source*)

Gather information on *Source*. If *Source* has already been processed and is still up-to-date according to the file timestamp, no action is taken. This predicate must be called on a file before information can be gathered.

**xref\_current\_source**(?*Source*)

*Source* has been processed.

**xref\_clean**(+*Source*)

Remove the information gathered for *Source*

**xref\_defined**(?*Source*, ?*Callable*, -*How*)

*Callable* is defined in *Source*. *How* is one of

|  |                                       |
|--|---------------------------------------|
| <code>dynamic(<i>Line</i>)</code>      | Declared dynamic at <i>Line</i>       |
| <code>thread_local(<i>Line</i>)</code> | Declared thread local at <i>Line</i>  |
| <code>multifile(<i>Line</i>)</code>    | Declared multifile at <i>Line</i>     |
| <code>local(<i>Line</i>)</code>        | First clause at <i>Line</i>           |
| <code>foreign(<i>Line</i>)</code>      | Foreign library loaded at <i>Line</i> |
| <code>constraint(<i>Line</i>)</code>   | CHR Constraint at <i>Line</i>         |
| <code>imported(<i>File</i>)</code>     | Imported from <i>File</i>             |

**xref.called**(?*Source*, ?*Callable*, ?*By*)  
*Callable* is called in *Source* by *By*.

**xref.exported**(?*Source*, ?*Callable*)  
*Callable* is public (exported from the module).

**xref.module**(?*Source*, ?*Module*)  
*Source* is a module file defining the given module.

**xref.built\_in**(?*Callable*)  
True if *Callable* is a built-in predicate. Currently this is assumed for all predicates defined in the `system` module and having the property `built_in`. Built-in predicates are not registered as ‘called’.

### A.32.1 Extending the library

The library provides hooks for extending the rules it uses for finding predicates called by some programming construct.

**prolog:called\_by**(+*Goal*, -*Called*)  
*Goal* is a non-var subgoal appearing in the called object (typically a clause body). If it succeeds it must return a list of goals called by *Goal*. As a special construct, if a term *Callable* + *N* is returned, *N* variable arguments are added to *Callable* before further processing. For simple meta-calls a single fact suffices. Complex rules as used in the `html_write` library provided by the HTTP package examine the arguments and create a list of called objects.

The current system cannot deal with the same name/arity in different modules that behave differently with respect to called arguments.

## A.33 library(quasi\_quotations): Define Quasi Quotation syntax

**author** Jan Wielemaker. Introduction of Quasi Quotation was suggested by Michael Hendricks.

**See also** [Why it's nice to be quoted: quasiquoting for haskell](#)

Inspired by [Haskell](#), SWI-Prolog support *quasi quotation*. Quasi quotation allows for embedding (long) strings using the syntax of an external language (e.g., HTML, SQL) in Prolog text and syntax-aware embedding of Prolog variables in this syntax. At the same time, quasi quotation provides an alternative to represent long strings and atoms in Prolog.

The basic form of a quasi quotation is defined below. Here, *Syntax* is an arbitrary Prolog term that must parse into a *callable* (atom or compound) term and *Quotation* is an arbitrary sequence of characters, not including the sequence `| }`. If this sequence needs to be embedded, it must be escaped according to the rules of the target language or the ‘quoter’ must provide an escaping mechanism.

```
{|Syntax||Quotation|}
```

While reading a Prolog term, and if the Prolog flag `quasi_quotes` is set to `true` (which is the case if this library is loaded), the parser collects quasi quotations. After reading the final full stop, the parser makes the call below. Here, *SyntaxName* is the functor name of *Syntax* above and *SyntaxArgs* is a list holding the arguments, i.e., `Syntax =.. [SyntaxName|SyntaxArgs]`. Splitting the syntax into its name and arguments is done to make the quasi quotation parser a predicate with a consistent arity 4, regardless of the number of additional arguments.

```
call(+SyntaxName, +Content, +SyntaxArgs, +VariableNames, -Result)
```

The arguments are defined as

- *SyntaxName* is the principal functor of the quasi quotation syntax. This must be declared using `quasi_quotation_syntax/1` and there must be a predicate `SyntaxName/4`.
- *Content* is an opaque term that carries the content of the quasi quoted material and position information about the source code. It is passed to `with_quasi_quote_input/3`.
- *SyntaxArgs* carries the additional arguments of the *Syntax*. These are commonly used to make the parameter passing between the clause and the quasi quotation explicit. For example:

```
...,
{|html(Name, Address)||
  <tr><td>Name<td>Address</tr>
|}
```

- *VariableNames* is the complete variable dictionary of the clause as it is made available through `read_term/3` with the option `variable_names`. It is a list of terms `Name = Var`.
- *Result* is a variable that must be unified to resulting term. Typically, this term is structured Prolog tree that carries a (partial) representation of the abstract syntax tree with embedded variables that pass the Prolog parameters. This term is normally either passed to a predicate that serializes the abstract syntax tree, or a predicate that processes the result in Prolog. For example, HTML is commonly embedded for writing HTML documents (see `library(http/html_write)`). Examples of languages that may be embedded for processing in Prolog are SPARQL, RuleML or regular expressions.

The file `library(http/html_quasiquotations)` provides the, suprisingly simple, quasi quotation parser for HTML.

**with\_quasi\_quotation\_input(+Content, -Stream, :Goal)**

[det]

Process the quasi-quoted *Content* using *Stream* parsed by *Goal*. *Stream* is a temporary stream with the following properties:

- Its initial *position* represents the position of the start of the quoted material.
- It is a text stream, using `utf8` encoding.
- It allows for repositioning
- It will be closed after *Goal* completes.

Arguments

---

*Goal* is executed as `once(Goal)`. *Goal* must succeed. Failure or exceptions from *Goal* are interpreted as syntax errors.

**See also** `phrase_from_quasi_quotation/2` can be used to process a quotation using a grammar.

**phrase\_from\_quasi\_quotation**(:*Grammar*, +*Content*) [det]

Process the quasi quotation using the DCG *Grammar*. Failure of the grammar is interpreted as a syntax error.

**See also** `with_quasi_quotation_input/3` for processing quotations from stream.

**quasi\_quotation\_syntax**(:*SyntaxName*) [det]

Declare the predicate *SyntaxName*/4 to implement the the quasi quote syntax *SyntaxName*. Normally used as a directive.

**quasi\_quotation\_syntax\_error**(+*Error*)

Report `syntax_error(Error)` using the current location in the quasi quoted input parser.

**throws** `error(syntax_error(Error), Position)`

## A.34 library(random): Random numbers

**author** R.A. O’Keefe, V.S. Costa, L. Damas, Jan Wielemaker

**See also** Built-in function `random/1`: `A is random(10)`

This library is derived from the DEC10 library `random`. Later, the core random generator was moved to C. The current version uses the SWI-Prolog arithmetic functions to realise this library. These functions are based on the GMP library.

**random**(-*R*:float) [det]

Binds *R* to a new random float in the *open* interval (0.0,1.0).

**See also**

- `setrand/1`, `getrand/1` may be used to fetch/set the state.
- In SWI-Prolog, `random/1` is implemented by the function `random_float/0`.

**random.between**(+*L*:int, +*U*:int, -*R*:int) [semidet]

Binds *R* to a random integer in [*L*,*U*] (i.e., including both *L* and *U*). Fails silently if *U* < *L*.



**random**(+L:int, +U:int, -R:int) [det]

**random**(+L:float, +U:float, -R:float) [det]

Generate a random integer or float in a range. If *L* and *U* are both integers, *R* is a random integer in the half open interval [*L*,*U*). If *L* and *U* are both floats, *R* is a float in the open interval (*L*,*U*).

**deprecated** Please use `random/1` for generating a random float and `random_between/3` for generating a random integer. Note that `random_between/3` includes the upper bound, while this predicate excludes it.

**setrand**(+State) [det]

**getrand**(-State) [det]

Query/set the state of the random generator. This is intended for restarting the generator at a known state only. The predicate `setrand/1` accepts an opaque term returned by `getrand/1`. This term may be asserted, written and read. The application may not make other assumptions about this term.

For compatibility reasons with older versions of this library, `setrand/1` also accepts a term `rand(A, B, C)`, where *A*, *B* and *C* are integers in the range 1..30,000. This argument is used to seed the random generator. Deprecated.

**Errors** `existence_error(random_state, _)` is raised if the underlying infrastructure cannot fetch the random state. This is currently the case if SWI-Prolog is not compiled with the GMP library.

**See also** `set_random/1` and `random_property/1` provide the SWI-Prolog native implementation.

**maybe** [semidet]

Succeed/fail with equal probability (variant of `maybe/1`).

**maybe**(+P) [semidet]

Succeed with probability *P*, fail with probability 1-*P*

**maybe**(+K, +N) [semidet]

Succeed with probability *K*/*N* (variant of `maybe/1`)

**random\_perm2**(?A, ?B, ?X, ?Y) [semidet]

Does *X=A, Y=B* or *X=B, Y=A* with equal probability.

**random\_member**(-X, +List:list) [semidet]

*X* is a random member of *List*. Equivalent to `random_between(1, |List|)`, followed by `nth1/3`. Fails if *List* is the empty list.

**Compatibility** Quintus and SICStus libraries.

**random\_select**(-X, +List, -Rest) [semidet]

**random\_select**(+X, -List, +Rest) [det]

Randomly select or insert an element. Either *List* or *Rest* must be a list. Fails if *List* is the empty list.

**Compatibility** Quintus and SICStus libraries.

**randset**(+K:int, +N:int, -S:list(int))

[det]

S is a sorted list of K unique random integers in the range 1..N. Implemented by enumerating 1..N and deciding whether or not the number should be part of the set. For example:

```
?- randset(5, 5, S).
S = [1, 2, 3, 4, 5].           (always)
?- randset(5, 20, S).
S = [2, 7, 10, 19, 20].
```

**See also** randseq/3.

**bug** Slow if N is large and K is small.

**randseq**(+K:int, +N:int, -List:list(int))

[det]

S is a list of K unique random integers in the range 1..N. The order is random. Works as if defined by the following code.

```
randseq(K, N, List) :-
    randset(K, N, Set),
    random_permutation(Set, List).
```

**See also** randset/3.

**random\_permutation**(+List, -Permutation)

[det]

**random\_permutation**(-List, +Permutation)

[det]

Permutation is a random permutation of List. This is intended to process the elements of List in random order. The predicate is symmetric.

**Errors** instantiation\_error, type\_error(list, \_).

## A.35 library(readutil): Reading lines, streams and files

This library contains primitives to read lines, files, multiple terms, etc. The package `clib` provides a shared object (DLL) named `readutil`. If the library can locate this shared object it will use the foreign implementation for reading character codes. Otherwise it will use a Prolog implementation. Distributed applications should make sure to deliver the `readutil` shared object if performance of these predicates is critical.

**read\_line\_to\_codes**(+Stream, -Codes)

Read the next line of input from *Stream* and unify the result with *Codes* after the line has been read. A line is ended by a newline character or end-of-file. Unlike `read_line_to_codes/3`, this predicate removes a trailing newline character.

On end-of-file the atom `end_of_file` is returned. See also `at_end_of_stream/[0,1]`.

**read\_line\_to\_codes**(+Stream, -Codes, ?Tail)

Difference-list version to read an input line to a list of character codes. Reading stops at the newline or end-of-file character, but unlike `read_line_to_codes/2`, the newline is retained in the output. This predicate is especially useful for reading a block of lines up to some delimiter. The following example reads an HTTP header ended by a blank line:

```

read_header_data(Stream, Header) :-
    read_line_to_codes(Stream, Header, Tail),
    read_header_data(Header, Stream, Tail).

read_header_data("\r\n", _, _) :- !.
read_header_data("\n", _, _) :- !.
read_header_data(" ", _, _) :- !.
read_header_data(_, Stream, Tail) :-
    read_line_to_codes(Stream, Tail, NewTail),
    read_header_data(Tail, Stream, NewTail).

```

**read\_stream\_to\_codes(+Stream, -Codes)**

Read all input until end-of-file and unify the result to *Codes*.

**read\_stream\_to\_codes(+Stream, -Codes, ?Tail)**

Difference-list version of `read_stream_to_codes/2`.

**read\_file\_to\_codes(+Spec, -Codes, +Options)**

Read a file to a list of character codes. *Spec* is a file specification for `absolute_file_name/3`. *Codes* is the resulting code list. *Options* is a list of options for `absolute_file_name/3` and `open/4`. In addition, the option `tail(Tail)` is defined, forming a difference-list.

**read\_file\_to\_terms(+Spec, -Terms, +Options)**

Read a file to a list of Prolog terms (see `read/1`). *Spec* is a file specification for `absolute_file_name/3`. *Terms* is the resulting list of Prolog terms. *Options* is a list of options for `absolute_file_name/3` and `open/4`. In addition, the option `tail(Tail)` is defined, forming a difference-list.

**A.36 library(record): Access named fields in a term**

The library `record` provides named access to fields in a record represented as a compound term such as `point(X, Y)`. The Prolog world knows various approaches to solve this problem, unfortunately with no consensus. The approach taken by this library is proposed by Richard O'Keefe on the SWI-Prolog mailinglist.

The approach automates a technique commonly described in Prolog text-books, where access and modification predicates are defined for the record type. Such predicates are subject to normal import/export as well as analysis by cross-referencers. Given the simple nature of the access predicates, an optimizing compiler can easily inline them for optimal performance.

A record is defined using the directive `record/1`. We introduce the library with a short example:

```

:- record point(x:integer=0, y:integer=0).

    ...,
    default_point(Point),
    point_x(Point, X),

```

```

set_x_of_point(10, Point, Point1),

make_point([y(20)], YPoint),

```

The principal functor and arity of the term used defines the name and arity of the compound used as records. Each argument is described using a term of the format below.

$\langle name \rangle[:\langle type \rangle][=\langle default \rangle]$

In this definition,  $\langle name \rangle$  is an atom defining the name of the argument,  $\langle type \rangle$  is an optional type specification as defined by `must_be/2` from `library error`, and  $\langle default \rangle$  is the default initial value. The  $\langle type \rangle$  defaults to `any`. If no default value is specified the default is an unbound variable.

A record declaration creates a set of predicates through *term-expansion*. We describe these predicates below. In this description,  $\langle constructor \rangle$  refers to the name of the record ('point' in the example above) and  $\langle name \rangle$  to the name of an argument (field).

- *default\_* $\langle constructor \rangle$ (-Record)  
Create a new record where all fields have their default values. This is the same as `make_` $\langle constructor \rangle$ ([], Record).
- *make\_* $\langle constructor \rangle$ (+Fields, -Record)  
Create a new record where specified fields have the specified values and remaining fields have their default value. Each field is specified as a term  $\langle name \rangle(\langle value \rangle)$ . See example in the introduction.
- *make\_* $\langle constructor \rangle$ (+Fields, -Record, -RestFields)  
Same as `make_` $\langle constructor \rangle$ /2, but named fields that do not appear in *Record* are returned in *RestFields*. This predicate is motivated by option-list processing. See `library option`.
- $\langle constructor \rangle$ \_ $\langle name \rangle$ (Record, Value)  
Unify *Value* with argument in *Record* named  $\langle name \rangle$ .<sup>2</sup>
- $\langle constructor \rangle$ \_data(?Name, +Record, ?Value)  
True when *Value* is the value for the field named *Name* in *Record*. This predicate does not perform type-checking.
- *set\_* $\langle name \rangle$ \_of\_ $\langle constructor \rangle$ (+Value, +OldRecord, -NewRecord)  
Replace the value for  $\langle name \rangle$  in *OldRecord* by *Value* and unify the result with *NewRecord*.
- *set\_* $\langle name \rangle$ \_of\_ $\langle constructor \rangle$ (+Value, !Record)  
Destructively replace the argument  $\langle name \rangle$  in *Record* by *Value* based on `setarg/3`. Use with care.
- *nb\_set\_* $\langle name \rangle$ \_of\_ $\langle constructor \rangle$ (+Value, !Record)  
As above, but using non-backtrackable assignment based on `nb_setarg/3`. Use with *extreme* care.

<sup>2</sup>Note this is not called 'get\_' as it performs unification and can perfectly well instantiate the argument.

- `set_⟨constructor⟩_fields(+Fields, +Record0, -Record)`  
Set multiple fields using the same syntax as `make_⟨constructor⟩/2`, but starting with *Record0* rather than the default record.
- `set_⟨constructor⟩_fields(+Fields, +Record0, -Record, -RestFields)`  
Similar to `set_⟨constructor⟩_fields/4`, but fields not defined by *⟨constructor⟩* are returned in *RestFields*.
- `set_⟨constructor⟩_field(+Field, +Record0, -Record)`  
Set a single field specified as a term *⟨name⟩(⟨value⟩)*.

**record(+Spec)**

The construct `:- record Spec, ...` is used to define access to named fields in a compound. It is subject to term-expansion (see `expand_term/2`) and cannot be called as a predicate. See section A.36 for details.

**A.37 library(registry): Manipulating the Windows registry**

The `registry` is only available on the MS-Windows version of SWI-Prolog. It loads the foreign extension `plregtry.dll`, providing the predicates described below. This library only makes the most common operations on the registry available through the Prolog user. The underlying DLL provides a more complete coverage of the Windows registry API. Please consult the sources in `pl/src/win32/foreign/plregtry.c` for further details.

In all these predicates, *Path* refers to a '/' separated path into the registry. This is *not* an atom containing '/'-characters as used for filenames, but a term using the functor `//2`. Windows defines the following roots for the registry: `classes_root`, `current_user`, `local_machine` and `users`.

**registry\_get\_key(+Path, -Value)**

Get the principal (default) value associated to this key. Fails silently if the key does not exist.

**registry\_get\_key(+Path, +Name, -Value)**

Get a named value associated to this key.

**registry\_set\_key(+Path, +Value)**

Set the principal (default) value of this key. Creates (a path to) the key if it does not already exist.

**registry\_set\_key(+Path, +Name, +Value)**

Associate a named value to this key. Creates (a path to) the key if it does not already exist.

**registry\_delete\_key(+Path)**

Delete the indicated key.

**shell\_register\_file\_type(+Ext, +Type, +Name, +OpenAction)**

Register a file-type. *Ext* is the extension to associate. *Type* is the type name, often something like `prolog.type`. *Name* is the name visible in the Windows file-type browser. Finally, *OpenAction* defines the action to execute when a file with this extension is opened in the Windows explorer.

**shell\_register\_dde(+Type, +Action, +Service, +Topic, +Command, +IfNotRunning)**

Associate DDE actions to a type. *Type* is the same type as used for the 2nd argument of `shell_register_file_type/4`, *Action* is the action to perform, *Service* and *Topic* specify the DDE topic to address, and *Command* is the command to execute on this topic. Finally, *IfNotRunning* defines the command to execute if the required DDE server is not present.

**shell\_register\_prolog(+Ext)**

Default registration of SWI-Prolog, which is invoked as part of the initialisation process on Windows systems. As the source also includes the above predicates, it is given as an example:

```
shell_register_prolog(Ext) :-
    current_prolog_flag(argv, [Me|_]),
    atomic_list_concat(['"', Me, '" "%1"', ], OpenCommand),
    shell_register_file_type(
        Ext, 'prolog.type', 'Prolog Source', OpenCommand),
    shell_register_dde(
        'prolog.type', consult,
        prolog, control, 'consult('"%1"')', Me),
    shell_register_dde(
        'prolog.type', edit,
        prolog, control, 'edit('"%1"')', Me).
```

**A.38 library(settings): Setting management**

**author** Jan Wielemaker

**See also** `library(config)` distributed with XPCE provides an alternative aimed at graphical applications.

This library allows management of configuration settings for Prolog applications. Applications define settings in one or multiple files using the directive `setting/4` as illustrated below:

```
:- use_module(library(settings)).

:- setting(version, atom,    '1.0', 'Current version').
:- setting(timeout, number,  20, 'Timeout in seconds').
```

The directive is subject to `term_expansion/2`, which guarantees proper synchronisation of the database if source-files are reloaded. This implies it is **not** possible to call `setting/4` as a predicate.

Settings are local to a module. This implies they are defined in a two-level namespace. Managing settings per module greatly simplifies assembling large applications from multiple modules that configuration through settings. This settings management library ensures proper access, loading and saving of settings.

**setting**(:*Name*, +*Type*, +*Default*, +*Comment*)*[det]*

Define a setting. *Name* denotes the name of the setting, *Type* its type. *Default* is the value before it is modified. *Default* can refer to environment variables and can use arithmetic expressions as defined by `eval_default/4`.

If a second declaration for a setting is encountered, it is ignored if *Type* and *Default* are the same. Otherwise a `permission_error` is raised.

Arguments

|                |  |
|----------------|--|
| <i>Name</i>    | <i>Name</i> of the setting (an atom)   |
| <i>Type</i>    | <i>Type</i> for setting. One of <code>any</code> or a type defined by <code>must_be/2</code> . |
| <i>Default</i> | <i>Default</i> value for the setting.  |
| <i>Comment</i> | Atom containing a (short) descriptive note.  |

**setting**(:*Name*, ?*Value*)*[nondet]*

True when *Name* is a currently defined setting with *Value*. Note that `setting(Name, Value)` only enumerates the settings of the current module. All settings can be enumerated using `setting(Module:Name, Value)`. This predicate is `det` if *Name* is ground.

**Errors** `existence_error(setting, Name)`

**set\_setting**(:*Name*, +*Value*)*[det]*

Change a setting. Performs existence and type-checking for the setting. If the effective value of the setting is changed it broadcasts the event below.

```
settings(changed(Module:Name, Old, New))
```

**Errors**

```
- existence_error(setting, Name)
- type_error(Type, Value)
```

**restore\_setting**(:*Name*)*[det]*

Restore the value of setting *Name* to its default. Broadcast a change like `set_setting/2` if the current value is not the default.

**set\_setting\_default**(:*Name*, +*Default*)*[det]*

Change the default for a setting. The effect is the same as `set_setting/2`, but the new value is considered the default when saving and restoring a setting. It is intended to change application defaults in a particular context.

**load\_settings**(*File*)*[det]***load\_settings**(*File*, +*Options*)*[det]*

Load local settings from *File*. Succeeds if *File* does not exist, setting the default save-file to *File*. *Options* are:

**undefined**(+*Action*)

Define how to handle settings that are not defined. When `error`, an error is printed and the setting is ignored. when `load`, the setting is loaded anyway, waiting for a definition.

|   |          |
|---|----------|
| <b>save_settings</b>  | [det]    |
| <b>save_settings(+File)</b>   | [det]    |
| Save modified settings to <i>File</i> .   |          |
| <b>current_setting(?Setting)</b>  | [nondet] |
| True if <i>Setting</i> is a currently defined setting   |          |
| <b>setting_property(+Setting, +Property)</b>  | [det]    |
| <b>setting_property(?Setting, ?Property)</b>  | [nondet] |
| Query currently defined settings. <i>Property</i> is one of   |          |
| <b>comment(-Atom)</b>   |          |
| <b>type(-Type)</b>  |          |
| Type of the setting.  |          |
| <b>default(-Default)</b>  |          |
| Default value. If this is an expression, it is evaluated.   |          |
| <b>source(-File:-Line)</b>  |          |
| Location where the setting is defined.  |          |
| <b>list_settings</b>  | [det]    |
| <b>list_settings(+Module)</b>   | [det]    |
| List settings to <code>current_output</code> . The second form only lists settings on the matching module.  |          |
| <b>To be done</b> Compute the required column widths  |          |
| <b>convert_setting_text(+Type, +Text, -Value)</b>   |          |
| Converts from textual form to Prolog <i>Value</i> . Used to convert values obtained from the environment. Public to provide support in user-interfaces to this library. |          |
| <b>Errors</b> <code>type_error(Type, Value)</code>  |          |

## A.39 library(simplex): Solve linear programming problems

author [Markus Triska](#)

### A.39.1 Introduction

A **linear programming problem** or simply **linear program** (LP) consists of:

- a set of *linear constraints*
- a set of **variables**
- a *linear objective function*.



The goal is to assign values to the variables so as to *maximize* (or minimize) the value of the objective function while satisfying all constraints.

Many optimization problems can be modeled in this way. As one basic example, consider a knapsack with fixed capacity  $C$ , and a number of items with sizes  $s(i)$  and values  $v(i)$ . The goal is to put as many items as possible in the knapsack (not exceeding its capacity) while maximizing the sum of their values.

As another example, suppose you are given a set of *coins* with certain values, and you are to find the minimum number of coins such that their values sum up to a fixed amount. Instances of these problems are solved below.

Solving an LP or integer linear program (ILP) with this library typically comprises 4 stages:

1. an initial state is generated with `gen_state/1`
2. all relevant constraints are added with `constraint/3`
3. `maximize/3` or `minimize/3` are used to obtain a *solved state* that represents an optimum solution
4. `variable_value/3` and `objective/2` are used on the solved state to obtain variable values and the objective function at the optimum.

The most frequently used predicates are thus:

**`gen_state(-State)`**

Generates an initial state corresponding to an empty linear program.

**`constraint(+Constraint, +S0, -S)`**

Adds a linear or integrality constraint to the linear program corresponding to state  $S0$ . A linear constraint is of the form `Left Op C`, where *Left* is a list of `Coefficient*Variable` terms (variables in the context of linear programs can be atoms or compound terms) and *C* is a non-negative numeric constant. The list represents the sum of its elements. *Op* can be `=`, `=<` or `>=`. The coefficient 1 can be omitted. An integrality constraint is of the form `integral(Variable)` and constrains *Variable* to an integral value.

**`maximize(+Objective, +S0, -S)`**

Maximizes the objective function, stated as a list of `Coefficient*Variable` terms that represents the sum of its elements, with respect to the linear program corresponding to state  $S0$ . `\arg{S}` is unified with an internal representation of the solved instance.

**`minimize(+Objective, +S0, -S)`**

Analogous to `maximize/3`.

**`variable_value(+State, +Variable, -Value)`**

*Value* is unified with the value obtained for *Variable*. *State* must correspond to a solved instance.

**`objective(+State, -Objective)`**

Unifies *Objective* with the result of the objective function at the obtained extremum. *State* must correspond to a solved instance.

All numeric quantities are converted to rationals via `rationalize/1`, and rational arithmetic is used throughout solving linear programs. In the current implementation, all variables are implicitly constrained to be *non-negative*. This may change in future versions, and non-negativity constraints should therefore be stated explicitly.

### A.39.2 Delayed column generation

*Delayed column generation* means that more constraint columns are added to an existing LP. The following predicates are frequently used when this method is applied:

**constraint**(+Name, +Constraint, +S0, -S)

Like `constraint/3`, and attaches the name *Name* (an atom or compound term) to the new constraint.

**shadow\_price**(+State, +Name, -Value)

Unifies *Value* with the shadow price corresponding to the linear constraint whose name is *Name*. *State* must correspond to a solved instance.

**constraint\_add**(+Name, +Left, +S0, -S)

*Left* is a list of `Coefficient*Variable` terms. The terms are added to the left-hand side of the constraint named *Name*. *S* is unified with the resulting state.

An example application of *delayed column generation* to solve a *bin packing* task is available from: [metalevel.at/various/colgen/](http://metalevel.at/various/colgen/)

### A.39.3 Solving LPs with special structure

The following predicates allow you to solve specific kinds of LPs more efficiently:

**transportation**(+Supplies, +Demands, +Costs, -Transport)

Solves a transportation problem. *Supplies* and *Demands* must be lists of non-negative integers. Their respective sums must be equal. *Costs* is a list of lists representing the cost matrix, where an entry  $(i,j)$  denotes the integer cost of transporting one unit from *i* to *j*. A transportation plan having minimum cost is computed and unified with *Transport* in the form of a list of lists that represents the transportation matrix, where element  $(i,j)$  denotes how many units to ship from *i* to *j*.

**assignment**(+Cost, -Assignment)

Solves a linear assignment problem. *Cost* is a list of lists representing the quadratic cost matrix, where element  $(i,j)$  denotes the integer cost of assigning entity  $i$  to entity  $j$ . An assignment with minimal cost is computed and unified with *Assignment* as a list of lists, representing an adjacency matrix.

### A.39.4 Examples

We include a few examples for solving LPs with this library.

#### Example 1

This is the "radiation therapy" example, taken from *Introduction to Operations Research* by Hillier and Lieberman.

**Prolog DCG notation** is used to *implicitly* thread the state through posting the constraints:

```
:- use_module(library(simplex)).

radiation(S) :-
    gen_state(S0),
    post_constraints(S0, S1),
    minimize([0.4*x1, 0.5*x2], S1, S).

post_constraints -->
    constraint([0.3*x1, 0.1*x2] =< 2.7),
    constraint([0.5*x1, 0.5*x2] = 6),
    constraint([0.6*x1, 0.4*x2] >= 6),
    constraint([x1] >= 0),
    constraint([x2] >= 0).
```

An example query:

```
?- radiation(S), variable_value(S, x1, Val1),
    variable_value(S, x2, Val2).
Val1 = 15 rdiv 2,
Val2 = 9 rdiv 2.
```

### Example 2

Here is an instance of the knapsack problem described above, where  $C = 8$ , and we have two types of items: One item with value 7 and size 6, and 2 items each having size 4 and value 4. We introduce two variables,  $x(1)$  and  $x(2)$  that denote how many items to take of each type.

```
:- use_module(library(simplex)).

knapsack(S) :-
    knapsack_constraints(S0),
    maximize([7*x(1), 4*x(2)], S0, S).

knapsack_constraints(S) :-
    gen_state(S0),
    constraint([6*x(1), 4*x(2)] =< 8, S0, S1),
    constraint([x(1)] =< 1, S1, S2),
    constraint([x(2)] =< 2, S2, S).
```

An example query yields:

```
?- knapsack(S), variable_value(S, x(1), X1),
    variable_value(S, x(2), X2).
X1 = 1
X2 = 1 rdiv 2.
```

That is, we are to take the one item of the first type, and half of one of the items of the other type to maximize the total value of items in the knapsack.

If items can not be split, integrality constraints have to be imposed:

```
knapsack_integral(S) :-
    knapsack_constraints(S0),
    constraint(integral(x(1)), S0, S1),
    constraint(integral(x(2)), S1, S2),
    maximize([7*x(1), 4*x(2)], S2, S).
```

Now the result is different:

```
?- knapsack_integral(S), variable_value(S, x(1), X1),
    variable_value(S, x(2), X2).

X1 = 0
X2 = 2
```

That is, we are to take only the *two* items of the second type. Notice in particular that always choosing the remaining item with best performance (ratio of value to size) that still fits in the knapsack does not necessarily yield an optimal solution in the presence of integrality constraints.

### Example 3

We are given:

- 3 coins each worth 1 unit
- 20 coins each worth 5 units and
- 10 coins each worth 20 units.

The task is to find a *minimal* number of these coins that amount to 111 units in total. We introduce variables  $c(1)$ ,  $c(5)$  and  $c(20)$  denoting how many coins to take of the respective type:

```
:- use_module(library(simplex)).

coins(S) :-
    gen_state(S0),
    coins(S0, S).

coins -->
    constraint([c(1), 5*c(5), 20*c(20)] = 111),
    constraint([c(1)] =< 3),
    constraint([c(5)] =< 20),
    constraint([c(20)] =< 10),
    constraint([c(1)] >= 0),
    constraint([c(5)] >= 0),
```

```
constraint([c(20)] >= 0),
constraint(integral(c(1))),
constraint(integral(c(5))),
constraint(integral(c(20))),
minimize([c(1), c(5), c(20)]).
```

An example query:

```
?- coins(S), variable_value(S, c(1), C1),
      variable_value(S, c(5), C5),
      variable_value(S, c(20), C20).

C1 = 1,
C5 = 2,
C20 = 5.
```

## A.40 library(solution\_sequences): Modify solution sequences

### See also

- all solution predicates `findall/3`, `bagof/3` and `setof/3`.
- `library(aggregate)`

The meta predicates of this library modify the sequence of solutions of a goal. The modifications and the predicate names are based on the classical database operations `DISTINCT`, `LIMIT`, `OFFSET`, `ORDER BY` and `GROUP BY`.

These predicates were introduced in the context of the [SWISH](#) Prolog browser-based shell, which can represent the solutions to a predicate as a table. Notably wrapping a goal in `distinct/1` avoids duplicates in the result table and using `order_by/2` produces a nicely ordered table.

However, the predicates from this library can also be used to stay longer within the clean paradigm where non-deterministic predicates are composed from simpler non-deterministic predicates by means of conjunction and disjunction. While evaluating a conjunction, we might want to eliminate duplicates of the first part of the conjunction. Below we give both the classical solution for solving variations of  $(a(X), b(X))$  and the ones using this library side-by-side.

|  |   |                                 |
|--|---|---------------------------------|
| <b>Avoid duplicates of earlier steps</b> | <pre>member(Xs, Xs), member(X, Xs), b(X).</pre> | <pre>distinct(a(X)), b(X)</pre> |
|--|---|---------------------------------|

Note that the `distinct/1` based solution returns the first result of `distinct(a(X))` immediately after `a/1` produces a result, while the `setof/3` based solution will first compute all results of `a/1`.

|   |  |   |
|---|--|---|
| <b>Only try b(X) only, for the top 10</b> | <pre>reverse(Xs, Desc), first_max_n(10, Desc, Limit), member(X, Limit), b(X)</pre> | <pre>limit(10, order_by([desc(X)], a(X))), b(X)</pre> |
|---|--|---|

Here we see power of composing primitives from this library and staying within the paradigm of pure non-deterministic relational predicates.

**distinct(:Goal)**

**distinct(?Witness, :Goal)**

True if *Goal* is true and no previous solution of *Goal* bound *Witness* to the same value. As previous answers need to be copied, equivalence testing is based on *term variance* ( $=@=/2$ ). The variant `distinct/1` is equivalent to `distinct(Goal, Goal)`.

If the answers are ground terms, the predicate behaves as the code below, but answers are returned as soon as they become available rather than first computing the complete answer set.

```
distinct(Goal) :-
    findall(Goal, Goal, List),
    list_to_set(List, Set),
    member(Goal, Set).
```

**reduced(:Goal)**

**reduced(?Witness, :Goal, +Options)**

Similar to `distinct/1`, but does not guarantee unique results in return for using a limited amount of memory. Both `distinct/1` and `reduced/1` create a table that block duplicate results. For `distinct/1`, this table may get arbitrary large. In contrast, `reduced/1` discards the table and starts a new one of the table size exceeds a specified limit. This filter is useful for reducing the number of answers when processing large or infinite long tail distributions. *Options*:

**size limit(+Integer)**

Max number of elements kept in the table. Default is 10,000.

**limit(+Count, :Goal)**

Limit the number of solutions. True if *Goal* is true, returning at most *Count* solutions. Solutions are returned as soon as they become available.

**offset(+Count, :Goal)**

Ignore the first *Count* solutions. True if *Goal* is true and produces more than *Count* solutions. This predicate computes and ignores the first *Count* solutions.

**call\_nth(:Goal, ?Nth)**

True when *Goal* succeeded for the *Nth* time. If *Nth* is bound on entry, the predicate succeeds deterministically if there are at least *Nth* solutions for *Goal*.

**order\_by(+Spec, :Goal)**

Order solutions according to *Spec*. *Spec* is a list of terms, where each element is one of. The ordering of solutions of *Goal* that only differ in variables that are *not* shared with *Spec* is not changed.

**asc**(*Term*)

Order solution according to ascending *Term*

**desc**(*Term*)

Order solution according to descending *Term*

**group\_by**(+*By*, +*Template*, :*Goal*, -*Bag*)

[*nondet*]

Group bindings of *Template* that have the same value for *By*. This predicate is almost the same as `bagof/3`, but instead of specifying the existential variables we specify the free variables. It is provided for consistency and complete coverage of the common database vocabulary.

## A.41 library(thread\_pool): Resource bounded thread management

See also `http_handler/3` and `http_spawn/2`.

The module `library(thread_pool)` manages threads in pools. A pool defines properties of its member threads and the maximum number of threads that can coexist in the pool. The call `thread_create_in_pool/4` allocates a thread in the pool, just like `thread_create/3`. If the pool is fully allocated it can be asked to wait or raise an error.

The library has been designed to deal with server applications that receive a variety of requests, such as HTTP servers. Simply starting a thread for each request is a bit too simple minded for such servers:

- Creating many CPU intensive threads often leads to a slow-down rather than a speedup.
- Creating many memory intensive threads may exhaust resources
- Tasks that require little CPU and memory but take long waiting for external resources can run many threads.

Using this library, one can define a pool for each set of tasks with comparable characteristics and create threads in this pool. Unlike the worker-pool model, threads are not started immediately. Depending on the design, both approaches can be attractive.

The library is implemented by means of a manager thread with the fixed thread id `__thread_pool_manager`. All state is maintained in this manager thread, which receives and processes requests to create and destroy pools, create threads in a pool and handle messages from terminated threads. Thread pools are *not* saved in a saved state and must therefore be recreated using the `initialization/1` directive or otherwise during startup of the application.

**thread\_pool.create**(+*Pool*, +*Size*, +*Options*)

[*det*]

Create a pool of threads. A pool of threads is a declaration for creating threads with shared properties (stack sizes) and a limited number of threads. Threads are created using `thread_create_in_pool/4`. If all threads in the pool are in use, the behaviour depends on the `wait` option of `thread_create_in_pool/4` and the `backlog` option described below. *Options* are passed to `thread_create/3`, except for

**backlog(+MaxBackLog)**

Maximum number of requests that can be suspended. Default is `infinite`. Otherwise it must be a non-negative integer. Using `backlog(0)` will never delay thread creation for this pool.

The pooling mechanism does *not* interact with the `detached` state of a thread. Threads can be created both `detached` and `normal` and must be joined using `thread_join/2` if they are not detached.

**thread\_pool\_destroy(+Name)***[det]*

Destroy the thread pool named *Name*.

**Errors** `existence_error(thread_pool, Name)`.

**current\_thread\_pool(?Name)***[nondet]*

True if *Name* refers to a defined thread pool.

**thread\_pool\_property(?Name, ?Property)***[nondet]*

True if *Property* is a property of thread pool *Name*. Defined properties are:

**options(Options)**

Thread creation options for this pool

**free(Size)**

Number of free slots on this pool

**size(Size)**

Total number of slots on this pool

**members(ListOfIDs)**

*ListOfIDs* is the list of threads running in this pool

**running(Running)**

Number of running threads in this pool

**backlog(Size)**

Number of delayed thread creations on this pool

**thread\_create\_in\_pool(+Pool, :Goal, -Id, +Options)***[det]*

Create a thread in *Pool*. *Options* overrule default thread creation options associated to the pool. In addition, the following option is defined:

**wait(+Boolean)**

If `true` (default) and the pool is full, wait until a member of the pool completes. If `false`, throw a `resource_error`.

**Errors**

- `resource_error(threads_in_pool(Pool))` is raised if `wait` is `false` or the backlog limit has been reached.
- `existence_error(thread_pool, Pool)` if *Pool* does not exist.



**create\_pool(+PoolName)***[semidet,multifile]*

Hook to create a thread pool lazily. The hook is called if `thread_create_in_pool/4` discovers that the thread pool does not exist. If the hook succeeds, `thread_create_in_pool/4` retries creating the thread. For example, we can use the following declaration to create threads in the pool `media`, which holds a maximum of 20 threads.

```
:- multifile thread_pool:create_pool/1.

thread_pool:create_pool(media) :-
    thread_pool_create(media, 20, []).
```

**A.42 library(ugraphs): Unweighted Graphs**Authors: *Richard O'Keefe & Vitor Santos Costa*

*Implementation and documentation are copied from YAP 5.0.1. The ugraph library is based on code originally written by Richard O'Keefe. The code was then extended to be compatible with the SICStus Prolog ugraphs library. Code and documentation have been cleaned and style has been changed to be more in line with the rest of SWI-Prolog.*

*The ugraphs library was originally released in the public domain. The YAP version is covered by the Perl Artistic license, version 2.0. This code is dual-licensed under the modified GPL as used for all SWI-Prolog libraries or the Perl Artistic license, version 2.0.*

The routines assume directed graphs; undirected graphs may be implemented by using two edges.

Originally graphs were represented in two formats. The SICStus library and this version of `ugraphs.pl` only use the *S-representation*. The S-representation of a graph is a list of (vertex-neighbors) pairs, where the pairs are in standard order (as produced by `keysort`) and the neighbors of each vertex are also in standard order (as produced by `sort`). This form is convenient for many calculations. Each vertex appears in the S-representation, even if it has no neighbors.

**vertices\_edges\_to\_ugraph(+Vertices, +Edges, -Graph)**

Given a graph with a set of *Vertices* and a set of *Edges*, *Graph* must unify with the corresponding S-representation. Note that vertices without edges will appear in *Vertices* but not in *Edges*. Moreover, it is sufficient for a vertex to appear in *Edges*.

```
?- vertices_edges_to_ugraph([], [1-3, 2-4, 4-5, 1-5], L).
L = [1-[3,5], 2-[4], 3-[], 4-[5], 5-[]]
```

In this case all vertices are defined implicitly. The next example shows three unconnected vertices:

```
?- vertices_edges_to_ugraph([6,7,8], [1-3, 2-4, 4-5, 1-5], L).
L = [1-[3,5], 2-[4], 3-[], 4-[5], 5-[], 6-[], 7-[], 8-[]] ?
```

**vertices(+Graph, -Vertices)**

Unify *Vertices* with all vertices appearing in *Graph*. Example:

```
?- vertices([1-[3,5],2-[4],3-[],4-[5],5-[]], L) .
L = [1, 2, 3, 4, 5]
```

**edges(+Graph, -Edges)**

Unify *Edges* with all edges appearing in *Graph*. Example:

```
?- edges([1-[3,5],2-[4],3-[],4-[5],5-[]], L) .
L = [1-3, 1-5, 2-4, 4-5]
```

**add\_vertices(+Graph, +Vertices, -NewGraph)**

Unify *NewGraph* with a new graph obtained by adding the list of *Vertices* to *Graph*. Example:

```
?- add_vertices([1-[3,5],2-[]], [0,1,2,9], NG) .
NG = [0-[], 1-[3,5], 2-[], 9-[]]
```

**del\_vertices(+Graph, +Vertices, -NewGraph)**

Unify *NewGraph* with a new graph obtained by deleting the list of *Vertices* and all edges that start from or go to a vertex in *Vertices* from *Graph*. Example:

```
?- del_vertices([2,1],
               [1-[3,5],2-[4],3-[],4-[5],
                5-[],6-[],7-[2,6],8-[]],
               NL) .
NL = [3-[],4-[5],5-[],6-[],7-[6],8-[]]
```

**add\_edges(+Graph, +Edges, -NewGraph)**

Unify *NewGraph* with a new graph obtained by adding the list of *Edges* to *Graph*. Example:

```
?- add_edges([1-[3,5],2-[4],3-[],4-[5],
              5-[],6-[],7-[],8-[]],
             [1-6,2-3,3-2,5-7,3-2,4-5],
             NL) .
NL = [1-[3,5,6], 2-[3,4], 3-[2], 4-[5],
      5-[7], 6-[], 7-[], 8-[]]
```

**del\_edges(+Graph, +Edges, -NewGraph)**

Unify *NewGraph* with a new graph obtained by removing the list of *Edges* from *Graph*. Notice that no vertices are deleted. Example:

```
?- del_edges([1-[3,5],2-[4],3-[],4-[5],5-[],6-[],7-[],8-[]],
             [1-6,2-3,3-2,5-7,3-2,4-5,1-3],
             NL) .
NL = [1-[5],2-[4],3-[],4-[],5-[],6-[],7-[],8-[]]
```

**transpose\_ugraph(+Graph, -NewGraph)**

Unify *NewGraph* with a new graph obtained from *Graph* by replacing all edges of the form V1-V2 by edges of the form V2-V1. The cost is  $O(|V|^2)$ . Notice that an undirected graph is its own transpose. Example:

```
?- transpose_ugraph([1-[3,5],2-[4],3-[],4-[5],
                    5-[],6-[],7-[],8-[]], NL) .
NL = [1-[],2-[],3-[1],4-[2],5-[1,4],6-[],7-[],8-[]]
```

**neighbours(+Vertex, +Graph, -Vertices)**

Unify *Vertices* with the list of neighbours of vertex *Vertex* in *Graph*. Example:

```
?- neighbours(4,[1-[3,5],2-[4],3-[],
                 4-[1,2,7,5],5-[],6-[],7-[],8-[]], NL) .
NL = [1,2,7,5]
```

**neighbors(+Vertex, +Graph, -Vertices)**

American version of `neighbours/3`.

**complement(+Graph, -NewGraph)**

Unify *NewGraph* with the graph complementary to *Graph*. Example:

```
?- complement([1-[3,5],2-[4],3-[],
               4-[1,2,7,5],5-[],6-[],7-[],8-[]], NL) .
NL = [1-[2,4,6,7,8],2-[1,3,5,6,7,8],3-[1,2,4,5,6,7,8],
      4-[3,5,6,8],5-[1,2,3,4,6,7,8],6-[1,2,3,4,5,7,8],
      7-[1,2,3,4,5,6,8],8-[1,2,3,4,5,6,7]]
```

**compose(+LeftGraph, +RightGraph, -NewGraph)**

Compose *NewGraph* by connecting the *drains* of *LeftGraph* to the *sources* of *RightGraph*. Example:

```
?- compose([1-[2],2-[3]], [2-[4],3-[1,2,4]], L) .
L = [1-[4], 2-[1,2,4], 3-[]]
```

**ugraph\_union(+Graph1, +Graph2, -NewGraph)**

*NewGraph* is the union of *Graph1* and *Graph2*. Example:

```
?- ugraph_union([1-[2], 2-[3]], [2-[4], 3-[1, 2, 4]], L) .
L = [1-[2], 2-[3, 4], 3-[1, 2, 4]]
```

### **top\_sort(+Graph, -Sort)**

Generate the set of nodes *Sort* as a topological sorting of *Graph*, if one is possible. A topological sort is possible if the graph is connected and acyclic. In the example we show how topological sorting works for a linear graph:

```
?- top_sort([1-[2], 2-[3], 3-[]], L) .
L = [1, 2, 3]
```

### **top\_sort(+Graph, -Sort0, -Sort)**

Generate the difference list *Sort-Sort0* as a topological sorting of *Graph*, if one is possible.

### **transitive\_closure(+Graph, -Closure)**

Generate the graph *Closure* as the transitive closure of *Graph*. Example:

```
?- transitive_closure([1-[2, 3], 2-[4, 5], 4-[6]], L) .
L = [1-[2, 3, 4, 5, 6], 2-[4, 5, 6], 4-[6]]
```

### **reachable(+Vertex, +Graph, -Vertices)**

Unify *Vertices* with the set of all vertices in *Graph* that are reachable from *Vertex*. Example:

```
?- reachable(1, [1-[3, 5], 2-[4], 3-[], 4-[5], 5-[]], V) .
V = [1, 3, 5]
```

## **A.43 library(url): Analysing and constructing URL**

### **author**

- Jan Wielemaker
- Lukas Faulstich

**deprecated** New code should use `library(uri)`, provided by the `clib` package.

This library deals with the analysis and construction of a URL, Universal Resource Locator. URL is the basis for communicating locations of resources (data) on the web. A URL consists of a protocol identifier (e.g. HTTP, FTP, and a protocol-specific syntax further defining the location. URLs are standardized in RFC-1738.

The implementation in this library covers only a small portion of the defined protocols. Though the initial implementation followed RFC-1738 strictly, the current is more relaxed to deal with frequent violations of the standard encountered in practical use.

### **global\_url(+URL, +Base, -Global)**

[det]

Translate a possibly relative *URL* into an absolute one.

**Errors** `syntax_error(illegal_url)` if *URL* is not legal.

### **is\_absolute\_url(+URL)**

True if *URL* is an absolute *URL*. That is, a *URL* that starts with a protocol identifier.

### **http\_location(?Parts, ?Location)**

Construct or analyze an HTTP location. This is similar to `parse_url/2`, but only deals with the location part of an HTTP URL. That is, the path, search and fragment specifiers. In the HTTP protocol, the first line of a message is

```
<Action> <Location> HTTP/<version>
```

Arguments

*Location* Atom or list of character codes.

### **parse\_url(?URL, ?Attributes)**

[det]

Construct or analyse a *URL*. *URL* is an atom holding a *URL* or a variable. *Attributes* is a list of components. Each component is of the format `Name(Value)`. Defined components are:

#### **protocol(Protocol)**

The used protocol. This is, after the optional `url:`, an identifier separated from the remainder of the *URL* using `:`. `parse_url/2` assumes the `http` protocol if no protocol is specified and the *URL* can be parsed as a valid HTTP url. In addition to the RFC-1738 specified protocols, the `file` protocol is supported as well.

#### **host(Host)**

*Host*-name or IP-address on which the resource is located. Supported by all network-based protocols.

#### **port(Port)**

Integer port-number to access on the `\arg{Host}`. This only appears if the port is explicitly specified in the *URL*. Implicit default ports (e.g., 80 for HTTP) do *not* appear in the part-list.

#### **path(Path)**

(File-) path addressed by the *URL*. This is supported for the `ftp`, `http` and `file` protocols. If no path appears, the library generates the path `/`.

#### **search(ListOfNameValue)**

Search-specification of HTTP *URL*. This is the part after the `?`, normally used to transfer data from HTML forms that use the HTTP GET method. In the *URL* it consists of a `www-form-encoded` list of `Name=Value` pairs. This is mapped to a list of Prolog `Name=Value` terms with decoded names and values.

#### **fragment(Fragment)**

*Fragment* specification of HTTP *URL*. This is the part after the `#` character.

The example below illustrates all of this for an HTTP *URL*.

```
?- parse_url('http://www.xyz.org/hello?msg=Hello+World%21#x',
P).
```

```
P = [ protocol(http),
      host('www.xyz.org'),
      fragment(x),
      search([ msg = 'Hello World!'
                ]),
      path('/hello')
    ]
```

By instantiating the parts-list this predicate can be used to create a *URL*.

**parse\_url(+URL, +BaseURL, -Attributes)** [det]

Similar to `parse_url/2` for relative URLs. If *URL* is relative, it is resolved using the absolute *URL BaseURL*.

**www\_form\_encode(+Value, -XWWWFormEncoded)** [det]

**www\_form\_encode(-Value, +XWWWFormEncoded)** [det]

En/decode to/from application/x-www-form-encoded. Encoding encodes all characters except RFC 3986 *unreserved* (ASCII alnum (see `code_type/2`)), and one of "-.\_~" using percent encoding. Newline is mapped to %OD%OA. When decoding, newlines appear as a single newline (10) character.

Note that a space is encoded as %20 instead of +. Decoding decodes both to a space.

**deprecated** Use `uri_encoded/3` for new code.

**set\_url\_encoding(?Old, +New)** [semidet]

Query and set the encoding for URLs. The default is `utf8`. The only other defined value is `iso_latin_1`.

**To be done** Having a global flag is highly inconvenient, but a work-around for old sites using ISO Latin 1 encoding.

**url\_iri(+Encoded, -Decoded)** [det]

**url\_iri(-Encoded, +Decoded)** [det]

Convert between a URL, encoding in US-ASCII and an IRI. An IRI is a fully expanded Unicode string. Unicode strings are first encoded into UTF-8, after which %-encoding takes place.

**parse\_url\_search(?Spec, ?Fields:list(Name=Value))** [det]

Construct or analyze an HTTP search specification. This deals with form data using the MIME-type `application/x-www-form-urlencoded` as used in HTTP GET requests.

**file\_name\_to\_url(+File, -URL)** [det]

**file\_name\_to\_url(-File, +URL)** [semidet]

Translate between a filename and a file:// *URL*.

**To be done** Current implementation does not deal with paths that need special encoding.

## A.44 library(varnumbers): Utilities for numbered terms

**See also** `numbervars/4,=@=/2 (variant/2)`.

**Compatibility** This library was introduced by Quintus and available in many related implementations, although not with exactly the same set of predicates.

This library provides the inverse functionality of the built-in `numbervars/3`. Note that this library suffers from the known issues that `'$VAR'(X)` is a normal Prolog term and, -unlike the built-in `numbervars`-, the inverse predicates do *not* process cyclic terms. The following predicate is true for any acyclic term that contains no `'$VAR'(X)`, `integer(X)` terms and no constraint variables:

```
always_true(X) :-
    copy_term(X, X2),
    numbervars(X),
    varnumbers(X, Copy),
    Copy =@= X2.
```

**numbervars(+Term)** [det]

Number variables in *Term* using `$VAR(N)`. Equivalent to `numbervars(Term, 0, _)`.

**See also** `numbervars/3, numbervars/4`

**varnumbers(+Term, -Copy)** [det]

Inverse of `numbervars/1`. Equivalent to `varnumbers(Term, 0, Copy)`.

**varnumbers(+Term, +Start, -Copy)** [det]

Inverse of `numbervars/3`. True when *Copy* is a copy of *Term* with all variables numbered  $\geq$  *Start* consistently replaced by fresh variables. Variables in *Term* are *shared* with *Copy* rather than replaced by fresh variables.

**Errors** `domain_error(acyclic_term, Term)` if *Term* is cyclic.

**Compatibility** Quintus, SICStus. Not in YAP version of this library

**max\_var\_number(+Term, +Start, -Max)** [det]

True when *Max* is the max of *Start* and the highest numbered `$VAR(N)` term.

**author** Vitor Santos Costa

**Compatibility** YAP

**varnumbers\_names(+Term, -Copy, -VariableNames)** [det]

If *Term* is a term with numbered and named variables using the reserved term `'$VAR'(X)`, *Copy* is a copy of *Term* where each `'$VAR'(X)` is consistently replaced by a fresh variable and *Bindings* is a list `X = Var`, relating the *X* terms with the variable it is mapped to.

**See also** `numbervars/3, varnumbers/3, read_term/3` using the `variable_names` option.

## A.45 library(yall): Lambda expressions

**author** Paulo Moura and Jan Wielemaker

**To be done** Extend optimization support

Prolog realizes *high-order* programming with meta-calling. The core predicate of this is `call/1`, which simply calls its argument. This can be used to define higher-order predicates such as `ignore/1` or `forall/2`. The `call/N` construct calls a *closure* with *N-1 additional arguments*. This is used to define higher-order predicates such as the `maplist/N` family or `foldl/N`.

The problem with higher order predicates based on `call/N` is that the additional arguments are always added to the end of the closure's argument list. This often requires defining trivial helper predicates to get the argument order right. For example, if you want to add a common postfix to a list of atoms you need to apply `atom_concat(In,Postfix,Out)`, but `maplist(x(PostFix),ListIn,ListOut)` calls `x(PostFix,In,Out)`. This is where this library comes in, which allows us to write

```
?- maplist([In,Out]>>atom_concat(In,'_p',Out), [a,b], ListOut).
ListOut = [a_p, b_p].
```

The `{...}` specifies which variables are *shared* between the lambda and the context. This allows us to write the code below. Without the `{PostFix}` a free variable would be passed to `atom_concat/3`.

```
add_postfix(PostFix, ListIn, ListOut) :-
    maplist({PostFix}/[In,Out]>>atom_concat(In,PostFix,Out),
           ListIn, ListOut).
```

This introduces the second application area of lambda expressions: the ability to stop binding variables in the context. This features shines when combined with `bagof/3` or `setof/3` where you normally have to specify the the variables in whose binding you are *not* interested using the `Var^Goal` construct (marking *Var* as existential quantified). Lambdas allow doing the reverse: specify the variables in which you are interested.

Lambda expressions use the syntax below

```
{...}/[...]>>Goal.
```

The `{...}` optional part is used for lambda-free variables. The order of variables doesn't matter hence the `{...}` set notation.

The `[...]` optional part lists lambda parameters. Here order of variables matters hence the list notation.

As `/` and `>>` are standard infix operators, no new operators are added by this library. An advantage of this syntax is that we can simply unify a lambda expression with `Free/Parameters>>Lambda` to access each of its components. Spaces in the lambda expression are not a problem although the goal may need to be written between `()`'s. Goals that are qualified by a module prefix also need to be wrapped inside parentheses.

Combined with `library(apply_macros)`, `library(yall)` allows writing one-liners for many list operations that have the same performance as hand written code.



The module name, *yall*, stands for Yet Another Lambda Library.

This module implements Logtalk's lambda expressions syntax. The development of this module was sponsored by Kyndi, Inc.

```
+Parameters >> +Lambda
>>(+Parameters, +Lambda, ?A1)
>>(+Parameters, +Lambda, ?A1, ?A2)
>>(+Parameters, +Lambda, ?A1, ?A2, ?A3)
>>(+Parameters, +Lambda, ?A1, ?A2, ?A3, ?A4)
>>(+Parameters, +Lambda, ?A1, ?A2, ?A3, ?A4, ?A5)
>>(+Parameters, +Lambda, ?A1, ?A2, ?A3, ?A4, ?A5, ?A6)
>>(+Parameters, +Lambda, ?A1, ?A2, ?A3, ?A4, ?A5, ?A6, ?A7)
```

Calls a copy of *Lambda*. This is similar to `call(Lambda, A1, ...)`, but arguments are reordered according to the list *Parameters*:

- The first `length(Parameters)` arguments from *A1*, ... are unified with (a copy of) *Parameters*, which *may* share them with variables in *Lambda*.
- Possible excess arguments are passed by position.

Arguments

*Parameters* is either a plain list of parameters or a term `{Free}/List`. *Free* represents variables that are shared between the context and the *Lambda* term. This is needed for compiling *Lambda* expressions.

```
+Free / :Lambda
/(+Free, :Lambda, ?A1)
/(+Free, :Lambda, ?A1, ?A2)
/(+Free, :Lambda, ?A1, ?A2, ?A3)
/(+Free, :Lambda, ?A1, ?A2, ?A3, ?A4)
/(+Free, :Lambda, ?A1, ?A2, ?A3, ?A4, ?A5)
/(+Free, :Lambda, ?A1, ?A2, ?A3, ?A4, ?A5, ?A6)
/(+Free, :Lambda, ?A1, ?A2, ?A3, ?A4, ?A5, ?A6, ?A7)
```

Shorthand for `Free/[ ]>>Lambda`. This is the same as applying `call/N` on *Lambda*, except that only variables appearing in *Free* are bound by the call. For example

```
p(1, a) .
p(2, b) .

?- {X}/p(X, Y) .
X = 1;
X = 2.
```

This can in particular be combined with `bagof/3` and `setof/3` to *select* particular variables to be concerned rather than using existential quantification (`^/2`) to *exclude* variables. For example, the two calls below are equivalent.

```
setof(X, Y^p(X,Y), Xs)
setof(X, {X}/p(X,_), Xs)
```

**is\_lambda**(@Term)

[semidet]

True if *Term* is a valid Lambda expression.

**lambda\_calls**(+LambdaExpression, -Goal)

[det]

**lambda\_calls**(+LambdaExpression, +ExtraArgs, -Goal)

[det]

*Goal* is the goal called if call/N is applied to *LambdaExpression*, where *ExtraArgs* are the additional arguments to call/N. *ExtraArgs* can be an integer or a list of concrete arguments.

This predicate is used for cross-referencing and code highlighting.

# B

## Hackers corner

---

This appendix describes a number of predicates which enable the Prolog user to inspect the Prolog environment and manipulate (or even redefine) the debugger. They can be used as entry points for experiments with debugging tools for Prolog. The predicates described here should be handled with some care as it is easy to corrupt the consistency of the Prolog system by misusing them.

### B.1 Examining the Environment Stack

**prolog\_current\_frame**(-Frame) [det]  
Unify *Frame* with an integer providing a reference to the parent of the current local stack frame. A pointer to the current local frame cannot be provided as the predicate succeeds deterministically and therefore its frame is destroyed immediately after succeeding.

**prolog\_current\_choice**(-Choice) [semidet]  
Unify *Choice* with an integer provided a reference to the last choice point. Fails if the current environment has no choice points. See also `prolog_choice_attribute/3`.

**prolog\_frame\_attribute**(+Frame, +Key, :Value)  
Obtain information about the local stack frame *Frame*. *Frame* is a frame reference as obtained through `prolog_current_frame/1`, `prolog_trace_interception/4` or this predicate. The key values are described below.

#### alternative

*Value* is unified with an integer reference to the local stack frame in which execution is resumed if the goal associated with *Frame* fails. Fails if the frame has no alternative frame.

#### has.alternatives

*Value* is unified with `true` if *Frame* still is a candidate for backtracking; `false` otherwise.

#### goal

*Value* is unified with the goal associated with *Frame*. If the definition module of the active predicate is not the calling context, the goal is represented as  $\langle module \rangle : \langle goal \rangle$ . Do not instantiate variables in this goal unless you **know** what you are doing! Note that the returned term may contain references to the frame and should be discarded before the frame terminates.<sup>1</sup>

---

<sup>1</sup>The returned term is actually an illegal Prolog term that may hold references from the global to the local stack to preserve the variable names.

**parent\_goal**

If *Value* is instantiated to a callable term, find a frame executing the predicate described by *Value* and unify the arguments of *Value* to the goal arguments associated with the frame. This is intended to check the current execution context. The user must ensure the checked parent goal is not removed from the stack due to last-call optimisation and be aware of the slow operation on deeply nested calls.

**predicate\_indicator**

Similar to `goal`, but only returning the `[<module>:]<name>/<arity>` term describing the term, not the actual arguments. It avoids creating an illegal term as `goal` and is used by the library `prolog_stack`.

**clause**

*Value* is unified with a reference to the currently running clause. Fails if the current goal is associated with a foreign (C) defined predicate. See also `nth_clause/3` and `clause_property/2`.

**level**

*Value* is unified with the recursion level of *Frame*. The top level frame is at level '0'.

**parent**

*Value* is unified with an integer reference to the parent local stack frame of *Frame*. Fails if *Frame* is the top frame.

**context\_module**

*Value* is unified with the name of the context module of the environment.

**top**

*Value* is unified with `true` if *Frame* is the top Prolog goal from a recursive call back from the foreign language; `false` otherwise.

**hidden**

*Value* is unified with `true` if the frame is hidden from the user, either because a parent has the `hide-children` attribute (all system predicates), or the system has no `trace-me` attribute.

**skipped**

*Value* is `true` if this frame was skipped in the debugger.

**pc**

*Value* is unified with the program pointer saved on behalf of the parent goal if the parent goal is not owned by a foreign predicate or belongs to a compound meta-call (e.g., `call((a,b))`).

**argument(N)**

*Value* is unified with the *N*-th slot of the frame. Argument 1 is the first argument of the goal. Arguments above the arity refer to local variables. Fails silently if *N* is out of range.

**prolog\_choice\_attribute(+ChoicePoint, +Key, -Value)**

Extract attributes of a choice point. *ChoicePoint* is a reference to a choice point as passed to `prolog_trace_interception/4` on the 3rd argument or obtained using `prolog_current_choice/1`. *Key* specifies the requested information:

**parent**

Requests a reference to the first older choice point.

**frame**

Requests a reference to the frame to which the choice point refers.

**type**

Requests the type. Defined values are `clause` (the goal has alternative clauses), `foreign` (non-deterministic foreign predicate), `jump` (clause internal choice point), `top` (first dummy choice point), `catch` (`catch/3` to allow for undo), `debug` (help the debugger), or `none` (has been deleted).

This predicate is used for the graphical debugger to show the choice point stack.

**deterministic(-Boolean)**

Unifies its argument with `true` if no choice point exists that is more recent than the entry of the clause in which it appears. There are few realistic situations for using this predicate. It is used by the `prolog/0` top level to check whether Prolog should prompt the user for alternatives. Similar results can be achieved in a more portable fashion using `call_cleanup/2`.

## B.2 Ancestral cuts

**prolog\_cut.to(+Choice)**

Prunes all choice points created since *Choice*. Can be used together with `prolog_current_choice/1` to implement *ancestral* cuts. This predicate is in the hackers corner because it should not be used in normal Prolog code. It may be used to create new high level control structures, particularly for compatibility purposes.

Note that in the current implementation, the pruned choice points and environment frames are *not* reclaimed. As a consequence, where predicates that are deterministic due to clause indexing, normal cuts or `(if->then;else)` and and tail recursive run in bounded local stack space, predicates using `prolog_cut.to/1` will run out of stack.

## B.3 Intercepting the Tracer

**prolog\_trace\_interception(+Port, +Frame, +Choice, -Action)**

Dynamic predicate, normally not defined. This predicate is called from the SWI-Prolog debugger just before it would show a port. If this predicate succeeds, the debugger assumes that the trace action has been taken care of and continues execution as described by *Action*. Otherwise the normal Prolog debugger actions are performed.

*Port* denotes the reason to activate the tracer ('port' in the 4/5-port, but with some additions):

**call**

Normal entry through the call port of the 4-port debugger.

**redo(PC)**

Normal entry through the redo port of the 4-port debugger. The `redo` port signals resuming a predicate to generate alternative solutions. If *PC* is 0 (zero), clause indexing has found another clause that will be tried next. Otherwise, *PC* is the program counter in the current clause where execution continues. This implies we are dealing with an in-clause choice point left by, e.g., `;/2`. Note that non-determinism in foreign predicates are also handled using an in-clause choice point.

**unify**

The unify port represents the *neck* instruction, signalling the end of the head-matching process. This port is normally invisible. See `leash/1` and `visible/1`.

**exit**

The exit port signals the goal is proved. It is possible for the goal to have alternatives. See `prolog_frame_attribute/3` to examine the goal stack.

**fail**

The fail port signals final failure of the goal.

**exception(*Except*)**

An exception is raised and still pending. This port is activated on each parent frame of the frame generating the exception until the exception is caught or the user restarts normal computation using `retry`. *Except* is the pending exception term.

**break(*PC*)**

A `break` instruction is executed. *PC* is program counter. This port is used by the graphical debugger.

**cut\_call(*PC*)**

A cut is encountered at *PC*. This port is used by the graphical debugger to visualise the effect of the cut.

**cut\_exit(*PC*)**

A cut has been executed. See `cut_call(PC)` for more information.

*Frame* is a reference to the current local stack frame, which can be examined using `prolog_frame_attribute/3`. *Choice* is a reference to the last choice point and can be examined using `prolog_choice_attribute/3`. *Action* must be unified with a term that specifies how execution must continue. The following actions are defined:

**abort**

Abort execution. See `abort/0`.

**continue**

Continue (i.e., *creep* in the command line debugger).

**fail**

Make the current goal fail.

**ignore**

Step over the current goal without executing it.

**nodebug**

Continue execution in normal nodebugging mode. See `nodebug/0`.

**retry**

Retry the current frame.

**retry(*Frame*)**

Retry the given frame. This must be a parent of the current frame.

**skip**

Skip over the current goal (i.e., *skip* in the command line debugger).

**up**

Skip to the parent goal (i.e., *up* in the command line debugger).

Together with the predicates described in section 4.39 and the other predicates of this chapter, this predicate enables the Prolog user to define a complete new debugger in Prolog. Besides this, it enables the Prolog programmer to monitor the execution of a program. The example below records all goals trapped by the tracer in the database.

```
prolog_trace_interception(Port, Frame, _PC, continue) :-
    prolog_frame_attribute(Frame, goal, Goal),
    prolog_frame_attribute(Frame, level, Level),
    recordz(trace, trace(Port, Level, Goal)).
```

To trace the execution of ‘go’ this way the following query should be given:

```
?- trace, go, notrace.
```

#### **prolog\_skip\_frame(-Frame)**

Indicate *Frame* as a skipped frame and set the ‘skip level’ (see `prolog_skip_level/2` to the recursion depth of *Frame*. The effect of the skipped flag is that a redo on a child of this frame is handled differently. First, a redo trace is called for the child, where the skip level is set to `redo_in_skip`. Next, the skip level is set to skip level of the skipped frame.

#### **prolog\_skip\_level(-Old, +New)**

Unify *Old* with the old value of ‘skip level’ and then set this level according to *New*. *New* is an integer, the atom `very_deep` (meaning don’t skip) or the atom `skip_in_redo` (see `prolog_skip_frame/1`). The ‘skip level’ is a setting of each Prolog thread that disables the debugger on all recursion levels deeper than the level of the variable. See also `prolog_skip_frame/1`.

## **B.4 Breakpoint and watchpoint handling**

SWI-Prolog support *breakpoints*. Breakpoints can be manipulated with the library `prolog_breakpoints`. Setting a breakpoint replaces a virtual machine instruction with the `D_BREAK` instruction. If the virtual machine executes a `D_BREAK`, it performs a callback to decide on the action to perform. This section describes this callback, called `prolog:break_hook/6`.

#### **prolog:break\_hook(+Clause, +PC, +FR, +BFR, +Expression, -Action)** [hook, semidet]

*Experimental* This hook is called if the virtual machine executes a `D_BREAK`, set using `set_breakpoint/4`. *Clause* and *PC* identify the breakpoint. *FR* and *BFR* provide the environment frame and current choicepoint. *Expression* identifies the action that is interrupted, and is one of the following:

#### **call(Goal)**

The instruction will call *Goal*. This is generated for nearly all instructions. Note that *Goal* is semantically equivalent to the compiled body term, but might differ syntactically. This is notably the case when arithmetic expressions are compiled in optimized mode (see `optimise`). In particular, the arguments of arithmetic expressions have already been evaluated. Thus, *A* is `3*B`, where *B* equals 3 results in a term `call(A is 9)` if the clause was compiled with optimization enabled.

**!**

The instruction will call the cut. Because the semantics of metacalling the cut differs from executing the cut in its original context we do not wrap the cut in `call/1`.

**:-**

The breakpoint is on the *neck* instruction, i.e., after performing the head unifications.

**exit**

The breakpoint is on the *exit* instruction, i.e., at the end of the clause. Note that the exit instruction may not be reached due to last-call optimisation.

**unify\_exit**

The breakpoint is on the completion of an in-lined unification while the system is not in debug mode. If the system is in debug mode, inlined unification is returned as `call(Var=Term)`.<sup>2</sup>

If `prolog:break_hook/6` succeeds, it must unify *Action* with a value that describes how execution must continue. Possible values for *Action* are:

**continue**

Just continue as if no breakpoint was present.

**debug**

Continue in *debug mode*. See `debug/0`.

**trace**

Continue in *trace mode*. See `trace/0`.

**call(Goal)**

Execute *Goal* instead of the goal that would be executed. *Goal* is executed as `call/1`, preserving (non-)determinism and exceptions.

If this hook throws an exception, the exception is propagated normally. If this hook is not defined or fails, the default action is executed. This implies that, if the thread is in debug mode, the tracer will be enabled (`trace`) and otherwise the breakpoint is ignored (`continue`).

This hook allows for injecting various debugging scenarios into the executable without recompiling. The hook can access variables of the calling context using the frame inspection predicates. Here are some examples.

- Create *conditional* breakpoints by imposing conditions before deciding the return `trace`.
- Watch variables at a specific point in the execution. Note that binding of these variables can be monitored using *attributed variables*, see section 8.1.
- Dynamically add *assertions* on variables using `assertion/1`.
- Wrap the *Goal* into a meta-call that traces progress of the *Goal*.

<sup>2</sup>This hack will disappear if we find a good solution for applying D-BREAK to inlined unification. Only option might be to place the break on both the unification start and end instructions.



## B.5 Adding context to errors: prolog\_exception\_hook

The hook `prolog_exception_hook/4` has been introduced in SWI-Prolog 5.6.5 to provide dedicated exception handling facilities for application frameworks, for example non-interactive server applications that wish to provide extensive context for exceptions for offline debugging.

**prolog\_exception\_hook(+ExceptionIn, -ExceptionOut, +Frame, +CatcherFrame)**

This hook predicate, if defined in the module `user`, is between raising an exception and handling it. It is intended to allow a program adding additional context to an exception to simplify diagnosing the problem. *ExceptionIn* is the exception term as raised by `throw/1` or one of the built-in predicates. The output argument *ExceptionOut* describes the exception that is actually raised. *Frame* is the innermost frame. See `prolog_frame_attribute/3` and the library `prolog_stack` for getting information from this. *CatcherFrame* is a reference to the frame calling the matching `catch/3`, `none` if the exception is not caught or `'C'` if the exception is caught in C calling Prolog using the flag `PL_Q_CATCH_EXCEPTION`.

The hook is run in ‘nodebug’ mode. If it succeeds, *ExceptionOut* is considered the current exception. If it fails, *ExceptionIn* is used for further processing. The hook is *never* called recursively. The hook is *not* allowed to modify *ExceptionOut* in such a way that it no longer unifies with the catching frame.

Typically, `prolog_exception_hook/4` is used to fill the second argument of `error(Formal, Context)` exceptions. *Formal* is defined by the ISO standard, while SWI-Prolog defines *Context* as a term `context(Location, Message)`. *Location* is bound to a term `<name>/<arity>` by the kernel. This hook can be used to add more information on the calling context, such as a full stack trace.

Applications that use exceptions as part of normal processing must do a quick test of the environment before starting expensive gathering information on the state of the program.

The hook can call `trace/0` to enter trace mode immediately. For example, imagine an application performing an unwanted division by zero while all other errors are expected and handled. We can force the debugger using the hook definition below. Run the program in debug mode (see `debug/0`) to preserve as much as possible of the error context.

```
user:prolog_exception_hook(
    error(evaluation_error(zero_divisor), _),
    _, _, _) :-
    trace, fail.
```

## B.6 Hooks using the exception predicate

This section describes the predicate `exception/3`, which can be defined by the user in the module `user` as a multifile predicate. Unlike the name suggests, this is actually a *hook* predicate that has no relation to Prolog exceptions as defined by the ISO predicates `catch/3` and `throw/1`.

The predicate `exception/3` is called by the kernel on a couple of events, allowing the user to ‘fix’ errors just-in-time. The mechanism allows for *lazy* creation of objects such as predicates.

**exception(+Exception, +Context, -Action)**

Dynamic predicate, normally not defined. Called by the Prolog system on run-time exceptions that can be repaired ‘just-in-time’. The values for *Exception* are described below. See also `catch/3` and `throw/1`.

If this hook predicate succeeds it must instantiate the *Action* argument to the atom `fail` to make the operation fail silently, `retry` to tell Prolog to retry the operation or `error` to make the system generate an exception. The action `retry` only makes sense if this hook modified the environment such that the operation can now succeed without error.

**undefined\_predicate**

*Context* is instantiated to a predicate indicator ([module]:<name>/<arity>). If the predicate fails, Prolog will generate an `existence_error` exception. The hook is intended to implement alternatives to the built-in autoloader, such as autoloading code from a database. Do *not* use this hook to suppress existence errors on predicates. See also `unknown` and section 2.13.

**undefined\_global\_variable**

*Context* is instantiated to the name of the missing global variable. The hook must call `nb_setval/2` or `b_setval/2` before returning with the action `retry`.

## B.7 Hooks for integrating libraries

Some libraries realise an entirely new programming paradigm on top of Prolog. An example is XPCE which adds an object system to Prolog as well as an extensive set of graphical primitives. SWI-Prolog provides several hooks to improve the integration of such libraries. See also section 4.5 for editing hooks and section 4.11.4 for hooking into the message system.

**prolog\_list\_goal(:Goal)**

Hook, normally not defined. This hook is called by the ‘L’ command of the tracer in the module `user` to list the currently called predicate. This hook may be defined to list only relevant clauses of the indicated *Goal* and/or show the actual source code in an editor. See also `portray/1` and `multifile/1`.

**prolog:debug\_control\_hook(:Action)**

Hook for the debugger control predicates that allows the creator of more high-level programming languages to use the common front-end predicates to control the debugger. For example, XPCE uses these hooks to allow for spying methods rather than predicates. *Action* is one of:

**spy(Spec)**

Hook in `spy/1`. If the hook succeeds `spy/1` takes no further action.

**nospy(Spec)**

Hook in `nospy/1`. If the hook succeeds `nospy/1` takes no further action. If `spy/1` is hooked, it is advised to place a complementary hook for `nospy/1`.

**nospyall**

Hook in `nospyall/0`. Should remove all spy points. This hook is called in a failure-driven loop.

**debugging**

Hook in `debugging/0`. It can be used in two ways. It can report the status of the additional debug points controlled by the above hooks and fail to let the system report the others, or it succeeds, overruling the entire behaviour of `debugging/0`.

**prolog:help\_hook(+Action)**

Hook into `help/0` and `help/1`. If the hook succeeds, the built-in actions are not executed. For example, `?- help(picture) .` is caught by the XPCE help hook to give help on the class *picture*. Defined actions are:

**help**

User entered plain `help/0` to give default help. The default performs `help(help/1)`, giving help on help.

**help(What)**

Hook in `help/1` on the topic *What*.

**apropos(What)**

Hook in `apropos/1` on the topic *What*.

## B.8 Hooks for loading files

All loading of source files is achieved by `load_files/2`. The hook `prolog.load_file/2` can be used to load Prolog code from non-files or even load entirely different information, such as foreign files.

**prolog.load\_file(+Spec, +Options)**

Load a single object. If this call succeeds, `load_files/2` assumes the action has been taken care of. This hook is only called if *Options* does not contain the `stream(Input)` option. The hook must be defined in the module `user`.

This can be used to load from unusual places. For example, library `http/http_load` loads Prolog directly from an HTTP server. It can also be used to load source in unusual forms, such as loading compressed files without decompressing them first. There is currently no example of that.

**prolog:comment\_hook(+Comments, +Pos, +Term)**

This hook allows for processing comments encountered by the compiler. If this hook is defined, the compiler calls `read_term/2` with the option `comments(Comments)`. If the list of comments returned by `read_term/2` is not empty it calls this comment hook with the following arguments.

- *Comments* is the non-empty list of comments. Each comment is a pair *Position-String*, where *String* is a string object (see section 5.2) that contains the comment *including* delimiters. Consecutive line comments are returned as a single comment.
- *Pos* is a stream-position term that describes the starting position of *Term*
- *Term* is the term read.

This hook is exploited by the documentation system. See `stream_position_data/3`. See also `read_term/3`.

# Compatibility with other Prolog dialects

---



This chapter explains issues for writing portable Prolog programs. It was started after discussion with Vitor Santos Costa, the leading developer of YAP Prolog<sup>1</sup>. YAP and SWI-Prolog have expressed the ambition to enhance the portability beyond the trivial Prolog examples, including complex libraries involving foreign code.

Although it is our aim to enhance compatibility, we are still faced with many incompatibilities between the dialects. As a first step both YAP and SWI will provide some instruments that help developing portable code. A first release of these tools appeared in SWI-Prolog 5.6.43. Some of the facilities are implemented in the base system, others in the library `dialect.pl`.

- The Prolog flag `dialect` is an unambiguous and fast way to find out which Prolog dialect executes your program. It has the value `swi` for SWI-Prolog and `yap` on YAP.
- The Prolog flag `version_data` is bound to a term `swi(Major, Minor, Patch, Extra)`
- Conditional compilation using `:- if(Condition) ...:- endif` is supported. See section 4.3.1.
- The predicate `expects_dialect/1` allows for specifying for which Prolog system the code was written.
- The predicates `exists_source/1` and `source_exports/2` can be used to query the library content. The `require/1` directive can be used to get access to predicates without knowing their location.
- The module predicates `use_module/1`, `use_module/2` have been extended with a notion for ‘import-except’ and ‘import-as’. This is particularly useful together with `reexport/1` and `reexport/2` to compose modules from other modules and mapping names.
- Foreign code can expect `__SWI_PROLOG__` when compiled for SWI-Prolog and `__YAP_PROLOG__` when compiled on YAP.

## **`:- expects_dialect(+Dialect)`**

This directive states that the code following the directive is written for the given Prolog *Dialect*. See also `dialect`. The declaration holds until the end of the file in which it appears. The current dialect is available using `prolog_load_context/2`.

The exact behaviour of this predicate is still subject to discussion. Of course, if *Dialect* matches the running dialect the directive has no effect. Otherwise we check for the existence of `library(dialect/Dialect)` and load it if the file is found. Currently, this file has this functionality:

---

<sup>1</sup><http://yap.sourceforge.net/>

- Define system predicates of the requested dialect we do not have.
- Apply `goal_expansion/2` rules that map conflicting predicates to versions emulating the requested dialect. These expansion rules reside in the dialect compatibility module, but are applied if `prolog_load_context(dialect, Dialect)` is active.
- Modify the search path for library directories, putting libraries compatible with the target dialect before the native libraries.
- Setup support for the default filename extension of the dialect.

#### **exists\_source(+Spec)**

Is true if *Spec* exists as a Prolog source. *Spec* uses the same conventions as `load_files/2`. Fails without error if *Spec* cannot be found.

#### **source\_exports(+Spec, +Export)**

Is true if source *Spec* exports *Export*, a predicate indicator. Fails without error otherwise.

## **C.1 Some considerations for writing portable code**

The traditional way to write portable code is to define custom predicates for all potentially non-portable code and define these separately for all Prolog dialects one wishes to support. Here are some considerations.

- Probably the best reason for this is that it allows to define minimal semantics required by the application for the portability predicates. Such functionality can often be mapped efficiently to the target dialect. Contrary, if code was written for dialect *X*, the defined semantics are those of dialect *X*. Emulating all extreme cases and full error handling compatibility may be tedious and result in a much slower implementation than needed. Take for example `call_cleanup/2`. The SICStus definition is fundamentally different from the SWI definition, but 99% of the applications just want to make calls like below to guarantee *StreamIn* is closed, even if `process/1` misbehaves.

```
call_cleanup(process(StreamIn), close(In))
```

- As a drawback, the code becomes full of *my\_call\_cleanup*, etc. and every potential portability conflict needs to be abstracted. It is hard for people who have to maintain such code later to grasp the exact semantics of the *my\_\** predicates and applications that combine multiple libraries using this compatibility approach are likely to encounter conflicts between the portability layers. A good start is not to use *my\_\**, but a prefix derived from the library or application name or names that explain the intended semantics more precisely.
- Another problem is that most code is initially not written with portability in mind. Instead, ports are requested by users or arise from the desire to switch Prolog dialect. Typically, we want to achieve compatibility with the new Prolog dialect with minimal changes, often keeping compatibility with the original dialect(s). This problem is well known from the C/Unix world and we advise anyone to study the philosophy of [GNU autoconf](#), from which we will illustrate some highlights below.

The GNU autoconf suite, known to most people as `configure`, was an answer to the frustrating life of Unix/C programmers when Unix dialects were about as abundant and poorly standardised as Prolog dialects today. Writing a portable C program can only be achieved using `cpp`, the C preprocessor. The C preprocessor performs two tasks: macro expansion and conditional compilation. Prolog realises macro expansion through `term_expansion/2` and `goal_expansion/2`. Conditional compilation is achieved using `:- if(Condition)` as explained in section 4.3.1. The situation appears similar.

The important lesson learned from GNU autoconf is that the *last* resort for conditional compilation to achieve portability is to switch on the platform or dialect. Instead, GNU autoconf allows you to write tests for specific properties of the platform. Most of these are whether or not some function or file is available. Then there are some standard tests for difficult-to-write-portable situations and finally there is a framework that allows you to write arbitrary C programs and check whether they can be compiled and/or whether they show the intended behaviour. Using a separate `configure` program is needed in C, as you cannot perform C compilation step or run C programs from the C preprocessor. In most Prolog environments we do not need this distinction as the compiler is integrated into the runtime environment and Prolog has excellent reflexion capabilities.

We must learn from the distinction to test for features instead of platform (dialect), as this makes the platform-specific code robust for future changes of the dialect. Suppose we need `compare/3` as defined in this manual. The `compare/3` predicate is not part of the ISO standard, but many systems support it and it is not unlikely it will become ISO standard or the intended dialect will start supporting it. GNU autoconf strongly advises to test for the availability:

```
:- if(\+current_predicate(_, compare(_,_,_))).
compare(<, Term1, Term2) :-
    Term1 @< Term2, !.
compare(>, Term1, Term2) :-
    Term1 @> Term2, !.
compare(=, Term1, Term2) :-
    Term1 == Term2.
:- endif.
```

This code is **much** more robust against changes to the intended dialect and, possibly at least as important, will provide compatibility with dialects you didn't even consider porting to right now.

In a more challenging case, the target Prolog has `compare/3`, but the semantics are different. What to do? One option is to write a `my_compare/3` and change all occurrences in the code. Alternatively you can rename calls using `goal_expansion/2` like below. This construct will not only deal with Prolog dialects lacking `compare/3` as well as those that only implement it for numeric comparison or have changed the argument order. Of course, writing rock-solid code would require a complete test-suite, but this example will probably cover all Prolog dialects that allow for conditional compilation, have core ISO facilities and provide `goal_expansion/2`, the things we claim a Prolog dialect should have to start writing portable code for it.

```
:- if(\+catch(compare(<,a,b), _, fail)).
compare_standard_order(<, Term1, Term2) :-
    Term1 @< Term2, !.
compare_standard_order(>, Term1, Term2) :-
    Term1 @> Term2, !.
```

```
compare_standard_order(=, Term1, Term2) :-  
    Term1 == Term2.  
  
goal_expansion(compare(Order, Term1, Term2),  
                compare_standard_order(Order, Term1, Term2)).  
:- endif.
```

# Glossary of Terms

---

# D

**anonymous [variable]**

The variable `_` is called the *anonymous* variable. Multiple occurrences of `_` in a single *term* are not *shared*.

**arguments**

Arguments are *terms* that appear in a *compound term*. *A1* and *a2* are the first and second argument of the term `myterm(A1, a2)`.

**arity**

Argument count (= number of arguments) of a *compound term*.

**assert**

Add a *clause* to a *predicate*. Clauses can be added at either end of the clause-list of a *predicate*. See `asserta/1` and `assertz/1`.

**atom**

Textual constant. Used as name for *compound terms*, to represent constants or text.

**backtracking**

Search process used by Prolog. If a predicate offers multiple *clauses* to solve a *goal*, they are tried one-by-one until one *succeeds*. If a subsequent part of the proof is not satisfied with the resulting *variable binding*, it may ask for an alternative *solution* (= *binding* of the *variables*), causing Prolog to reject the previously chosen *clause* and try the next one.

**binding [of a variable]**

Current value of the *variable*. See also *backtracking* and *query*.

**built-in [predicate]**

Predicate that is part of the Prolog system. Built-in predicates cannot be redefined by the user, unless this is overruled using `redefine_system_predicate/1`.

**body**

Part of a *clause* behind the *neck* operator (`:-`).

**choice point**

A *choice point* represents a choice in the search for a *solution*. Choice points are created if multiple clauses match a *query* or using disjunction (`;/2`). On *backtracking*, the execution state of the most recent *choice point* is restored and search continues with the next alternative (i.e., next clause or second branch of `;/2`).



**clause**

‘Sentence’ of a Prolog program. A *clause* consists of a *head* and *body* separated by the *neck* operator (`: -`) or it is a *fact*. For example:

```
parent(X) :-
    father(X, _).
```

Expressed as “X is a parent if X is a father of someone”. See also *variable* and *predicate*.

**compile**

Process where a Prolog *program* is translated to a sequence of instructions. See also *interpreted*. SWI-Prolog always compiles your program before executing it.

**compound [term]**

Also called *structure*. It consists of a name followed by *N arguments*, each of which are *terms*. *N* is called the *arity* of the term.

**context module**

If a *term* is referring to a *predicate* in a *module*, the *context module* is used to find the target module. The context module of a *goal* is the module in which the *predicate* is defined, unless this *predicate* is *module transparent*, in which case the *context module* is inherited from the parent *goal*. See also `module_transparent/1` and *meta-predicate*.

**dcg**

Abbreviation for *Definite Clause Grammar*.

**det [determinism]**

Short for *deterministic*.

**determinism**

How many solutions a *goal* can provide. Values are ‘nondet’ (zero to infinite), ‘multi’ (one to infinite), ‘det’ (exactly one) and ‘semidet’ (zero or one).

**deterministic**

A *predicate* is *deterministic* if it succeeds exactly one time without leaving a *choice point*.

**dynamic [predicate]**

A *dynamic* predicate is a predicate to which *clauses* may be *asserted* and from which *clauses* may be *retracted* while the program is running. See also *update view*.

**exported [predicate]**

A *predicate* is said to be *exported* from a *module* if it appears in the *public list*. This implies that the predicate can be *imported* into another module to make it visible there. See also `use_module/[1, 2]`.

**fact**

*Clause* without a *body*. This is called a fact because, interpreted as logic, there is no condition to be satisfied. The example below states `john` is a person.

```
person(john).
```

**fail**

A *goal* is said to have failed if it could not be *proven*.

**float**

Computer's crippled representation of a real number. Represented as 'IEEE double'.

**foreign**

Computer code expressed in languages other than Prolog. SWI-Prolog can only cooperate directly with the C and C++ computer languages.

**functor**

Combination of name and *arity* of a *compound* term. The term  $f_{\circ\circ}(a, b, c)$  is said to be a term belonging to the functor  $f_{\circ\circ}/3$ .  $f_{\circ\circ}/0$  is used to refer to the *atom*  $f_{\circ\circ}$ .

**goal**

Question stated to the Prolog engine. A *goal* is either an *atom* or a *compound* term. A *goal* either succeeds, in which case the *variables* in the *compound* terms have a *binding*, or it *fails* if Prolog fails to prove it.

**hashing**

*Indexing* technique used for quick lookup.

**head**

Part of a *clause* before the *neck* operator ( $: -$ ). This is an *atom* or *compound* term.

**imported [predicate]**

A *predicate* is said to be *imported* into a *module* if it is defined in another *module* and made available in this *module*. See also chapter 6.

**indexing**

Indexing is a technique used to quickly select candidate *clauses* of a *predicate* for a specific *goal*. In most Prolog systems, indexing is done (only) on the first *argument* of the *head*. If this argument is instantiated to an *atom*, *integer*, *float* or *compound* term with *functor*, *hashing* is used to quickly select all *clauses* where the first argument may *unify* with the first argument of the *goal*. SWI-Prolog supports just-in-time and multi-argument indexing. See section 2.18.

**integer**

Whole number. On all implementations of SWI-Prolog integers are at least 64-bit signed values. When linked to the GNU GMP library, integer arithmetic is unbounded. See also `current_prolog_flag/2`, `flags` bounded, `max_integer` and `min_integer`.

**interpreted**

As opposed to *compiled*, interpreted means the Prolog system attempts to prove a *goal* by directly reading the *clauses* rather than executing instructions from an (abstract) instruction set that is not or only indirectly related to Prolog.

**instantiation [of an argument]**

To what extent a term is bound to a value. Typical levels are 'unbound' (a *variable*), 'ground' (term without variables) or 'partially bound' (term with embedded variables).

**meta-predicate**

A *predicate* that reasons about other *predicates*, either by calling them, (re)defining them or querying *properties*.

**mode [declaration]**

Declaration of an argument *instantiation* pattern for a *predicate*, often accompanied with a *determinism*.

**module**

Collection of predicates. Each module defines a name-space for predicates. *built-in* predicates are accessible from all modules. Predicates can be published (*exported*) and *imported* to make their definition available to other modules.

**module transparent [predicate]**

A *predicate* that does not change the *context module*. Sometimes also called a *meta-predicate*.

**multi [determinism]**

A *predicate* is said to have *determinism* multi if it generates at *least* one answer.

**multifile [predicate]**

Predicate for which the definition is distributed over multiple source files. See `multifile/1`.

**neck**

Operator (`:` `-`) separating *head* from *body* in a *clause*.

**nondet**

Short for *non deterministic*.

**non deterministic**

A *non deterministic* predicate is a predicate that may fail or succeed any number of times.

**operator**

Symbol (*atom*) that may be placed before its *operand* (prefix), after its *operand* (postfix) or between its two *operands* (infix).

In Prolog, the expression `a+b` is exactly the same as the canonical term `+(a,b)`.

**operand**

*Argument* of an *operator*.

**precedence**

The *priority* of an *operator*. Operator precedence is used to interpret `a+b*c` as `+(a, *(b,c))`.

**predicate**

Collection of *clauses* with the same *functor* (name/arity). If a *goal* is proved, the system looks for a *predicate* with the same functor, then uses *indexing* to select candidate *clauses* and then tries these *clauses* one-by-one. See also *backtracking*.

**predicate indicator**

Term of the form Name/Arity (traditional) or Name//Arity (ISO DCG proposal), where Name is an atom and Arity a non-negative integer. It acts as an *indicator* (or reference) to a predicate or DCG rule.

**priority**

In the context of *operators* a synonym for *precedence*.

**program**

Collection of *predicates*.

**property**

Attribute of an object. SWI-Prolog defines various *\*\_property* predicates to query the status of predicates, clauses. etc.

**prove**

Process where Prolog attempts to prove a *query* using the available *predicates*.

**public list**

List of *predicates* exported from a *module*.

**query**

See *goal*.

**retract**

Remove a *clause* from a *predicate*. See also *dynamic*, *update view* and *assert*.

**semidet**

Shorthand for

**semi deterministic**

.

**semi deterministic**

A *predicate* that is *semi deterministic* either fails or succeeds exactly once without a *choice point*. See also *deterministic*.

**shared**

Two *variables* are called *shared* after they are *unified*. This implies if either of them is *bound*, the other is bound to the same value:

```
?- A = B, A = a.  
A = B, B = a.
```

**singleton [variable]**

*Variable* appearing only one time in a *clause*. SWI-Prolog normally warns for this to avoid you making spelling mistakes. If a variable appears on purpose only once in a clause, write it as `_` (see *anonymous*). Rules for naming a variable and avoiding a warning are given in section [2.16.1](#).

**solution**

*Bindings* resulting from a successfully *proven goal*.

**structure**

Synonym for *compound term*.

**string**

Used for the following representations of text: a packed array (see section 5.2, SWI-Prolog specific), a list of character codes or a list of one-character *atoms*.

**succeed**

A *goal* is said to have *succeeded* if it has been *proven*.

**term**

Value in Prolog. A *term* is either a *variable*, *atom*, *integer*, *float* or *compound* term. In addition, SWI-Prolog also defines the type *string*.

**transparent**

See *module transparent*.

**unify**

Prolog process to make two terms equal by assigning variables in one term to values at the corresponding location of the other term. For example:

```
?- foo(a, B) = foo(A, b).
A = a,
B = b.
```

Unlike assignment (which does not exist in Prolog), unification is not directed.

**update view**

How Prolog behaves when a *dynamic predicate* is changed while it is running. There are two models. In most older Prolog systems the change becomes immediately visible to the *goal*, in modern systems including SWI-Prolog, the running *goal* is not affected. Only new *goals* ‘see’ the new definition.

**variable**

A Prolog variable is a value that ‘is not yet bound’. After *binding* a variable, it cannot be modified. *Backtracking* to a point in the execution before the variable was bound will turn it back into a variable:


```
?- A = b, A = c.
false.

?- (A = b; true; A = c).
A = b ;
true ;
A = c .
```

See also *unify*.

# SWI-Prolog License Conditions and Tools

---



As of version 7.4.0<sup>1</sup>, the SWI-Prolog source code is distributed under the [Simplified BSD](#) license:

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This, unfortunately, **does not mean you can any version of SWI-Prolog under the above license.** The SWI-Prolog core may be linked to libraries that are more restrictive and in addition your code may have loaded extension packages that have more restrictive conditions. In particular, the core is by default linked to [libgmp](#), distributed under the Lesser GNU Public license.

The above implies you need to configure and recompile the system without these components. For this we provide options to the `configure` script:

```
./configure --without-gpl
./configure --without-lgpl
```

---

<sup>1</sup>Actually pre-release 7.3.33

The GNU MP Bignum Library provides unbounded integers, rational numbers and some cryptographic functionality. As libgmp is provided under the Lesser GNU Public license it may legally be combined with proprietary software as long as libgmp is *dynamically linked* (default) and the end user can replace the libgmp shared object and use your application with their (possibly modified) version of libgmp. In practice this leads to problems if the application is not accessible (e.g., embedded in closed hardware) or you want to avoid customers to peek around in the process memory as they can easily do so by adding a backdoor to the modified LGPL component. Note that such a protection is in general not possible anyway if the customer has unrestricted access to the machine on which the application runs.

## E.1 Contributing to the SWI-Prolog project

To reach maximal coherence we will, as a rule of thumb, only accept new code that has the Simplified BSD license and existing code with a *permissive* license such as MIT, Apache, BSD-3, etc. In exceptional cases we may accept code with GPL or LGPL conditions. Such code must be tagged using a `license/1` directive (Prolog) or a call to `PL_license()` for foreign code and, if they are part of the core, the code must be excluded using the `--without-gpl` or `--without-lgpl` option.

## E.2 Software support to keep track of license conditions

Given the above, it is possible that SWI-Prolog packages and extensions rely on the GPL, LGPL or other licenses. The predicates below allow for registering license requirements for Prolog files and foreign modules. The predicate `license/0` reports which components from the currently configured system are distributed under non-permissive open source licenses and therefore may need to be replaced to suit your requirements.

### license

Evaluate the license conditions of all loaded components. If the system contains one or more components that are licenced under GPL-like restrictions the system indicates this program may only be distributed under the GPL license as well as which components prohibit the use of other license conditions. Likewise for for LGPL components.

### license(+LicenseId, +Component)

Register the fact that *Component* is distributed under a license identified by *LicenseId*. Known license identifiers can be listed using `known_licenses/0`. A new license can be registered as a known language using a declaration like below. The second argument defines the *category* if the license, which is one of `gpl`, `lgpl`, `permissive` or `proprietary`.

```
:- multifile license:license/3.

license:license(mylicense, permissive,
               [ comment('My personal license'),
                 url('http://www.mine.org/license.html')
               ]).

:- license(mylicense).
```

**license(+LicenseId)**

Intended as a directive in Prolog source files. It takes the current filename and calls `license/2`.

`void PL_license(const char *LicenseId, const char *Component)`

Intended for the `install()` procedure of foreign libraries. This call can be made *before* `PL_initialise()`.

**known\_licenses**

List all licenses *known* to the system. This does not imply the system contains code covered by the listed licenses. See `license/2`.

**E.3 License conditions inherited from used code****E.3.1 Cryptographic routines**

Cryptographic routines are used in `variant_shal/2` and `crypt`. These routines are provided under the following conditions:

Copyright (c) 2002, Dr Brian Gladman, Worcester, UK. All rights reserved.

**LICENSE TERMS**

The free distribution and use of this software in both source and binary form is allowed (with or without changes) provided that:

1. distributions of this source code include the above copyright notice, this list of conditions and the following disclaimer;
2. distributions in binary form include the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other associated materials;
3. the copyright holder's name is not used to endorse products built using this software without specific written permission.

ALTERNATIVELY, provided that this notice is retained in full, this product may be distributed under the terms of the GNU General Public License (GPL), in which case the provisions of the GPL apply INSTEAD OF those given above.

**DISCLAIMER**

This software is provided 'as is' with no explicit or implied warranties in respect of its properties, including, but not limited to, correctness and/or fitness for purpose.



# Summary

---

## F.1 Predicates

The predicate summary is used by the Prolog predicate `apropos/1` to suggest predicates from a keyword.

|                           |  |
|---------------------------|--|
| <code>@/2</code>          | Call using calling context   |
| <code>!/0</code>          | Cut (discard choicepoints)   |
| <code>,/2</code>          | Conjunction of goals   |
| <code>-&gt;/2</code>      | If-then-else   |
| <code>*-&gt;/2</code>     | Soft-cut   |
| <code>./2</code>          | Consult. Also functional notation  |
| <code>:&lt;/2</code>      | Select keys from a dict  |
| <code>;/2</code>          | Disjunction of two goals   |
| <code>&lt;/2</code>       | Arithmetic smaller   |
| <code>=/2</code>          | True when arguments are unified  |
| <code>=./2</code>         | “Univ.” Term to list conversion  |
| <code>=:/2</code>         | Arithmetic equality  |
| <code>=&lt;/2</code>      | Arithmetic smaller or equal  |
| <code>==/2</code>         | Test for strict equality   |
| <code>=@=/2</code>        | Test for structural equality (variant)                                     |
| <code>=\=/2</code>        | Arithmetic not equal   |
| <code>&gt;/2</code>       | Arithmetic larger  |
| <code>&gt;=/2</code>      | Arithmetic larger or equal   |
| <code>&gt; :&lt;/2</code> | Partial dict unification   |
| <code>?=/2</code>         | Test of terms can be compared now  |
| <code>@&lt;/2</code>      | Standard order smaller   |
| <code>@=&lt;/2</code>     | Standard order smaller or equal  |
| <code>@&gt;/2</code>      | Standard order larger  |
| <code>@&gt;=/2</code>     | Standard order larger or equal   |
| <code>\+/1</code>         | Negation by failure. Same as <code>not/1</code>                            |
| <code>\=/2</code>         | True if arguments cannot be unified  |
| <code>\==/2</code>        | True if arguments are not strictly equal                                   |
| <code>\=@=/2</code>       | Not structural identical   |
| <code>^/2</code>          | Existential quantification ( <code>bagof/3</code> , <code>setof/3</code> ) |
| <code> /2</code>          | Disjunction in DCGs. Same as <code>;/2</code>                              |
| <code>{ }/1</code>        | DCG escape; constraints  |
| <code>abolish/1</code>    | Remove predicate definition from the database                              |
| <code>abolish/2</code>    | Remove predicate definition from the database                              |

---

|                                       |   |
|---------------------------------------|---|
| <code>abolish_all_tables/0</code>     | Abolish computed tables                           |
| <code>abolish_table_subgoals/1</code> | Abolish tables for a goal                         |
| <code>abort/0</code>                  | Abort execution, return to top level              |
| <code>absolute_file_name/2</code>     | Get absolute path name                            |
| <code>absolute_file_name/3</code>     | Get absolute path name with options               |
| <code>access_file/2</code>            | Check access permissions of a file                |
| <code>acyclic_term/1</code>           | Test term for cycles                              |
| <code>add_import_module/3</code>      | Add module to the auto-import list                |
| <code>add_nb_set/2</code>             | Add term to a non-backtrackable set               |
| <code>add_nb_set/3</code>             | Add term to a non-backtrackable set               |
| <code>append/1</code>                 | Append to a file                                  |
| <code>apply/2</code>                  | Call goal with additional arguments               |
| <code>apropos/1</code>                | <code>online_help</code> Search manual            |
| <code>arg/3</code>                    | Access argument of a term                         |
| <code>assoc_to_list/2</code>          | Convert association tree to list                  |
| <code>assert/1</code>                 | Add a clause to the database                      |
| <code>assert/2</code>                 | Add a clause to the database, give reference      |
| <code>asserta/1</code>                | Add a clause to the database (first)              |
| <code>asserta/2</code>                | Add a clause to the database (first)              |
| <code>assertion/1</code>              | Make assertions about your program                |
| <code>assertz/1</code>                | Add a clause to the database (last)               |
| <code>assertz/2</code>                | Add a clause to the database (last)               |
| <code>attach_console/0</code>         | Attach I/O console to thread                      |
| <code>attach_packs/0</code>           | Attach add-ons                                    |
| <code>attach_packs/1</code>           | Attach add-ons from directory                     |
| <code>attach_packs/2</code>           | Attach add-ons from directory                     |
| <code>attribute_goals/3</code>        | Project attributes to goals                       |
| <code>attr_unify_hook/2</code>        | Attributed variable unification hook              |
| <code>attr_portray_hook/2</code>      | Attributed variable print hook                    |
| <code>attvar/1</code>                 | Type test for attributed variable                 |
| <code>at_end_of_stream/0</code>       | Test for end of file on input                     |
| <code>at_end_of_stream/1</code>       | Test for end of file on stream                    |
| <code>at_halt/1</code>                | Register goal to run at <code>halt/1</code>       |
| <code>atom/1</code>                   | Type check for an atom                            |
| <code>atom_chars/2</code>             | Convert between atom and list of characters       |
| <code>atom_codes/2</code>             | Convert between atom and list of characters codes |
| <code>atom_concat/3</code>            | Concatenate two atoms                             |
| <code>atom_length/2</code>            | Determine length of an atom                       |
| <code>atom_number/2</code>            | Convert between atom and number                   |
| <code>atom_prefix/2</code>            | Test for start of atom                            |
| <code>atom_string/2</code>            | Conversion between atom and string                |
| <code>atom_to_term/3</code>           | Convert between atom and term                     |
| <code>atomic/1</code>                 | Type check for primitive                          |
| <code>atomic_concat/3</code>          | Concatenate two atomic values to an atom          |
| <code>atomic_list_concat/2</code>     | Append a list of atomics                          |
| <code>atomic_list_concat/3</code>     | Append a list of atomics with separator           |
| <code>atomics_to_string/2</code>      | Concatenate list of inputs to a string            |

---

|  |  |
|--|--|
| <code>atomics_to_string/3</code>           | Concatenate list of inputs to a string                         |
| <code>autoload/0</code>                    | Autoload all predicates now                                    |
| <code>autoload_path/1</code>               | Add directories for autoloading                                |
| <code>b_getval/2</code>                    | Fetch backtrackable global variable                            |
| <code>b_set_dict/3</code>                  | Destructive assignment on a dict                               |
| <code>b_setval/2</code>                    | Assign backtrackable global variable                           |
| <code>bagof/3</code>                       | Find all solutions to a goal                                   |
| <code>between/3</code>                     | Integer range checking/generating                              |
| <code>blob/2</code>                        | Type check for a blob  |
| <code>break/0</code>                       | Start interactive top level                                    |
| <code>break_hook/6</code>                  | (hook) Debugger hook   |
| <code>byte_count/2</code>                  | Byte-position in a stream                                      |
| <code>call/1</code>                        | Call a goal  |
| <code>call/[2..]</code>                    | Call with additional arguments                                 |
| <code>call_cleanup/3</code>                | Guard a goal with a cleanup-handler                            |
| <code>call_cleanup/2</code>                | Guard a goal with a cleanup-handler                            |
| <code>call_dcg/3</code>                    | As <code>phrase/3</code> without type checking                 |
| <code>call_residue_vars/2</code>           | Find residual attributed variables                             |
| <code>call_shared_object_function/2</code> | UNIX: Call C-function in shared (.so) file                     |
| <code>call_with_depth_limit/3</code>       | Prove goal with bounded depth                                  |
| <code>call_with_inference_limit/3</code>   | Prove goal in limited inferences                               |
| <code>callable/1</code>                    | Test for atom or compound term                                 |
| <code>cancel_halt/1</code>                 | Cancel <code>halt/0</code> from an <code>at_halt/1</code> hook |
| <code>catch/3</code>                       | Call goal, watching for exceptions                             |
| <code>char_code/2</code>                   | Convert between character and character code                   |
| <code>char_conversion/2</code>             | Provide mapping of input characters                            |
| <code>char_type/2</code>                   | Classify characters  |
| <code>character_count/2</code>             | Get character index on a stream                                |
| <code>chdir/1</code>                       | Compatibility: change working directory                        |
| <code>chr_constraint/1</code>              | CHR Constraint declaration                                     |
| <code>chr_show_store/1</code>              | List suspended CHR constraints                                 |
| <code>chr_trace/0</code>                   | Start CHR tracer   |
| <code>chr_type/1</code>                    | CHR Type declaration   |
| <code>chr_notrace/0</code>                 | Stop CHR tracer  |
| <code>chr_leash/1</code>                   | Define CHR leashed ports                                       |
| <code>chr_option/2</code>                  | Specify CHR compilation options                                |
| <code>clause/2</code>                      | Get clauses of a predicate                                     |
| <code>clause/3</code>                      | Get clauses of a predicate                                     |
| <code>clause_property/2</code>             | Get properties of a clause                                     |
| <code>close/1</code>                       | Close stream   |
| <code>close/2</code>                       | Close stream (forced)  |
| <code>close_dde_conversation/1</code>      | Win32: Close DDE channel                                       |
| <code>close_shared_object/1</code>         | UNIX: Close shared library (.so file)                          |
| <code>collation_key/2</code>               | Sort key for locale dependent ordering                         |
| <code>comment_hook/3</code>                | (hook) handle comments in sources                              |
| <code>compare/3</code>                     | Compare, using a predicate to determine the order              |
| <code>compile_aux_clauses/1</code>         | Compile predicates for <code>goal_expansion/2</code>           |

|  |  |
|--|--|
| <code>compile_predicates/1</code>          | Compile dynamic code to static                                 |
| <code>compiling/0</code>                   | Is this a compilation run?                                     |
| <code>compound/1</code>                    | Test for compound term   |
| <code>compound_name_arity/3</code>         | Name and arity of a compound term                              |
| <code>compound_name_arguments/3</code>     | Name and arguments of a compound term                          |
| <code>code_type/2</code>                   | Classify a character-code                                      |
| <code>consult/1</code>                     | Read (compile) a Prolog source file                            |
| <code>context_module/1</code>              | Get context module of current goal                             |
| <code>convert_time/8</code>                | Break time stamp into fields                                   |
| <code>convert_time/2</code>                | Convert time stamp to string                                   |
| <code>copy_stream_data/2</code>            | Copy all data from stream to stream                            |
| <code>copy_stream_data/3</code>            | Copy n bytes from stream to stream                             |
| <code>copy_predicate_clauses/2</code>      | Copy clauses between predicates                                |
| <code>copy_term/2</code>                   | Make a copy of a term  |
| <code>copy_term/3</code>                   | Copy a term and obtain attribute-goals                         |
| <code>copy_term_nat/2</code>               | Make a copy of a term without attributes                       |
| <code>create_prolog_flag/3</code>          | Create a new Prolog flag                                       |
| <code>current_arithmetic_function/1</code> | Examine evaluable functions                                    |
| <code>current_atom/1</code>                | Examine existing atoms   |
| <code>current_blob/2</code>                | Examine typed blobs  |
| <code>current_char_conversion/2</code>     | Query input character mapping                                  |
| <code>current_engine/1</code>              | Enumerate known engines  |
| <code>current_flag/1</code>                | Examine existing flags   |
| <code>current_foreign_library/2</code>     | <code>shlib</code> Examine loaded shared libraries (.so files) |
| <code>current_format_predicate/2</code>    | Enumerate user-defined format codes                            |
| <code>current_functor/2</code>             | Examine existing name/arity pairs                              |
| <code>current_input/1</code>               | Get current input stream                                       |
| <code>current_key/1</code>                 | Examine existing database keys                                 |
| <code>current_locale/1</code>              | Get the current locale   |
| <code>current_module/1</code>              | Examine existing modules                                       |
| <code>current_op/3</code>                  | Examine current operator declarations                          |
| <code>current_output/1</code>              | Get the current output stream                                  |
| <code>current_predicate/1</code>           | Examine existing predicates (ISO)                              |
| <code>current_predicate/2</code>           | Examine existing predicates                                    |
| <code>current_signal/3</code>              | Current software signal mapping                                |
| <code>current_stream/3</code>              | Examine open streams   |
| <code>current_table/2</code>               | Find answer table for a variant                                |
| <code>current_trie/1</code>                | Enumerate known tries  |
| <code>cyclic_term/1</code>                 | Test term for cycles   |
| <code>day_of_the_week/2</code>             | Determine ordinal-day from date                                |
| <code>date_time_stamp/2</code>             | Convert date structure to time-stamp                           |
| <code>date_time_value/3</code>             | Extract info from a date structure                             |
| <code>dcg_translate_rule/2</code>          | Source translation of DCG rules                                |
| <code>dcg_translate_rule/4</code>          | Source translation of DCG rules                                |
| <code>dde_current_connection/2</code>      | Win32: Examine open DDE connections                            |
| <code>dde_current_service/2</code>         | Win32: Examine DDE services provided                           |
| <code>dde_execute/2</code>                 | Win32: Execute command on DDE server                           |

|                          |  |
|--------------------------|--|
| dde_register_service/2   | Win32: Become a DDE server                     |
| dde_request/3            | Win32: Make a DDE request                      |
| dde_poke/3               | Win32: POKE operation on DDE server            |
| dde_unregister_service/1 | Win32: Terminate a DDE service                 |
| debug/0                  | Test for debugging mode                        |
| debug/1                  | Select topic for debugging                     |
| debug/3                  | Print debugging message on topic               |
| debug_control_hook/1     | (hook) Extend <code>spy/1</code> , etc.        |
| debugging/0              | Show debugger status                           |
| debugging/1              | Test where we are debugging topic              |
| default_module/2         | Query module inheritance                       |
| del_attr/2               | Delete attribute from variable                 |
| del_attrs/1              | Delete all attributes from variable            |
| del_dict/4               | Delete Key-Value pair from a dict              |
| delete_directory/1       | Remove a folder from the file system           |
| delete_file/1            | Remove a file from the file system             |
| delete_import_module/2   | Remove module from import list                 |
| deterministic/1          | Test deterministicy of current clause          |
| dif/2                    | Constrain two terms to be different            |
| directory_files/2        | Get entries of a directory/folder              |
| discontiguous/1          | Indicate distributed definition of a predicate |
| divmod/4                 | Compute quotient and remainder of two integers |
| downcase_atom/2          | Convert atom to lower-case                     |
| duplicate_term/2         | Create a copy of a term                        |
| dwim_match/2             | Atoms match in “Do What I Mean” sense          |
| dwim_match/3             | Atoms match in “Do What I Mean” sense          |
| dwim_predicate/2         | Find predicate in “Do What I Mean” sense       |
| dynamic/1                | Indicate predicate definition may change       |
| edit/0                   | Edit current script- or associated file        |
| edit/1                   | Edit a file, predicate, module (extensible)    |
| elif/1                   | Part of conditional compilation (directive)    |
| else/0                   | Part of conditional compilation (directive)    |
| empty_assoc/1            | Create/test empty association tree             |
| empty_nb_set/1           | Test/create an empty non-backtrackable set     |
| encoding/1               | Define encoding inside a source file           |
| endif/0                  | End of conditional compilation (directive)     |
| engine_create/3          | Create an interactor                           |
| engine_create/4          | Create an interactor                           |
| engine_destroy/1         | Destroy an interactor                          |
| engine_fetch/1           | Get term from caller                           |
| engine_next/2            | Ask interactor for next term                   |
| engine_next_reified/2    | Ask interactor for next term                   |
| engine_post/2            | Send term to an interactor                     |
| engine_post/3            | Send term to an interactor and wait for reply  |
| engine_self/1            | Get handle to running interactor               |
| engine_yield/1           | Make term available to caller                  |
| ensure_loaded/1          | Consult a file if that has not yet been done   |

|  |   |
|--|---|
| <code>erase/1</code>                   | Erase a database record or clause                         |
| <code>exception/3</code>               | (hook) Handle runtime exceptions                          |
| <code>exists_directory/1</code>        | Check existence of directory                              |
| <code>exists_file/1</code>             | Check existence of file                                   |
| <code>exists_source/1</code>           | Check existence of a Prolog source                        |
| <code>expand_answer/2</code>           | Expand answer of query                                    |
| <code>expand_file_name/2</code>        | Wildcard expansion of file names                          |
| <code>expand_file_search_path/2</code> | Wildcard expansion of file paths                          |
| <code>expand_goal/2</code>             | Compiler: expand goal in clause-body                      |
| <code>expand_goal/4</code>             | Compiler: expand goal in clause-body                      |
| <code>expand_query/4</code>            | Expanded entered query                                    |
| <code>expand_term/2</code>             | Compiler: expand read term into clause(s)                 |
| <code>expand_term/4</code>             | Compiler: expand read term into clause(s)                 |
| <code>expects_dialect/1</code>         | For which Prolog dialect is this code written?            |
| <code>explain/1</code>                 | <code>explain</code> Explain argument                     |
| <code>explain/2</code>                 | <code>explain</code> 2nd argument is explanation of first |
| <code>export/1</code>                  | Export a predicate from a module                          |
| <code>fail/0</code>                    | Always false  |
| <code>false/0</code>                   | Always false  |
| <code>fast_term_serialized/2</code>    | Fast term (de-)serialization                              |
| <code>fast_read/2</code>               | Read binary term serialization                            |
| <code>fast_write/2</code>              | Write binary term serialization                           |
| <code>current_prolog_flag/2</code>     | Get system configuration parameters                       |
| <code>file_base_name/2</code>          | Get file part of path                                     |
| <code>file_directory_name/2</code>     | Get directory part of path                                |
| <code>file_name_extension/3</code>     | Add, remove or test file extensions                       |
| <code>file_search_path/2</code>        | Define path-aliases for locating files                    |
| <code>find_chr_constraint/1</code>     | Returns a constraint from the store                       |
| <code>findall/3</code>                 | Find all solutions to a goal                              |
| <code>findall/4</code>                 | Difference list version of <code>findall</code> /3        |
| <code>findnsols/4</code>               | Find first <i>N</i> solutions                             |
| <code>findnsols/5</code>               | Difference list version of <code>findnsols</code> /4      |
| <code>fill_buffer/1</code>             | Fill the input buffer of a stream                         |
| <code>flag/3</code>                    | Simple global variable system                             |
| <code>float/1</code>                   | Type check for a floating point number                    |
| <code>flush_output/0</code>            | Output pending characters on current stream               |
| <code>flush_output/1</code>            | Output pending characters on specified stream             |
| <code>forall/2</code>                  | Prove goal for all solutions of another goal              |
| <code>format/1</code>                  | Formatted output  |
| <code>format/2</code>                  | Formatted output with arguments                           |
| <code>format/3</code>                  | Formatted output on a stream                              |
| <code>format_time/3</code>             | C <code>strftime()</code> like date/time formatter        |
| <code>format_time/4</code>             | date/time formatter with explicit locale                  |
| <code>format_predicate/2</code>        | Program <code>format/[1, 2]</code>                        |
| <code>term_attvars/2</code>            | Find attributed variables in a term                       |
| <code>term_variables/2</code>          | Find unbound variables in a term                          |
| <code>term_variables/3</code>          | Find unbound variables in a term                          |

|  |  |
|--|--|
| <code>text_to_string/2</code>          | Convert arbitrary text to a string               |
| <code>freeze/2</code>                  | Delay execution until variable is bound          |
| <code>frozen/2</code>                  | Query delayed goals on var                       |
| <code>functor/3</code>                 | Get name and arity of a term or construct a term |
| <code>garbage_collect/0</code>         | Invoke the garbage collector                     |
| <code>garbage_collect_atoms/0</code>   | Invoke the atom garbage collector                |
| <code>garbage_collect_clauses/0</code> | Invoke clause garbage collector                  |
| <code>gen_assoc/3</code>               | Enumerate members of association tree            |
| <code>gen_nb_set/2</code>              | Generate members of non-backtrackable set        |
| <code>gensym/2</code>                  | Generate unique atoms from a base                |
| <code>get/1</code>                     | Read first non-blank character                   |
| <code>get/2</code>                     | Read first non-blank character from a stream     |
| <code>get_assoc/3</code>               | Fetch key from association tree                  |
| <code>get_assoc/5</code>               | Fetch key from association tree                  |
| <code>get_attr/3</code>                | Fetch named attribute from a variable            |
| <code>get_attrs/2</code>               | Fetch all attributes of a variable               |
| <code>get_byte/1</code>                | Read next byte (ISO)                             |
| <code>get_byte/2</code>                | Read next byte from a stream (ISO)               |
| <code>get_char/1</code>                | Read next character as an atom (ISO)             |
| <code>get_char/2</code>                | Read next character from a stream (ISO)          |
| <code>get_code/1</code>                | Read next character (ISO)                        |
| <code>get_code/2</code>                | Read next character from a stream (ISO)          |
| <code>get_dict/3</code>                | Get the value associated to a key from a dict    |
| <code>get_dict_ex/3</code>             | Get the value associated to a key from a dict    |
| <code>get_dict/5</code>                | Replace existing value in a dict                 |
| <code>get_flag/2</code>                | Get value of a flag                              |
| <code>get_single_char/1</code>         | Read next character from the terminal            |
| <code>get_string_code/3</code>         | Get character code at index in string            |
| <code>get_time/1</code>                | Get current time                                 |
| <code>get0/1</code>                    | Read next character                              |
| <code>get0/2</code>                    | Read next character from a stream                |
| <code>getenv/2</code>                  | Get shell environment variable                   |
| <code>goal_expansion/2</code>          | Hook for macro-expanding goals                   |
| <code>goal_expansion/4</code>          | Hook for macro-expanding goals                   |
| <code>ground/1</code>                  | Verify term holds no unbound variables           |
| <code>gdebug/0</code>                  | Debug using graphical tracer                     |
| <code>gspy/1</code>                    | Spy using graphical tracer                       |
| <code>gtrace/0</code>                  | Trace using graphical tracer                     |
| <code>guitracer/0</code>               | Install hooks for the graphical debugger         |
| <code>gxref/0</code>                   | Cross-reference loaded program                   |
| <code>halt/0</code>                    | Exit from Prolog                                 |
| <code>halt/1</code>                    | Exit from Prolog with status                     |
| <code>term_hash/2</code>               | Hash-value of ground term                        |
| <code>term_hash/4</code>               | Hash-value of term with depth limit              |
| <code>help/0</code>                    | Give help on help                                |
| <code>help/1</code>                    | Give help on predicates and show parts of manual |
| <code>help_hook/1</code>               | (hook) User-hook in the help-system              |

---

|                         |   |
|-------------------------|---|
| if/1                    | Start conditional compilation (directive)   |
| ignore/1                | Call the argument, but always succeed       |
| import/1                | Import a predicate from a module            |
| import_module/2         | Query import modules                        |
| in_pce_thread/1         | Run goal in XPCE thread                     |
| in_pce_thread_sync/1    | Run goal in XPCE thread                     |
| include/1               | Include a file with declarations            |
| initialization/1        | Initialization directive                    |
| initialization/2        | Initialization directive                    |
| initialize/0            | Run program initialization                  |
| instance/2              | Fetch clause or record from reference       |
| integer/1               | Type check for integer                      |
| interactor/0            | Start new thread with console and top level |
| is/2                    | Evaluate arithmetic expression              |
| is_absolute_file_name/1 | True if arg defines an absolute path        |
| is_assoc/1              | Verify association list                     |
| is_engine/1             | Type check for an engine handle             |
| is_list/1               | Type check for a list                       |
| is_dict/1               | Type check for a dict                       |
| is_dict/2               | Type check for a dict in a class            |
| is_stream/1             | Type check for a stream handle              |
| is_trie/1               | Type check for a trie handle                |
| is_thread/1             | Type check for an thread handle             |
| join_threads/0          | Join all terminated threads interactively   |
| keysort/2               | Sort, using a key                           |
| known_licenses/0        | Print known licenses                        |
| last/2                  | Last element of a list                      |
| leash/1                 | Change ports visited by the tracer          |
| length/2                | Length of a list                            |
| library_directory/1     | (hook) Directories holding Prolog libraries |
| license/0               | Evaluate licenses of loaded modules         |
| license/1               | Define license for current file             |
| license/2               | Define license for named module             |
| line_count/2            | Line number on stream                       |
| line_position/2         | Character position in line on stream        |
| list_debug_topics/0     | List registered topics for debugging        |
| list_to_assoc/2         | Create association tree from list           |
| list_to_set/2           | Remove duplicates from a list               |
| list_strings/0          | Help porting to version 7                   |
| listing/0               | List program in current module              |
| listing/1               | List predicate                              |
| load_files/1            | Load source files                           |
| load_files/2            | Load source files with options              |
| load_foreign_library/1  | shlib Load shared library (.so file)        |
| load_foreign_library/2  | shlib Load shared library (.so file)        |
| locale_create/3         | Create a new locale object                  |
| locale_destroy/1        | Destroy a locale object                     |

---



|                                       |   |
|---------------------------------------|---|
| <code>locale_property/2</code>        | Query properties of locale objects                  |
| <code>locale_sort/2</code>            | Language dependent sort of atoms                    |
| <code>make/0</code>                   | Reconsult all changed source files                  |
| <code>make_directory/1</code>         | Create a folder on the file system                  |
| <code>make_library_index/1</code>     | Create autoload file INDEX.pl                       |
| <code>make_library_index/2</code>     | Create selective autoload file INDEX.pl             |
| <code>map_assoc/2</code>              | Map association tree                                |
| <code>map_assoc/3</code>              | Map association tree                                |
| <code>dict_create/3</code>            | Create a dict from data                             |
| <code>dict_pairs/3</code>             | Convert between dict and list of pairs              |
| <code>max_assoc/3</code>              | Highest key in association tree                     |
| <code>memberchk/2</code>              | Deterministic member/2                              |
| <code>message_hook/3</code>           | Intercept <code>print_message/2</code>              |
| <code>message_line_element/2</code>   | (hook) Intercept <code>print_message_lines/3</code> |
| <code>message_property/2</code>       | (hook) Define display of a message                  |
| <code>message_queue_create/1</code>   | Create queue for thread communication               |
| <code>message_queue_create/2</code>   | Create queue for thread communication               |
| <code>message_queue_destroy/1</code>  | Destroy queue for thread communication              |
| <code>message_queue_property/2</code> | Query message queue properties                      |
| <code>message_to_string/2</code>      | Translate message-term to string                    |
| <code>meta_predicate/1</code>         | Declare access to other predicates                  |
| <code>min_assoc/3</code>              | Lowest key in association tree                      |
| <code>module/1</code>                 | Query/set current type-in module                    |
| <code>module/2</code>                 | Declare a module                                    |
| <code>module/3</code>                 | Declare a module with language options              |
| <code>module_property/2</code>        | Find properties of a module                         |
| <code>module_transparent/1</code>     | Indicate module based meta-predicate                |
| <code>msort/2</code>                  | Sort, do not remove duplicates                      |
| <code>multifile/1</code>              | Indicate distributed definition of predicate        |
| <code>mutex_create/1</code>           | Create a thread-synchronisation device              |
| <code>mutex_create/2</code>           | Create a thread-synchronisation device              |
| <code>mutex_destroy/1</code>          | Destroy a mutex                                     |
| <code>mutex_lock/1</code>             | Become owner of a mutex                             |
| <code>mutex_property/2</code>         | Query mutex properties                              |
| <code>mutex_statistics/0</code>       | Print statistics on mutex usage                     |
| <code>mutex_trylock/1</code>          | Become owner of a mutex (non-blocking)              |
| <code>mutex_unlock/1</code>           | Release ownership of mutex                          |
| <code>mutex_unlock_all/0</code>       | Release ownership of all mutexes                    |
| <code>name/2</code>                   | Convert between atom and list of character codes    |
| <code>nb_current/2</code>             | Enumerate non-backtrackable global variables        |
| <code>nb_delete/1</code>              | Delete a non-backtrackable global variable          |
| <code>nb_getval/2</code>              | Fetch non-backtrackable global variable             |
| <code>nb_link_dict/3</code>           | Non-backtrackable assignment to dict                |
| <code>nb_linkarg/3</code>             | Non-backtrackable assignment to term                |
| <code>nb_linkval/2</code>             | Assign non-backtrackable global variable            |
| <code>nb_set_to_list/2</code>         | Convert non-backtrackable set to list               |
| <code>nb_set_dict/3</code>            | Non-backtrackable assignment to dict                |

|   |  |
|---|--|
| <code>nb_setarg/3</code>                      | Non-backtrackable assignment to term                                   |
| <code>nb_setval/2</code>                      | Assign non-backtrackable global variable                               |
| <code>nl/0</code>                             | Generate a newline   |
| <code>nl/1</code>                             | Generate a newline on a stream   |
| <code>nodebug/0</code>                        | Disable debugging  |
| <code>nodebug/1</code>                        | Disable debug-topic  |
| <code>noguitracer/0</code>                    | Disable the graphical debugger   |
| <code>nonground/2</code>                      | Term is not ground due to witness                                      |
| <code>nonvar/1</code>                         | Type check for bound term  |
| <code>nonterminal/1</code>                    | Set predicate property   |
| <code>noprofile/1</code>                      | Hide (meta-) predicate for the profiler                                |
| <code>noprotocol/0</code>                     | Disable logging of user interaction                                    |
| <code>normalize_space/2</code>                | Normalize white space  |
| <code>nospy/1</code>                          | Remove spy point   |
| <code>nospyall/0</code>                       | Remove all spy points  |
| <code>not/1</code>                            | Negation by failure (argument not provable). Same as <code>\+/1</code> |
| <code>notrace/0</code>                        | Stop tracing   |
| <code>notrace/1</code>                        | Do not debug argument goal   |
| <code>nth_clause/3</code>                     | N-th clause of a predicate   |
| <code>nth_integer_root_and_remainder/4</code> | Integer root and remainder   |
| <code>number/1</code>                         | Type check for integer or float  |
| <code>number_chars/2</code>                   | Convert between number and one-char atoms                              |
| <code>number_codes/2</code>                   | Convert between number and character codes                             |
| <code>number_string/2</code>                  | Convert between number and string                                      |
| <code>numbervars/3</code>                     | Number unbound variables of a term                                     |
| <code>numbervars/4</code>                     | Number unbound variables of a term                                     |
| <code>on_signal/3</code>                      | Handle a software signal   |
| <code>once/1</code>                           | Call a goal deterministically  |
| <code>op/3</code>                             | Declare an operator  |
| <code>open/3</code>                           | Open a file (creating a stream)  |
| <code>open/4</code>                           | Open a file (creating a stream)  |
| <code>open_dde_conversation/3</code>          | Win32: Open DDE channel  |
| <code>open_null_stream/1</code>               | Open a stream to discard output  |
| <code>open_resource/3</code>                  | Open a program resource as a stream                                    |
| <code>open_shared_object/2</code>             | UNIX: Open shared library (.so file)                                   |
| <code>open_shared_object/3</code>             | UNIX: Open shared library (.so file)                                   |
| <code>open_string/2</code>                    | Open a string as a stream  |
| <code>ord_list_to_assoc/2</code>              | Convert ordered list to assoc  |
| <code>parse_time/2</code>                     | Parse text to a time-stamp   |
| <code>parse_time/3</code>                     | Parse text to a time-stamp   |
| <code>pce_dispatch/1</code>                   | Run XPCE GUI in separate thread  |
| <code>pce_call/1</code>                       | Run goal in XPCE GUI thread  |
| <code>peek_byte/1</code>                      | Read byte without removing   |
| <code>peek_byte/2</code>                      | Read byte without removing   |
| <code>peek_char/1</code>                      | Read character without removing  |
| <code>peek_char/2</code>                      | Read character without removing  |
| <code>peek_code/1</code>                      | Read character-code without removing                                   |

|  |   |
|--|---|
| <code>peek_code/2</code>                   | Read character-code without removing            |
| <code>peek_string/3</code>                 | Read a string without removing                  |
| <code>phrase/2</code>                      | Activate grammar-rule set                       |
| <code>phrase/3</code>                      | Activate grammar-rule set (returning rest)      |
| <code>phrase_from_quasi_quotation/2</code> | Parse quasi quotation with DCG                  |
| <code>please/3</code>                      | Query/change environment parameters             |
| <code>plus/3</code>                        | Logical integer addition                        |
| <code>portray/1</code>                     | (hook) Modify behaviour of <code>print/1</code> |
| <code>portray_clause/1</code>              | Pretty print a clause                           |
| <code>portray_clause/2</code>              | Pretty print a clause to a stream               |
| <code>predicate_property/2</code>          | Query predicate attributes                      |
| <code>predsort/3</code>                    | Sort, using a predicate to determine the order  |
| <code>print/1</code>                       | Print a term                                    |
| <code>print/2</code>                       | Print a term on a stream                        |
| <code>print_message/2</code>               | Print message from (exception) term             |
| <code>print_message_lines/3</code>         | Print message to stream                         |
| <code>profile/1</code>                     | Obtain execution statistics                     |
| <code>profile/2</code>                     | Obtain execution statistics                     |
| <code>profile_count/3</code>               | Obtain profile results on a predicate           |
| <code>profiler/2</code>                    | Obtain/change status of the profiler            |
| <code>prolog/0</code>                      | Run interactive top level                       |
| <code>prolog_alert_signal/2</code>         | Query/set unblock signal                        |
| <code>prolog_choice_attribute/3</code>     | Examine the choice point stack                  |
| <code>prolog_current_choice/1</code>       | Reference to most recent choice point           |
| <code>prolog_current_frame/1</code>        | Reference to goal's environment stack           |
| <code>prolog_cut_to/1</code>               | Realise global cuts                             |
| <code>prolog_edit:locate/2</code>          | Locate targets for <code>edit/1</code>          |
| <code>prolog_edit:locate/3</code>          | Locate targets for <code>edit/1</code>          |
| <code>prolog_edit:edit_source/1</code>     | Call editor for <code>edit/1</code>             |
| <code>prolog_edit:edit_command/2</code>    | Specify editor activation                       |
| <code>prolog_edit:load/0</code>            | Load <code>edit/1</code> extensions             |
| <code>prolog_exception_hook/4</code>       | Rewrite exceptions                              |
| <code>prolog_file_type/2</code>            | Define meaning of file extension                |
| <code>prolog_frame_attribute/3</code>      | Obtain information on a goal environment        |
| <code>prolog_ide/1</code>                  | Program access to the development environment   |
| <code>prolog_list_goal/1</code>            | (hook) Intercept tracer 'L' command             |
| <code>prolog_load_context/2</code>         | Context information for directives              |
| <code>prolog_load_file/2</code>            | (hook) Program <code>load_files/2</code>        |
| <code>prolog_skip_level/2</code>           | Indicate deepest recursion to trace             |
| <code>prolog_skip_frame/1</code>           | Perform 'skip' on a frame                       |
| <code>prolog_stack_property/2</code>       | Query properties of the stacks                  |
| <code>prolog_to_os_filename/2</code>       | Convert between Prolog and OS filenames         |
| <code>prolog_trace_interception/4</code>   | <code>user</code> Intercept the Prolog tracer   |
| <code>project_attributes/2</code>          | Project constraints to query variables          |
| <code>prompt1/1</code>                     | Change prompt for 1 line                        |
| <code>prompt/2</code>                      | Change the prompt used by <code>read/1</code>   |
| <code>protocol/1</code>                    | Make a log of the user interaction              |

---

|                                |  |
|--------------------------------|--|
| protocola/1                    | Append log of the user interaction to file       |
| protocolling/1                 | On what file is user interaction logged          |
| public/1                       | Declaration that a predicate may be called       |
| put/1                          | Write a character                                |
| put/2                          | Write a character on a stream                    |
| put_assoc/4                    | Add Key-Value to association tree                |
| put_attr/3                     | Put attribute on a variable                      |
| put_attrs/2                    | Set/replace all attributes on a variable         |
| put_byte/1                     | Write a byte                                     |
| put_byte/2                     | Write a byte on a stream                         |
| put_char/1                     | Write a character                                |
| put_char/2                     | Write a character on a stream                    |
| put_code/1                     | Write a character-code                           |
| put_code/2                     | Write a character-code on a stream               |
| put_dict/3                     | Add/replace multiple keys in a dict              |
| put_dict/4                     | Add/replace a single key in a dict               |
| qcompile/1                     | Compile source to Quick Load File                |
| qcompile/2                     | Compile source to Quick Load File                |
| qsave_program/1                | Create runtime application                       |
| qsave_program/2                | Create runtime application                       |
| quasi_quotation_syntax/1       | Declare quasi quotation syntax                   |
| quasi_quotation_syntax_error/1 | Raise syntax error                               |
| random_property/1              | Query properties of random generation            |
| rational/1                     | Type check for a rational number                 |
| rational/3                     | Decompose a rational                             |
| read/1                         | Read Prolog term                                 |
| read/2                         | Read Prolog term from stream                     |
| read_clause/3                  | Read clause from stream                          |
| read_history/6                 | Read using history substitution                  |
| read_link/3                    | Read a symbolic link                             |
| read_pending_codes/3           | Fetch buffered input from a stream               |
| read_pending_chars/3           | Fetch buffered input from a stream               |
| read_string/3                  | Read a number of characters into a string        |
| read_string/5                  | Read string upto a delimiter                     |
| read_term/2                    | Read term with options                           |
| read_term/3                    | Read term with options from stream               |
| read_term_from_atom/3          | Read term with options from atom                 |
| recorda/2                      | Record term in the database (first)              |
| recorda/3                      | Record term in the database (first)              |
| recorded/2                     | Obtain term from the database                    |
| recorded/3                     | Obtain term from the database                    |
| recordz/2                      | Record term in the database (last)               |
| recordz/3                      | Record term in the database (last)               |
| redefine_system_predicate/1    | Abolish system definition                        |
| reexport/1                     | Load files and re-export the imported predicates |
| reexport/2                     | Load predicates from a file and re-export it     |
| reload_foreign_libraries/0     | Reload DLLs/shared objects                       |

---

|   |   |
|---|---|
| <code>reload_library_index/0</code>       | Force reloading the autoload index                |
| <code>rename_file/2</code>                | Change name of file                               |
| <code>repeat/0</code>                     | Succeed, leaving infinite backtrack points        |
| <code>require/1</code>                    | This file requires these predicates               |
| <code>reset/3</code>                      | Wrapper for delimited continuations               |
| <code>reset_gensym/1</code>               | Reset a gensym key                                |
| <code>reset_gensym/0</code>               | Reset all gensym keys                             |
| <code>reset_profiler/0</code>             | Clear statistics obtained by the profiler         |
| <code>resource/2</code>                   | Declare a program resource                        |
| <code>resource/3</code>                   | Declare a program resource                        |
| <code>retract/1</code>                    | Remove clause from the database                   |
| <code>retractall/1</code>                 | Remove unifying clauses from the database         |
| <code>same_file/2</code>                  | Succeeds if arguments refer to same file          |
| <code>same_term/2</code>                  | Test terms to be at the same address              |
| <code>see/1</code>                        | Change the current input stream                   |
| <code>seeing/1</code>                     | Query the current input stream                    |
| <code>seek/4</code>                       | Modify the current position in a stream           |
| <code>seen/0</code>                       | Close the current input stream                    |
| <code>select_dict/2</code>                | Select matching attributes from a dict            |
| <code>select_dict/3</code>                | Select matching attributes from a dict            |
| <code>set_end_of_stream/1</code>          | Set physical end of an open file                  |
| <code>set_flag/2</code>                   | Set value of a flag                               |
| <code>set_input/1</code>                  | Set current input stream from a stream            |
| <code>set_locale/1</code>                 | Set the default local                             |
| <code>set_module/1</code>                 | Set properties of a module                        |
| <code>set_output/1</code>                 | Set current output stream from a stream           |
| <code>set_prolog_IO/3</code>              | Prepare streams for interactive session           |
| <code>set_prolog_flag/2</code>            | Define a system feature                           |
| <code>set_prolog_gc_thread/1</code>       | Control the gc thread                             |
| <code>set_prolog_stack/2</code>           | Modify stack characteristics                      |
| <code>set_random/1</code>                 | Control random number generation                  |
| <code>set_stream/2</code>                 | Set stream attribute                              |
| <code>set_stream_position/2</code>        | Seek stream to position                           |
| <code>setup_call_cleanup/3</code>         | Undo side-effects safely                          |
| <code>setup_call_catcher_cleanup/4</code> | Undo side-effects safely                          |
| <code>setarg/3</code>                     | Destructive assignment on term                    |
| <code>setenv/2</code>                     | Set shell environment variable                    |
| <code>setlocale/3</code>                  | Set/query C-library regional information          |
| <code>setof/3</code>                      | Find all unique solutions to a goal               |
| <code>shell/1</code>                      | Execute OS command                                |
| <code>shell/2</code>                      | Execute OS command                                |
| <code>shift/1</code>                      | Shift control to the closest <code>reset/3</code> |
| <code>show_profile/1</code>               | Show results of the profiler                      |
| <code>size_file/2</code>                  | Get size of a file in characters                  |
| <code>size_nb_set/2</code>                | Determine size of non-backtrackable set           |
| <code>skip/1</code>                       | Skip to character in current input                |
| <code>skip/2</code>                       | Skip to character on stream                       |

|                        |   |
|------------------------|---|
| sleep/1                | Suspend execution for specified time                  |
| sort/2                 | Sort elements in a list                               |
| sort/4                 | Sort elements in a list                               |
| source_exports/2       | Check whether source exports a predicate              |
| source_file/1          | Examine currently loaded source files                 |
| source_file/2          | Obtain source file of predicate                       |
| source_file_property/2 | Information about loaded files                        |
| source_location/2      | Location of last read term                            |
| split_string/4         | Break a string into substrings                        |
| spy/1                  | Force tracer on specified predicate                   |
| stamp_date_time/3      | Convert time-stamp to date structure                  |
| statistics/0           | Show execution statistics                             |
| statistics/2           | Obtain collected statistics                           |
| stream_pair/3          | Create/examine a bi-directional stream                |
| stream_position_data/3 | Access fields from stream position                    |
| stream_property/2      | Get stream properties                                 |
| string/1               | Type check for string                                 |
| string_concat/3        | atom_concat / 3 for strings                           |
| string_length/2        | Determine length of a string                          |
| string_chars/2         | Conversion between string and list of characters      |
| string_codes/2         | Conversion between string and list of character codes |
| string_code/3          | Get or find a character code in a string              |
| string_lower/2         | Case conversion to lower case                         |
| string_upper/2         | Case conversion to upper case                         |
| string_predicate/1     | (hook) Predicate contains strings                     |
| strip_module/3         | Extract context module and term                       |
| style_check/1          | Change level of warnings                              |
| sub_atom/5             | Take a substring from an atom                         |
| sub_atom_icasechk/3    | Case insensitive substring match                      |
| sub_string/5           | Take a substring from a string                        |
| subsumes_term/2        | One-sided unification test                            |
| succ/2                 | Logical integer successor relation                    |
| swritef/2              | Formatted write on a string                           |
| swritef/3              | Formatted write on a string                           |
| tab/1                  | Output number of spaces                               |
| tab/2                  | Output number of spaces on a stream                   |
| table/1                | Declare predicate to be tabled                        |
| tdebug/0               | Switch all threads into debug mode                    |
| tdebug/1               | Switch a thread into debug mode                       |
| tell/1                 | Change current output stream                          |
| telling/1              | Query current output stream                           |
| term_expansion/2       | (hook) Convert term before compilation                |
| term_expansion/4       | (hook) Convert term before compilation                |
| term_singletons/2      | Find singleton variables in a term                    |
| term_string/2          | Read/write a term from/to a string                    |
| term_string/3          | Read/write a term from/to a string                    |
| term_subsumer/3        | Most specific generalization of two terms             |

|                                      |   |
|--------------------------------------|---|
| <code>term_to_atom/2</code>          | Convert between term and atom                   |
| <code>thread_affinity/3</code>       | Query and control the <i>affinity</i> mask      |
| <code>thread_at_exit/1</code>        | Register goal to be called at exit              |
| <code>thread_create/2</code>         | Create a new Prolog task                        |
| <code>thread_create/3</code>         | Create a new Prolog task                        |
| <code>thread_detach/1</code>         | Make thread cleanup after completion            |
| <code>thread_exit/1</code>           | Terminate Prolog task with value                |
| <code>thread_get_message/1</code>    | Wait for message                                |
| <code>thread_get_message/2</code>    | Wait for message in a queue                     |
| <code>thread_get_message/3</code>    | Wait for message in a queue                     |
| <code>thread_initialization/1</code> | Run action at start of thread                   |
| <code>thread_join/1</code>           | Wait for Prolog task-completion                 |
| <code>thread_join/2</code>           | Wait for Prolog task-completion                 |
| <code>thread_local/1</code>          | Declare thread-specific clauses for a predicate |
| <code>thread_message_hook/3</code>   | Thread local <code>message_hook/3</code>        |
| <code>thread_peek_message/1</code>   | Test for message                                |
| <code>thread_peek_message/2</code>   | Test for message in a queue                     |
| <code>thread_property/2</code>       | Examine Prolog threads                          |
| <code>thread_self/1</code>           | Get identifier of current thread                |
| <code>thread_send_message/2</code>   | Send message to another thread                  |
| <code>thread_send_message/3</code>   | Send message to another thread                  |
| <code>thread_setconcurrency/2</code> | Number of active threads                        |
| <code>thread_signal/2</code>         | Execute goal in another thread                  |
| <code>thread_statistics/3</code>     | Get statistics of another thread                |
| <code>threads/0</code>               | List running threads                            |
| <code>throw/1</code>                 | Raise an exception (see <code>catch/3</code> )  |
| <code>time/1</code>                  | Determine time needed to execute goal           |
| <code>time_file/2</code>             | Get last modification time of file              |
| <code>tmp_file/2</code>              | Create a temporary filename                     |
| <code>tmp_file_stream/3</code>       | Create a temporary file and open it             |
| <code>tndebug/0</code>               | Switch off debug mode in all threads            |
| <code>tndebug/1</code>               | Switch off debug mode in a thread               |
| <code>told/0</code>                  | Close current output                            |
| <code>tprofile/1</code>              | Profile a thread for some period                |
| <code>trace/0</code>                 | Start the tracer                                |
| <code>trace/1</code>                 | Set trace point on predicate                    |
| <code>trace/2</code>                 | Set/Clear trace point on ports                  |
| <code>tracing/0</code>               | Query status of the tracer                      |
| <code>trie_delete/3</code>           | Remove term from trie                           |
| <code>trie_destroy/1</code>          | Destroy a trie                                  |
| <code>trie_gen/3</code>              | Get all terms from a trie                       |
| <code>trie_insert/3</code>           | Insert term into a trie                         |
| <code>trie_insert/4</code>           | Insert term into a trie                         |
| <code>trie_lookup/3</code>           | Lookup a term in a trie                         |
| <code>trie_new/1</code>              | Create a trie                                   |
| <code>trie_property/2</code>         | Examine a trie's properties                     |
| <code>trie_update/3</code>           | Update associated value in trie                 |

|                            |   |
|----------------------------|---|
| trie_term/2                | Get term from a trie by handle                    |
| trim_stacks/0              | Release unused memory resources                   |
| true/0                     | Succeed   |
| tspy/1                     | Set spy point and enable debugging in all threads |
| tspy/2                     | Set spy point and enable debugging in a thread    |
| tty_get_capability/3       | Get terminal parameter                            |
| tty_goto/2                 | Goto position on screen                           |
| tty_put/2                  | Write control string to terminal                  |
| tty_size/2                 | Get row/column size of the terminal               |
| ttyflush/0                 | Flush output on terminal                          |
| unify_with_occurs_check/2  | Logically sound unification                       |
| unifiable/3                | Determining binding required for unification      |
| unix/1                     | OS interaction                                    |
| unknown/2                  | Trap undefined predicates                         |
| unload_file/1              | Unload a source file                              |
| unload_foreign_library/1   | shlib Detach shared library (.so file)            |
| unload_foreign_library/2   | shlib Detach shared library (.so file)            |
| unsetenv/1                 | Delete shell environment variable                 |
| upcase_atom/2              | Convert atom to upper-case                        |
| use_foreign_library/1      | Load DLL/shared object (directive)                |
| use_foreign_library/2      | Load DLL/shared object (directive)                |
| use_module/1               | Import a module                                   |
| use_module/2               | Import predicates from a module                   |
| valid_string_goal/1        | (hook) Goal handles strings                       |
| var/1                      | Type check for unbound variable                   |
| var_number/2               | Check that var is numbered by numbervars          |
| var_property/2             | Variable properties during macro expansion        |
| variant_sha1/2             | Term-hash for term-variants                       |
| variant_hash/2             | Term-hash for term-variants                       |
| version/0                  | Print system banner message                       |
| version/1                  | Add messages to the system banner                 |
| visible/1                  | Ports that are visible in the tracer              |
| volatile/1                 | Predicates that are not saved                     |
| wait_for_input/3           | Wait for input with optional timeout              |
| when/2                     | Execute goal when condition becomes true          |
| wildcard_match/2           | Csh(1) style wildcard match                       |
| win_add_dll_directory/1    | Add directory to DLL search path                  |
| win_add_dll_directory/2    | Add directory to DLL search path                  |
| win_remove_dll_directory/1 | Remove directory from DLL search path             |
| win_exec/2                 | Win32: spawn Windows task                         |
| win_has_menu/0             | Win32: true if console menu is available          |
| win_folder/2               | Win32: get special folder by CSIDL                |
| win_insert_menu/2          | swipl-win.exe: add menu                           |
| win_insert_menu_item/4     | swipl-win.exe: add item to menu                   |
| win_shell/2                | Win32: open document through Shell                |
| win_shell/3                | Win32: open document through Shell                |
| win_registry_get_value/3   | Win32: get registry value                         |



---

|   |  |
|---|--|
| <code>win_window_pos/1</code>             | Win32: change size and position of window              |
| <code>window_title/2</code>               | Win32: change title of window                          |
| <code>with_mutex/2</code>                 | Run goal while holding mutex                           |
| <code>with_output_to/2</code>             | Write to strings and more                              |
| <code>with_quasi_quotation_input/3</code> | Parse quasi quotation from stream                      |
| <code>working_directory/2</code>          | Query/change CWD                                       |
| <code>write/1</code>                      | Write term   |
| <code>write/2</code>                      | Write term to stream                                   |
| <code>writeln/1</code>                    | Write term, followed by a newline                      |
| <code>writeln/2</code>                    | Write term, followed by a newline to a stream          |
| <code>write_canonical/1</code>            | Write a term with quotes, ignore operators             |
| <code>write_canonical/2</code>            | Write a term with quotes, ignore operators on a stream |
| <code>write_length/3</code>               | Determine #characters to output a term                 |
| <code>write_term/2</code>                 | Write term with options                                |
| <code>write_term/3</code>                 | Write term with options to stream                      |
| <code>writeln/1</code>                    | Formatted write  |
| <code>writeln/2</code>                    | Formatted write on stream                              |
| <code>writeq/1</code>                     | Write term, insert quotes                              |
| <code>writeq/2</code>                     | Write term, insert quotes on stream                    |

## F.2 Library predicates

### F.2.1 library(aggregate)

|                  |   |
|------------------|---|
| aggregate/3      | Aggregate bindings in Goal according to Template. |
| aggregate/4      | Aggregate bindings in Goal according to Template. |
| aggregate_all/3  | Aggregate bindings in Goal according to Template. |
| aggregate_all/4  | Aggregate bindings in Goal according to Template. |
| foreach/2        | True if conjunction of results is true.           |
| free_variables/4 | Find free variables in bagof/setof template.      |

### F.2.2 library(ansi\_term)

|               |                                   |
|---------------|-----------------------------------|
| ansi_format/3 | Format text with ANSI attributes. |
|---------------|-----------------------------------|

### F.2.3 library(apply)

|             |  |
|-------------|--|
| convlist/3  | Similar to maplist/3, but elements for which call(Goal, ElemIn, _) fails are omitted from ListOut. |
| exclude/3   | Filter elements for which Goal fails.  |
| foldl/4     | Fold a list, using arguments of the list as left argument.   |
| foldl/5     | Fold a list, using arguments of the list as left argument.   |
| foldl/6     | Fold a list, using arguments of the list as left argument.   |
| foldl/7     | Fold a list, using arguments of the list as left argument.   |
| include/3   | Filter elements for which Goal succeeds.   |
| maplist/2   | True if Goal can successfully be applied on all elements of List.                                  |
| maplist/3   | As maplist/2, operating on pairs of elements from two lists.                                       |
| maplist/4   | As maplist/2, operating on triples of elements from three lists.                                   |
| maplist/5   | As maplist/2, operating on quadruples of elements from four lists.                                 |
| partition/4 | Filter elements of List according to Pred.   |
| partition/5 | Filter List according to Pred in three sets.   |
| scanl/4     | Left scan of list.   |
| scanl/5     | Left scan of list.   |
| scanl/6     | Left scan of list.   |
| scanl/7     | Left scan of list.   |

### F.2.4 library(assoc)

|                   |  |
|-------------------|--|
| assoc_to_list/2   | Translate assoc into a pairs list      |
| assoc_to_keys/2   | Translate assoc into a key list        |
| assoc_to_values/2 | Translate assoc into a value list      |
| empty_assoc/1     | Test/create an empty assoc             |
| gen_assoc/3       | Non-deterministic enumeration of assoc |
| get_assoc/3       | Get associated value                   |
| get_assoc/5       | Get and replace associated value       |
| list_to_assoc/2   | Translate pair list to assoc           |
| map_assoc/2       | Test assoc values                      |

|                     |                                      |
|---------------------|--------------------------------------|
| map_assoc/3         | Map assoc values                     |
| max_assoc/3         | Max key-value of an assoc            |
| min_assoc/3         | Min key-value of an assoc            |
| ord_list_to_assoc/2 | Translate ordered list into an assoc |
| put_assoc/4         | Add association to an assoc          |

### F.2.5 library(broadcast)

|                     |  |
|---------------------|--|
| broadcast/1         | Send event notification                  |
| broadcast_request/1 | Request all agents                       |
| listen/2            | Listen to event notifications            |
| listen/3            | Listen to event notifications            |
| unlisten/1          | Stop listening to event notifications    |
| unlisten/2          | Stop listening to event notifications    |
| unlisten/3          | Stop listening to event notifications    |
| listening/3         | Who is listening to event notifications? |

### F.2.6 library(charsio)

|                        |  |
|------------------------|--|
| atom_to_chars/2        | Convert Atom into a list of character codes.                   |
| atom_to_chars/3        | Convert Atom into a difference list of character codes.        |
| format_to_chars/3      | Use format/2 to write to a list of character codes.            |
| format_to_chars/4      | Use format/2 to write to a difference list of character codes. |
| number_to_chars/2      | Convert Atom into a list of character codes.                   |
| number_to_chars/3      | Convert Number into a difference list of character codes.      |
| open_chars_stream/2    | Open Codes as an input stream.                                 |
| read_from_chars/2      | Read Codes into Term.  |
| read_term_from_chars/3 | Read Codes into Term.  |
| with_output_to_chars/2 | Run Goal as with once/1.                                       |
| with_output_to_chars/3 | Run Goal as with once/1.                                       |
| with_output_to_chars/4 | Same as with_output_to_chars/3 using an explicit stream.       |
| write_to_chars/2       | Write a term to a code list.                                   |
| write_to_chars/3       | Write a term to a code list.                                   |

### F.2.7 library(check)

|                      |  |
|----------------------|--|
| check/0              | Run all consistency checks defined by checker/2.   |
| checker/2            | Register code validation routines.   |
| list_autoload/0      | Report predicates that may be auto-loaded.   |
| list_redefined/0     | List predicates that are defined in the global module =user= as well as in a normal module; th |
| list_strings/0       | List strings that appear in clauses.   |
| list_strings/1       | List strings that appear in clauses.   |
| list_trivial_fails/0 | List goals that trivially fail because there is no matching clause.                            |
| list_trivial_fails/1 | List goals that trivially fail because there is no matching clause.                            |
| list_undefined/0     | Report undefined predicates.   |
| list_undefined/1     | Report undefined predicates.   |

|                          |   |
|--------------------------|---|
| list_void_declarations/0 | List predicates that have declared attributes, but no clauses.          |
| string_predicate/1       | Multifile hook to disable list_strings/0 on the given predicate.        |
| trivial_fail_goal/1      | Multifile hook that tells list_trivial_fails/0 to accept Goal as valid. |
| valid_string_goal/1      | Multifile hook that qualifies Goal as valid for list_strings/0.         |

### F.2.8 library(clpb)

|                    |  |
|--------------------|--|
| labeling/1         | Enumerate concrete solutions.                          |
| random_labeling/2  | Select a single random solution.                       |
| sat/1              | True iff Expr is a satisfiable Boolean expression.     |
| sat_count/2        | Count the number of admissible assignments.            |
| taut/2             | Tautology check.                                       |
| weighted_maximum/3 | Enumerate weighted optima over admissible assignments. |

### F.2.9 library(clpfd)

|                      |  |
|----------------------|--|
| # / \ /2             | P and Q hold.  |
| # < /2               | The arithmetic expression X is less than Y.                                    |
| # <== /2             | Q implies P.   |
| # <==> /2            | P and Q are equivalent.  |
| # = /2               | The arithmetic expression X equals Y.  |
| # <= /2              | The arithmetic expression X is less than or equal to Y.                        |
| # ==> /2             | P implies Q.   |
| # > /2               | Same as Y # < X.   |
| # >= /2              | Same as Y # <= X.  |
| # \ /1               | Q does _not_ hold.   |
| # \ /2               | Either P holds or Q holds, but not both.                                       |
| # \ / /2             | P or Q holds.  |
| # \ = /2             | The arithmetic expressions X and Y evaluate to distinct integers.              |
| all_different/1      | Like all_distinct/1, but with weaker propagation.                              |
| all_distinct/1       | True iff Vars are pairwise distinct.   |
| automaton/3          | Describes a list of finite domain variables with a finite automaton.           |
| automaton/8          | Describes a list of finite domain variables with a finite automaton.           |
| chain/2              | Zs form a chain with respect to Relation.                                      |
| circuit/1            | True iff the list Vs of finite domain variables induces a Hamiltonian circuit. |
| cumulative/1         | Equivalent to cumulative(Tasks, [limit(1)]).                                   |
| cumulative/2         | Schedule with a limited resource.  |
| disjoint/2/1         | True iff Rectangles are not overlapping.                                       |
| element/3            | The N-th element of the list of finite domain variables Vs is V.               |
| fd_dom/2             | Dom is the current domain (see in/2) of Var.                                   |
| fd_inf/2             | Inf is the infimum of the current domain of Var.                               |
| fd_size/2            | Reflect the current size of a domain.  |
| fd_sup/2             | Sup is the supremum of the current domain of Var.                              |
| fd_var/1             | True iff Var is a CLP(FD) variable.  |
| global_cardinality/2 | Global Cardinality constraint.   |
| global_cardinality/3 | Global Cardinality constraint.   |

|                  |  |
|------------------|--|
| in/2             | Var is an element of Domain.   |
| indomain/1       | Bind Var to all feasible values of its domain on backtracking.       |
| ins/2            | The variables in the list Vars are elements of Domain.               |
| label/1          | Equivalent to labeling([], Vars).                                    |
| labeling/2       | Assign a value to each variable in Vars.                             |
| lex_chain/1      | Lists are lexicographically non-decreasing.                          |
| scalar_product/4 | True iff the scalar product of Cs and Vs is in relation Rel to Expr. |
| serialized/2     | Describes a set of non-overlapping tasks.                            |
| sum/3            | The sum of elements of the list Vars is in relation Rel to Expr.     |
| tuples_in/2      | True iff all Tuples are elements of Relation.                        |
| zcompare/3       | Analogous to compare/3, with finite domain variables A and B.        |

### F.2.10 library(clpqr)

|            |  |
|------------|--|
| entailed/1 | Check if constraint is entailed                  |
| inf/2      | Find the infimum of an expression                |
| sup/2      | Find the supremum of an expression               |
| minimize/1 | Minimizes an expression                          |
| maximize/1 | Maximizes an expression                          |
| bb_inf/3   | Infimum of expression for mixed-integer problems |
| bb_inf/4   | Infimum of expression for mixed-integer problems |
| bb_inf/5   | Infimum of expression for mixed-integer problems |
| dump/3     | Dump constraints on variables                    |

### F.2.11 library(csv)

|                     |  |
|---------------------|--|
| csv_options/2       | Compiled is the compiled representation of the CSV processing options as they may be passed into |
| csv_read_file/2     | Read a CSV file into a list of rows.   |
| csv_read_file/3     | Read a CSV file into a list of rows.   |
| csv_read_file_row/3 | True when Row is a row in File.  |
| csv_read_row/3      | Read the next CSV record from Stream and unify the result with Row.                              |
| csv_read_stream/3   | Read CSV data from Stream.   |
| csv_write_file/2    | Write a list of Prolog terms to a CSV file.  |
| csv_write_file/3    | Write a list of Prolog terms to a CSV file.  |
| csv_write_stream/3  | Write the rows in Data to Stream.  |
| csv//1              | Prolog DCG to 'read/write' CSV data.   |
| csv//2              | Prolog DCG to 'read/write' CSV data.   |

### F.2.12 library(degbasics)

|                   |   |
|-------------------|---|
| alpha_to_lower//1 | Read a letter (class =alpha=) and return it as a lowercase letter.                          |
| atom//1           | Generate codes of Atom.   |
| blank//0          | Take next =space= character from input.   |
| blanks//0         | Skip zero or more white-space characters.   |
| blanks_to_nl//0   | Take a sequence of blank/ /0 codes if blanks are followed by a newline or end of the input. |
| digit//1          | Number processing.  |

|                    |   |
|--------------------|---|
| digits//1          | Number processing.  |
| eos//0             | Matches end-of-input.   |
| float//1           | Process a floating point number.  |
| integer//1         | Number processing.  |
| nonblank//1        | Code is the next non-blank (=graph=) character.   |
| nonblanks//1       | Take all =graph= characters.  |
| number//1          | Generate extract a number.  |
| prolog_var_name//1 | Matches a Prolog variable name.   |
| remainder//1       | Unify List with the remainder of the input.   |
| string//1          | Take as few as possible tokens from the input, taking one more each time on backtracking.     |
| string_without//2  | Take as many codes from the input until the next character code appears in the list EndCodes. |
| white//0           | Take next =white= character from input.   |
| whites//0          | Skip white space _inside_ a line.   |
| xdigit//1          | True if the next code is a hexadecimal digit with Weight.                                     |
| xdigits//1         | List of weights of a sequence of hexadecimal codes.   |
| xinteger//1        | Generate or extract an integer from a sequence of hexadecimal digits.                         |

### F.2.13 library(dcghighorder)

|             |   |
|-------------|---|
| foreach//2  | Generate a list from the solutions of Generator.  |
| foreach//3  | Generate a list from the solutions of Generator.  |
| optional//2 | Perform an optional match, executing Default if Match is not matched.   |
| sequence//2 | Match or generate a sequence of Element.  |
| sequence//3 | Match or generate a sequence of Element where each pair of elements is separated by Sep.                            |
| sequence//5 | Match or generate a sequence of Element enclosed by Start end End, where each pair of elements is separated by Sep. |

### F.2.14 library(debug)

|                         |   |
|-------------------------|---|
| assertion/1             | Acts similar to C assert() macro.                     |
| assertion_failed/2      | This hook is called if the Goal of assertion/1 fails. |
| debug/1                 | Add/remove a topic from being printed.                |
| debug/3                 | Format a message if debug topic is enabled.           |
| debug_message_context/1 | Specify additional context for debug messages.        |
| debug_print_hook/3      | Hook called by debug/3.                               |
| debugging/1             | Examine debug topics.                                 |
| debugging/2             | Examine debug topics.                                 |
| list_debug_topics/0     | List currently known debug topics and their setting.  |
| nodebug/1               | Add/remove a topic from being printed.                |

### F.2.15 library(dict)

|                   |   |
|-------------------|---|
| dict_fill/4       | Implementation for the dict_to_same_keys/3 'OnEmpty' closure that fills new cells with a copy of the value. |
| dict_keys/2       | True when Keys is an ordered set of the keys appearing in Dict.   |
| dicts_join/3      | Join dicts in Dicts that have the same value for Key, provided they do not have conflicting values.         |
| dicts_join/4      | Join two lists of dicts (Dicts1 and Dicts2) on Key.   |
| dicts_same_keys/2 | True if List is a list of dicts that all have the same keys and Keys is an ordered set of these keys.       |

|                                   |   |
|-----------------------------------|---|
| <code>dicts_same_tag/2</code>     | True when List is a list of dicts that all have the tag Tag.  |
| <code>dicts_slice/3</code>        | DictsOut is a list of Dicts only containing values for Keys.  |
| <code>dicts_to_compounds/4</code> | True when Dicts and Compounds are lists of the same length and each element of Compounds is a compound of the corresponding element of Dicts. |
| <code>dicts_to_same_keys/3</code> | DictsOut is a copy of DictsIn, where each dict contains all keys appearing in all dicts of DictsIn.   |

**F.2.16 library(error)**

|                                      |   |
|--------------------------------------|---|
| <code>current_type/3</code>          | True when Type is a currently defined type and Var satisfies Type of the body term Body succeeds.               |
| <code>domain_error/2</code>          | The argument is of the proper type, but has a value that is outside the supported values.                       |
| <code>existence_error/2</code>       | Term is of the correct type and correct domain, but there is no existing (external) resource that matches Term. |
| <code>existence_error/3</code>       | Term is of the correct type and correct domain, but there is no existing (external) resource that matches Term. |
| <code>has_type/2</code>              | True if Term satisfies Type.  |
| <code>instantiation_error/1</code>   | An argument is under-instantiated.  |
| <code>is_of_type/2</code>            | True if Term satisfies Type.  |
| <code>must_be/2</code>               | True if Term satisfies the type constraints for Type.   |
| <code>permission_error/3</code>      | It is not allowed to perform Action on the object Term that is of the given Type.                               |
| <code>representation_error/1</code>  | A representation error indicates a limitation of the implementation.  |
| <code>resource_error/1</code>        | A goal cannot be completed due to lack of resources.  |
| <code>syntax_error/1</code>          | A text has invalid syntax.  |
| <code>type_error/2</code>            | Tell the user that Term is not of the expected Type.  |
| <code>uninstantiation_error/1</code> | An argument is over-instantiated.   |

**F.2.17 library(explain)**

|                        |  |
|------------------------|--|
| <code>explain/1</code> | Give an explanation on Term.                     |
| <code>explain/2</code> | True when Explanation is an explanation of Term. |

**F.2.18 library(help)**

|                               |   |
|-------------------------------|---|
| <code>apropos/1</code>        | Print objects from the manual whose name or summary match with Query. |
| <code>help/0</code>           | Show help for What.   |
| <code>help/1</code>           | Show help for What.   |
| <code>show_html_hook/1</code> | Hook called to display the extracted HTML document.                   |

**F.2.19 library(iostream)****F.2.20 library(summaries.d/iostream/tex)****F.2.21 library(lists)**

|                             |  |
|-----------------------------|--|
| <code>append/2</code>       | Concatenate a list of lists.                                 |
| <code>append/3</code>       | List1AndList2 is the concatenation of List1 and List2.       |
| <code>delete/3</code>       | Delete matching elements from a list.                        |
| <code>flatten/2</code>      | Is true if FlatList is a non-nested version of NestedList.   |
| <code>intersection/3</code> | True if Set3 unifies with the intersection of Set1 and Set2. |
| <code>is_set/1</code>       | True if Set is a proper list without duplicates.             |

|                 |   |
|-----------------|---|
| last/2          | Succeeds when Last is the last element of List.                             |
| list_to_set/2   | True when Set has the same elements as List in the same order.              |
| max_list/2      | True if Max is the largest number in List.                                  |
| max_member/2    | True when Max is the largest member in the standard order of terms.         |
| member/2        | True if Elem is a member of List.   |
| min_list/2      | True if Min is the smallest number in List.                                 |
| min_member/2    | True when Min is the smallest member in the standard order of terms.        |
| nextto/3        | True if Y directly follows X in List.                                       |
| nth0/3          | True when Elem is the Index'th element of List.                             |
| nth0/4          | Select/insert element at index.   |
| nth1/3          | Is true when Elem is the Index'th element of List.                          |
| nth1/4          | As nth0/4, but counting starts at 1.  |
| numlist/3       | List is a list [Low, Low+1, ... High].                                      |
| permutation/2   | True when Xs is a permutation of Ys.  |
| prefix/2        | True iff Part is a leading substring of Whole.                              |
| proper_length/2 | True when Length is the number of elements in the proper list List.         |
| reverse/2       | Is true when the elements of List2 are in reverse order compared to List1.  |
| same_length/2   | Is true when List1 and List2 are lists with the same number of elements.    |
| select/3        | Is true when List1, with Elem removed, results in List2.                    |
| select/4        | Select from two lists at the same position.                                 |
| selectchk/3     | Semi-deterministic removal of first element in List that unifies with Elem. |
| selectchk/4     | Semi-deterministic version of select/4.                                     |
| subset/2        | True if all elements of SubSet belong to Set as well.                       |
| subtract/3      | Delete all elements in Delete from Set.                                     |
| sum_list/2      | Sum is the result of adding all numbers in List.                            |
| union/3         | True if Set3 unifies with the union of the lists Set1 and Set2.             |

### F.2.22 library(main)

|                |  |
|----------------|--|
| argv_options/3 | Generic transformation of long commandline arguments to options. |
| main/0         | Call main/1 using the passed command-line arguments.             |

### F.2.23 library(occurs)

|                       |   |
|-----------------------|---|
| contains_term/2       | Succeeds if Sub is contained in Term (=, deterministically).  |
| contains_var/2        | Succeeds if Sub is contained in Term (==, deterministically). |
| free_of_term/2        | Succeeds if Sub does not unify to any subterm of Term.        |
| free_of_var/2         | Succeeds if Sub is not equal (==) to any subterm of Term.     |
| occurrences_of_term/3 | Count the number of SubTerms in Term.                         |
| occurrences_of_var/3  | Count the number of SubTerms in Term.                         |
| sub_term/2            | Generates (on backtracking) all subterms of Term.             |
| sub_var/2             | Generates (on backtracking) all subterms (==) of Term.        |

### F.2.24 library(option)

|                |  |
|----------------|--|
| dict_options/2 | Convert between an option list and a dictionary. |
|----------------|--|



|                              |  |
|------------------------------|--|
| <code>merge_options/3</code> | Merge two option lists.                                      |
| <code>meta_options/3</code>  | Perform meta-expansion on options that are module-sensitive. |
| <code>option/2</code>        | Get an Option from OptionList.                               |
| <code>option/3</code>        | Get an Option from OptionList.                               |
| <code>select_option/3</code> | Get and remove Option from an option list.                   |
| <code>select_option/4</code> | Get and remove Option with default value.                    |

### F.2.25 `library(optparse)`

|                              |   |
|------------------------------|---|
| <code>opt_arguments/3</code> | Extract commandline options according to a specification.                             |
| <code>opt_help/2</code>      | True when Help is a help string synthesized from OptsSpec.                            |
| <code>opt_parse/4</code>     | Equivalent to <code>opt_parse(OptsSpec, ApplArgs, Opts, PositionalArgs, [ ])</code> . |
| <code>opt_parse/5</code>     | Parse the arguments Args (as list of atoms) according to OptsSpec.                    |
| <code>parse_type/3</code>    | Hook to parse option text Codes to an object of type Type.                            |

### F.2.26 `library(ordsets)`

|                                 |   |
|---------------------------------|---|
| <code>is_ordset/1</code>        | True if Term is an ordered set.   |
| <code>list_to_ord_set/2</code>  | Transform a list into an ordered set.   |
| <code>ord_add_element/3</code>  | Insert an element into the set.   |
| <code>ord_del_element/3</code>  | Delete an element from an ordered set.  |
| <code>ord_disjoint/2</code>     | True if Set1 and Set2 have no common elements.  |
| <code>ord_empty/1</code>        | True when List is the empty ordered set.  |
| <code>ord_intersect/2</code>    | True if both ordered sets have a non-empty intersection.  |
| <code>ord_intersect/3</code>    | Intersection holds the common elements of Set1 and Set2.  |
| <code>ord_intersection/2</code> | Intersection of a powerset.   |
| <code>ord_intersection/3</code> | Intersection holds the common elements of Set1 and Set2.  |
| <code>ord_intersection/4</code> | Intersection and difference between two ordered sets.   |
| <code>ord_memberchk/2</code>    | True if Element is a member of OrdSet, compared using <code>==</code> .                             |
| <code>ord_selectchk/3</code>    | Selectchk/3, specialised for ordered sets.  |
| <code>ord_seteq/2</code>        | True if Set1 and Set2 have the same elements.   |
| <code>ord_subset/2</code>       | Is true if all elements of Sub are in Super.  |
| <code>ord_subtract/3</code>     | Diff is the set holding all elements of InOSet that are not in NotInOSet.                           |
| <code>ord_symdiff/3</code>      | Is true when Difference is the symmetric difference of Set1 and Set2.                               |
| <code>ord_union/2</code>        | True if Union is the union of all elements in the superset SetOfSets.                               |
| <code>ord_union/3</code>        | Union is the union of Set1 and Set2.  |
| <code>ord_union/4</code>        | True iff <code>ord_union(Set1, Set2, Union)</code> and <code>ord_subtract(Set2, Set1, New)</code> . |

### F.2.27 `library(persistency)`

|   |  |
|---|--|
| <code>current_persistent_predicate/1</code> | True if PI is a predicate that provides access to the persistent database DB.                          |
| <code>db_attach/2</code>                    | Use File as persistent database for the calling module.  |
| <code>db_attached/1</code>                  | True if the context module attached to the persistent database File.                                   |
| <code>db_detach/0</code>                    | Detach persistency from the calling module and delete all persistent clauses from the Prolog database. |
| <code>db_sync/1</code>                      | Synchronise database with the associated file.   |
| <code>db_sync_all/1</code>                  | Sync all registered databases.   |

`persistent/1`                      Declare dynamic database terms.

### F.2.28 `library(predicate_options)`

|   |   |
|---|---|
| <code>assert_predicate_options/4</code>     | As <code>predicate_options(:PI, +Arg, +Options)</code> .                  |
| <code>check_predicate_option/3</code>       | Verify predicate options at runtime.                                      |
| <code>check_predicate_options/0</code>      | Analyse loaded program for erroneous options.                             |
| <code>current_option_arg/2</code>           | True when Arg of PI processes predicate options.                          |
| <code>current_predicate_option/3</code>     | True when Arg of PI processes Option.                                     |
| <code>current_predicate_options/3</code>    | True when Options is the current active option declaration for PI on Arg. |
| <code>derive_predicate_options/0</code>     | Derive new predicate option declarations.                                 |
| <code>derived_predicate_options/1</code>    | Derive predicate option declarations for a module.                        |
| <code>derived_predicate_options/3</code>    | Derive option arguments using static analysis.                            |
| <code>predicate_options/3</code>            | Declare that the predicate PI processes options on Arg.                   |
| <code>retractall_predicate_options/0</code> | Remove all dynamically (derived) predicate options.                       |

### F.2.29 `library(prologpack)`

|                                    |  |
|------------------------------------|--|
| <code>environment/2</code>         | Hook to define the environment for building packs.               |
| <code>pack_info/1</code>           | Print more detailed information about Pack.                      |
| <code>pack_install/1</code>        | Install a package.   |
| <code>pack_install/2</code>        | Install package Name.  |
| <code>pack_list/1</code>           | Query package server and installed packages and display results. |
| <code>pack_list_installed/0</code> | List currently installed packages.                               |
| <code>pack_property/2</code>       | True when Property is a property of an installed Pack.           |
| <code>pack_rebuild/0</code>        | Rebuild foreign components of all packages.                      |
| <code>pack_rebuild/1</code>        | Rebuilt possible foreign components of Pack.                     |
| <code>pack_remove/1</code>         | Remove the indicated package.                                    |
| <code>pack_search/1</code>         | Query package server and installed packages and display results. |
| <code>pack_upgrade/1</code>        | Try to upgrade the package Pack.                                 |
| <code>pack_url_file/2</code>       | True if File is a unique id for the referenced pack and version. |

### F.2.30 `library(prologxref)`

|                                    |                                    |
|------------------------------------|------------------------------------|
| <code>prolog:called_by/2</code>    | (hook) Extend cross-referencer     |
| <code>xref_built_in/1</code>       | Examine defined built-ins          |
| <code>xref_called/3</code>         | Examine called predicates          |
| <code>xref_clean/1</code>          | Remove analysis of source          |
| <code>xref_current_source/1</code> | Examine cross-referenced sources   |
| <code>xref_defined/3</code>        | Examine defined predicates         |
| <code>xref_exported/2</code>       | Examine exported predicates        |
| <code>xref_module/2</code>         | Module defined by source           |
| <code>xref_source/1</code>         | Cross-reference analysis of source |

### F.2.31 `library(pairs)`

|                                   |  |
|-----------------------------------|--|
| <code>group_pairs_by_key/2</code> | Group values with equivalent ( <code>==/2</code> ) consecutive keys. |
| <code>map_list_to_pairs/3</code>  | Create a Key-Value list by mapping each element of List.             |
| <code>pairs_keys/2</code>         | Remove the values from a list of Key-Value pairs.                    |
| <code>pairs_keys_values/3</code>  | True if Keys holds the keys of Pairs and Values the values.          |
| <code>pairs_values/2</code>       | Remove the keys from a list of Key-Value pairs.                      |
| <code>transpose_pairs/2</code>    | Swap Key-Value to Value-Key.   |

**F.2.32 library(pio)****library(pure\_input)**

|   |  |
|---|--|
| <code>phrase_from_file/2</code>           | Process the content of File using the DCG rule Grammar.              |
| <code>phrase_from_file/3</code>           | As <code>phrase_from_file/2</code> , providing additional Options.   |
| <code>phrase_from_stream/2</code>         | Run Grammar against the character codes on Stream.                   |
| <code>stream_to_lazy_list/2</code>        | Create a lazy list representing the character codes in Stream.       |
| <code>lazy_list_character_count//1</code> | True when CharCount is the current character count in the Lazy list. |
| <code>lazy_list_location//1</code>        | Determine current (error) location in a lazy list.                   |
| <code>syntax_error//1</code>              | Throw the syntax error Error at the current location of the input.   |

**F.2.33 library(random)**

|                                   |  |
|-----------------------------------|--|
| <code>getrand/1</code>            | Query/set the state of the random generator.                                 |
| <code>maybe/0</code>              | Succeed/fail with equal probability (variant of <code>maybe/1</code> ).      |
| <code>maybe/1</code>              | Succeed with probability P, fail with probability 1-P.                       |
| <code>maybe/2</code>              | Succeed with probability K/N (variant of <code>maybe/1</code> ).             |
| <code>random/1</code>             | Binds R to a new random float in the <code>_open_</code> interval (0.0,1.0). |
| <code>random/3</code>             | Generate a random integer or float in a range.                               |
| <code>random_between/3</code>     | Binds R to a random integer in [L,U] (i.e., including both L and U).         |
| <code>random_member/2</code>      | X is a random member of List.  |
| <code>random_perm2/4</code>       | Does <code>X=A,Y=B</code> or <code>X=B,Y=A</code> with equal probability.    |
| <code>random_permutation/2</code> | Permutation is a random permutation of List.                                 |
| <code>random_select/3</code>      | Randomly select or insert an element.  |
| <code>randseq/3</code>            | S is a list of K unique random integers in the range 1..N.                   |
| <code>randset/3</code>            | S is a sorted list of K unique random integers in the range 1..N.            |
| <code>setrand/1</code>            | Query/set the state of the random generator.                                 |

**F.2.34 library(readutil)**

|                                     |                                       |
|-------------------------------------|---------------------------------------|
| <code>read_line_to_codes/2</code>   | Read line from a stream               |
| <code>read_line_to_codes/3</code>   | Read line from a stream               |
| <code>read_stream_to_codes/2</code> | Read contents of stream               |
| <code>read_stream_to_codes/3</code> | Read contents of stream               |
| <code>read_file_to_codes/3</code>   | Read contents of file                 |
| <code>read_file_to_terms/3</code>   | Read contents of file to Prolog terms |

**F.2.35 library(record)**

record/1 Define named fields in a term

**F.2.36 library(registry)**

This library is only available on Windows systems.

|                            |                             |
|----------------------------|-----------------------------|
| registry_get_key/2         | Get principal value of key  |
| registry_get_key/3         | Get associated value of key |
| registry_set_key/2         | Set principal value of key  |
| registry_set_key/3         | Set associated value of key |
| registry_delete_key/1      | Remove a key                |
| shell_register_file_type/4 | Register a file-type        |
| shell_register_dde/6       | Register DDE action         |
| shell_register_prolog/1    | Register Prolog             |

**F.2.37 library(settings)****F.2.38 library(simplex)**

|                  |  |
|------------------|--|
| assignment/2     | Solve assignment problem                             |
| constraint/3     | Add linear constraint to state                       |
| constraint/4     | Add named linear constraint to state                 |
| constraint_add/4 | Extend a named constraint                            |
| gen_state/1      | Create empty linear program                          |
| maximize/3       | Maximize objective function in to linear constraints |
| minimize/3       | Minimize objective function in to linear constraints |
| objective/2      | Fetch value of objective function                    |
| shadow_price/3   | Fetch shadow price in solved state                   |
| transportation/4 | Solve transportation problem                         |
| variable_value/3 | Fetch value of variable in solved state              |

**F.2.39 library(ugraphs)**

|                            |                                   |
|----------------------------|-----------------------------------|
| vertices_edges_to_ugraph/3 | Create unweighted graph           |
| vertices/2                 | Find vertices in graph            |
| edges/2                    | Find edges in graph               |
| add_vertices/3             | Add vertices to graph             |
| del_vertices/3             | Delete vertices from graph        |
| add_edges/3                | Add edges to graph                |
| del_edges/3                | Delete edges from graph           |
| transpose_ugraph/2         | Invert the direction of all edges |
| neighbors/3                | Find neighbors of vertice         |
| neighbours/3               | Find neighbors of vertice         |
| complement/2               | Inverse presense of edges         |
| compose/3                  |                                   |

|                                   |                                    |
|-----------------------------------|------------------------------------|
| <code>top_sort/2</code>           | Sort graph topologically           |
| <code>top_sort/3</code>           | Sort graph topologically           |
| <code>transitive_closure/2</code> | Create transitive closure of graph |
| <code>reachable/3</code>          | Find all reachable vertices        |
| <code>ugraph_union/3</code>       | Union of two graphs                |

**F.2.40 library(url)**

|                                 |   |
|---------------------------------|---|
| <code>file_name_to_url/2</code> | Translate between a filename and a file:// URL.         |
| <code>global_url/3</code>       | Translate a possibly relative URL into an absolute one. |
| <code>http_location/2</code>    | Construct or analyze an HTTP location.                  |
| <code>is_absolute_url/1</code>  | True if URL is an absolute URL.                         |
| <code>parse_url/2</code>        | Construct or analyse a URL.                             |
| <code>parse_url/3</code>        | Similar to <code>parse_url/2</code> for relative URLs.  |
| <code>parse_url_search/2</code> | Construct or analyze an HTTP search specification.      |
| <code>set_url_encoding/2</code> | Query and set the encoding for URLs.                    |
| <code>url_iri/2</code>          | Convert between a URL, encoding in US-ASCII and an IRI. |
| <code>www_form_encode/2</code>  | En/decode to/from application/x-www-form-encoded.       |

**F.2.41 library(www\_browser)**

|                             |                              |
|-----------------------------|------------------------------|
| <code>www_open_url/1</code> | Open a web-page in a browser |
|-----------------------------|------------------------------|

**F.2.42 library(solution\_sequences)**

|                         |  |
|-------------------------|--|
| <code>call_nth/2</code> | True when Goal succeeded for the Nth time.   |
| <code>distinct/1</code> | True if Goal is true and no previous solution of Goal bound Witness to the same value.                                     |
| <code>distinct/2</code> | True if Goal is true and no previous solution of Goal bound Witness to the same value.                                     |
| <code>group_by/4</code> | Group bindings of Template that have the same value for By.  |
| <code>limit/2</code>    | Limit the number of solutions.   |
| <code>offset/2</code>   | Ignore the first Count solutions.  |
| <code>order_by/2</code> | Order solutions according to Spec.   |
| <code>reduced/1</code>  | Similar to <code>distinct/1</code> , but does not guarantee unique results in return for using a limited amount of memory. |
| <code>reduced/3</code>  | Similar to <code>distinct/1</code> , but does not guarantee unique results in return for using a limited amount of memory. |

**F.2.43 library(thread\_pool)**

|                                      |   |
|--------------------------------------|---|
| <code>create_pool/1</code>           | Hook to create a thread pool lazily.                |
| <code>current_thread_pool/1</code>   | True if Name refers to a defined thread pool.       |
| <code>thread_create_in_pool/4</code> | Create a thread in Pool.                            |
| <code>thread_pool_create/3</code>    | Create a pool of threads.                           |
| <code>thread_pool_destroy/1</code>   | Destroy the thread pool named Name.                 |
| <code>thread_pool_property/2</code>  | True if Property is a property of thread pool Name. |

**F.2.44 library(varnumbers)**

---

|                    |  |
|--------------------|--|
| max_var_number/3   | True when Max is the max of Start and the highest numbered \$VAR(N) term.                    |
| numbervars/1       | Number variables in Term using \$VAR(N).   |
| varnumbers/2       | Inverse of numbervars/1.   |
| varnumbers/3       | Inverse of numbervars/3.   |
| varnumbers_names/3 | If Term is a term with numbered and named variables using the reserved term '\$VAR'(X), Copy |

### F.2.45 library(yall)

|                |   |
|----------------|---|
| /2             | Shorthand for 'Free/[]>>Lambda'.  |
| /3             | Shorthand for 'Free/[]>>Lambda'.  |
| /4             | Shorthand for 'Free/[]>>Lambda'.  |
| /5             | Shorthand for 'Free/[]>>Lambda'.  |
| /6             | Shorthand for 'Free/[]>>Lambda'.  |
| /7             | Shorthand for 'Free/[]>>Lambda'.  |
| /8             | Shorthand for 'Free/[]>>Lambda'.  |
| /9             | Shorthand for 'Free/[]>>Lambda'.  |
| >>/2           | Calls a copy of Lambda.   |
| >>/3           | Calls a copy of Lambda.   |
| >>/4           | Calls a copy of Lambda.   |
| >>/5           | Calls a copy of Lambda.   |
| >>/6           | Calls a copy of Lambda.   |
| >>/7           | Calls a copy of Lambda.   |
| >>/8           | Calls a copy of Lambda.   |
| >>/9           | Calls a copy of Lambda.   |
| is_lambda/1    | True if Term is a valid Lambda expression.  |
| lambda_calls/2 | Goal is the goal called if call/N is applied to LambdaExpression, where ExtraArgs are the additional ar |
| lambda_calls/3 | Goal is the goal called if call/N is applied to LambdaExpression, where ExtraArgs are the additional ar |

## F.3 Arithmetic Functions

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| <code>*/2</code>                     | Multiplication                        |
| <code>**/2</code>                    | Power function                        |
| <code>+/1</code>                     | Unary plus (No-op)                    |
| <code>+/2</code>                     | Addition                              |
| <code>-/1</code>                     | Unary minus                           |
| <code>-/2</code>                     | Subtraction                           |
| <code>/ /2</code>                    | Division                              |
| <code>/ //2</code>                   | Integer division                      |
| <code>/ \2</code>                    | Bitwise and                           |
| <code>&lt;&lt;/2</code>              | Bitwise left shift                    |
| <code>&gt;&gt;/2</code>              | Bitwise right shift                   |
| <code>./2</code>                     | List of one character: character code |
| <code>\1</code>                      | Bitwise negation                      |
| <code>\ /2</code>                    | Bitwise or                            |
| <code>^/2</code>                     | Power function                        |
| <code>abs/1</code>                   | Absolute value                        |
| <code>acos/1</code>                  | Inverse (arc) cosine                  |
| <code>acosh/1</code>                 | Inverse hyperbolic cosh               |
| <code>asin/1</code>                  | Inverse (arc) sine                    |
| <code>asinh/1</code>                 | Inverse (arc) sinh                    |
| <code>atan/1</code>                  | Inverse hyperbolic sine               |
| <code>atan/2</code>                  | Rectangular to polar conversion       |
| <code>atanh/1</code>                 | Inverse hyperbolic tangent            |
| <code>atan2/2</code>                 | Rectangular to polar conversion       |
| <code>ceil/1</code>                  | Smallest integer larger than arg      |
| <code>ceiling/1</code>               | Smallest integer larger than arg      |
| <code>cos/1</code>                   | Cosine                                |
| <code>cosh/1</code>                  | Hyperbolic cosine                     |
| <code>copysign/2</code>              | Apply sign of N2 to N1                |
| <code>cputime/0</code>               | Get CPU time                          |
| <code>div/2</code>                   | Integer division                      |
| <code>e/0</code>                     | Mathematical constant                 |
| <code>erf/1</code>                   | Gauss error function                  |
| <code>erfc/1</code>                  | Complementary error function          |
| <code>epsilon/0</code>               | Floating point precision              |
| <code>eval/1</code>                  | Evaluate term as expression           |
| <code>exp/1</code>                   | Exponent (base <i>e</i> )             |
| <code>float/1</code>                 | Explicitly convert to float           |
| <code>float_fractional_part/1</code> | Fractional part of a float            |
| <code>float_integer_part/1</code>    | Integer part of a float               |
| <code>floor/1</code>                 | Largest integer below argument        |
| <code>gcd/2</code>                   | Greatest common divisor               |
| <code>getbit/2</code>                | Get bit at index from large integer   |
| <code>inf/0</code>                   | Positive infinity                     |

---

|                |                             |
|----------------|-----------------------------|
| integer/1      | Round to nearest integer    |
| lgamma/1       | Log of gamma function       |
| log/1          | Natural logarithm           |
| log10/1        | 10 base logarithm           |
| lsb/1          | Least significant bit       |
| max/2          | Maximum of two numbers      |
| min/2          | Minimum of two numbers      |
| msb/1          | Most significant bit        |
| mod/2          | Remainder of division       |
| nan/0          | Not a Number (NaN)          |
| powm/3         | Integer exponent and modulo |
| random/1       | Generate random number      |
| random_float/0 | Generate random number      |
| rational/1     | Convert to rational number  |
| rationalize/1  | Convert to rational number  |
| rdiv/2         | Ration number division      |
| rem/2          | Remainder of division       |
| round/1        | Round to nearest integer    |
| truncate/1     | Truncate float to integer   |
| pi/0           | Mathematical constant       |
| popcount/1     | Count 1s in a bitvector     |
| sign/1         | Extract sign of value       |
| sin/1          | Sine                        |
| sinh/1         | Hyperbolic sine             |
| sqrt/1         | Square root                 |
| tan/1          | Tangent                     |
| tanh/1         | Hyperbolic tangent          |
| xor/2          | Bitwise exclusive or        |



## F.4 Operators

|          |      |       |                           |
|----------|------|-------|---------------------------|
| \$       | 1    | $fx$  | Bind top-level variable   |
| $\wedge$ | 200  | $xy$  | Existential qualification |
| $\wedge$ | 200  | $xy$  | Arithmetic function       |
| mod      | 300  | $fx$  | Arithmetic function       |
| *        | 400  | $yfx$ | Arithmetic function       |
| /        | 400  | $yfx$ | Arithmetic function       |
| //       | 400  | $yfx$ | Arithmetic function       |
| <<       | 400  | $yfx$ | Arithmetic function       |
| >>       | 400  | $yfx$ | Arithmetic function       |
| xor      | 400  | $yfx$ | Arithmetic function       |
| +        | 500  | $fx$  | Arithmetic function       |
| -        | 500  | $fx$  | Arithmetic function       |
| ?        | 500  | $fx$  | XPCE: obtainer            |
| \        | 500  | $fx$  | Arithmetic function       |
| +        | 500  | $yfx$ | Arithmetic function       |
| -        | 500  | $yfx$ | Arithmetic function       |
| /\       | 500  | $yfx$ | Arithmetic function       |
| \/       | 500  | $yfx$ | Arithmetic function       |
| :        | 600  | $xy$  | module:term separator     |
| <        | 700  | $fx$  | Predicate                 |
| =        | 700  | $fx$  | Predicate                 |
| =..      | 700  | $fx$  | Predicate                 |
| =:=      | 700  | $fx$  | Predicate                 |
| <        | 700  | $fx$  | Predicate                 |
| ==       | 700  | $fx$  | Predicate                 |
| @=       | 700  | $fx$  | Predicate                 |
| =\=      | 700  | $fx$  | Predicate                 |
| >        | 700  | $fx$  | Predicate                 |
| >=       | 700  | $fx$  | Predicate                 |
| @<       | 700  | $fx$  | Predicate                 |
| @=<      | 700  | $fx$  | Predicate                 |
| @>       | 700  | $fx$  | Predicate                 |
| @>=      | 700  | $fx$  | Predicate                 |
| is       | 700  | $fx$  | Predicate                 |
| \=       | 700  | $fx$  | Predicate                 |
| \==      | 700  | $fx$  | Predicate                 |
| =@=      | 700  | $fx$  | Predicate                 |
| not      | 900  | $fy$  | Predicate                 |
| \+       | 900  | $fy$  | Predicate                 |
| ,        | 1000 | $xy$  | Predicate                 |
| ->       | 1050 | $xy$  | Predicate                 |
| *->      | 1050 | $xy$  | Predicate                 |
| ;        | 1100 | $xy$  | Predicate                 |
|          | 1105 | $xy$  | DCG disjunction           |

|                    |      |            |                          |
|--------------------|------|------------|--------------------------|
| discontiguous      | 1150 | <i>fx</i>  | Directive                |
| dynamic            | 1150 | <i>fx</i>  | Directive                |
| module_transparent | 1150 | <i>fx</i>  | Directive                |
| meta_predicate     | 1150 | <i>fx</i>  | Head                     |
| multifile          | 1150 | <i>fx</i>  | Directive                |
| thread_local       | 1150 | <i>fx</i>  | Directive                |
| volatile           | 1150 | <i>fx</i>  | Directive                |
| initialization     | 1150 | <i>fx</i>  | Directive                |
| : -                | 1200 | <i>fx</i>  | Introduces a directive   |
| ? -                | 1200 | <i>fx</i>  | Introduces a directive   |
| -->                | 1200 | <i>xfx</i> | DCGrammar: rewrite       |
| : -                | 1200 | <i>xfx</i> | head : - body. separator |

# Bibliography

---

- [Bowen *et al.*, 1983] D. L. Bowen, L. M. Byrd, and W.F. Clocksin. A portable Prolog compiler. In L. M. Pereira, editor, *Proceedings of the Logic Programming Workshop 1983*, Lisbon, Portugal, 1983. Universidade nova de Lisboa.
- [Bratko, 1986] I. Bratko. *Prolog Programming for Artificial Intelligence*. Addison-Wesley, Reading, Massachusetts, 1986.
- [Butenhof, 1997] David R. Butenhof. *Programming with POSIX threads*. Addison-Wesley, Reading, MA, USA, 1997.
- [Byrd, 1980] L. Byrd. Understanding the control flow of Prolog programs. *Logic Programming Workshop*, 1980.
- [Clocksin & Melish, 1987] W. F. Clocksin and C. S. Melish. *Programming in Prolog*. Springer-Verlag, New York, Third, Revised and Extended edition, 1987.
- [Demoen, 2002] Bart Demoen. Dynamic attributes, their hProlog implementation, and a first evaluation. Report CW 350, Department of Computer Science, K.U.Leuven, Leuven, Belgium, oct 2002. URL = <http://www.cs.kuleuven.ac.be/publicaties/rapporten/cw/CW350.abs.html>.
- [Desouter *et al.*, 2015] Benoit Desouter, Marko van Dooren, and Tom Schrijvers. Tabling as a library with delimited control. *TPLP*, 15(4-5):419–433, 2015.
- [Frühwirth, ] T. Frühwirth. Thom Fruehwirth’s constraint handling rules website. <http://www.constraint-handling-rules.org>.
- [Frühwirth, 2009] T. Frühwirth. *Constraint Handling Rules*. Cambridge University Press, 2009.
- [Graham *et al.*, 1982] Susan L. Graham, Peter B. Kessler, and Marshall K. McKusick. gprof: a call graph execution profiler. In *SIGPLAN Symposium on Compiler Construction*, pages 120–126, 1982.
- [Hodgson, 1998] Jonathan Hodgson. validation suite for conformance with part 1 of the standard, 1998, <http://www.sju.edu/~jhodgson/pub/suite.tar.gz>.
- [Holzbaur, 1992] Christian Holzbaur. Metastructures versus attributed variables in the context of extensible unification. In *PLILP*, volume 631, pages 260–268. Springer-Verlag, 1992. LNCS 631.
- [Kernighan & Ritchie, 1978] B. W. Kernighan and D. M. Ritchie. *The C Programming Language*. Prentice-Hall, Englewood Cliffs, New Jersey, 1978.

- [Neumerkel, 1993] Ulrich Neumerkel. The binary WAM, a simplified Prolog engine. Technical report, Technische Universität Wien, 1993. <http://www.complang.tuwien.ac.at/ulrich/papers/PDF/binwam-nov93.pdf>.
- [O’Keefe, 1990] R. A. O’Keefe. *The Craft of Prolog*. MIT Press, Massachusetts, 1990.
- [Pereira, 1986] F. Pereira. *C-Prolog User’s Manual*. EdCaad, University of Edinburgh, 1986.
- [Qui, 1997] AI International Ltd., Berkhamsted, UK. *Quintus Prolog, User Guide and Reference Manual*, 1997.
- [Schimpf, 2002] Joachim Schimpf. Logical loops. In PeterJ. Stuckey, editor, *Logic Programming*, volume 2401 of *Lecture Notes in Computer Science*, pages 224–238. Springer Berlin Heidelberg, 2002.
- [Schrijvers *et al.*, 2013] Tom Schrijvers, Bart Demoen, Benoit Desouter, and Jan Wielemaker. Delimited continuations for prolog. *TPLP*, 13(4-5):533–546, 2013.
- [Sterling & Shapiro, 1986] L. Sterling and E. Shapiro. *The Art of Prolog*. MIT Press, Cambridge, Massachusetts, 1986.
- [Tarau, 2011] Paul Tarau. Coordination and concurrency in multi-engine prolog. In Wolfgang De Meuter and Grăia-Catalin Roman, editors, *Coordination Models and Languages - 13th International Conference, COORDINATION 2011, Reykjavik, Iceland, June 6-9, 2011. Proceedings*, volume 6721 of *Lecture Notes in Computer Science*, pages 157–171. Springer, 2011.
- [Triska, 2016] Markus Triska. The Boolean constraint solver of SWI-Prolog: System description. In *FLOPS*, volume 9613 of *LNCS*, pages 45–61, 2016. <https://www.metalevel.at/swiclpb.pdf>.

# Index

---

( library, 325  
-lswipl library, 396  
.pl, 71  
.pro, 71  
?= /2, 113  
@ /2, 270  
= : = /2, 188  
/ \ /2, 194  
= \ = /2, 188  
| /2, 114  
# / \ /2, 456  
# = /2, 447  
# < == > /2, 455  
# > = /2, 447  
# > /2, 447  
# = < /2, 447  
# < /2, 447  
# \ = /2, 447  
# \ /1, 455  
# \ /2, 456  
, /2, 114  
# \ / /2, 456  
{ } /1, 459  
! /0, 113  
/, 71  
/ /2, 191, 535  
/ /3, 535  
/ /4, 535  
/ /5, 535  
/ /6, 535  
/ /7, 535  
/ /8, 535  
/ /9, 535  
. /2, 192  
. /3, 254  
= /2, 109  
== /2, 110  
> = /2, 188  
> /2, 188  
^ /2, 196  
/ / /2, 191  
- > /2, 114  
= < /2, 188  
# < == /2, 456  
< < /2, 194  
< /2, 188  
> : < /2, 258  
: < /2, 258  
- /1, 190  
- /2, 190  
\ = /2, 109  
\ /1, 194  
\ == /2, 110  
\ + /1, 115  
\ / /2, 194  
+ /1, 190  
+ /2, 190  
\* \* /2, 195  
# == > /2, 455  
> > /2, 194, 535  
> > /3, 535  
> > /4, 535  
> > /5, 535  
> > /6, 535  
> > /7, 535  
> > /8, 535  
> > /9, 535  
; /2, 114  
\* - > /2, 114  
= @ = /2, 111  
\ = @ = /2, 112  
@ > = /2, 110  
@ > /2, 110  
\* /2, 190  
@ = < /2, 110  
@ < /2, 110  
= . . /2, 172  
\, 71  
\_PL\_get\_arg(), 351  
64-bits  
    platforms, 68  
  
abolish /1, 132  
abolish /2, 132

- abolish/[1  
2], 43
- abolish\_all\_tables/0, 283
- abolish\_table\_subgoals/1, 283
- abort/0, 25, 31, 120, 121, 147, 150, 153, 226, 302,  
382, 385, 540
- abs/1, 191
- absolute\_file\_name/2, 15, 88, 94, 222, 224, 226,  
412
- absolute\_file\_name/3, 41, 46, 51, 54, 81, 87, 93,  
94, 96, 214, 222, 223, 379, 380, 412,  
513
- absolute\_file\_name/[2  
3], 49, 93, 223
- access\_file/2, 41, 50, 157, 221, 223, 410
- acos/1, 194
- acosh/1, 195
- acquire(), 367
- acyclic\_term/1, 61, 109, 111
- add\_edges/3, 528
- add\_import\_module/3, 272, 277
- add\_nb\_set/2, 482
- add\_nb\_set/3, 482
- add\_vertices/3, 528
- agent, 423
- aggregate *library*, 327
- aggregate/3, 131, 268, 417
- aggregate/4, 268, 417
- aggregate\_all/3, 131, 417
- aggregate\_all/4, 417
- all\_different/1, 450
- all\_distinct/1, 449
- alpha\_to\_lower/1, 465
- AMD64, 69
- anonymous  
variable, 60
- anonymous variable, 550
- ansi\_format/3, 125, 418
- ansi\_term *library*, 39, 124, 125
- answer subsumption  
tabling, 281
- append/1, 154, 156
- append/2, 266, 476
- append/3, 144, 178, 476
- apply/2, 115
- apply\_macros *library*, 116, 130
- apropos/1, 27, 52, 545, 559
- apropos\_match/2, 179
- arg/3, 172
- argv\_options/3, 406, 481
- arithmetic\_function/1, 374
- arity, 550
- asin/1, 194
- asinh/1, 195
- assert, 550
- assert/1, 87, 133, 134, 137, 139, 141, 208, 264,  
267, 318
- assert/2, 39, 134, 144
- assert\_predicate\_options/4, 503
- asserta/1, 24, 61, 62, 93, 112, 131, 133, 134, 269,  
270, 550
- asserta/2, 134
- assertion/1, 469, 542
- assertz/1, 18, 93, 131–134, 143, 144, 276, 286,  
329, 550
- assertz/2, 134
- assignment/2, 520
- assoc *library*, 110, 256, 260, 261, 481
- assoc\_to\_keys/2, 422
- assoc\_to\_list/2, 422
- assoc\_to\_values/2, 422
- at\_end\_of\_stream/0, 162
- at\_end\_of\_stream/1, 163
- at\_end\_of\_stream/[0  
1], 150, 512
- at\_halt/1, 41, 96, 97, 227, 311, 386, 393, 561
- atan/1, 195
- atan/2, 195
- atan2/2, 195
- atanh/1, 195
- atom, 550
- atom//1, 466
- atom/1, 108, 291, 346
- atom\_chars/2, 86, 158, 161, 176, 177, 183, 263
- atom\_codes/2, 86, 158, 176–178, 183, 263
- atom\_concat/3, 178, 245, 413, 572
- ATOM\_dot(), 345
- atom\_length/2, 42, 179, 245
- ATOM\_nil(), 345
- atom\_number/2, 157, 177, 178
- atom\_prefix/2, 179
- atom\_result/2, 274
- atom\_string/2, 244
- atom\_to\_chars/2, 425

- atom\_to\_chars/3, 425
- atom\_to\_term/3, 171, 178
- atomic/1, 108
- atomic\_concat/3, 178
- atomic\_list\_concat/2, 177, 178
- atomic\_list\_concat/3, 178
- atomics\_to\_string/2, 246
- atomics\_to\_string/3, 246
- attach\_console/0, 321, 382
- attach\_packs/0, 54
- attach\_packs/1, 54
- attach\_packs/2, 54, 55
- attr\_portray\_hook/2, 164, 289
- attr\_unify\_hook/2, 52, 286–288
- attribute\_goals/1, 289
- attvar/1, 288
- autoload/0, 54, 92, 407, 408, 413
- autoload\_path/1, 53
- automaton/3, 453
- automaton/8, 453
  
- b\_getval/2, 209
- b\_set\_dict/3, 259
- b\_setval/2, 47, 131, 208, 209, 259, 329, 544
- backcomp *library*, 174, 207
- backtracking, 550
- bagof/3, 61, 201, 202, 268, 327, 559
- bb\_inf/3, 459
- bb\_inf/4, 459
- bb\_inf/5, 459
- between/3, 187
- binding, 550
- bits
  - 64, 68
- blackboard, 423
- blank//0, 465
- blanks//0, 465
- blanks\_to\_nl//0, 465
- blob/2, 108, 146
- body, 550
- Boehm GC, 403
- BOM, 66
- break/0, 25, 31, 38, 48, 226, 302, 382
- broadcast, 423
- broadcast *library*, 423
- broadcast/1, 423
- broadcast\_request/1, 423
  
- built-in predicate, 550
- Byte Order Mark, 66
- byte\_count/2, 152, 160
  
- call/1, 81, 108, 113–115, 119, 120, 229, 231, 234, 235, 264, 292, 370, 542
- call/2, 108, 115
- call/3, 166
- call/4, 157
- call\_cleanup/2, 118, 119, 158, 539, 547
- call\_cleanup/3, 119
- call\_dcg/3, 130
- call\_nth/2, 524
- call\_residue\_vars/2, 291, 292
- call\_shared\_object\_function/2, 338
- call\_with\_depth\_limit/3, 116, 117
- call\_with\_inference\_limit/3, 116, 117
- call\_with\_time\_limit/2, 117, 121
- callable/1, 108, 347, 507
- cancel\_halt/1, 96, 227, 393
- catch/3, 119–122, 169, 221, 226, 234, 310, 312, 313, 330, 539, 543, 544, 573
- catch\_with\_backtrace/3, 120
- ceil/1, 194
- ceiling/1, 194
- chain/2, 454
- char\_code/2, 86, 177
- char\_conversion/2, 39, 185
- char\_type/2, 59, 179, 181, 183
- character set, 55
- character\_count/2, 152, 160
- chat:inv\_map\_list/5, 235
- chdir/1, 226
- check *library*, 93
- check/0, 92, 426
- check:string\_predicate/1, 248
- check:valid\_string\_goal/1, 248, 249
- check\_predicate\_option/3, 503
- check\_predicate\_options/0, 503
- checker/2, 428
- choice point, 550
- chr *library*, 300, 302
- chr\_constraint/1, 297, 304
- chr\_leash/1, 302
- chr\_notrace/0, 301, 302
- chr\_option/2, 296, 304
- chr\_show\_store/1, 303

- chr\_trace/0, 301, 302
- chr\_type/1, 298
- circuit/1, 452
- clause, 551
- clause/2, 45, 107, 144, 408
- clause/3, 134, 144, 145, 409
- clause/[2  
3], 43
- clause\_property/2, 92, 94, 141, 142, 144, 538
- close/1, 145, 149, 151
- close/2, 149
- close\_any/1, 475
- close\_dde\_conversation/1, 239
- close\_shared\_object/1, 337
- CLP, 285
- clpfd *library*, 271
- clpqr *library*, 458
- code\_type/2, 179, 181, 183
- collate, 183
- collation\_key/2, 179, 183, 184, 212
- COM, 366
- command line
  - arguments, 24
- compare
  - language-specific, 183
- compare(), 367
- compare/3, 61, 110, 201, 378, 548
- compile\_aux\_clauses/1, 87, 99, 141
- compile\_predicates/1, 139
- compiling/0, 98, 104
- complement/2, 529
- completion
  - TAB, 74
- compose/3, 529
- compound, 551
- compound/1, 108
- compound\_name\_arguments/3, 108, 173, 251, 254
- compound\_name\_arity/3, 108, 172, 173, 251, 254
- concat\_atom/3, 179
- constraint programming, 285
- constraint/3, 519
- constraint/4, 520
- constraint\_add/4, 520
- consult/1, 17, 20, 52, 80, 87–89, 91–93, 103, 104, 139
- contains\_term/2, 483
- contains\_var/2, 483
- context module, 551
- context\_module/1, 269, 275, 370
- convert\_setting\_text/3, 518
- convert\_time/[2  
8], 222
- convlist/3, 419
- copy\_file/2, 211
- copy\_predicate\_clauses/2, 132
- copy\_stream\_data/2, 163
- copy\_stream\_data/3, 152, 163
- copy\_term/2, 61, 112, 175, 176, 209, 259, 286, 290
- copy\_term/3, 158, 166, 286, 289, 290
- copy\_term\_nat/2, 290
- copysign/2, 192
- cos/1, 194
- cosh/1, 195
- count\_atom\_results/3, 274
- cputime/0, 197
- create\_pool/1, 527
- create\_prolog\_flag/3, 36, 49, 51, 380
- crypt *library*, 558
- crypto *library*, 192
- crypto\_n\_random\_bytes/2, 192
- csv//1, 462
- csv//2, 462
- csv\_options/2, 463
- csv\_read\_file/2, 200, 462
- csv\_read\_file/3, 462
- csv\_read\_file\_row/3, 463
- csv\_read\_row/3, 463
- csv\_read\_stream/3, 462
- csv\_write\_file/2, 464
- csv\_write\_file/3, 464
- csv\_write\_stream/3, 464
- ctypes *library*, 181
- cumulative/1, 452
- cumulative/2, 452
- current\_arithmetic\_function/1, 198
- current\_atom/1, 139
- current\_blob/2, 140, 367
- current\_char\_conversion/2, 185
- current\_engine/1, 333
- current\_flag/1, 140
- current\_foreign\_library/2, 337, 407
- current\_format\_predicate/2, 208



- current\_functor/2, 140
- current\_input/1, 96, 146, 156
- current\_key/1, 134, 140
- current\_locale/1, 181
- current\_module/1, 140, 275
- current\_op/3, 184, 185
- current\_option\_arg/2, 503
- current\_output/1, 146, 156
- current\_persistent\_predicate/1, 497
- current\_predicate/1, 115, 140, 141
- current\_predicate/2, 140, 141
- current\_predicate\_option/3, 503
- current\_predicate\_options/3, 503
- current\_prolog\_flag/2, 22–24, 36, 53, 55, 58, 88, 169, 239, 335, 381, 415, 552
- current\_setting/1, 518
- current\_signal/3, 127
- current\_stream/3, 151, 226
- current\_table/2, 283
- current\_thread\_pool/1, 526
- current\_trie/1, 136
- current\_type/3, 474
- cyclic terms, 61
- cyclic\_term/1, 61, 109
  
- daemon, 423
- date\_time\_stamp/2, 216
- date\_time\_value/3, 215, 217
- day\_of\_the\_week/2, 220
- db\_attach/2, 497
- db\_attached/1, 497
- db\_detach/0, 497
- db\_sync/1, 497
- db\_sync\_all/1, 498
- DCG, 87, 128
  - indexing, 63
- dcg, 551
- dcg\_translate\_rule/2, 99, 100
- dcg\_translate\_rule/4, 100
- dde\_current\_connection/2, 240
- dde\_current\_service/2, 240
- dde\_execute/2, 239
- dde\_poke/4, 239
- dde\_register\_service/2, 239
- dde\_request/3, 239
- dde\_unregister\_service/1, 240
- debug *library*, 83
- debug/0, 30, 32, 48, 122, 228, 229, 237, 322, 381, 542, 543
- debug/1, 468
- debug/3, 123, 469
- debug\_message\_context/1, 469
- debugging
  - exceptions, 121
- debugging/0, 52, 229, 545
- debugging/1, 468
- debugging/2, 468
- declarative, 286
- default\_module/2, 99, 141–143, 272
- del\_assoc/4, 422
- del\_attr/2, 288, 290
- del\_attrs/1, 290
- del\_dict/4, 258
- del\_edges/3, 528
- del\_max\_assoc/4, 422
- del\_min\_assoc/4, 422
- del\_vertices/3, 528
- delete/3, 477
- delete\_directory/1, 225
- delete\_file/1, 211, 222, 225
- delete\_import\_module/2, 272, 277
- derive\_predicate\_options/0, 504
- derived\_predicate\_options/1, 504
- derived\_predicate\_options/3, 504
- deserialize, 128
- det, 551
- determinism, 551
- deterministic, 551
- deterministic/1, 118, 539
- Development environment, 71
- dialect.pl *library*, 546
- dict\_create/3, 257
- dict\_fill/4, 470
- dict\_keys/2, 470
- dict\_options/2, 485
- dict\_pairs/3, 257, 261
- dicts\_join/3, 470
- dicts\_join/4, 470
- dicts\_same\_keys/2, 470
- dicts\_same\_tag/2, 470
- dicts\_slice/3, 471
- dicts\_to\_compounds/4, 471
- dicts\_to\_same\_keys/3, 470
- dif *library*, 291

- dif/2, 61, 109, 113, 285, 290–292
- digit//1, 465
- digits//1, 465
- directory\_file\_path/3, 221
- directory\_files/2, 224
- discontiguous/1, 92, 123, 138, 139, 230
- disjoint2/1, 453
- display/1, 204, 354, 355
- distinct/1, 524
- distinct/2, 524
- div/2, 191
- divmod/4, 187
- dld, 335
- do\_not\_use/1, 270
- domain/2, 287
- domain\_error/2, 365, 472
- downcase\_atom/2, 182, 183
- dump/3, 459, 462
- duplicate\_term/2, 61, 175, 176, 209
- dwim\_match/2, 144, 240
- dwim\_match/3, 240
- dwim\_predicate/2, 144
- dynamic predicate, 551
- dynamic/1, 44, 48, 86, 92, 131, 133, 138, 139, 141, 275, 318, 408, 409
- e/0, 196
- edge/2, 282
- edges/2, 528
- edit/0, 38, 105
- edit/1, 19, 41, 52, 74, 75, 80, 84, 92, 93, 105, 106, 270, 569
- editline *library*, 45
- element/3, 451
- elif/1, 101
- else/0, 101
- Emacs, 25
- emacs/prolog\_colour *library*, 78
- emacs/prolog\_mode *library*, 78
- empty\_assoc/1, 421
- empty\_nb\_set/1, 482
- encoding/1, 65, 92
- endif/0, 101
- engine\_create/3, 332
- engine\_create/4, 332
- engine\_destroy/1, 331, 332
- engine\_fetch/1, 330, 332, 333
- engine\_next/1, 327
- engine\_next/2, 327, 332
- engine\_next\_reified/2, 332
- engine\_post/2, 332, 333
- engine\_post/3, 332, 333
- engine\_self/1, 333
- engine\_yield/1, 327, 330–332
- ensure\_loaded/1, 33, 87, 88, 91, 266
- entailed/1, 459
- environment/2, 506
- eos/0, 466
- epsilon/0, 196
- erase/1, 131, 134, 144
- erf/1, 196
- erfc/1, 196
- error *library*, 107, 514
- eval/1, 197
- exception/3, 52, 209, 543, 544
- exceptions
  - debugging, 121
- exclude/3, 419
- existence\_error/2, 472
- existence\_error/3, 472
- exists\_directory/1, 157, 221, 222, 410
- exists\_file/1, 41, 157, 221, 410
- exists\_source/1, 546, 547
- exp/1, 195
- expand\_answer/2, 227
- expand\_file\_name/2, 41, 89, 212, 222–224
- expand\_file\_search\_path/2, 94
- expand\_goal/2, 44, 98, 99, 101
- expand\_goal/4, 100
- expand\_query/4, 227
- expand\_term/2, 96, 98–100, 128, 139, 515
- expand\_term/4, 100
- expects\_dialect/1, 89, 90, 96, 546
- explain *library*, 564
- explain/1, 28
- explain/2, 28
- export/1, 102, 139, 273
- export\_list/2, 273
- exported predicate, 551
- fact, 551
- fail/0, 99, 113
- false/0, 113
- fast\_read/2, 159

- fast\_term\_serialized/2, 158
- fast\_write/2, 158
- fastrw *library*, 158
- fd\_dom/2, 457
- fd\_inf/2, 457
- fd\_size/2, 457
- fd\_sup/2, 457
- fd\_var/1, 457
- fields/4, 515
- file\_base\_name/2, 222
- file\_directory\_name/2, 221, 222
- file\_name\_extension/3, 224
- file\_name\_to\_url/2, 532
- file\_of\_label/2, 270
- file\_search\_path/2, 20, 24, 38, 49, 51, 53, 54, 72, 81, 89, 93, 94, 96, 157, 380, 397, 411, 412, 414
- filesex *library*, 211, 221
- fill\_buffer/1, 163
- find\_chr\_constraint/1, 303
- findall/3, 61, 112, 113, 131, 201, 203, 261, 286, 327, 328, 332, 564
- findall/4, 201
- findnsols/4, 201, 564
- findnsols/5, 201
- flag/3, 131, 135, 140, 175
- flag:access\_level, 37
- flag:address\_bits, 37
- flag:agc\_margin, 37
- flag:allow\_dot\_in\_atom, 37
- flag:allow\_variable\_name\_as\_functor, 37
- flag:answer\_write\_options, 47
- flag:apple, 37
- flag:arch, 38
- flag:argv, 37
- flag:associated\_file, 38
- flag:autoload, 38
- flag:back\_quotes, 38
- flag:backtrace, 38
- flag:backtrace\_depth, 38
- flag:backtrace\_goal\_depth, 38
- flag:backtrace\_show\_lines, 38
- flag:bounded, 38
- flag:break\_level, 38
- flag:c\_cc, 38
- flag:c\_cflags, 38
- flag:c\_ldflags, 38
- flag:c\_libplso, 39
- flag:c\_libs, 39
- flag:char\_conversion, 39
- flag:character\_escapes, 39
- flag:colon\_sets\_calling\_context, 39
- flag:color\_term, 39
- flag:compile\_meta\_arguments, 39
- flag:compiled\_at, 40
- flag:console\_menu, 40
- flag:cpu\_count, 40
- flag:dde, 40
- flag:debug, 40
- flag:debug\_on\_error, 40
- flag:debugger\_show\_context, 40
- flag:debugger\_write\_options, 40
- flag:dialect, 40
- flag:double\_quotes, 40
- flag:editor, 41
- flag:emacs\_inferior\_process, 41
- flag:encoding, 41
- flag:executable, 41
- flag:exit\_status, 41
- flag:file\_name\_case\_handling, 41
- flag:file\_name\_variables, 41
- flag:file\_search\_cache\_time, 41
- flag:gc, 42
- flag:gc\_thread, 42
- flag:generate\_debug\_info, 42
- flag:gmp\_version, 42
- flag:gui, 42
- flag:history, 42
- flag:home, 42
- flag:hwnd, 42
- flag:integer\_rounding\_function, 42
- flag:iso, 42
- flag:large\_files, 43
- flag:last\_call\_optimisation, 43
- flag:max\_arity, 43
- flag:max\_integer, 43
- flag:max\_tagged\_integer, 43
- flag:message\_context, 43
- flag:min\_integer, 43
- flag:min\_tagged\_integer, 44
- flag:mitigate\_spectre, 44
- flag:occurs\_check, 44
- flag:open\_shared\_object, 44
- flag:optimise, 44

- flag:os\_argv, 44
- flag:pid, 44
- flag:pipe, 44
- flag:posix\_shell, 45
- flag:print\_write\_options, 45
- flag:prompt\_alternatives\_on, 45
- flag:protect\_static\_code, 45
- flag:qcompile, 45
- flag:readline, 45
- flag:report\_error, 46
- flag:resource\_database, 45
- flag:runtime, 46
- flag:sandboxed\_load, 46
- flag:saved\_program, 46
- flag:shared\_object\_extension, 46
- flag:shared\_object\_search\_path, 46
- flag:signals, 46
- flag:stack\_limit, 46
- flag:stream\_type\_check, 46
- flag:system\_thread\_id, 46
- flag:table\_space, 46
- flag:threads, 46
- flag:timezone, 47
- flag:tmp\_dir, 45
- flag:toplevel\_goal, 47
- flag:toplevel\_mode, 47
- flag:toplevel\_print\_anon, 47
- flag:toplevel\_print\_factorized, 47
- flag:toplevel\_prompt, 48
- flag:toplevel\_var\_size, 48
- flag:trace\_gc, 48
- flag:traditional, 48
- flag:tty\_control, 48
- flag:unix, 48
- flag:unknown, 48
- flag:unload\_foreign\_libraries, 48
- flag:user\_flags, 49
- flag:var\_prefix, 49
- flag:verbose, 49
- flag:verbose\_autoload, 49
- flag:verbose\_file\_search, 49
- flag:verbose\_load, 49
- flag:version, 49
- flag:version\_data, 49
- flag:version\_git, 49
- flag:warn\_override\_implicit\_import, 49
- flag:win\_file\_access\_check, 50
- flag:windows, 49, 50
- flag:wine\_version, 49
- flag:write\_attributes, 50
- flag:write\_help\_with\_overstrike, 50
- flag:xpce, 50
- flag:xpce\_version, 50
- flag:xref, 50
- flatten/2, 266, 479
- float/1, 466
- float/1, 107, 108, 193
- float\_fractional\_part/1, 193
- float\_integer\_part/1, 194
- floor/1, 194
- flounder, 291
- flush\_output/0, 161
- flush\_output/1, 124, 161, 163
- flush\_output/[0  
1], 147, 161
- foldl/4, 420
- foldl/5, 420
- foldl/6, 420
- foldl/7, 420
- forall/2, 203
- foreach/2, 468
- foreach/3, 468
- foreach/2, 203, 417
- fork/1, 237
- format/1, 124, 203, 205
- format/2, 58, 148, 168, 180, 203, 205, 207
- format/3, 123–126, 146, 157, 164, 177, 178, 180,  
183, 189, 190, 203, 207, 208, 248, 249
- format/[1  
2], 164, 564
- format/[2  
3], 58
- format\_predicate/2, 208
- format\_time/3, 43, 47, 180, 208, 212, 217
- format\_time/4, 217, 219
- format\_to\_chars/3, 425
- format\_to\_chars/4, 425
- free\_of\_term/2, 483
- free\_of\_var/2, 483
- free\_variables/4, 417
- freeze/2, 291, 292
- frozen/2, 292
- functor, 552
- functor/3, 108, 140, 172, 173, 210, 251, 254

- garbage\_collect/0, 236, 331
- garbage\_collect\_atoms/0, 37, 236, 331, 386
- garbage\_collect\_clauses/0, 63, 102, 103, 131, 236
- gcd/2, 191
- gdebug/0, 80
- gen\_assoc/3, 421
- gen\_nb\_set/2, 482
- gen\_state/1, 519
- gensym/2, 474
- get/1, 162, 255
- get/2, 162
- get0/1, 148, 162
- get0/2, 162
- get\_assoc/3, 261, 421
- get\_assoc/5, 421
- get\_attr/3, 288, 290
- get\_attrs/2, 290
- get\_byte/1, 161, 162
- get\_byte/2, 161
- get\_byte/[1  
2], 86
- get\_char/1, 161
- get\_char/2, 161
- get\_char/[1  
2], 86
- get\_code/1, 86, 146, 161, 162
- get\_code/2, 65, 152, 161–163
- get\_code/[1  
2], 86
- get\_dict/3, 255, 256
- get\_dict/5, 257
- get\_dict\_ex/3, 254–256
- get\_flag/2, 135
- get\_single\_char/1, 23, 48, 162
- get\_string\_code/3, 245
- get\_time/1, 44, 216, 222, 233, 314, 316
- getbit/2, 197
- getenv/2, 212, 483
- getrand/1, 511
- global\_cardinality/2, 451
- global\_cardinality/3, 451
- global\_url/3, 530
- GMP, 189
- GNU-Emacs, 25
- goal, 552
- goal\_expansion/2, 50, 52, 87, 95, 98–101, 103, 547, 548, 561
- goal\_expansion/4, 87, 100
- ground/1, 61, 109, 137, 174, 347
- group\_by/4, 525
- group\_pairs\_by\_key/2, 495
- gspy/1, 30, 80
- gtrace/0, 30, 80, 321
- guitracer/0, 80, 84, 228
- gxref/0, 81, 267, 408, 507
- halt/0, 20, 31, 47, 96, 98, 226, 406, 561
- halt/1, 41, 226, 382, 560
- halt/[0  
1], 96
- has\_type/2, 473
- hashing, 552
- head, 552
- heaps *library*, 330
- help/0, 26, 52, 545
- help/1, 26, 50, 52, 545
- Herbrand term, 285
- hooks, 51
- hotswap *library*, 412
- html\_write *library*, 508
- http/http\_error *library*, 122
- http/http\_header *library*, 219
- http/http\_load *library*, 91, 545
- http\_location/2, 531
- http\_open/3, 126
- http\_timestamp/2, 219
- IA32, 69
- IDE, 71
- if
  - directive, 101
- if/1, 95, 101, 405
- ignore/1, 116, 234, 310
- immediate
  - update view, 137
- import/1, 273
- import\_module/2, 140, 272
- imported predicate, 552
- in/2, 447
- in\_pce\_thread/1, 325
- in\_pce\_thread\_sync/1, 325, 326
- include/1, 87, 88, 91, 92, 94, 95, 145
- include/3, 419
- indexing, 552

- DCG, 63
- deep, 63
- jiti, 62
- term-hashes, 137
- indomain/1, 448
- inf/0, 196
- inf/2, 459
- infinite trees, 61
- initialization/1, 88, 97, 103, 104, 209, 311, 335, 390, 409, 410
- initialization/2, 23, 33, 47, 97, 103, 406, 409, 410
- initialize/0, 23, 98
- ins/2, 448
- instance/2, 134
- instantiation, 552
- instantiation\_error/1, 365, 472
- integer, 552
  - unbounded, 188
- integer//1, 465
- integer/1, 107, 108, 193
- interactor/0, 153, 321
- internationalization, 64
- interpreted, 552
- intersection/3, 480
- is/2, 188, 189, 193, 304
- is\_absolute\_file\_name/1, 224
- is\_absolute\_url/1, 531
- is\_assoc/1, 422
- is\_dict/1, 256
- is\_dict/2, 256
- is\_engine/1, 333
- is\_lambda/1, 536
- is\_list/1, 198
- is\_of\_type/2, 473
- is\_ordset/1, 492
- is\_set/1, 480
- is\_stream/1, 151
- is\_thread/1, 312
- is\_trie/1, 136
- ISO Latin 1, 55
- Java, 366
- jiti\_list/0, 63
- jitindex, 62
- join\_threads/0, 321
- keysort/2, 200, 201
- known\_licenses/0, 557, 558
- label/1, 448
- labeling/1, 433
- labeling/2, 448
- lambda\_calls/2, 536
- lambda\_calls/3, 536
- last/2, 478
- lazy\_list\_character\_count/1, 499
- lazy\_list\_location//1, 499
- leash/1, 30, 229, 302, 540
- length/2, 199, 255
- lex\_chain/1, 450
- lgamma/1, 196
- library(apply\_macros) *library*, 87
- library(dcg/basics) *library*, 129
- library\_directory/1, 51, 53, 54, 93
- license/0, 557
- license/1, 557, 558
- license/2, 557, 558
- limit/2, 524
- line\_count/2, 152, 154, 160, 210
- line\_position/2, 152–154, 160, 210
- list\_autoload/0, 427
- list\_debug\_topics/0, 469
- list\_redefined/0, 427
- list\_settings/0, 518
- list\_settings/1, 518
- list\_strings/0, 242, 248, 249, 251, 427
- list\_strings/1, 427
- list\_to\_assoc/2, 261, 421
- list\_to\_ord\_set/2, 492
- list\_to\_set/2, 480
- list\_trivial\_fails/0, 427
- list\_trivial\_fails/1, 427
- list\_undefined/0, 39, 93, 143, 413, 426
- list\_undefined/1, 426
- list\_void\_declarations/0, 427
- listen/2, 424
- listen/3, 424, 425
- listening/3, 425
- listing/0, 19, 107
- listing/1, 19, 31, 107
- lists *library*, 198
- lists:member/2, 107
- load\_files/1, 88

- load\_files/2, 45, 46, 49, 52, 65, 88, 90, 91, 94, 95, 103–105, 230, 266, 507, 545, 547, 569
- load\_foreign\_library/1, 97, 336, 337, 395
- load\_foreign\_library/2, 336
- load\_settings/1, 517
- load\_settings/2, 517
- locale, 183
- locale\_create/3, 180
- locale\_destroy/1, 180
- locale\_property/2, 180
- locale\_sort/2, 179, 183, 184, 212
- log/1, 195
- log10/1, 195
- logical
  - update view, 137
- lsb/1, 197
- MacOS, 37
- main *library*, 33, 120
- main/0, 33, 120, 481
- main/1, 33
- make/0, 14, 18, 19, 39, 53, 54, 75, 80, 84, 89–93, 95, 102, 103
- make\_directory/1, 211, 225
- make\_library\_index/1, 53
- make\_library\_index/2, 53, 54
- make\_library\_index/[1 2], 54
- map\_assoc/2, 422
- map\_assoc/3, 422
- map\_list\_to\_pairs/3, 495
- maplist/2, 203, 263, 419
- maplist/3, 261, 267, 274, 419
- maplist/4, 419
- maplist/5, 419
- max/2, 192
- max\_assoc/3, 421
- max\_list/2, 479
- max\_member/2, 479
- max\_var\_number/3, 533
- maximize/1, 459
- maximize/3, 519
- maybe/0, 511
- maybe/1, 511
- maybe/2, 511
- member/2, 31, 118, 199, 223, 266, 476, 567
- memberchk/2, 112, 199, 250
- memory
  - layout, 66
- merge\_options/3, 485
- message
  - service, 423
- message\_hook/3, 51, 123–126, 238, 573
- message\_prefix\_hook/2, 51
- message\_property/2, 39, 51, 125
- message\_queue\_create/1, 314–316
- message\_queue\_create/2, 310, 315, 317
- message\_queue\_create/3, 319
- message\_queue\_destroy/1, 316
- message\_queue\_property/2, 313, 316
- message\_to\_string/2, 124, 125
- meta-predicate, 553
- meta\_options/3, 266, 485
- meta\_predicate/1, 39, 99, 108, 142, 143, 267–269, 273, 276, 370, 383, 408
- mild/1, 19
- min/2, 192
- min\_assoc/3, 421
- min\_list/2, 479
- min\_member/2, 479
- minimize/1, 459
- minimize/3, 519
- mod/2, 191
- mode, 553
- module, 553
  - context, 551
- module transparent, 553
- module/1, 48, 87, 139, 184, 270, 310
- module/2, 98, 184, 185, 264, 265, 267, 271, 273, 277
- module/3, 265
- module\_property/2, 275, 276
- module\_transparent/1, 143, 269, 270, 275, 276, 370, 551
- msb/1, 197
- msort/2, 200
- multi, 553
- multifile/1, 48, 92, 138, 139, 142, 544, 553
- must\_be/2, 473, 514
- mutex\_create/1, 319, 320
- mutex\_create/2, 320, 321
- mutex\_destroy/1, 320
- mutex\_lock/1, 320
- mutex\_property/2, 321

- mutex\_statistics/0, 314
- mutex\_trylock/1, 320
- mutex\_unlock/1, 320
- mutex\_unlock\_all/0, 320
- my\_compare/3, 548
- mypred/1, 270
- name/1, 267
- name/2, 176, 177
- name\_of/2, 424
- nan/0, 197
- nb\_current/2, 209, 210
- nb\_delete/1, 210
- nb\_getval/2, 209, 210
- nb\_link\_dict/3, 259
- nb\_linkarg/3, 175, 176, 259
- nb\_linkval/2, 176, 209, 210, 259
- nb\_set *library*, 481
- nb\_set\_dict/3, 259
- nb\_set\_to\_list/2, 482
- nb\_setarg/3, 85, 131, 175, 176, 201, 259, 481, 514
- nb\_setval/2, 131, 175, 176, 208–210, 259, 330, 544
- neck, 553
- neighbors/3, 529
- neighbours/3, 529
- nextto/3, 477
- nl/0, 160
- nl/1, 160
- nl/[0  
1], 204
- nodebug/0, 229, 540
- nodebug/1, 468
- noguitracer/0, 80, 84, 228
- non deterministic, 553
- non\_terminal/1, 139, 143
- nonblank//1, 465
- nonblanks//1, 465
- nondet, 553
- nonground/2, 109, 174
- nonvar/1, 107
- noprofile/1, 234
- noprotocol/0, 228
- normalize\_space/2, 183
- nospy/1, 31, 52, 229, 322, 544
- nospyall/0, 52, 229, 544
- not/1, 115, 559
- notrace/0, 228, 302
- notrace/1, 229
- nth0/3, 477
- nth0/4, 477
- nth1/3, 477
- nth1/4, 478
- nth\_clause/3, 141, 144, 538
- nth\_integer\_root\_and\_remainder/4, 187
- number
  - rational, 188
- number//1, 466
- number/1, 108
- number\_chars/2, 86, 177
- number\_codes/2, 86, 176–178
- number\_string/2, 244
- number\_to\_chars/2, 425
- number\_to\_chars/3, 425
- numbervars/1, 533
- numbervars/3, 61, 165, 173, 174
- numbervars/4, 61, 167, 173, 174
- numlist/3, 479
- obfuscate *library*, 413
- objective/2, 519
- occurrences\_of\_term/3, 483
- occurrences\_of\_var/3, 483
- occurs\_check, 111
- offset/2, 524
- on\_signal/3, 127
- once/1, 114–117, 157, 201, 226, 229, 231, 319, 320, 372
- online\_help *library*, 560
- op/3, 138, 165, 184, 185, 271
- open/3, 41, 85, 145–147, 149, 157, 365, 410
- open/4, 65, 66, 86, 146, 147, 149, 150, 152, 154, 163, 181, 221, 260, 261, 410, 411, 513
- open\_any/5, 475
- open\_chars\_stream/2, 426
- open\_dde\_conversation/3, 239
- open\_hook/6, 475
- open\_null\_stream/1, 149, 152
- open\_resource/2, 406, 411
- open\_resource/3, 391, 407, 410, 411
- open\_shared\_object/2, 44, 214, 335, 337
- open\_shared\_object/3, 337, 411
- open\_string/2, 247
- operand, 553



- operator, 553
  - and modules, 184
- opt\_arguments/3, 490
- opt\_help/2, 491
- opt\_parse/4, 491
- opt\_parse/5, 491
- option *library*, 260, 263, 514
- option/2, 484
- option/3, 484
- optional//2, 467
- options *library*, 262
- ord\_add\_element/3, 493
- ord\_del\_element/3, 493
- ord\_disjoint/2, 492
- ord\_empty/1, 492
- ord\_intersect/2, 492
- ord\_intersect/3, 492
- ord\_intersection/2, 493
- ord\_intersection/3, 493
- ord\_intersection/4, 493
- ord\_list\_to\_assoc/2, 421
- ord\_memberchk/2, 493
- ord\_selectchk/3, 493
- ord\_seteq/2, 492
- ord\_subset/2, 493
- ord\_subtract/3, 493
- ord\_syndiff/3, 494
- ord\_union/2, 494
- ord\_union/3, 494
- ord\_union/4, 494
- order\_by/2, 200, 524
- ordsets *library*, 110
- pack\_info/1, 504
- pack\_install/1, 505
- pack\_install/2, 505
- pack\_list/1, 504
- pack\_list\_installed/0, 504
- pack\_property/2, 506
- pack\_rebuild/0, 506
- pack\_rebuild/1, 506
- pack\_remove/1, 506
- pack\_search/1, 504
- pack\_upgrade/1, 506
- pack\_url\_file/2, 506
- pairs *library*, 201, 261
- pairs\_keys/2, 495
- pairs\_keys\_values/3, 494
- pairs\_values/2, 494
- parse\_time/2, 219
- parse\_time/3, 219, 220
- parse\_type/3, 491
- parse\_url/2, 531
- parse\_url/3, 532
- parse\_url\_search/2, 532
- partition/4, 419
- partition/5, 419
- pce\_dispatch/1, 325, 326
- pce\_thread/1, 325
- pce\_xref *library*, 81
- peek\_byte/1, 162
- peek\_byte/2, 162
- peek\_byte/[1  
2], 86
- peek\_char/1, 162
- peek\_char/2, 162
- peek\_char/[1  
2], 86
- peek\_code/1, 162
- peek\_code/2, 162
- peek\_code/[1  
2], 86
- peek\_string/3, 162
- pengines *library*, 201, 327
- permission\_error/3, 366, 472
- permutation/2, 478
- persistence *library*, 131
- persistent/1, 497
- person:name/1, 267
- phrase/2, 129
- phrase/3, 129, 130, 247, 268, 561
- phrase\_from\_file/2, 498
- phrase\_from\_file/3, 499
- phrase\_from\_quasi\_quotation/2, 510
- phrase\_from\_stream/2, 499
- pi/0, 196
- PL\_abort\_hook(), 385
- PL\_abort\_unhook(), 385
- PL\_action(), 381
- PL\_agc\_hook(), 386
- PL\_atom\_chars(), 345
- PL\_atom\_nchars(), 352
- PL\_atom\_wchars(), 352
- PL\_backtrace(), 401

- PL\_backtrace\_string(), 401
- PL\_blob\_data(), 368
- PL\_BLOB\_NOCOPY, 367
- PL\_BLOB\_TEXT, 367
- PL\_BLOB\_UNIQUE, 367
- PL\_call(), 372
- PL\_call\_predicate(), 372
- PL\_chars\_to\_term(), 363
- PL\_check\_data(), 401
- PL\_check\_stacks(), 401
- PL\_cleanup(), 393
- PL\_cleanup\_fork(), 393
- PL\_clear\_exception(), 376
- PL\_close\_foreign\_frame(), 373
- PL\_close\_query(), 372
- PL\_compare(), 378
- PL\_cons\_functor(), 356
- PL\_cons\_functor\_v(), 357
- PL\_cons\_list(), 357
- PL\_context(), 373
- PL\_copy\_term\_ref(), 340
- PL\_create\_engine(), 324
- PL\_current\_prolog\_flag(), 381
- PL\_current\_query(), 372
- PL\_cut\_query(), 372
- PL\_CYCLIC\_TERM, 353
- PL\_destroy\_engine(), 325
- PL\_discard\_foreign\_frame(), 373
- PL\_dispatch\_hook(), 385
- PL\_domain\_error(), 365
- PL\_duplicate\_record(), 378
- PL\_end\_stubborn\_change(), 403
- PL\_erase(), 378
- PL\_erase\_external(), 379
- PL\_exception(), 376
- PL\_existence\_error(), 365
- PL\_exit\_hook(), 386
- PL\_fail(), 342
- PL\_foreign\_context(), 344
- PL\_foreign\_context\_address(), 344
- PL\_foreign\_context\_predicate(), 344
- PL\_foreign\_control(), 343
- PL\_free(), 402
- PL\_functor\_arity(), 345
- PL\_functor\_name(), 345
- PL\_get\_arg(), 351
- PL\_get\_atom(), 348
- PL\_get\_atom\_chars(), 348
- PL\_get\_atom\_ex(), 364
- PL\_get\_atom\_nchars(), 351
- PL\_get\_blob(), 368
- PL\_get\_bool(), 350
- PL\_get\_bool\_ex(), 364
- PL\_get\_char\_ex(), 365
- PL\_get\_chars(), 348
- PL\_get\_compound\_name\_arity(), 350
- PL\_get\_file\_name(), 380
- PL\_get\_file\_nameW(), 380
- PL\_get\_float(), 350
- PL\_get\_float\_ex(), 365
- PL\_get\_functor(), 350
- PL\_get\_head(), 353
- PL\_get\_int64(), 350
- PL\_get\_int64\_ex(), 364
- PL\_get\_integer(), 350
- PL\_get\_integer\_ex(), 364
- PL\_get\_intptr(), 350
- PL\_get\_intptr\_ex(), 364
- PL\_get\_list(), 353
- PL\_get\_list\_chars(), 350
- PL\_get\_list\_ex(), 365
- PL\_get\_list\_nchars(), 351
- PL\_get\_long(), 350
- PL\_get\_long\_ex(), 364
- PL\_get\_module(), 350
- PL\_get\_mpq(), 369
- PL\_get\_mpz(), 369
- PL\_get\_name\_arity(), 350
- PL\_get\_nchars(), 351
- PL\_get\_nil(), 353
- PL\_get\_nil\_ex(), 365
- PL\_get\_pointer(), 350
- PL\_get\_pointer\_ex(), 365
- PL\_get\_signum\_ex(), 378
- PL\_get\_size\_ex(), 364
- PL\_get\_string\_chars(), 348
- PL\_get\_tail(), 353
- PL\_get\_wchars(), 352
- PL\_halt(), 393
- PL\_handle\_signals(), 377
- PL\_initialise(), 390
- PL\_instantiation\_error(), 365
- PL\_is\_acyclic(), 348
- PL\_is\_atom(), 347

PL\_is\_atomic(), 348  
PL\_is\_blob(), 368  
PL\_is\_callable(), 347  
PL\_is\_compound(), 347  
PL\_is\_float(), 347  
PL\_is\_functor(), 347  
PL\_is\_ground(), 347  
PL\_is\_initialised(), 391  
PL\_is\_integer(), 347  
PL\_is\_list(), 347  
PL\_is\_number(), 348  
PL\_is\_pair(), 348  
PL\_is\_string(), 347  
PL\_is\_variable(), 347  
PL\_license(), 558  
PL\_LIST, 353  
PL\_malloc(), 402  
PL\_malloc\_atomic(), 403  
PL\_malloc\_atomic\_uncollectable(), 403  
PL\_malloc\_stubborn(), 403  
PL\_malloc\_uncollectable(), 403  
PL\_module\_name(), 374  
PL\_new\_atom(), 345  
PL\_new\_atom\_mbchars(), 345  
PL\_new\_atom\_nchars(), 352  
PL\_new\_atom\_wchars(), 352  
PL\_new\_functor(), 345  
PL\_new\_module(), 374  
PL\_new\_term\_ref(), 340  
PL\_new\_term\_refs(), 340  
PL\_next\_solution(), 372  
PL\_NOT\_A\_LIST, 354  
PL\_on\_halt(), 386  
PL\_open\_foreign\_frame(), 372  
PL\_open\_query(), 370  
PL\_PARTIAL\_LIST, 353  
PL\_permission\_error(), 366  
PL\_pred(), 370  
PL\_predicate(), 370  
PL\_predicate\_info(), 370  
PL\_put\_atom(), 354  
PL\_put\_atom\_chars(), 354  
PL\_put\_atom\_nchars(), 351  
PL\_put\_blob(), 368  
PL\_put\_bool(), 354  
PL\_put\_chars(), 354  
PL\_put\_float(), 356  
PL\_put\_functor(), 356  
PL\_put\_int64(), 356  
PL\_put\_integer(), 356  
PL\_put\_list(), 356  
PL\_put\_list\_chars(), 356  
PL\_put\_list\_nchars(), 351  
PL\_put\_list\_ncodes(), 351  
PL\_put\_nil(), 356  
PL\_put\_pointer(), 356  
PL\_put\_string\_chars(), 354  
PL\_put\_string\_nchars(), 351, 356  
PL\_put\_term(), 356  
PL\_put\_term\_from\_chars(), 366  
PL\_put\_variable(), 354  
PL\_query(), 382  
PL\_quote(), 363  
PL\_raise(), 377  
PL\_raise\_exception(), 375  
PL\_realloc(), 402  
PL\_record(), 378  
PL\_record\_external(), 379  
PL\_recorded(), 378  
PL\_recorded\_external(), 379  
PL\_register\_atom(), 346  
PL\_register\_extensions(), 385  
PL\_register\_extensions\_in\_module(), 384  
PL\_register\_foreign(), 384  
PL\_register\_foreign\_in\_module(), 382  
PL\_representation\_error(), 365  
PL\_reset\_term\_refs(), 341  
PL\_resource\_error(), 366  
PL\_retry(), 343  
PL\_retry\_address(), 343  
PL\_rewind\_foreign\_frame(), 373  
PL\_same\_compound(), 378  
PL\_set\_engine(), 325  
PL\_set\_prolog\_flag(), 380  
PL\_set\_resource\_db\_mem(), 391  
PL\_sigaction(), 376  
PL\_signal(), 377  
PL\_skip\_list(), 353  
PL\_strip\_module(), 374  
PL\_succeed(), 342  
PL\_syntax\_error(), 366  
PL\_term\_type(), 346  
PL\_thread\_at\_exit(), 324  
PL\_thread\_attach\_engine(), 323

- PL\_thread\_destroy\_engine(), 324
- PL\_thread\_self(), 323
- PL\_throw(), 376
- PL\_toplevel(), 393
- PL\_type\_error(), 365
- PL\_unify(), 358
- PL\_unify\_arg(), 360
- PL\_unify\_atom(), 359
- PL\_unify\_atom\_chars(), 359
- PL\_unify\_atom\_nchars(), 351
- PL\_unify\_blob(), 368
- PL\_unify\_bool(), 359
- PL\_unify\_bool\_ex(), 365
- PL\_unify\_chars(), 359
- PL\_unify\_compound(), 360
- PL\_unify\_float(), 359
- PL\_unify\_functor(), 359
- PL\_unify\_int64(), 359
- PL\_unify\_integer(), 359
- PL\_unify\_list(), 360
- PL\_unify\_list\_chars(), 359
- PL\_unify\_list\_ex(), 365
- PL\_unify\_list\_nchars(), 351
- PL\_unify\_list\_ncodes(), 351
- PL\_unify\_mpq(), 369
- PL\_unify\_mpz(), 369
- PL\_unify\_nil(), 360
- PL\_unify\_nil\_ex(), 365
- PL\_unify\_pointer(), 359
- PL\_unify\_string\_chars(), 359
- PL\_unify\_string\_nchars(), 351
- PL\_unify\_term(), 360
- PL\_unify\_thread\_id(), 323
- PL\_unify\_uint64(), 359
- PL\_unify\_wchars(), 352
- PL\_unify\_wchars\_diff(), 352
- PL\_uninstantiation\_error(), 365
- PL\_unregister\_atom(), 346
- PL\_unregister\_blob\_type(), 367
- PL\_warning(), 381
- PL\_wchars\_to\_term(), 363
- plus/3, 187
- PLVERSION, 403
- poll(), 159
- popcount/1, 197
- portable
  - prolog code, 546
- portray/1, 32, 51, 73, 164, 166, 168, 371, 387, 544
- portray\_clause/1, 107
- portray\_clause/2, 107, 174
- portray\_text *library*, 168
- portray\_text/1, 130, 249
- powm/3, 196
- precedence, 553
- pred/1, 270
- predicate, 553
  - dynamic, 551
  - exported, 551
  - imported, 552
- predicate indicator, 85, 553
- predicate\_options/3, 502
- predicate\_property/2, 89, 92, 100, 115, 139–141, 268, 276
- predsort/3, 200, 201
- prefix/2, 476
- print/1, 45, 166–168, 204, 206, 371, 569
- print/2, 45, 168
- print\_message/2, 39, 43, 49, 51, 88, 96, 121–124, 126, 168, 170, 238, 310, 311, 567
- print\_message\_lines/3, 123–126, 567
- priority, 554
- process *library*, 147, 211, 212
- process\_create/3, 147, 212, 213
- profile file, 20
- profile/1, 231, 322, 393
- profile/2, 231
- profiler/2, 234
- profiling
  - foreign code, 403
- program, 554
- project\_attributes/2, 289
- prolog/0, 25, 154, 226, 227, 270, 393, 406, 539
- prolog/assertion\_failed, 469
- prolog/debug\_print\_hook, 469
- prolog/message\_line\_element, 418
- prolog:break\_hook/6, 541, 542
- prolog:called\_by/2, 408, 508
- prolog:comment\_hook/3, 168, 545
- prolog:debug\_control\_hook/1, 52, 544
- prolog:help\_hook/1, 52, 545
- prolog:message\_line\_element/2, 124, 125
- prolog:message\_prefix\_hook/2, 125
- prolog:show\_profile\_hook/1, 234

- prolog\_alert\_signal/2, 23, 128
- prolog\_breakpoints *library*, 541
- prolog\_choice\_attribute/3, 537, 538, 540
- prolog\_codewalk *library*, 143
- prolog\_current\_choice/1, 537–539
- prolog\_current\_frame/1, 537
- prolog\_cut\_to/1, 539
- prolog\_debug/1, 402
- prolog\_edit:edit\_command/2, 52, 106
- prolog\_edit:edit\_source/1, 52, 74, 84, 106
- prolog\_edit:load/0, 106
- prolog\_edit:locate/2, 106
- prolog\_edit:locate/3, 52, 105, 106
- prolog\_event\_hook/1, 121
- prolog\_exception\_hook/4, 120–122, 238, 543
- prolog\_file\_type/2, 87, 94, 223
- prolog\_frame\_attribute/3, 144, 537, 540, 543
- prolog\_ide/1, 83
- prolog\_jiti *library*, 63
- prolog\_list\_goal/1, 52, 544
- prolog\_load\_context/2, 95, 96, 99, 169, 546
- prolog\_load\_file/2, 52, 91, 545
- prolog\_nodebug/1, 402
- prolog\_pack *library*, 54
- prolog\_server *library*, 146, 154, 413
- prolog\_skip\_frame/1, 541
- prolog\_skip\_level/2, 541
- prolog\_source *library*, 50
- prolog\_stack *library*, 120, 538, 543
- prolog\_stack\_property/2, 237, 238
- prolog\_to\_os\_filename/2, 72, 214, 221, 224
- prolog\_trace\_interception/4, 52, 80, 228, 238, 537–539
- prolog\_var\_name//1, 466
- prolog\_xref *library*, 50, 81, 264
- prompt
  - alternatives, 45
- prompt/2, 171, 172, 310
- prompt1/1, 172
- propagation, 285
- proper\_length/2, 478
- property, 554
- protocol/1, 227, 228
- protocola/1, 227, 228
- protocolling/1, 228
- prove, 554
- public list, 554
- public/1, 138, 139, 143, 408, 413
- pure\_input *library*, 163
- put/1, 160, 256
- put/2, 160, 256
- put\_assoc/4, 422
- put\_attr/3, 175, 288–290
- put\_attrs/2, 290
- put\_byte/1, 160
- put\_byte/2, 160
- put\_byte/[1  
2], 86
- put\_char/1, 160, 161
- put\_char/2, 161
- put\_char/[1  
2], 86
- put\_code/1, 160, 161
- put\_code/2, 65, 161, 163
- put\_code/[1  
2], 86
- put\_dict/3, 256, 257
- put\_dict/4, 256, 257
- qcompile/1, 14, 87, 89, 90, 98, 104, 105, 306
- qcompile/2, 105
- qsave\_program/1, 40, 97, 407
- qsave\_program/2, 14, 35, 41, 45, 54, 73, 83, 97, 391, 405, 406, 409, 410, 413
- qsave\_program/[1  
2], 24, 35, 46, 144, 335, 390, 397, 408
- quasi\_quotation\_syntax/1, 143, 510
- quasi\_quotation\_syntax\_error/1, 510
- query, 552
- quiet, 22
- random *library*, 197
- random/1, 192, 510
- random/3, 511
- random\_between/3, 510
- random\_float/0, 192
- random\_labeling/2, 434
- random\_member/2, 511
- random\_perm2/4, 511
- random\_permutation/2, 512
- random\_property/1, 198
- random\_select/3, 511
- randseq/3, 512
- randset/3, 512

- rational
  - number, 188
- rational trees, 61
- rational/1, 107, 193
- rational/3, 107, 189
- rationalize/1, 193
- rbtrees *library*, 47
- RDF
  - memory usage, 69
- rdiv/2, 191
- reachable/3, 530
- read/1, 37, 39, 68, 146, 148, 161, 167–169, 171, 184, 210, 513, 569
- read/2, 159, 168
- read\_clause/3, 61, 168, 230
- read\_file\_to\_codes/3, 513
- read\_file\_to\_terms/3, 513
- read\_from\_chars/2, 177, 425
- read\_history/6, 171
- read\_line\_to\_codes/2, 247, 512
- read\_line\_to\_codes/3, 512
- read\_link/3, 224
- read\_pending\_chars/3, 164
- read\_pending\_codes/3, 163, 164
- read\_stream\_to\_codes/2, 513
- read\_stream\_to\_codes/3, 513
- read\_string/3, 247
- read\_string/5, 246, 247
- read\_term/2, 37, 96, 100, 164, 166, 169, 171, 178, 242, 244, 545
- read\_term/3, 61, 166, 168, 169, 171, 184, 185, 227, 260, 545
- read\_term/[2  
3], 170
- read\_term\_from\_atom/3, 171, 178
- read\_term\_from\_chars/3, 426
- readline *library*, 45
- readutil *library*, 74
- reconsult, 88
- record *library*, 259–261, 513
- record/1, 513, 515
- recorda/2, 134
- recorda/3, 61, 131, 134, 140, 208, 378, 379
- recorded/2, 134
- recorded/3, 131, 134, 409
- recordz/2, 134
- recordz/3, 61, 131, 134
- redefine\_system\_predicate/1, 132, 550
- reduced/1, 524
- reduced/3, 524
- reexport/1, 88, 90, 271, 546
- reexport/2, 88–90, 271, 546
- register\_iri\_scheme/3, 147, 156, 157, 410
- registry *library*, 515
- registry\_delete\_key/1, 515
- registry\_get\_key/2, 515
- registry\_get\_key/3, 515
- registry\_set\_key/2, 515
- registry\_set\_key/3, 515
- release(), 367
- reload\_foreign\_libraries/0, 337
- reload\_library\_index/0, 53, 54
- rem/2, 191
- remainder/1, 466
- rename\_file/2, 211, 222
- repeat/0, 113, 116, 118
- representation\_error/1, 365, 472
- require/1, 92, 546
- reset/3, 119, 571
- reset\_gensym/0, 474
- reset\_gensym/1, 474
- reset\_profiler/0, 234
- residual, 291
- resource/2, 406, 410–412
- resource/3, 45, 52, 410, 412
- resource\_error/1, 366, 473
- restore\_setting/1, 517
- retract, 554
- retract/1, 18, 87, 93, 131–133, 137, 139, 141, 286, 318, 329
- retractall/1, 131–133
- retractall\_predicate\_options/0, 504
- rev/3, 265
- reverse/2, 130, 265, 478
- round/1, 193
- same\_file/2, 221, 222
- same\_length/2, 478
- same\_term/2, 176
- sandbox/safe\_meta, 418
- sat/1, 433
- sat\_count/2, 433
- save\_settings/0, 518
- save\_settings/1, 518

- scalar\_product/4, 450
- scanl/4, 420
- scanl/5, 420
- scanl/6, 420
- scanl/7, 420
- see/1, 145, 146, 154, 155
- seeing/1, 154–156, 226
- seek/4, 151, 152
- seen/0, 156
- select(), 159
- select/3, 476
- select/4, 477
- select\_dict/2, 258
- select\_dict/3, 258
- select\_option/3, 485
- select\_option/4, 485
- selectchk/3, 476
- selectchk/4, 477
- semi deterministic, 554
- semidet, 554
- sequence//2, 467
- sequence//3, 467
- sequence//5, 467
- serialize, 128
- serialized/2, 451
- set\_breakpoint/4, 30, 541
- set\_end\_of\_stream/1, 163
- set\_flag/2, 135
- set\_input/1, 146, 153, 155, 156
- set\_locale/1, 181
- set\_module/1, 133, 272, 276
- set\_output/1, 146, 156
- set\_prolog\_flag/2, 28, 36, 49–51, 87, 188, 380
- set\_prolog\_gc\_thread/1, 42, 237
- set\_prolog\_IO/3, 146, 154
- set\_prolog\_stack/2, 229, 237, 238, 243
- set\_random/1, 192, 197, 198
- set\_setting/2, 517
- set\_setting\_default/2, 517
- set\_stream/2, 65, 66, 146, 147, 151, 152, 154, 159, 162, 181
- set\_stream\_position/2, 151, 152
- set\_url\_encoding/2, 532
- setarg/3, 85, 131, 175, 176, 210, 259, 288, 514
- setenv/2, 212
- setlocale/1, 310
- setlocale/3, 184, 212
- setof/3, 61, 202, 268, 559
- setrand/1, 511
- setting/2, 517
- setting/4, 517
- setting\_property/2, 518
- settings *library*, 36
- setup\_call\_catcher\_cleanup/4, 118
- setup\_call\_cleanup/2, 319
- setup\_call\_cleanup/3, 117–119, 121, 311, 320, 372
- shadow\_price/3, 520
- shared, 554
- shell/0, 212
- shell/1, 45, 72, 106, 211, 212
- shell/2, 211, 213
- shell/[1  
2], 211
- shell\_register\_dde/6, 516
- shell\_register\_file\_type/4, 515, 516
- shell\_register\_prolog/1, 516
- shift/1, 119
- shlib *library*, 562, 566, 574
- show\_coverage/1, 413
- show\_html\_hook/1, 27
- show\_profile/1, 231, 234
- sign/1, 191
- sin/1, 194
- singleton, 554
  - variable, 60
- sinh/1, 195
- size\_file/2, 157, 222, 411
- size\_nb\_set/2, 482
- skip/1, 162
- skip/2, 162
- sleep/1, 23, 241
- SLG
  - resolution, 278
- socket *library*, 211
- Solaris, 312
- solution, 554
- sort/2, 110, 117, 199–202
- sort/4, 199
- source\_exports/2, 546, 547
- source\_file/1, 94
- source\_file/2, 92, 94, 104, 141, 142
- source\_file\_property/2, 90, 92, 94
- source\_location/2, 95, 96



- split\_string/4, 179, 245, 247
- spy/1, 30, 40, 42, 52, 80, 84, 86, 229, 270, 322, 544, 563
- sqrt/1, 194
- stack
  - memory management, 66
- stamp\_date\_time/3, 215, 216
- startup file, 20
- statistics *library*, 231
- statistics/0, 123, 231
- statistics/2, 44, 197, 231–233, 313
- stream\_pair/3, 146, 149, 151, 152
- stream\_position\_data/3, 96, 151, 152, 169, 545
- stream\_property/2, 66, 96, 147, 149, 152–154, 171
- stream\_to\_lazy\_list/2, 500
- string//1, 464
- string/1, 108, 206, 244
- string\_chars/2, 245
- string\_code/3, 245, 250
- string\_codes/2, 245, 248
- string\_concat/3, 245, 248
- string\_length/2, 245
- string\_lower/2, 247
- string\_predicate/1, 427
- string\_upper/2, 247
- string\_without//2, 464
- strip\_module/3, 269, 274–276
- structure, 554
- style\_check/1, 60, 90, 139, 229
- sub\_atom/5, 179, 246
- sub\_atom\_icasechk/3, 179
- sub\_string/5, 245, 246, 248
- sub\_term/2, 483
- sub\_var/2, 483
- subset/2, 480
- subsumes\_chk/2, 112, 138
- subsumes\_term/2, 61, 111, 112
- subtract/3, 480
- succ/2, 187
- succeed, 555
- sum/3, 450
- sum\_list/2, 479
- sup/2, 459
- swi/pce\_profile *library*, 231
- swi\_edit *library*, 106
- swritef/2, 205
- swritef/3, 157, 203, 204
- syntax\_error/1, 472, 499
- system:format/3, 249
- TAB
  - completion, 74
- tab/1, 161
- tab/2, 161
- table/1, 46, 278, 280, 282, 283
- tabling *library*, 119, 136
- tan/1, 194
- tanh/1, 195
- taut/2, 433
- tcp\_sockopt/2, 159
- tdebug/0, 30, 309, 322
- tdebug/1, 322
- tell/1, 145, 146, 154–156
- telling/1, 154–156, 226
- term, 555
- term\_attvars/2, 290
- term\_expansion/2, 50, 52, 87, 95, 98, 99, 101, 103, 104, 227, 300, 548
- term\_expansion/4, 87, 100
- term\_factorized/3, 158
- term\_hash/2, 61, 63, 64, 137, 138
- term\_hash/4, 63, 64, 137, 138
- term\_singletons/2, 174
- term\_string/2, 178, 244
- term\_string/3, 244
- term\_subsumer/3, 112
- term\_to\_atom/2, 157, 178, 363
- term\_variables/2, 61, 109, 171, 174
- term\_variables/3, 174
- terms
  - cyclic, 61
- text\_to\_string/2, 245
- thread *library*, 40
- thread\_affinity/3, 312
- thread\_at\_exit/1, 227, 309, 311, 312, 324
- thread\_create/2, 308
- thread\_create/3, 308, 311, 312, 326, 332
- thread\_create\_in\_pool/4, 310, 526
- thread\_detach/1, 309–311
- thread\_exit/1, 311, 313, 320
- thread\_get\_message/1, 315, 316, 331
- thread\_get\_message/2, 316
- thread\_get\_message/3, 314–316



- thread\_initialization/1, 209, 311
- thread\_join/1, 310
- thread\_join/2, 309–312
- thread\_local/1, 125, 131, 139, 143, 226, 318, 330
- thread\_message\_hook/3, 124
- thread\_peek\_message/1, 315, 316
- thread\_peek\_message/2, 316
- thread\_pool\_create/3, 525
- thread\_pool\_destroy/1, 526
- thread\_pool\_property/2, 526
- thread\_property/2, 309–312
- thread\_self/1, 46, 310, 311, 314
- thread\_send\_message/2, 314, 316, 331
- thread\_send\_message/3, 314, 315
- thread\_setconcurrency/2, 40, 312
- thread\_signal/2, 23, 117, 318, 322, 377, 394
- thread\_statistics/3, 313
- threads/0, 321
- throw/1, 29, 61, 119, 120, 126, 128, 311, 313, 318, 375, 376, 543, 544
- time/1, 197, 231
- time\_file/2, 157, 222, 410
- tmp\_file/2, 225
- tmp\_file\_stream/3, 225
- tnodebug/0, 322
- tnodebug/1, 322
- told/0, 156
- top\_sort/2, 530
- top\_sort/3, 530
- tprofile/1, 322
- trace/0, 29, 30, 42, 48, 80, 84, 228, 302, 318, 381, 542, 543
- trace/1, 40, 228
- trace/2, 228
- tracing/0, 228
- transformation
  - of program, 98
- transitive\_closure/2, 530
- transparent, 553
- transportation/4, 520
- transpose\_pairs/2, 495
- transpose\_ugraph/2, 529
- trie\_delete/3, 136
- trie\_destroy/1, 135
- trie\_gen/3, 135, 136
- trie\_insert/3, 136
- trie\_insert/4, 136
- trie\_insert\_new/3, 136
- trie\_lookup/3, 136
- trie\_new/1, 135
- trie\_property/2, 136
- trie\_term/2, 136
- trie\_update/3, 136
- trim\_stacks/0, 236, 237, 331
- trivial\_fail\_goal/1, 427
- true/0, 44, 99, 113, 116
- truncate/1, 194
- tspy/1, 30, 309, 321, 322
- tspy/2, 322
- tty\_get\_capability/3, 210, 211
- tty\_goto/2, 210
- tty\_put/2, 211
- tty\_size/2, 211
- ttyflush/0, 161, 204
- tuples\_in/2, 450
- type\_error/2, 126, 365, 471
- UCS, 64
- ugraph *library*, 527
- ugraph\_union/3, 529
- ugraphs.pl *library*, 527
- Unicode, 64
- unifiable/3, 61, 111, 112
- unify, 555
- unify\_with\_occurs\_check/2, 44, 61, 111
- uninstantiation\_error/1, 472
- union/3, 480
- unix, 48
- unix *library*, 211
- unix/1, 212
- unknown/2, 229, 415
- unlisten/1, 424
- unlisten/2, 424
- unlisten/3, 425
- unload\_file/1, 90, 95
- unload\_foreign\_library/1, 337
- unload\_foreign\_library/2, 337
- unsetenv/1, 212
- upcase\_atom/2, 182, 183
- update view, 137, 555
- URL, 213
- url *library*, 482
- url\_iri/2, 532

- use\_foreign\_library/1, 93, 97, 214, 337, 407, 409, 411
- use\_foreign\_library/2, 337
- use\_module/1, 49, 52, 72, 88, 89, 92, 103, 265–267, 271, 272, 408, 409, 546
- use\_module/2, 53, 88, 89, 265–267, 271, 546
- use\_module/[1 2], 33, 80, 87, 90, 91, 273, 551
- user library, 569
- user profile file, 20
- user:exception/3, 52
- user:file\_search\_path/2, 53
- UTF-8, 64
- utf-8, 86
- valgrind, 403
- valid\_string\_goal/1, 427
- var/1, 107, 288, 346
- var\_number/2, 174
- var\_property/2, 100
- variable, 555
  - anonymous, 550
- variable\_value/3, 519
- variant, 111
- variant\_hash/2, 138
- variant\_sha1/2, 138, 558
- varnumbers/2, 533
- varnumbers/3, 533
- varnumbers\_names/3, 533
- verbose, 22
- version/0, 25, 125, 126
- version/1, 125, 126
- vertices/2, 528
- vertices\_edges\_to\_ugraph/3, 527
- view
  - update, 555
- visible/1, 229, 540
- volatile/1, 144, 318, 408, 409
- wait\_for\_input/3, 153, 159
- weighted\_maximum/3, 434
- when library, 292
- when/2, 61, 113, 174, 292
- white//0, 465
- whites//0, 465
- wildcard\_match/2, 240
- win\_add\_dll\_directory/1, 214
- win\_add\_dll\_directory/2, 214
- win\_exec/2, 211, 213
- win\_folder/2, 20, 23, 214
- win\_has\_menu/0, 221
- win\_insert\_menu/2, 221
- win\_insert\_menu\_item/4, 221
- win\_registry\_get\_value/3, 213
- win\_remove\_dll\_directory/1, 214
- win\_shell/2, 211, 213, 482
- win\_shell/3, 213
- win\_window\_pos/1, 220
- window\_title/2, 220
- windows, 50
- with\_mutex/2, 318–320, 322, 410
- with\_output\_to/2, 146, 156–158, 164, 178, 183, 207, 217
- with\_output\_to\_chars/2, 426
- with\_output\_to\_chars/3, 426
- with\_output\_to\_chars/4, 426
- with\_quasi\_quotation\_input/3, 509
- working\_directory/2, 21, 212, 223, 226
- write(), 367
- write/1, 50, 61, 68, 146, 167, 184, 204, 207, 349, 354, 367
- write/2, 167
- write\_canonical/1, 166, 167, 169, 206, 242
- write\_canonical/2, 158, 167, 174, 349
- write\_length/3, 166, 179
- write\_term/2, 30, 40, 45, 47, 164–169, 174, 178, 204, 207, 242, 244, 289
- write\_term/3, 50, 51, 165, 166, 173, 179, 184
- write\_to\_chars/2, 425
- write\_to\_chars/3, 425
- writeln/1, 203
- writeln/2, 15, 58, 164, 203, 204
- writeln/1, 167
- writeln/2, 167
- writeq/1, 167, 204, 206
- writeq/2, 167, 349
- www\_form\_encode/2, 532
- www\_open\_url/1, 482, 483
- xdigit//1, 466
- xdigits//1, 466
- xinteger//1, 466
- xor/2, 194
- xref\_built\_in/1, 508

xref\_called/3, 508  
xref\_clean/1, 507  
xref\_current\_source/1, 507  
xref\_defined/3, 507  
xref\_exported/2, 508  
xref\_module/2, 508  
xref\_source/1, 507

## YAP

prolog, 546

zcompare/3, 286, 456